

FINAL

# GROUNDWATER BACKGROUND EVALUATION

Fort Wingate Depot Activity  
McKinley County, New Mexico

December 26, 2019

Contract No. W912DQ18D3010  
Task Order No. W912BV19F0038

Prepared for:



US Army Corps of Engineers - Tulsa District  
1645 South 101<sup>st</sup> East Avenue  
Tulsa, OK 74128

Prepared by:



HDR Environmental, Operations and Construction, Inc.  
2365 Iron Point Rd, Suite 300  
Folsom, California 95630

*Page intentionally blank*

**REPORT DOCUMENTATION PAGE**

*Form Approved*  
OMB No. 0704-0188

The public reporting burden for this collection of information is estimated to average 1 hour per response, including the time for reviewing instructions, searching existing data sources, gathering and maintaining the data needed, and completing and reviewing the collection of information. Send comments regarding this burden estimate or any other aspect of this collection of Information, including suggestions for reducing the burden, to Department of Defense, Washington Headquarters Services, Directorate for Information Operations and Reports (0704-0188), 1215 Jefferson Davis Highway, Suite 1204, Arlington, VA 22202-4302. Respondents should be aware that notwithstanding any other provision of law, no person shall be subject to any penalty for failing to comply with a collection of information if it does not display a currently valid OMB control number.

**PLEASE DO NOT RETURN YOUR FORM TO THE ABOVE ADDRESS.**

<b>1. REPORT DATE (DD-MM-YYYY)</b> 12-26-2019		<b>2. REPORT TYPE</b> Technical Report		<b>3. DATES COVERED (From – To)</b> 3 April 2019 - 3 April 2023	
<b>4. TITLE AND SUBTITLE</b> Groundwater Background Evaluation Report Fort Wingate Depot Activity McKinley County, New Mexico				<b>5a. CONTRACT NUMBER</b> W912DQ18D3010	
				<b>5b. GRANT NUMBER</b> N/A	
				<b>5c. PROGRAM ELEMENT NUMBER</b> N/A	
<b>6. AUTHOR(S)</b> May Raad Olga Kosta Carmen Moya Rodriguez Charlie O'Neill Joy Rogalla Todd Wilson				<b>5d. PROJECT NUMBER</b> N/A	
				<b>5e. TASK NUMBER</b> W912BV19F0038	
				<b>5d. WORK UNIT NUMBER</b> N/A	
<b>7. PERFORMING ORGANIZATION NAME(S) AND ADDRESS(ES)</b> HDR Environmental, Operations and Construction Inc. 2365 Iron Point Rd, Suite 300 Folsom, California 95630				<b>8. PERFORMING ORGANIZATION REPORT NUMBER</b> N/A	
<b>9. SPONSORING/MONITORING AGENCY NAME(S) AND ADDRESS(ES)</b> U.S. Army Corps of Engineers, Tulsa District 1645 South 101 <sup>st</sup> East Avenue Tulsa, OK 74128 Project Manager: Steve Smith				<b>10. SPONSOR/MONITOR'S ACRONYM(S)</b> USACE	
				<b>11. SPONSOR/MONITOR'S REPORT NUMBER(S)</b>	
<b>12. DISTRIBUTION/AVAILABILITY STATEMENT</b> Unlimited					
<b>13. SUPPLEMENTARY NOTES</b>					
<b>14. ABSTRACT</b> This report presents the statistical analysis of background groundwater quality for the Northern Area groundwater regime at Fort Wingate Depot Activity (FWDA) located in McKinley County, New Mexico. The background groundwater quality was evaluated such that statistically-derived background threshold values (BTVs) could be established for constituents in the alluvial and bedrock aquifers.					
<b>15. SUBJECT TERMS</b> Monitoring well, groundwater, aquifer, alluvial, bedrock, background threshold value (BTV)					
<b>16. SECURITY CLASSIFICATION OF:</b>			<b>17. LIMITATION OF ABSTRACT</b>	<b>18. NUMBER OF PAGES</b>	<b>19a. NAME OF RESPONSIBLE PERSON</b>
<b>a. REPORT</b>	<b>b. ABSTRACT</b>	<b>c. THIS PAGE</b>			Mark Patterson
U	U	U		62	<b>19b. TELEPHONE NUMBER (Include area code)</b> 330-358-7312



**DEPARTMENT OF THE ARMY**  
**OFFICE OF THE DEPUTY CHIEF OF STAFF, G-9**  
**600 ARMY PENTAGON**  
**WASHINGTON, DC 20310-0600**

December 23, 2019

Base Realignment and Closure Division

Mr. Dave Cobrain  
Chief, Hazardous Waste Bureau  
New Mexico Environment Department  
2905 Rodeo Park Drive East, Building 1  
Santa Fe, New Mexico 87505-6303

RE: Final Groundwater Background Evaluation Report, Fort Wingate Depot Activity, McKinley County, New Mexico. EPA# NM62113820974, HWB-FWDA-14-007

Dear Mr. Cobrain:

The purpose of this letter is to submit the Final Groundwater Background Evaluation Report, Fort Wingate Depot Activity (FWDA) Gallup, New Mexico. The New Mexico Environment Department (NMED) letter HWB-FWDA-14-007, dated November 30, 2017 request the document to be submitted no later than December 29, 2019 for your review and approval. The enclosed report is revised by our new contractor and provides its findings.

If you have questions or require further information, please call me at (505) 721-9770.

Sincerely,

Mark Patterson  
BRAC Environmental Coordinator

Enclosures

CF:

Dave Cobrain, NMED, HWB  
Ben Wear NMED, HWB  
Michiya Suzuki, NMED, HWB  
Chuck Hendrickson, U.S. EPA Region 6  
Ian Thomas, BRACD  
Steven Smith, USACE  
Saqib Khan, USACE  
David Becker, USACE  
Clayton Seoutewa, SW BIA  
George Padilla, BIA, NRO  
Sharlene Begay-Platero, Navajo Nation  
Mark Harrington, Pueblo of Zuni  
Admin Record, NM  
Admin Record, Ohio

Media

2 hard copies, 2 Disks  
with Cobrain  
with Cobrain  
1 Disk  
1 Disk  
1 Disk  
1 Hard Copy, 1 Disk  
1 Disk  
1 Hard Copy, 1 Disk  
1 Hard Copy, 2 Disks  
1 Hard Copy, 7 Disks  
1 Hard Copy, 8 Disks  
1 Hard Copy, 1 Disk  
1 Hard Copy, 1 Disk

## Document Certification

**40 CFR 270.11**  
**December 2019**

I certify under penalty of law that this document and all attachments were prepared under my direction or supervision in accordance with a system designed to assure that qualified personnel properly gather and evaluate the information submitted. Based on my inquiry of the person or persons who manage the system, or those persons directly responsible for gathering the information; the information submitted is, to the best of my knowledge and belief, true, accurate, and complete. I am aware that there are significant penalties for submitting false information, including the possibility of fine and imprisonment for knowing violations.

PATTERSON.MARK.C.1229214493  
Digitally signed by  
PATTERSON.MARK.C.1229214493  
Date: 2019.12.23 11:47:22 -05'00'

---

Mr. Mark Patterson  
Base Realignment and Closure Division

*Page intentionally blank*

FINAL

GROUNDWATER BACKGROUND EVALUATION

Fort Wingate Depot Activity  
McKinley County, New Mexico

December 26, 2019

Contract No. W912DQ18D3010  
Task Order No. W912BV19F0038

Prepared for:

US Army Corps of Engineers - Tulsa District  
1645 South 101<sup>st</sup> East Avenue  
Tulsa, OK 74128

Prepared by:

HDR Environmental, Operations and Construction, Inc.  
2365 Iron Point Rd, Suite 300  
Folsom, California 95630

*Page intentionally blank*



## DOCUMENT DISTRIBUTION

Organization (Name)	Number of Printed Copies	Number of Electronic Copies
Dave Cobrain (NMED HWB)	2	2
Chuck Hendrickson (USEPA 6)	0	1
Mark Patterson (FWDA BEC)	0	1
FWDA Admin Record (NM)	1	1
Ian Thomas (BRACD)	0	1
Steve Smith, Ft. Worth District (USACE SWF)	0	1
Sharlene Begay- Platero	1	7
David Becker, USACE	0	1
Mark Harrington (POZ)	1	8
Clayton Seoutewa (BIA Zuni)	1	1
George Padilla (BIA-NR)	1	2
Admin Record (OH)	1	1

Notes:

BIA Zuni	Bureau of Indian Affairs – Zuni Representative
BIA-NR	Bureau of Indian Affairs – Navajo Representative
BRACD	(U. S. Army) Base Realignment and Closure Division
FWDA BEC	Fort Wingate Depot Activity Base Environmental Coordinator
NM	New Mexico
NMED HWB	New Mexico Environment Department Hazardous Waste Bureau
NN	Navajo Nation
OH	Ohio
POZ	Pueblo of Zuni
USACE SWF	U.S. Army Corps of Engineers – Fort Worth District
USEPA	United States Environmental Protection Agency

*Page intentionally blank*

1 **Table of Contents**

2 Acronyms and Abbreviations..... iii

3 1 Introduction..... 1

4 1.1 Report Organization..... 1

5 1.2 Site Summary ..... 1

6 1.3 Study Methodology ..... 2

7 2 Statistical Analysis ..... 5

8 2.1 Outlier Test Results – Background Wells ..... 6

9 2.2 Data Distribution ..... 7

10 2.3 Background Trends..... 7

11 2.4 Statistical Comparison of Alluvial and Bedrock Background Wells ..... 8

12 2.5 Summary of Statistical Analysis ..... 9

13 3 Background Threshold Values ..... 11

14 4 Findings ..... 13

15 5 References ..... 14

16 Appendix A: Statistical Summary Reports ..... 45

17 Appendix B: NCSS Output ..... 46

18 Appendix C: ProUCL Output ..... 47

19 Appendix D: SPSS Output ..... 48

20 **Tables**

21 Table 1: Monitoring Wells Utilized for Statistical Analysis ..... 26

22 Table 2: Constituents Utilized for Statistical Analysis ..... 27

23 Table 3: Descriptive Statistics for the Background Data Set..... 28

24 Table 4: Dixon’s Outlier Test Results ..... 32

25 Table 5: Data Distributions – Background ..... 33

26 Table 6: Trend Analysis Results..... 36

27 Table 7: ANOVA Test Results for Differences in Monitoring Constituent Concentrations between  
28 Alluvial & Bedrock Aquifers..... 37

29 Table 8: Summary of Background Data Analysis ..... 40

30 Table 9: Background Threshold Values for Monitoring Constituents ..... 42

1	<b>Figures</b>	
2	Figure 1: Site Location Map .....	16
3	Figure 2: Monitoring Wells Utilized for Statistical Analysis .....	17
4	Figure 3A: Scatter Plots in Support of Outlier Analysis - Alluvial .....	18
5	Figure 3B: Scatter Plots in Support of Outlier Analysis – Alluvial .....	19
6	Figure 3C: Scatter Plots in Support of Outlier Analysis – Bedrock .....	20
7	Figure 4A: Box and Whisker Plots .....	21
8	Figure 4B: Box and Whisker Plots .....	22
9	Figure 4C: Box and Whisker Plots .....	23
10	Figure 4D: Box and Whisker Plots .....	24

# 1 Acronyms and Abbreviations

2	ANOVA	analysis of variance
3	BTVs	background threshold values
4	COC	Contaminant of Concern
5	DL	detection limit
6	DQR	double quantification rule
7	FWDA	Fort Wingate Depot Activity
8	GOF	goodness of fit
9	GPMR	Groundwater Periodic Monitoring Report
10	IQR	inter-quartile range
11	LOD	limit of detection
12	LOQ	limit of quantitation
13	MDL	method detection limit
14	mg/L	milligrams per liter
15	MLE	maximum likelihood estimation
16	NCSS	Number Cruncher Statistical System
17	ND	non-detect
18	NMED	New Mexico Environment Department
19	RCRA	Resource Conservation and Recovery Act
20	RFI	RCRA Facility Investigation
21	SPSS	Statistical Package for the Social Sciences
22	UPL	upper prediction limit
23	UTL	upper tolerance limit
24	U.S.	United States
25	USACE	U.S. Army Corps of Engineers – Tulsa District
26	USACE SWF	U.S. Army Corps of Engineers – Fort Worth District
27	USEPA	U.S. Environmental Protection Agency

*Page intentionally blank*

# 1 Introduction

2 This report describes the development of background threshold values (BTVs) for chemical  
3 constituents in groundwater in the Northern Area alluvial and bedrock aquifers at Fort Wingate  
4 Depot Activity (FWDA), McKinley County, New Mexico (**Figure 1**). BTVs represent background  
5 or aquifer conditions unaffected by FWDA activities and provide a basis for comparison with  
6 monitoring and sampling results as an indicator of whether FWDA activities may have affected  
7 groundwater. If the monitoring or sampling results for a constituent exceed the applicable BTV,  
8 then further action may be required. The BTVs were calculated from analytical results for  
9 groundwater samples collected from approved background wells. The number of approved  
10 downgradient wells in the monitoring network was used as input for establishing BTVs that satisfy  
11 site-wide false positive objectives. The statistical analysis was performed in support of the site's  
12 Resource Conservation and Recovery Act (RCRA) Facility Investigation (RFI) as required by the  
13 Permit NM6213820974 (NMED 2015a). The BTVs can be used to compare groundwater  
14 analytical results from FWDA monitoring wells as an indication of changes in groundwater quality.

## 15 1.1 Report Organization

16 This report is organized as follows:

- 17 • Section 2 characterizes the distributions and trends of the constituent concentrations in  
18 the alluvial and bedrock aquifers.
- 19 • Section 3 presents the estimated BTVs for the constituents in the alluvial and bedrock  
20 aquifers. The BTVs are derived from upper prediction limits (UPLs), which represent the  
21 upper boundary of a prediction interval for an independently obtained observation (or an  
22 independent future observation). The use of UPLs was presented to in a letter dated June  
23 2019 (DOA 2019)
- 24 • Section 4 summarizes the findings from the analysis.
- 25 • Appendix A (provided electronically), presents statistical summary reports supporting the  
26 statistical output used to profile the data sets, assess outliers, evaluate distributions,  
27 assess trends, test for differences in concentration between the two aquifers, and the  
28 calculation of estimated UPLs for aquifer-specific BTVs.

29 The tables and figures are provided at the end of the report.

## 30 1.2 Site Summary

31 The former mission of FWDA was to store, ship, and receive material and to dispose of obsolete  
32 or deteriorated explosives and ammunition (PMC Environmental 2001). The FWDA mission  
33 ceased and the installation closed in January 1993. The current FWDA operations in the Northern  
34 Area are focused on assessment and remediation of contamination resulting from these past  
35 military activities. Large quantities of waste water associated with demilitarization operations were  
36 historically pumped to the leaching beds where the waste water infiltrated to the soil column and  
37 groundwater. This resulted in groundwater contamination from explosives, perchlorate, and  
38 nitrate in the Northern Area alluvial and bedrock groundwater aquifers.

39 The corrective action and cleanup objective for groundwater, as currently outlined in the RCRA  
40 permit is to reduce concentrations of contaminants of concern (COCs) in the Northern Area

1 groundwater to cleanup levels for explosives, perchlorate, and nitrate in accordance with Permit  
2 Section VI.B.6a (Monitoring of Hazardous Constituents).

### 3 **1.3 Study Methodology**

4 BTVs for chemical constituents in groundwater are needed to support the evaluation of  
5 groundwater conditions and determine changes in groundwater quality. Background is defined as  
6 the natural or baseline groundwater quality at a site, and can be characterized using data from  
7 upgradient, historical, or sometimes cross-gradient well samples. For this study, background wells  
8 and wells located downgradient from the background wells in each groundwater aquifer were  
9 selected. Background data were evaluated and background levels established for 23 total and  
10 dissolved metals, nitrate, and perchlorate. Background was not established for explosives  
11 because those constituents would be considered to represent contamination.

12 In the Northern Area there are 47 active wells in the alluvial aquifer and 18 wells in the bedrock  
13 aquifer from where groundwater samples are collected. Background groundwater monitoring  
14 wells for statistical analysis were selected based upon the monitoring well completion interval  
15 (alluvial or bedrock aquifer) and potential for water quality influence from FWDA operations  
16 (**Figure 2**). The well completion interval was determined from the Groundwater Periodic  
17 Monitoring Report (GPMR) designations (Sundance 2019). The following criteria were used to  
18 select the background wells:

- 19 • Distance from historic FWDA operations.
- 20 • Groundwater monitoring well located hydrogeologically upgradient from FWDA operations  
21 as documented in the GPMRs with repeated groundwater flow direction and repeated  
22 sufficient gradient to preclude FWDA operations as a contaminating source (Sundance  
23 2019, Sundance 2017, Sundance 2015).
- 24 • Consultation with the Army and directive from the New Mexico Environment Department  
25 (NMED) (NMED 2015b).

26 Based upon this criteria, there are seven alluvial wells in the in the northeastern portion of the site  
27 that are hydrogeologically upgradient with sufficient distantance from FWDA operations. These  
28 wells are TMW24, TMW26, TMW27, TMW28, BGMW01, BGMW02, and BGMW03. Six of these  
29 wells were excluded for the following reasons:

- 30 • Administration Area alluvial wells TMW24 and TMW26 are adjacent to the historic leaky  
31 cistern and actively leaking deep bedrock well 69 (Sundance 2019). The leakage of  
32 bedrock water to the alluvial aquifer may influence groundwater quality at TMW24 and  
33 TMW26 and therefore these wells were not included as background wells.
- 34 • Alluvial monitoring well TMW27 was identified as potentially impacted by site activities  
35 and was not included as a background well (NMED 2015b).
- 36 • Alluvial monitoring well TMW28 is located immediately adjacent to the Rio Puerco and  
37 groundwater at this location may be influenced by surface water recharge, therefore this  
38 well was not included as a background well.



- 1       • Alluvial monitoring wells BGMW01, BGMW02 and BGMW03 were identified as potentially  
2       impacted by site activities and therefore BGMW02 and BGMW03 were not included as  
3       background wells (NMED 2015b).

4 BGMW01 was retained as an appropriate background monitoring well because this well is furthest  
5 from FWDA operations and is the most hydrogeologically upgradient of the alluvial wells  
6 (Sundance 2019, Sundance 2017, Sundance 2015).

7 For the bedrock aquifer, there are 18 active wells from where groundwater samples are collected  
8 (Sundance 2019). Fifteen of these wells are located south of the Administration Area and in close  
9 proximity to historic FWDA operational areas.

- 10       • Therefore these fifteen wells were excluded from consideration as background wells. In  
11       addition, two of these fifteen bedrock monitoring wells (TMW17 and TMW19) were  
12       identified as potentially impacted by site activities and were not included as background  
13       wells (NMED 2015b).

14 Three wells (BGMW08, BGMW09, BGMW10) located east and hydrogeologically upgradient of  
15 the Administration Area were retained as these three wells are furthest from FWDA operations  
16 and are the most hydrogeologically upgradient of the bedrock wells (Sundance 2019).

17 Based upon these criteria presented above, one well (BGMW01) was utilized to establish BTVs  
18 in the alluvial aquifer and three wells (BGMW08, BGMW09, BGMW10) were utilized to establish  
19 BTVs in the bedrock aquifer. It was beyond the scope of this study to assess differences in  
20 groundwater quality among the excluded wells or to perform a comparison of BTVs with and  
21 without the excluded wells.

22 The single alluvial well BGMW01, which is at the most upgradient location for the alluvial aquifer  
23 in this portion of FWDA, has sufficient data points (15 monitoring events collected across 7 years)  
24 to conduct a statistical analysis of alluvial data. The three bedrock background wells BGMW08,  
25 BGMW09, BGMW10 each had 3 monitoring events (collected across 1-1/2 years); therefore the  
26 data were pooled to derive a sufficient number of samples for a statistical analysis of bedrock  
27 groundwater data (USEPA 2009). Pooling the data increases the statistical power of the analyses  
28 and increases the confidence in the final BTVs. When considering a distribution, it is not  
29 the number of wells but the number of samples utilized that drives the statistical analysis.

30 Groundwater analytical results were used to establish BTVs for the selected chemical constituents  
31 in groundwater in the alluvial and bedrock aquifers. Fifteen monitoring events at alluvial well  
32 BGMW01 were taken between April 2012 and April 2019 and used to establish BTVs for the  
33 alluvial aquifer. Three monitoring events at each of the three bedrock wells BGMW08, BGMW09  
34 and BGMW10 were taken between April 2018 and April 2019, and used to establish BTVs for the  
35 bedrock aquifer.

36 The downgradient wells were selected as those wells which are hydrogeologically downgradient  
37 from the background wells and completed within the same aquifer as the background well(s).  
38 Downgradient well observations are tested against the BTVs to identify groundwater quality  
39 changes. Since multiple constituents from multiple downgradient wells are being compared there

1 is a cumulative risk of false positive error; that is, of incorrectly indicating an exceedance of  
2 background. The number of downgradient wells is utilized to identify the number of background  
3 comparison tests so that the appropriate significance level for establishing the BTVs is selected  
4 to control for the side-wide false positive errors.

5 Software packages ProUCL (Singh and Singh 2015), Number Cruncher Statistical System  
6 (NCSS) (NCSS 2013), R (R Core Team 2018), and Statistical Package for the Social Sciences  
7 (SPSS) (IBM 2013) were used in the production of the statistics. ProUCL is offered by the United  
8 States Environmental Protection Agency (USEPA), R is a free software environment, NCSS and  
9 SPSS are licensed software packages. The choice of statistical methods used in the analysis of  
10 groundwater data and in the development of BTVs primarily uses concepts and approaches  
11 documented in the USEPA's "Statistical Analysis of Groundwater Monitoring Data at RCRA  
12 Facilities: Unified Guidance" (Unified Guidance) (USEPA 2009).

## 2 Statistical Analysis

This section identifies the wells and monitoring constituents used for this study and presents a descriptive statistical evaluation of the groundwater data. This evaluation was performed to assess outliers, evaluate distributions, assess trends, and test for differences in concentration between the two aquifers. The statistical tests described in this section include the following:

- Analysis for statistical outliers using Dixon’s test for outliers (Section 2.1). Outliers are values that are not representative of the population from which they are sampled and may be excluded from further analysis to avoid potentially biasing the calculation of background concentrations.
- Goodness Of Fit (GOF) tests to indicate whether parametric or nonparametric distributions best model the observed data (Section 2.2). The outcome of the GOF test (parametric or nonparametric) decides which statistical method to use when assessing trends over time. The two methods considered are the Maximum Likelihood Regression (MLE) for parametric distributions or the Mann-Kendall trend test for nonparametric distributions.
- Trend tests to determine whether groundwater conditions are stable (Section 2.3). The presence of a trend can signify several possibilities such as contaminated background, site-wide changes in the aquifer, seasonal fluctuations, or aquifer disturbances due to new well installation.
- Calculation and comparison of the central tendencies (means or medians) of the constituents between the alluvial and bedrock background wells using analysis of variance (ANOVA) methods (Section 2.4). This analysis addresses the question whether the background data across both aquifers can be pooled to represent overall groundwater conditions.

The wells listed in **Table 1** were selected to be included in the evaluation based upon the well selection criteria described in Section 1.3. The analytical results from the background wells were used to compute the BTVs. The number of downgradient wells were used to determine the number of comparisons required between the BTVs and the analytical results from FWDA monitoring wells to achieve the target site-wide false positive rates. **Figure 2** shows the location of the background wells and the respective downgradient wells. **Table 2** lists the constituents included in the evaluation. The alluvial and bedrock background sample sizes (i.e., quantity of qualifying samples) were evaluated per constituent. In instances where duplicate samples were collected on a given date, the median of the two values was used to represent the sampling event. If duplicate samples exhibited a mix of detect and non-detect (ND) values, the detected value was selected. Descriptive statistics were calculated for the background data set including ND values and excluding ND values. The descriptive analysis was performed with NDs removed to better understand the central tendency and range of the detected values.

The method detection limit (MDL) also referred to as the detection limit (DL), is the lowest level at which a result can be reliably distinguished from method blank results. For the descriptive

1 statistics of background data sets that included NDs, the DL was substituted as the ND value.  
2 When the DL value was not available, the limit of detection (LOD) was used. For consistency  
3 throughout this report, DL will be used, regardless of whether the value used was the DL or the  
4 LOD.

5 A summary of the descriptive statistics for each of the alluvial and bedrock background data sets  
6 is provided in **Table 3**. Note that for the trend analyses described in Section 2.3 and for the  
7 establishment of statistically-derived BTVs in Section 3, imputation methods using the MLE for  
8 NDs, Regression on Order Statistics or Kaplan-Meier methods, where appropriate, were used.

9 Following the calculation of descriptive statistics, the statistical analysis for the alluvial and  
10 bedrock background data sets were performed to evaluate for outliers, data distributions, and  
11 trends for total and dissolved metals, nitrate, and perchlorate, where data quantity and quality  
12 permit. Mean or median concentration differences between the alluvial and bedrock background  
13 wells were evaluated for each constituent to assess whether the data across the aquifers can be  
14 pooled for establishing BTVs. A total of 15 samples (one sample per monitoring event) from well  
15 BGMW01 were included for the descriptive analysis of the background alluvial monitoring well  
16 results for the constituents of interest. Nine samples (three monitoring events from BGMW08,  
17 BGMW09, and BGMW10) were included for the descriptive analysis of the background bedrock  
18 monitoring well results for the same constituents. Supporting statistical output used to profile the  
19 data sets, assess outliers, evaluate distributions, assess trends, and test for differences in  
20 concentration between the two aquifers is presented in **Appendix A**.

## 21 **2.1 Outlier Test Results – Background Wells**

22 Outliers are values that are not representative of the population from which they are sampled.  
23 The background data sets were screened for outliers using Dixon's outlier test, which is suitable  
24 for data sets containing less than 25 samples. The outlier test was conducted using a significance  
25 of one percent or a confidence level of 99 percent. For constituents that had NDs, the NDs were  
26 removed prior to testing for outliers.

27 Statistical outliers were identified in the background data set evaluated both in alluvial and  
28 bedrock wells. The constituent concentrations identified as statistical outliers were sampled from  
29 alluvial well BGMW01 and bedrock well BGMW09, and are listed in **Table 4**.

30 As stated in the ProUCL Technical Guide (Singh and Singh 2015), groundwater sample  
31 concentrations are typically highly variable in nature, hence outliers identified in a statistical  
32 context are expected but do not necessarily signify that the outliers are from different distributions.  
33 A visual inspection of concentration versus time plots for constituents including the outliers listed  
34 in **Table 4** reveal the presence of the potential outliers as shown in **Figures 3a – 3c**. The Unified  
35 Guidance (USEPA 2009) recommends not removing statistically identified outliers unless some  
36 basis for a likely error or discrepancy can be identified or they are of high-magnitude compared  
37 to other concentrations. The statistical outliers were investigated but neither data entry or  
38 measurement errors were identified. Although the elevated values appear as statistical outliers,  
39 the values varied within one order of magnitude which is considered a reasonable range of  
40 variability. Given the variable nature of groundwater samples and the small sample sizes, the

1 statistical outliers should not be removed from the data set at this time for purposes of determining  
2 background concentrations. As additional background samples are collected over time, the  
3 variability in concentrations can be better understood. As new data become available, outlier test  
4 results may change and earlier observations thought to be outliers may no longer be outliers.

## 5 **2.2 Data Distribution**

6 Groundwater data was fit to known distribution models using GOF tests incorporated into ProUCL.  
7 For data sets comprised of 50 or fewer samples, ProUCL's GOF module incorporates the Shapiro-  
8 Wilk GOF test to determine normal or lognormal distribution and Anderson-Darling to determine  
9 gamma distribution. The GOF tests are performed at the 0.05 level of significance. Normal,  
10 lognormal and gamma distributions are parametric distributions. If a data set could not be fit with  
11 any of these three parametric distributions, it was considered to follow a nonparametric  
12 distribution. Background samples that consisted of more than 50 percent NDs were considered  
13 to follow a non-parametric distribution as they had an insufficient number of detected values for  
14 identifying an appropriate parametric distribution. Data distributions are listed in **Table 5**.

15 It is important to correctly specify the method used for computing the BTVs. Statistical tests  
16 conducted under parametric distribution assumptions have more power to detect an exceedance  
17 when compared to tests conducted under nonparametric distribution assumptions; however, if  
18 incorrectly specified, parametric tests can result in misleading and inaccurate results. With  
19 parametric tests, the distribution is known so more information is available about the  
20 characteristics of the data. As a result, inferences can be made about the data with smaller sample  
21 sizes. Nonparametric tests are based solely on the data as there is no discernible distribution.  
22 Hence, nonparametric tests have less power because they require a larger sample size to draw  
23 conclusions with the same degree of confidence. However, nonparametric test results are more  
24 reliable when the distribution of the data is not evident.

## 25 **2.3 Background Trends**

26 Background constituent concentrations in groundwater should demonstrate stable conditions  
27 through time, free of trends. As stated in the Unified Guidance (USEPA 2009), a trend can signify  
28 several conditions, including contamination, site-wide changes in the aquifer, seasonal  
29 fluctuations, or aquifer disturbances due to new well installation. Constituents were analyzed for  
30 trends within the data set using a MLE regression for constituents which followed parametric  
31 distributions and Mann-Kendall tests for those that were treated under nonparametric  
32 distributional assumptions. The MLE regression can be applied to data sets that can be fitted to  
33 a specific distribution model and that contain NDs with multiple DLs. The Mann-Kendall test is  
34 suitable for data series with no discernable distributions and the same DL value for NDs.

35 Constituents treated with more than 50 percent NDs or with multiple DLs were not assessed for  
36 trends. A trend analysis was conducted for constituents in each of the alluvial and bedrock  
37 aquifers with background data sets that had a sufficient number of detected values. Constituents  
38 that exhibited a statistically significant trend in the alluvial or bedrock aquifer are summarized in  
39 **Table 6**.

1 Of the 48 different constituents (23 metals (total and dissolved), nitrate and perchlorate)  
2 potentially available for trend testing, only three constituents (dissolved nickel and total arsenic in  
3 the alluvial well, and total chromium in the bedrock wells) exhibited statistically significant trends.  
4 The background well regression analysis showed potentially decreasing trends for dissolved  
5 nickel and total arsenic from the alluvial background monitoring well and for total chromium from  
6 the bedrock well monitoring wells. There were no increasing or decreasing trends identified for  
7 other monitoring constituents with sufficient data quantity and quality for testing with the MLE  
8 analysis or Mann-Kendall test. Although statistical trends were identified for these three  
9 constituents, these trends were not consistent among alluvial and bedrock monitoring wells  
10 (**Table 6**). Additionally, the limited duration of the sampling program adds potential uncertainty as  
11 to the environmentally relevant significance of these trends.

## 12 **2.4 Statistical Comparison of Alluvial and Bedrock Background** 13 **Wells**

14 The locations of the one alluvial background well and the three bedrock background wells have  
15 been selected to represent overall groundwater conditions at the FWDA site. Given that the wells  
16 are screened in different aquifers, aquifer specific BTVs have been derived. However, if the  
17 distributions of the monitoring constituents for each of the aquifers are the same (i.e. the  
18 constituent follows a normal or lognormal distribution in samples from both aquifers), it may be  
19 possible to pool all the data. Pooling increases the sample size for each constituent, providing  
20 stronger statistical power to reject the null hypotheses that there are no exceedances when there  
21 really are exceedances. To determine if pooling the data between background wells from the two  
22 aquifers is possible from a statistical perspective, ANOVA tests were conducted for each  
23 monitoring constituent provided the constituent did not have 100 percent of its observations as  
24 NDs.

25 Two different types of hypothesis tests under lognormal and nonparametric distributional  
26 assumptions were conducted for each of the background data sets using two types of ANOVA  
27 tests: lognormal (parametric) and nonparametric ANOVA. Both methods attempt to assess  
28 whether distinct observations differ on average. Specifically for this analysis, the ANOVA was  
29 used to determine whether there is a difference between observations collected from the alluvial  
30 well BGMW01 and the pooled observations from the bedrock wells BGMW08, BGMW09 and  
31 BGMW10 for each of the dissolved metals, total metals, and nitrate, where data quantity and  
32 quality permit. Perchlorate was not analyzed as all of the observations in the alluvial well are  
33 NDs.

34 The lognormal (log) ANOVA test is identical to the ANOVA under normality assumptions; that is,  
35 the data are independent and identically distributed, the residuals of the data are normally  
36 distributed, and the variances among the groups under study are constant. As many groundwater  
37 constituents follow lognormal or lognormal-like distributions, the raw data were transformed by  
38 taking their natural logarithms. The Kruskal-Wallis test is a non-parametric, rank-based  
39 alternative to the parametric ANOVA. Instead of a test of means, the Kruskal-Wallis tests  
40 differences among average population ranks equivalent to the medians.

1 While some constituents followed parametric distributions (see **Table 5**), their distributions were  
2 not always consistent between the two background aquifers. For example, a constituent may  
3 have both the alluvial and bedrock aquifer distributions as parametric, one parametric and one  
4 nonparametric or both nonparametric. Both classes of ANOVA were applied to the monitoring  
5 constituents as further lines of evidence and their outcomes are summarized in **Table 7**. In over  
6 60 percent of all tests, the log ANOVA or the Kruskal-Wallis indicated that the background  
7 concentrations between the two aquifers were different and hence one would reject the null  
8 hypothesis that there are no differences between the results for the background wells from the  
9 two aquifers at the 5 percent level of significance. With the majority of constituents showing  
10 differences in average concentrations based on the ANOVA tests, there is evidence to support  
11 the assumption that the data from the two aquifers should be treated separately from a  
12 groundwater monitoring and data evaluation perspective. **Figure 4** presents side-by-side box  
13 and whisker plots for each monitoring constituent. Side-by-side box and whisker plots are a simple  
14 visualization tool to demonstrate the degree as how distributions can vary because they  
15 summarize the center and spread of the data. The Inter-Quartile Range (IQR) is the distance  
16 between the upper (75th percentile) and lower (25th percentile) lines of the box and is a common  
17 measure of spread. The box plot whisker is a line that goes out from the box to the whisker  
18 boundaries, which is 1.5 times the IQR. Extreme values (outliers), indicated by the red dots, are  
19 usually three times the IQR. When plots of differing distributions are placed side-by-side,  
20 differences in central tendencies and spread or variance can be observed.

21 A primary trend which can be easily observed is that the medians of the bedrock constituents tend  
22 to be higher than the medians found in the alluvial background well. The variability in the  
23 concentrations collected from the three bedrock background wells is notably larger than observed  
24 alluvial concentrations. While the sample sizes for the alluvial and bedrock background wells are  
25 relatively small, the ANOVA test results and the apparent differences of the distributions based  
26 on the side-by-side box and whisker plots between the alluvial and bedrock background wells  
27 suggest that the BTVs should be specific to an aquifer and should not be pooled. As more data  
28 is collected at the background wells, tests for differences in means or medians between the two  
29 monitoring networks may be updated to monitor changes in the distributional differences.

## 30 **2.5 Summary of Statistical Analysis**

31 A summary of the statistical analysis results is provided in **Table 8**, and is discussed below.  
32 Based on the analysis results, the following assumptions were applied to develop the BTVs:

- 33 • The statistical outliers identified for the dissolved and total metals from alluvial well  
34 BGMW01 and bedrock well BGMW09 were not removed from the data set to be used for  
35 developing background concentrations for the site at this time. These metals are flagged  
36 as outliers in **Table 8**.
- 37 • Monitoring constituents from the alluvial and bedrock monitoring network that are 100  
38 percent NDs were treated under nonparametric distribution assumptions with the  
39 maximum DL chosen to represent background.
- 40 • For the background alluvial well BGMW01, monitoring constituents which exhibited a more  
41 than 50 percent NDs were treated under nonparametric distribution assumptions with the

1 maximum detect value chosen to represent background, until additional results can be  
2 included in the data sets. GOF tests were used to fit dissolved and total metals with  
3 sufficient background data to known parametric distribution models (e.g., gamma,  
4 lognormal, or normal). Metals that could not be fit to a discernible distribution are  
5 nonparametric. The monitoring constituents from the alluvial aquifer treated under  
6 nonparametric assumptions are listed in **Table 8**.

- 7 • For the background data set from the three bedrock aquifer wells BGMW08, BGMW09  
8 and BGMW10, monitoring constituents which exhibited a high percentage of NDs were  
9 treated under nonparametric distribution assumptions with the maximum detected value  
10 chosen to represent background, until additional results can be included in the data sets.  
11 These constituents are listed in **Table 8**. All dissolved and total metals with sufficient  
12 background data were fit to a known parametric distribution model using GOF tests.
- 13 • Based on the small data set (less than 20 samples) and/or short duration (less than 3 full  
14 seasonal cycles for bedrock data) of the monitoring program, results from the outlier and  
15 trend analyses should be considered preliminary until additional sample results are  
16 included in the data set and re-evaluated.
- 17 • Testing and graphing for differences in concentration between the alluvial and bedrock  
18 aquifers for the monitoring constituents revealed sufficient differences to treat the two  
19 aquifers as distinct to date. As background sample size grows, changes in the differences  
20 in concentration should be re-evaluated.



## 3 Background Threshold Values

This section presents the BTVs for the monitoring constituents in alluvial and bedrock wells.

The BTV is the statistically-derived background concentration (the UPL), or, depending on the proportion of NDs, the maximum detected value or the maximum DL.

Although the upper tolerance limit (UTL) has been used in the past to derive BTVs as suggested in the Risk Guidance (NMED 2019) the UPL is the statistic recommended by both the Unified Guidance (USEPA 2009) and the ProUCL Technical Guide (Singh and Singh 2015) to estimate BTVs for groundwater concentrations. The construction of a UTL is highly similar to that of a UPL; however, the statistical interpretation is different. Unlike the UTL, the UPL can be constructed to control for site-wide false positive errors and improve statistical power. False positive errors arise when concentration increases above background are identified when in actuality no true exceedance has occurred. Good statistical power suggests that concentration increases above background are correctly identified. The UTL lacks the statistical properties that allow practitioners to implement strategies that meet these two performance characteristics for testing for exceedances in background concentrations.

The UPL represents the upper boundary of a prediction interval for an independently obtained observation (or an independent future observation). The significance level per UPL is modified to control for the site-wide false positive rate incurred when evaluating multiple downgradient well-constituent during semi-annual monitoring events for potential exceedances over background. As recommended by the Unified Guidance (USEPA 2009), individual test significance levels are set such that the overall cumulative false positive rate is 10 percent or less. In addition, the UPL estimation methodology incorporates the number of verification sampling events to confirm whether an observed exceedance from a constituent at a particular downgradient well is actually an exceedance or an outcome of random variation.

For constituents that have all ND background values, the maximum DL was chosen to represent the background value and the double quantification rule<sup>1</sup> (DQR) was used to evaluate whether or not there was an exceedance.

The test significance level per constituent was estimated such that the cumulative false positive rate over all well-constituent pair comparisons was approximately ten percent. Depending on the aquifer and constituent, individual UPL test significance levels ranged from 0.0001 to 0.0207 percent (i.e., UPLs ranged from 99.9% to 97.9% confidence levels).

The number of verification samples per constituent was selected to provide sufficient statistical power to detect an exceedance when an exceedance occurred, conditional to the background sample size, its distributional properties, and the total number of statistical test comparisons.

---

<sup>1</sup>Regardless of the background sample size, when 100 percent of the measurements are NDs, then the DQR can be used to test for an exceedance relative to background. According to the Unified Guidance, a confirmed exceedance is registered if any well-constituent pair in the '100% ND' group exhibits quantified measurements in two consecutive sample and resample events.

- 1 The calculated alluvial and bedrock aquifer BTVs for each monitoring constituent are provided in
- 2 **Table 9.**

## 1 4 Findings

2 The finding of the statistical analyses are provided below:


- 3 1. The statistical evaluations deemed the analytical results from the background wells to be  
4 representative of current background conditions and therefore appropriate for establishing  
5 BTVs.
- 6 2. The BTVs were calculated for dissolved metals, total metals, perchlorate, and nitrate for  
7 the alluvial and bedrock aquifers. The BTVs are considered to represent background or  
8 aquifer conditions unaffected by FWDA activities, and are used to provide a numerical  
9 basis for comparison with groundwater monitoring results. Values exceeding the BTV may  
10 indicate contamination is present and additional action may be required. The BTVs are  
11 provided in **Table 9**.
- 12 3. Based upon the ANOVA test results of dissolved and total metals between the alluvial and  
13 bedrock aquifers, it appears that the samples were not derived from the same population  
14 because they do not share similar concentration averages and variability. Therefore,  
15 results for samples collected from the two aquifers should be considered to represent  
16 separate populations and the monitoring constituents should be evaluated separately by  
17 aquifer.
- 18 4. Samples collected from FWDA often have high turbidity which can affect observed  
19 analytical results (Sundance, 2019). Well turbidity can introduce excess naturally  
20 occurring trace elements into the samples and result in elevated, inconsistent, and  
21 incomparable metals results within and between wells. The BTVs for each monitoring  
22 constituent from the alluvial and bedrock aquifers reflect the background conditions from  
23 which they were sampled. The background data should continue to be monitored and  
24 assessed to provide additional information about groundwater quality at the facility. As  
25 more data is collected, the BTVs can be updated to reflect background conditions at the  
26 facility.






## 1 5 References


- 2 DOA 2019. Letter from Mark Patterson to John Kieling titled “Final Groundwater  
3 Supplemental RFI Work Plan Revision 4, dated March 23, 2018 Request for Work Plan and  
4 Risk Guidance Deviations, Fort Wingate Depot Activity, McKinley County, New Mexico” 13  
5 June.  
6
- 7 IBM 2013. IBM SPSS Statistics for Windows, Version 22.0. Armonk, NY: IBM Corp. Released  
8 2013
- 9 NCSS 2013. NCSS 9 Statistical Software. NCSS, LLC. Kaysville, Utah, USA,  
10 [ncss.com/software/ncss](http://ncss.com/software/ncss).
- 11 NMED 2019. *Risk Assessment Guidance for Site Investigations and Remediation Volume I Soil*  
12 *Screening Guidance for Human Health Risk*. March 7.
- 13 NMED, 2015a. Class 3 Permit Modifications for the for the Hazardous Waste Facility Permit, Fort  
14 Wingate Depot Activity, McKinley County, New Mexico. USEPA ID No. NM6213820974. New  
15 Mexico Environment Department Hazardous Waste Bureau. February.
- 16 NMED 2015b. *Disapproval Technical Memorandum Groundwater Background Evaluation for Fort*  
17 *Wingate Depot Activity, New Mexico, EPA ID# NM6213820974, FWDA-14-007*. September.
- 18 PMC Environmental, 2001. *Final RCRA Facility Investigation Report, TNT Leaching Beds Area,*  
19 *September*
- 20 R Core Team 2018. R Core: A language and environment for statistical computing. R Foundation  
21 for Statistical Computing, Vienna, Austria. URL <https://www.R-project.org/>.
- 22 Singh and Singh 2015. *ProUCL 5.1.002 Technical Guide Statistical Software for Environmental*  
23 *Applications for Data Sets with and without Nondetect Observations*. Singh, A. and Ashok  
24 Singh. EPA/600/R07/041, 2015.
- 25 Sundance 2019. *Groundwater Periodic Monitoring Report, July through December 2017*. Final  
26 Revision 1. February
- 27 Sundance 2017. *Groundwater Periodic Monitoring Report, January through June 2017*. Final.  
28 September
- 29 Sundance 2015. *Groundwater Periodic Monitoring Report, July through December 2014*. Final.  
30 March
- 31 USEPA 2009. *Statistical Analysis of Groundwater Monitoring Data at RCRA Facilities: Unified*  
32 *Guidance*. Office of Resource Conservation and Recovery, Program Implementation and  
33 Information Division, USEPA, EPA 530/R-09-007, 2009.

# 1 Figures

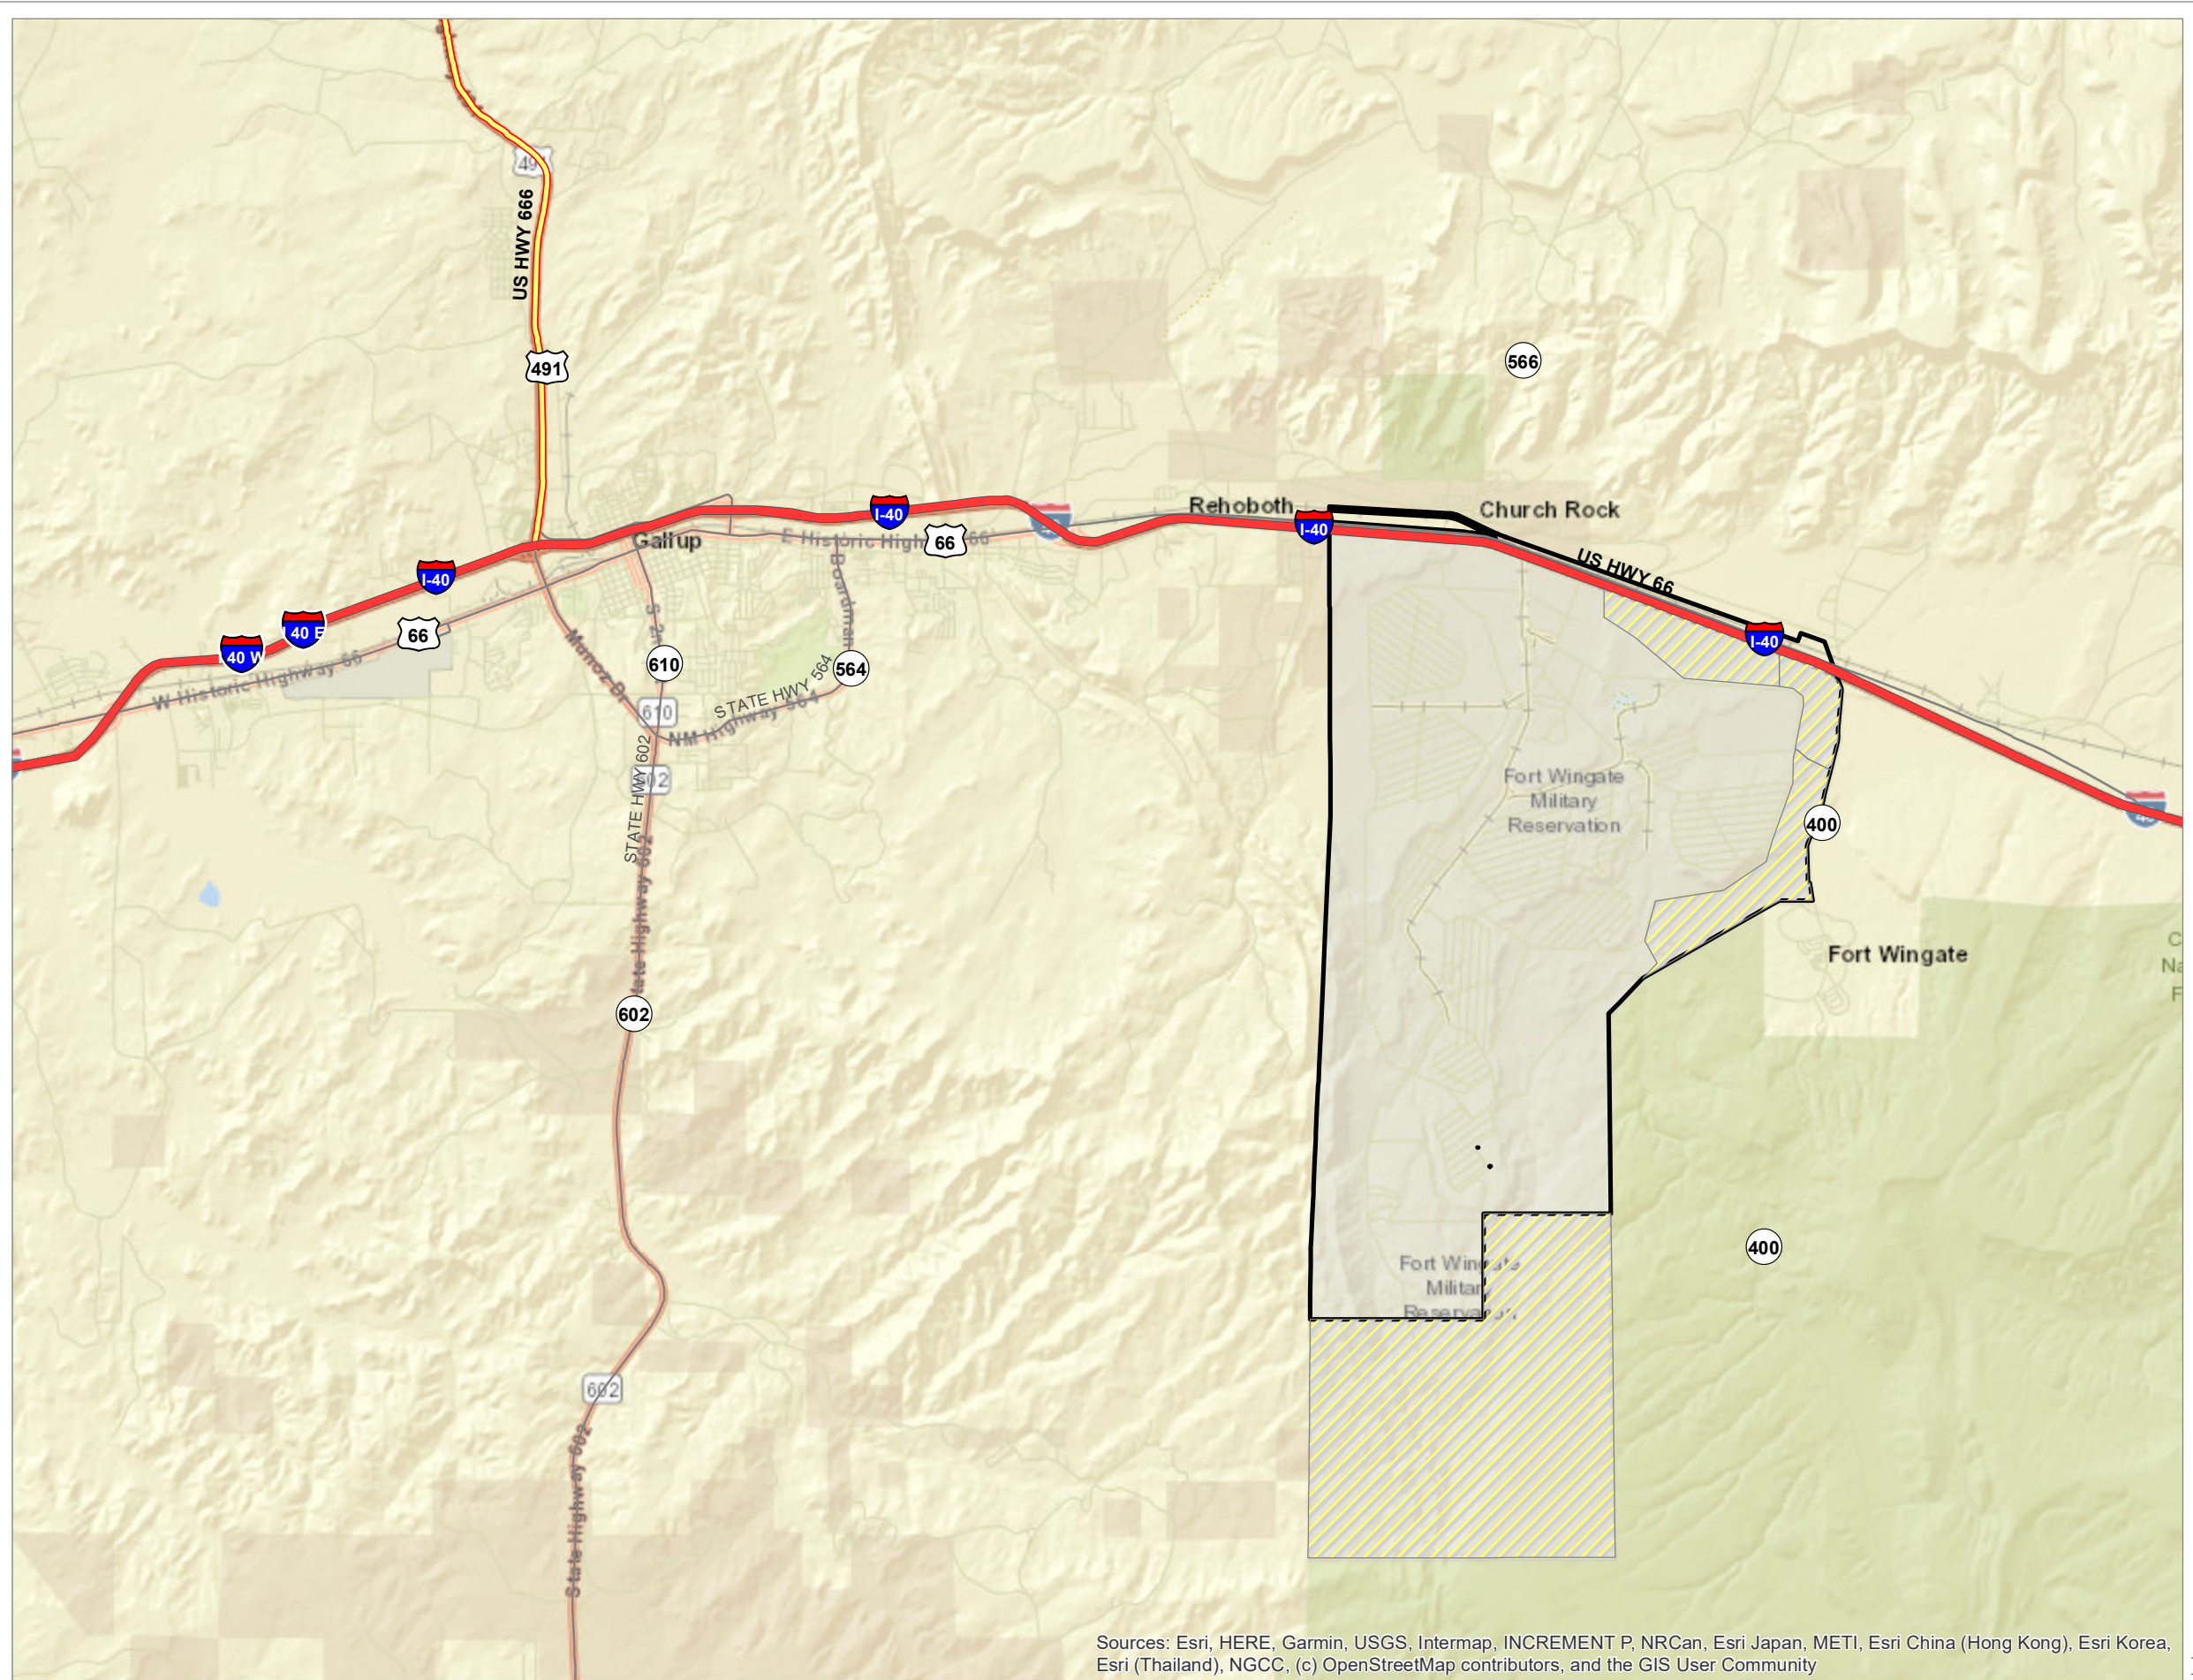



- Legend**
-  FWDA Site Boundary
  -  Transferred FWDA Property
  -  Interstate
  -  Highways
  -  Secondary Roads

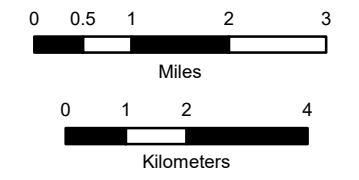


Coordinate System:  
 WGS 1984 Web Mercator Auxiliary Sphere  
 Projection:  
 Mercator Auxiliary Sphere  
 Datum:  
 WGS 1984




**Figure 1**  
 SITE LOCATION MAP  
 GROUNDWATER BACKGROUND  
 EVALUATION  
 FORT WINGATE DEPOT ACTIVITY  
 MCKINLEY COUNTY, NEW MEXICO

Sources: Esri, HERE, Garmin, USGS, Intermap, INCREMENT P, NRCan, Esri Japan, METI, Esri China (Hong Kong), Esri Korea, Esri (Thailand), NGCC, (c) OpenStreetMap contributors, and the GIS User Community



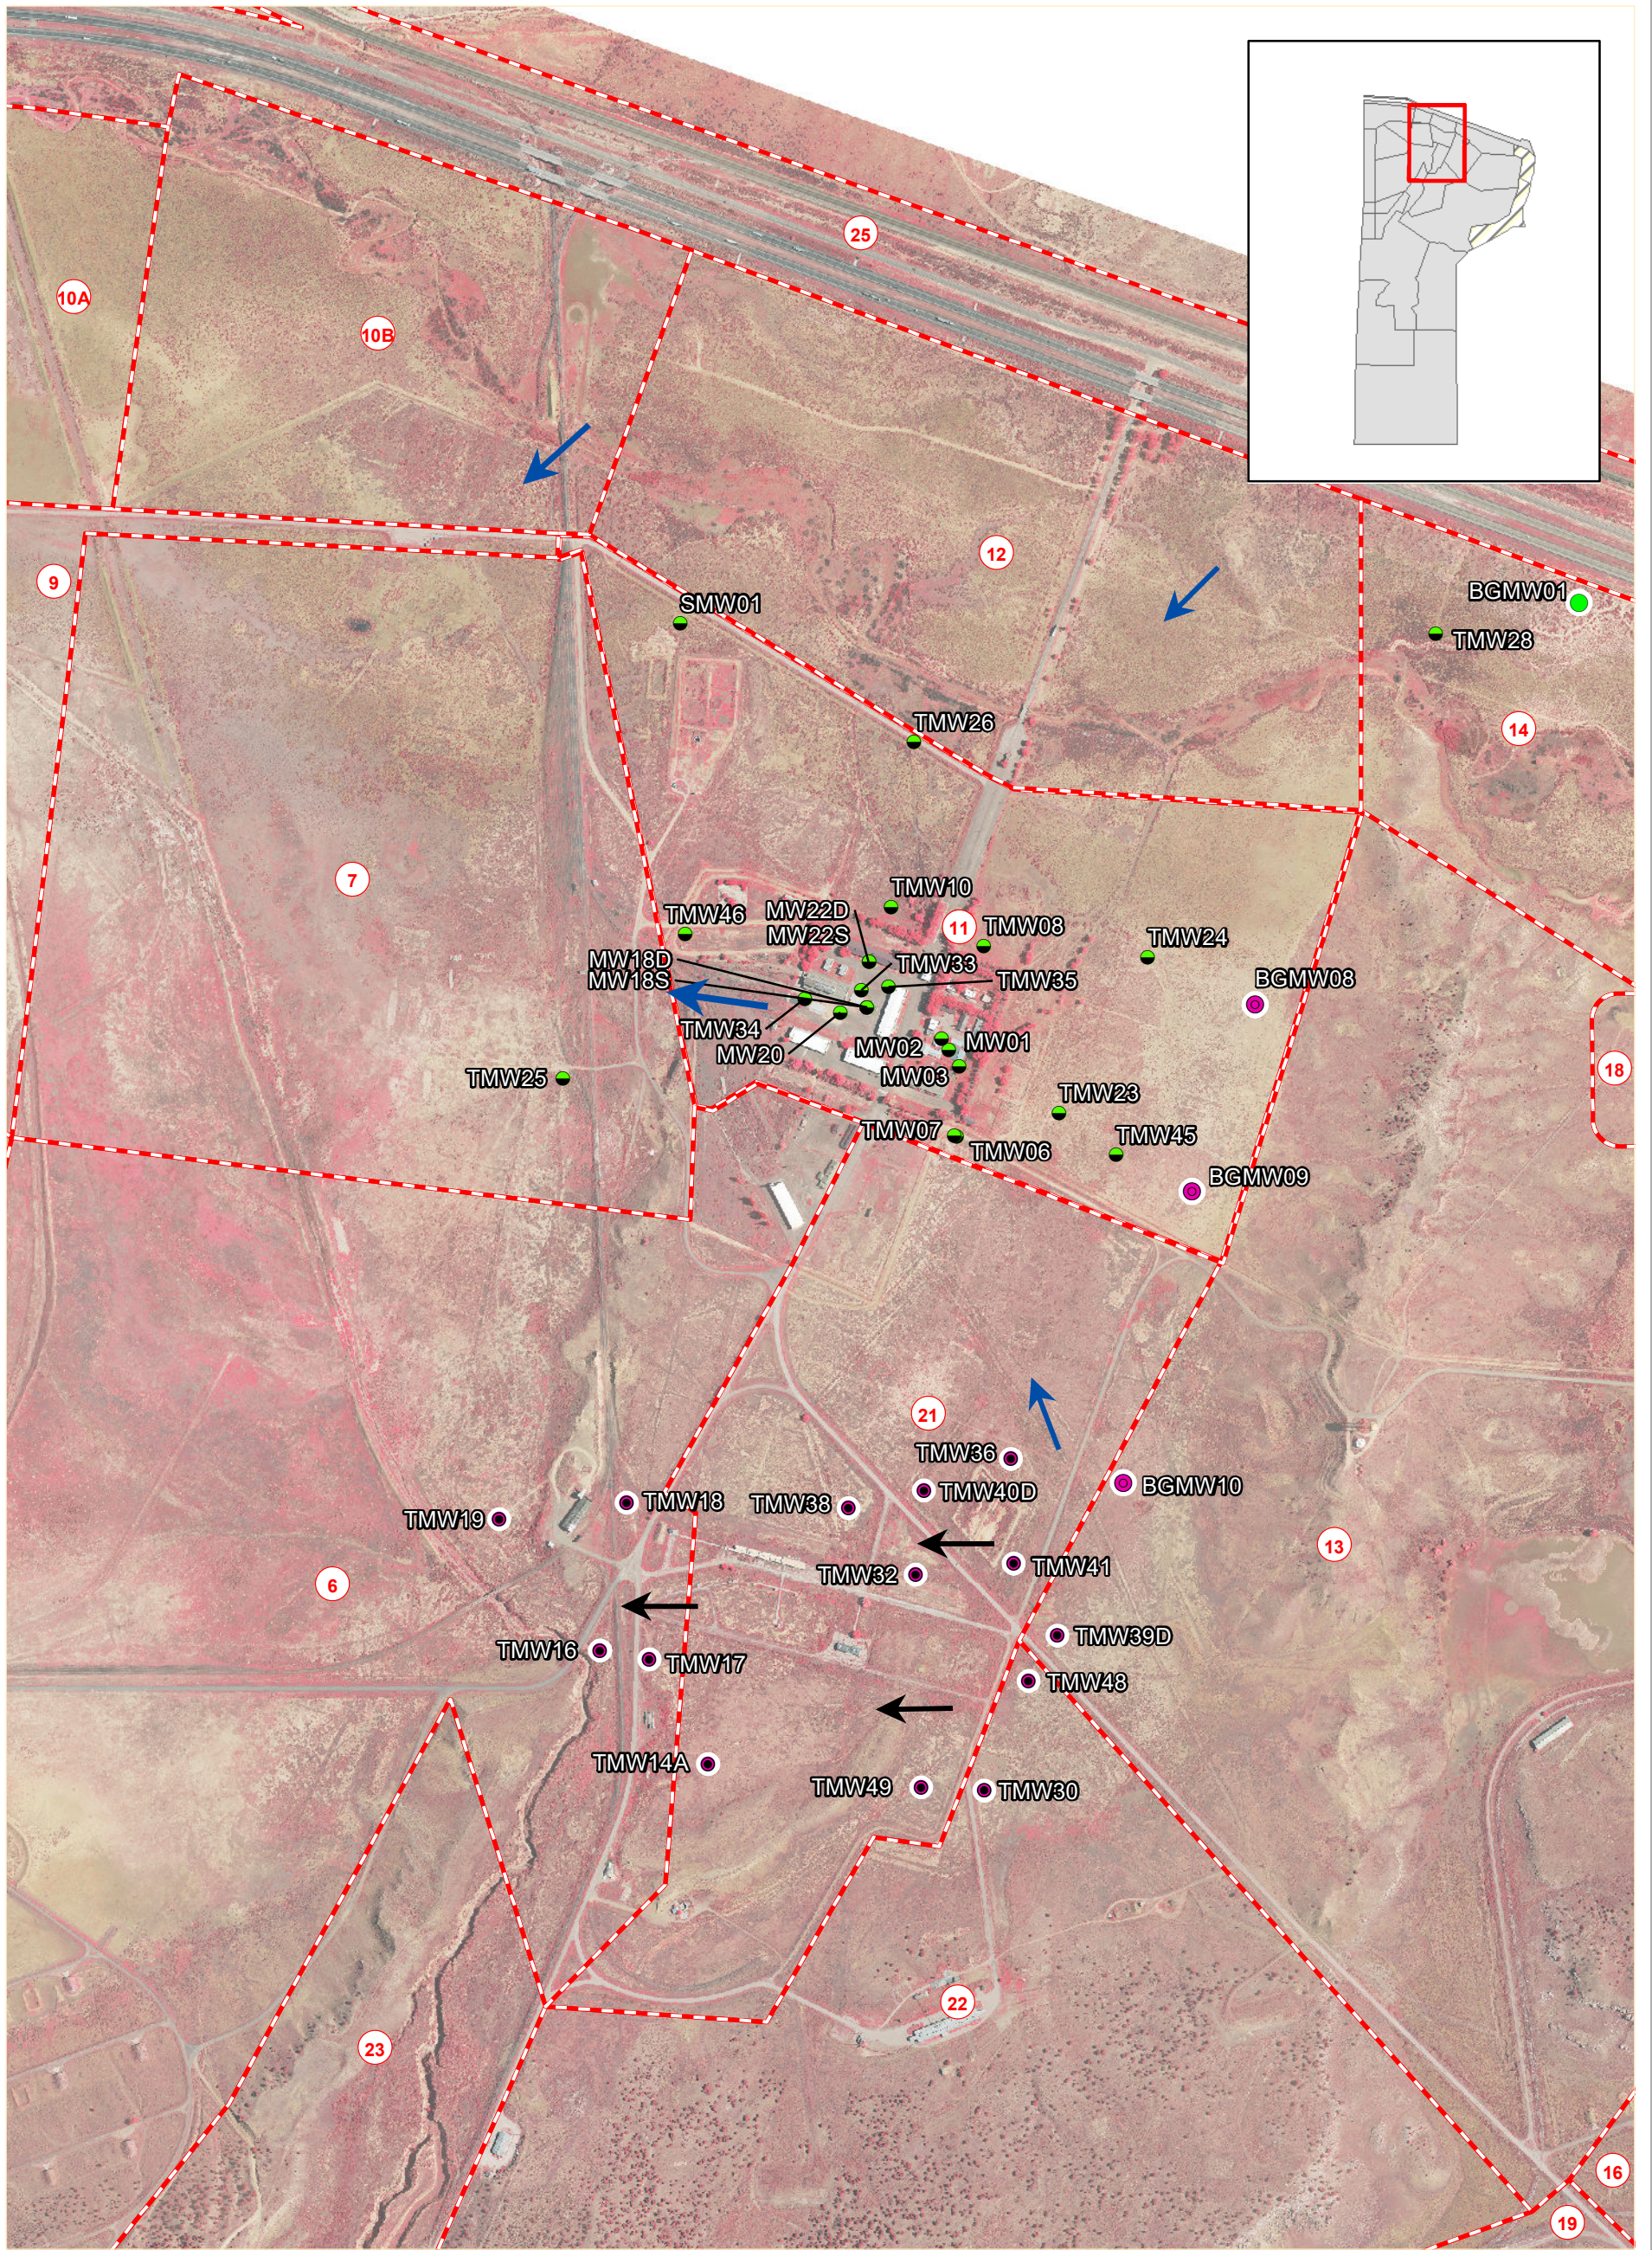

- Legend**
- Alluvial Background Well
  - Alluvial Downgradient Well
  - Bedrock Background Well
  - Bedrock Downgradient Well
  - Alluvial Aquifer Groundwater Flow Direction
  - Bedrock Aquifer Groundwater Flow Direction
  - FWDA Parcel Boundaries
  - FWDA Parcel Number
- Notes**  
FWDA = Fort Wingate Depot Activity








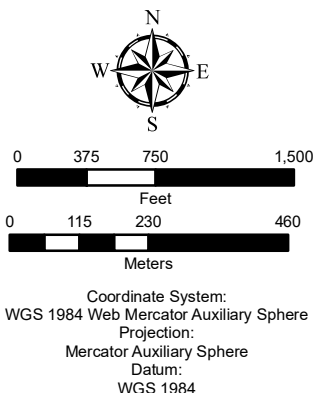


Updated:  
12/11/2019 10:30:06 AM










**Figure 2**  
MONITORING WELLS UTILIZED FOR STATISTICAL ANALYSIS  
GROUNDWATER BACKGROUND EVALUATION  
FORT WINGATE DEPOT ACTIVITY  
MCKINLEY COUNTY, NEW MEXICO



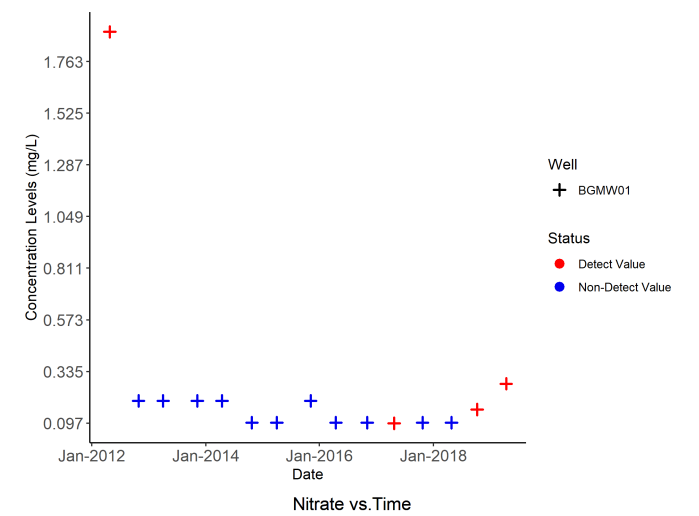
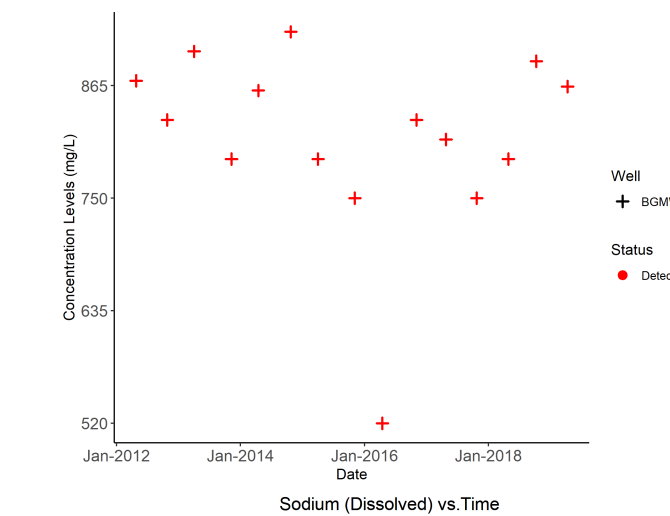
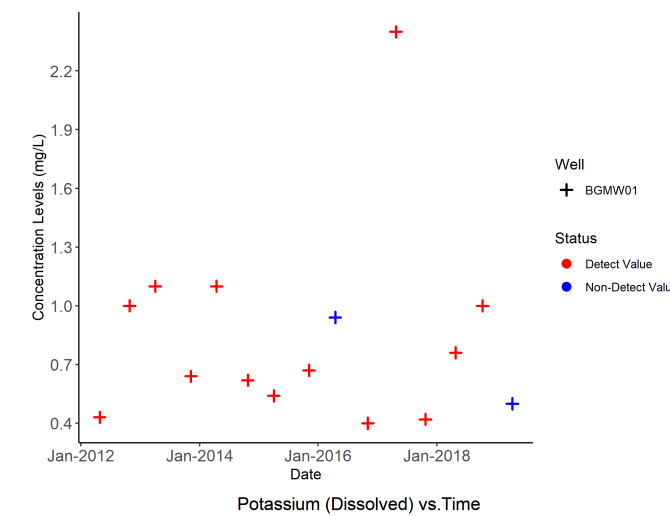
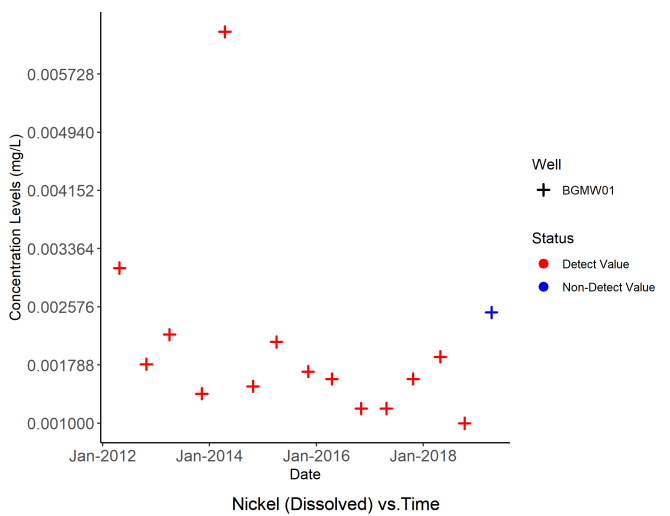
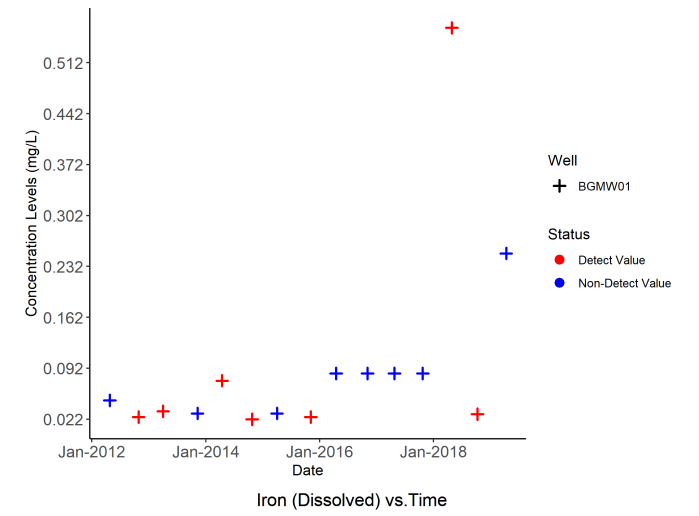
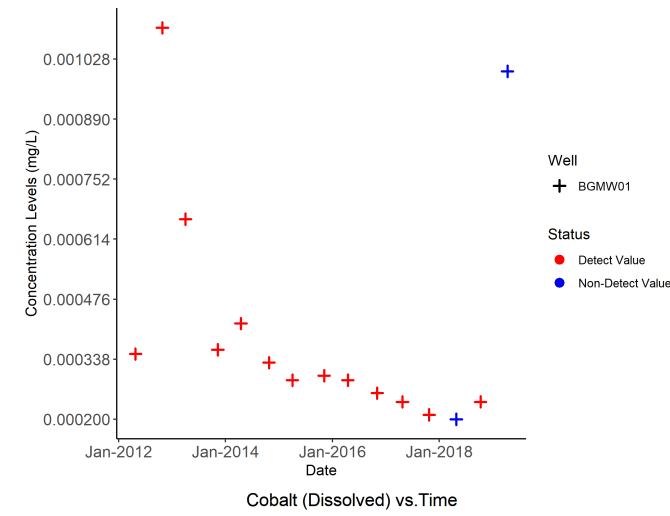
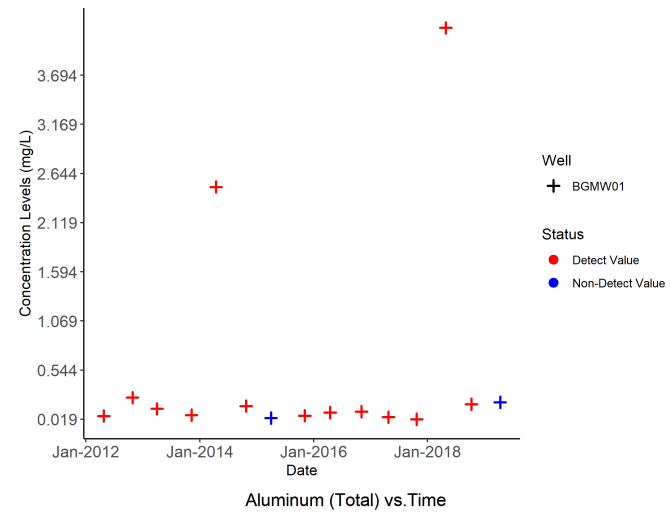
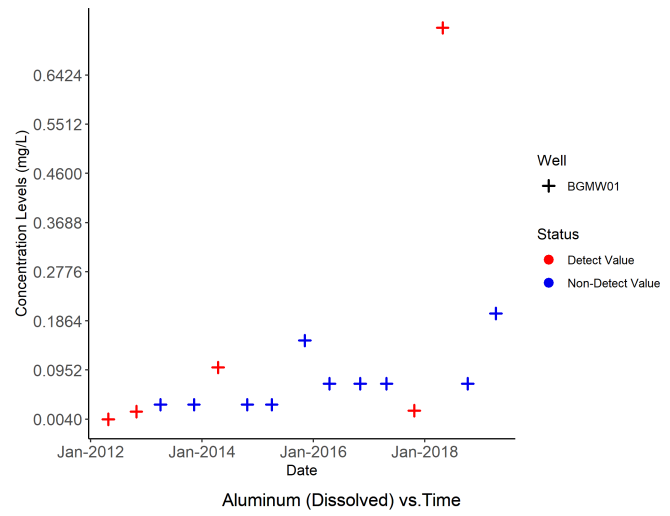


**Figure 3A**  
SCATTER PLOTS IN SUPPORT OF OUTLIER ANALYSIS - ALLUVIAL  
GROUNDWATER BACKGROUND EVALUATION  
FORT WINGATE DEPOT ACTIVITY MCKINLEY COUNTY, NEW MEXICO







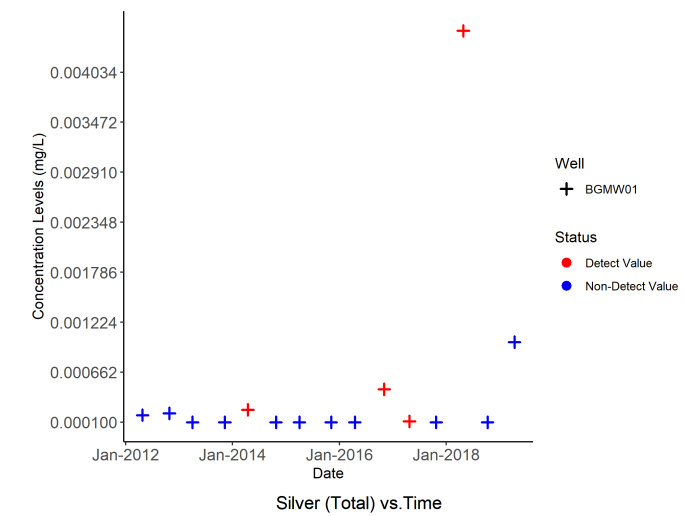
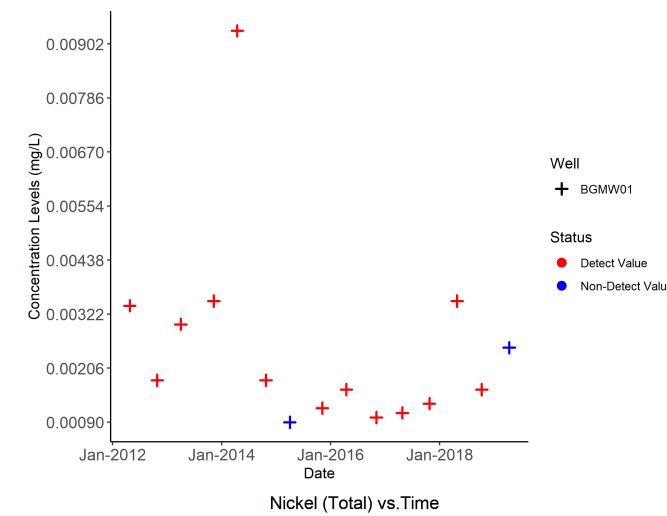
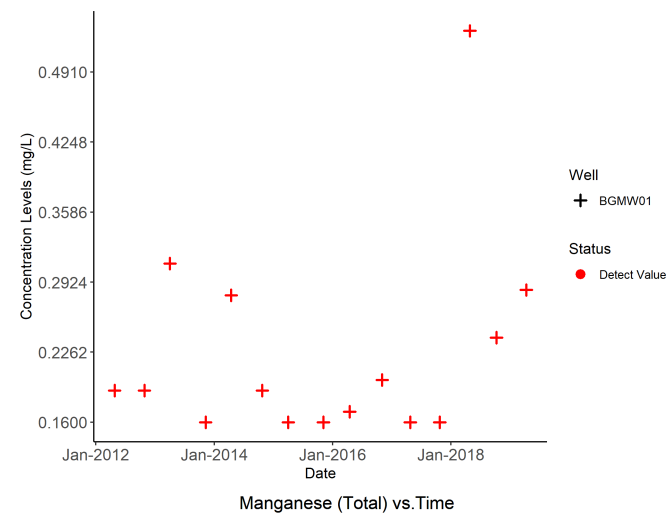
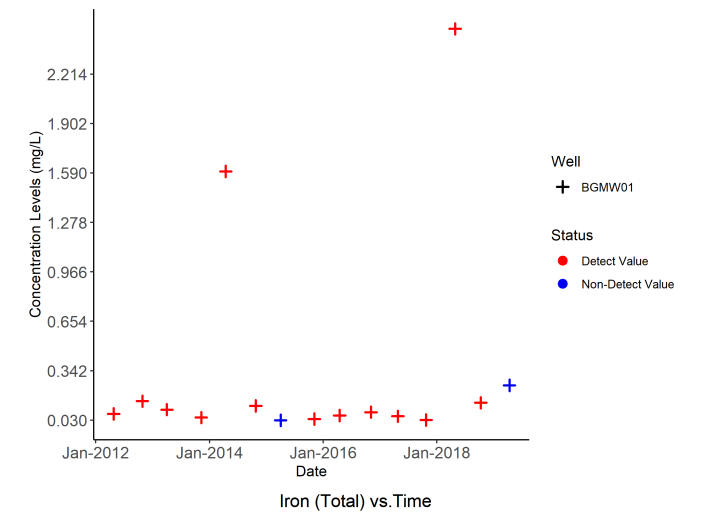
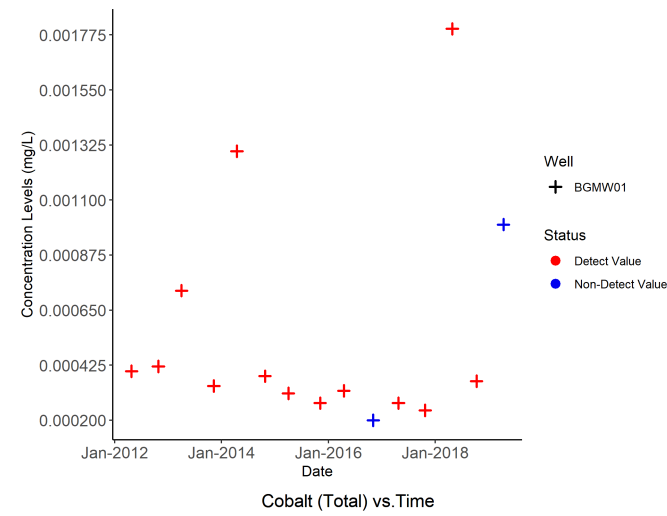
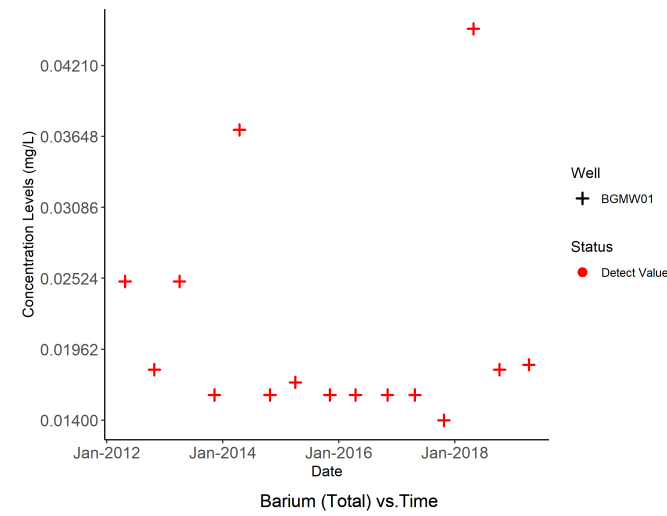
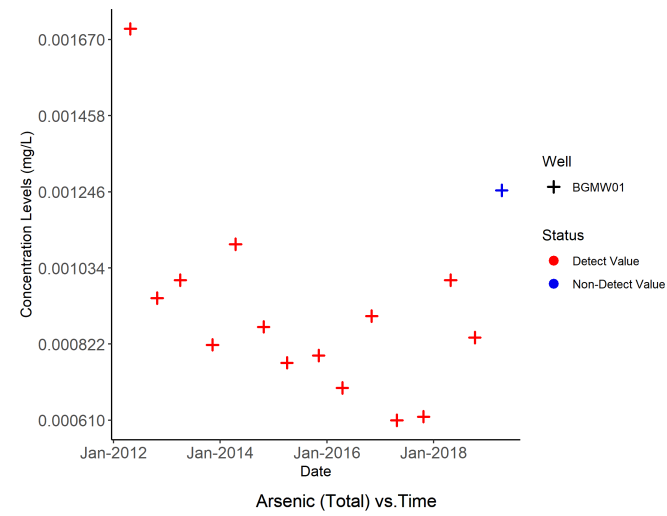


**Figure 3B**  
 SCATTER PLOTS IN SUPPORT OF OUTLIER ANALYSIS - ALLUVIAL  
 GROUNDWATER BACKGROUND EVALUATION  
 FORT WINGATE DEPOT ACTIVITY MCKINLEY COUNTY, NEW MEXICO

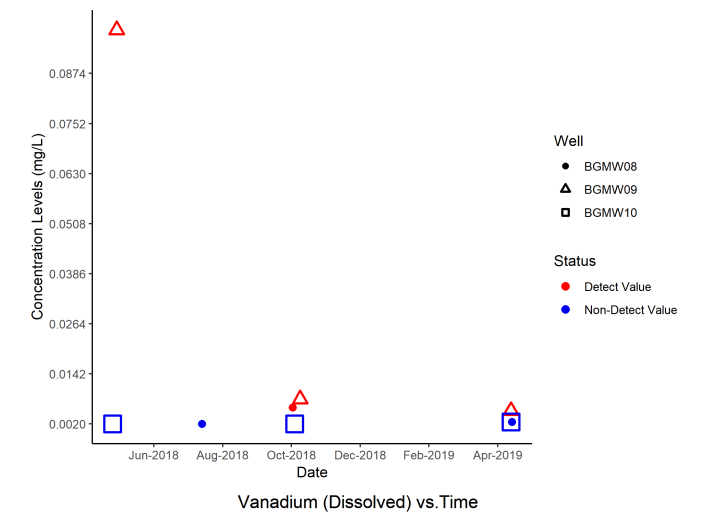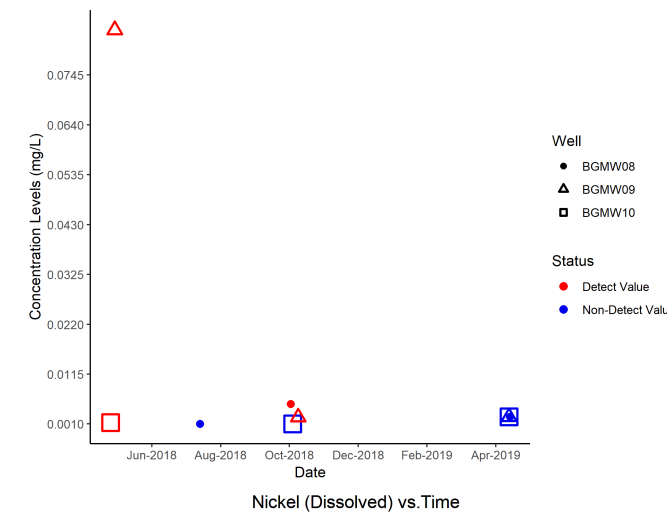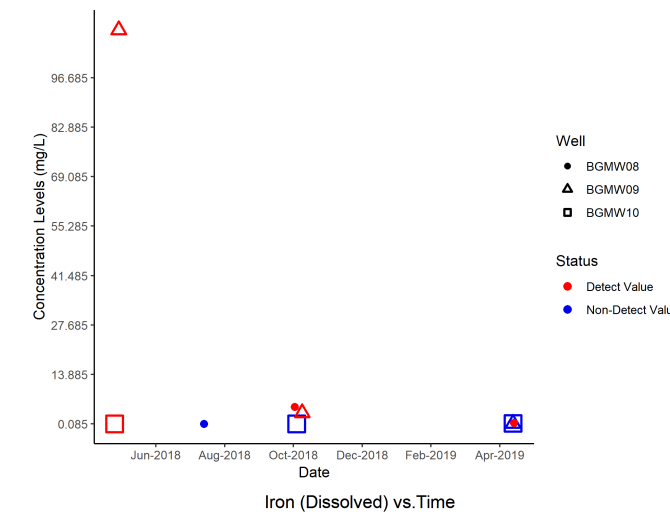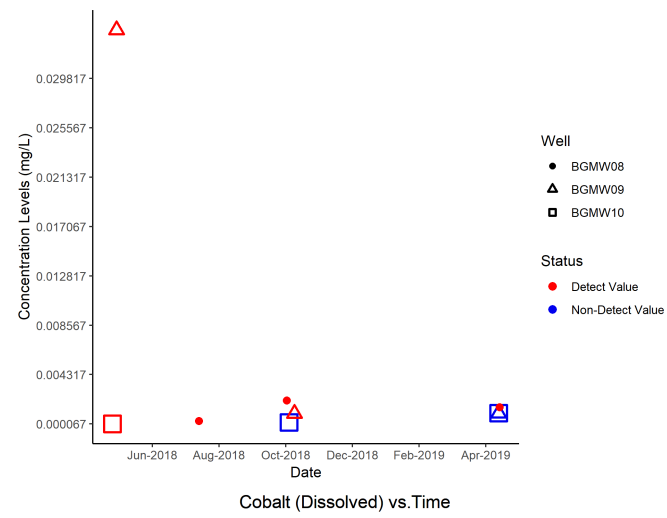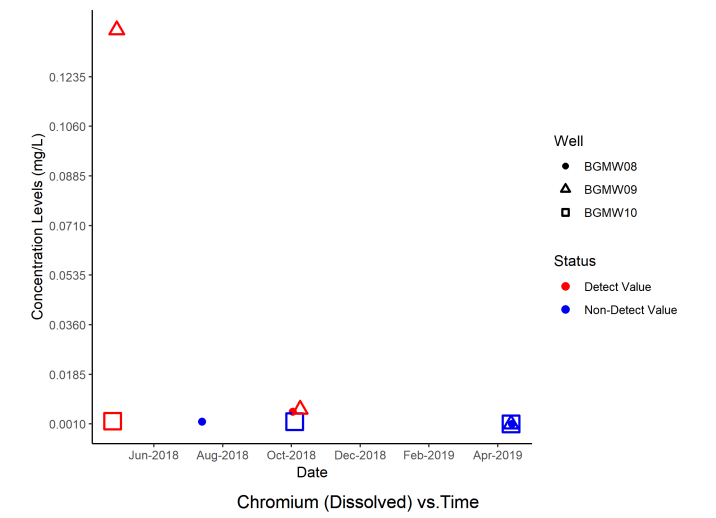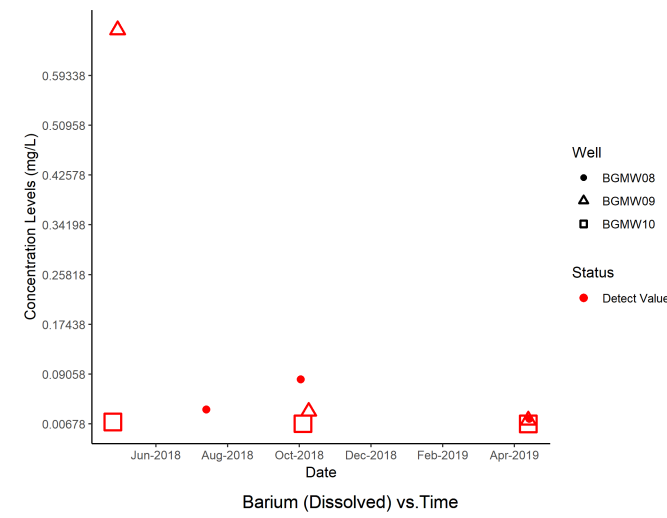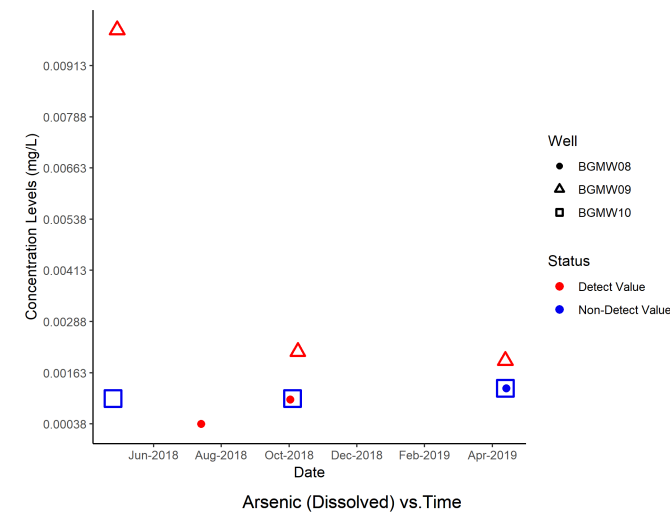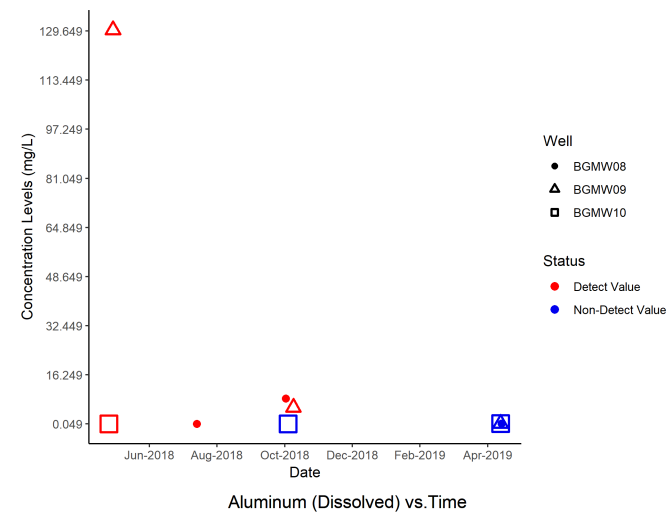


**Figure 3C**  
 SCATTER PLOTS IN SUPPORT OF OUTLIER ANALYSIS - BEDROCK  
 GROUNDWATER BACKGROUND EVALUATION  
 FORT WINGATE DEPOT ACTIVITY MCKINLEY COUNTY, NEW MEXICO



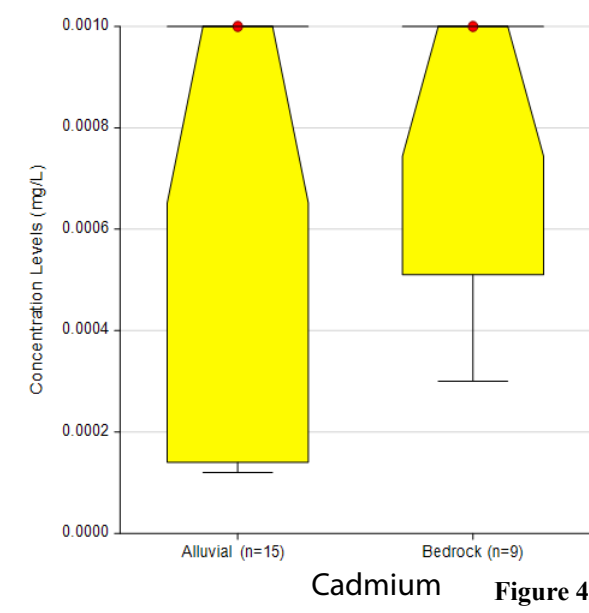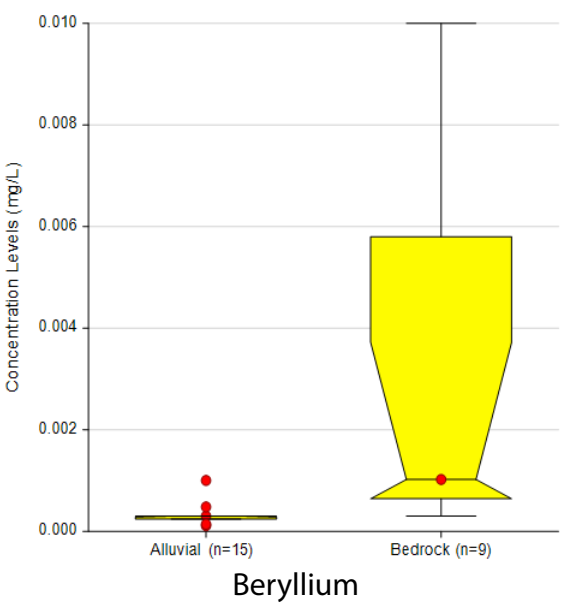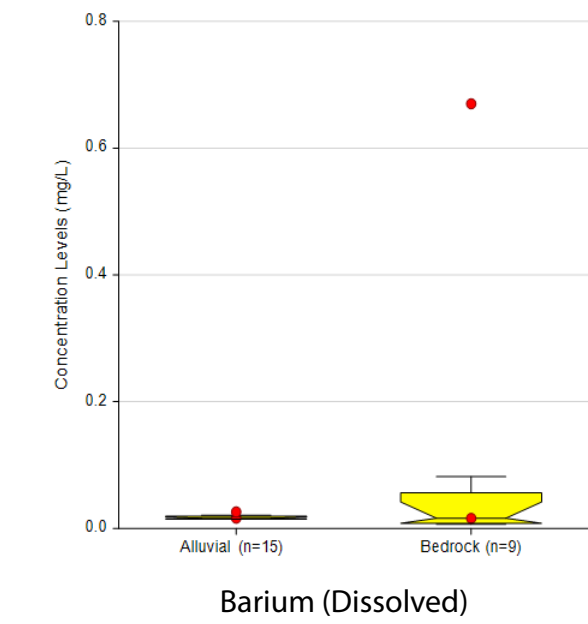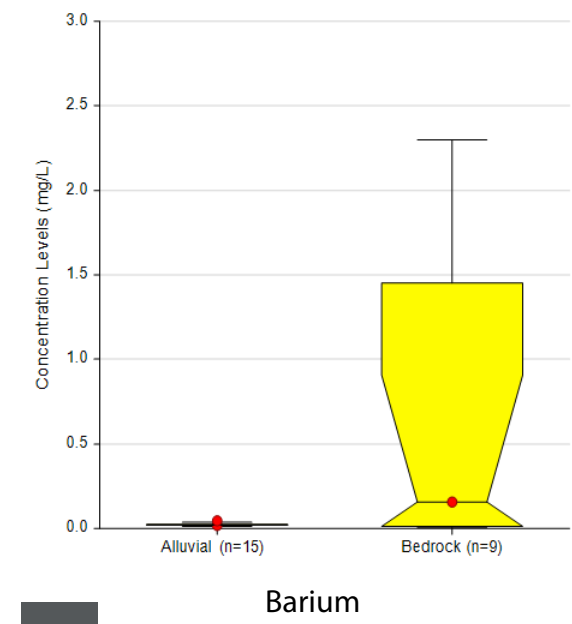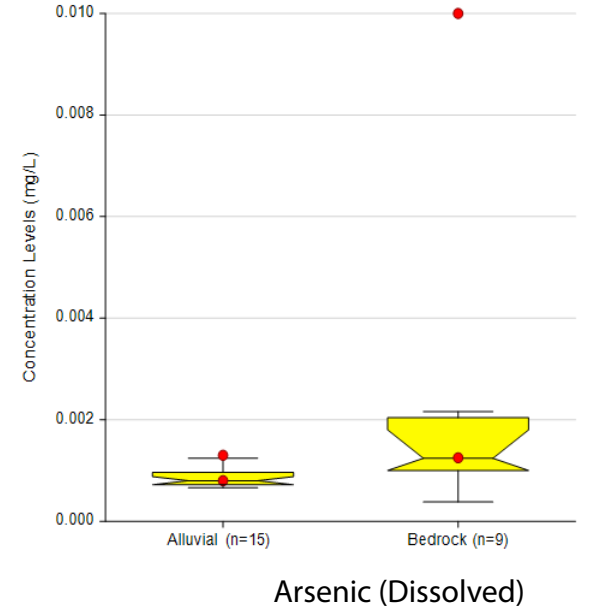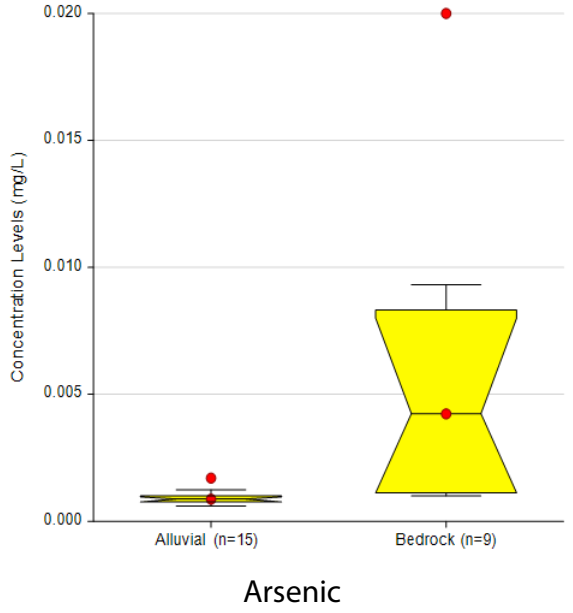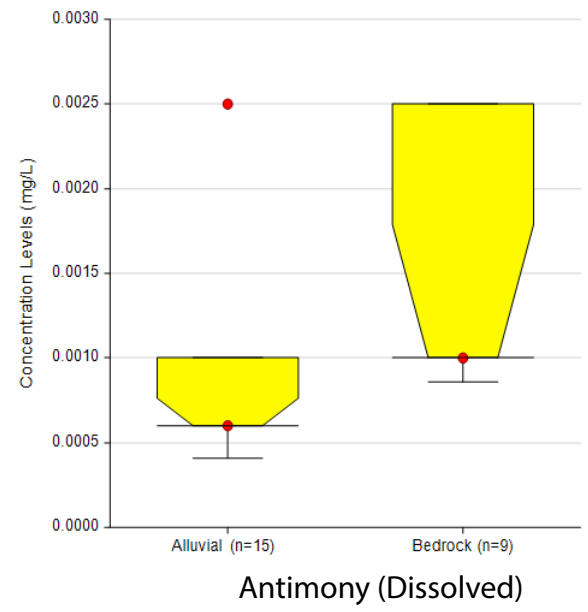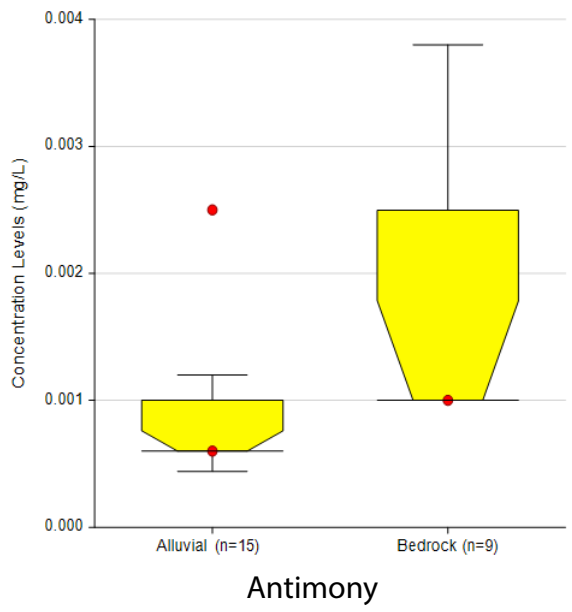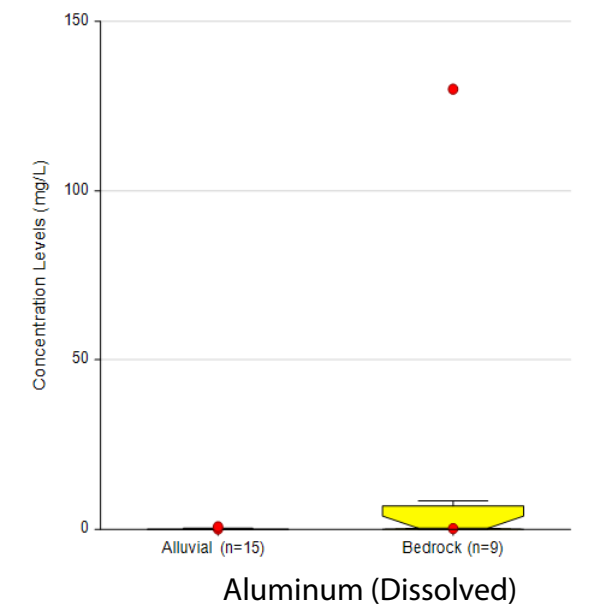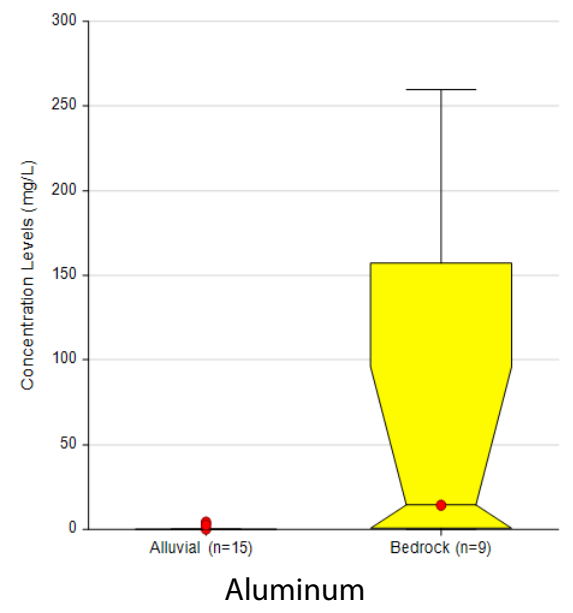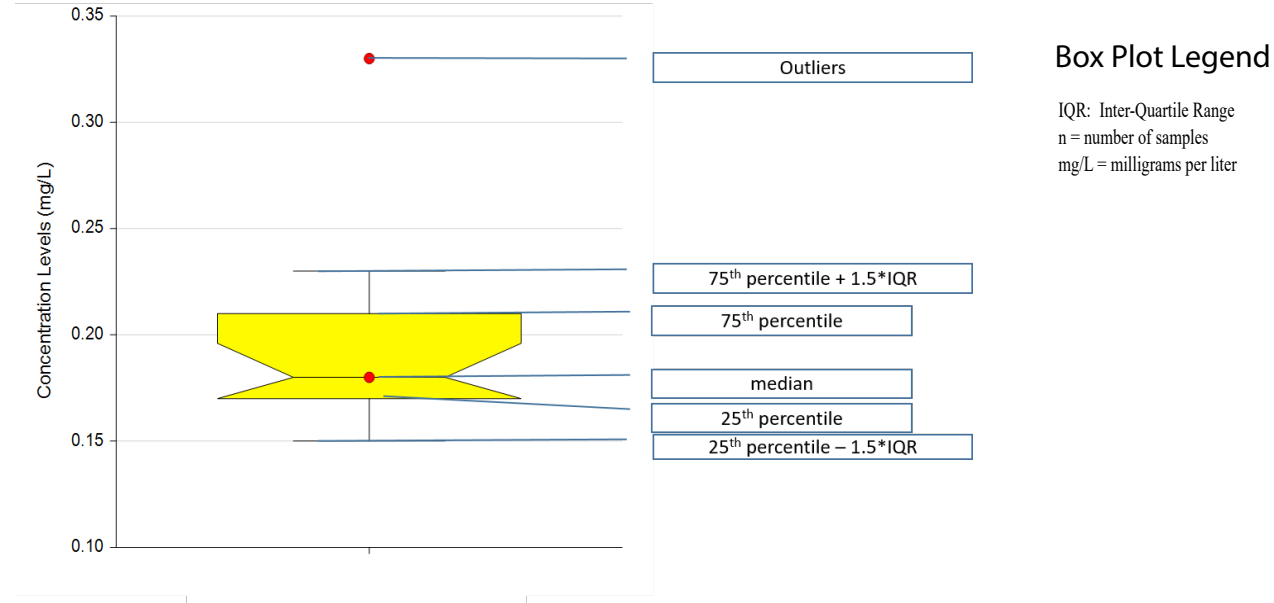


**Figure 4A**  
**BOX AND WHISKER PLOTS**  
**GROUNDWATER BACKGROUND EVALUATION**  
**FORT WINGATE DEPOT ACTIVITY MCKINLEY COUNTY, NEW MEXICO**

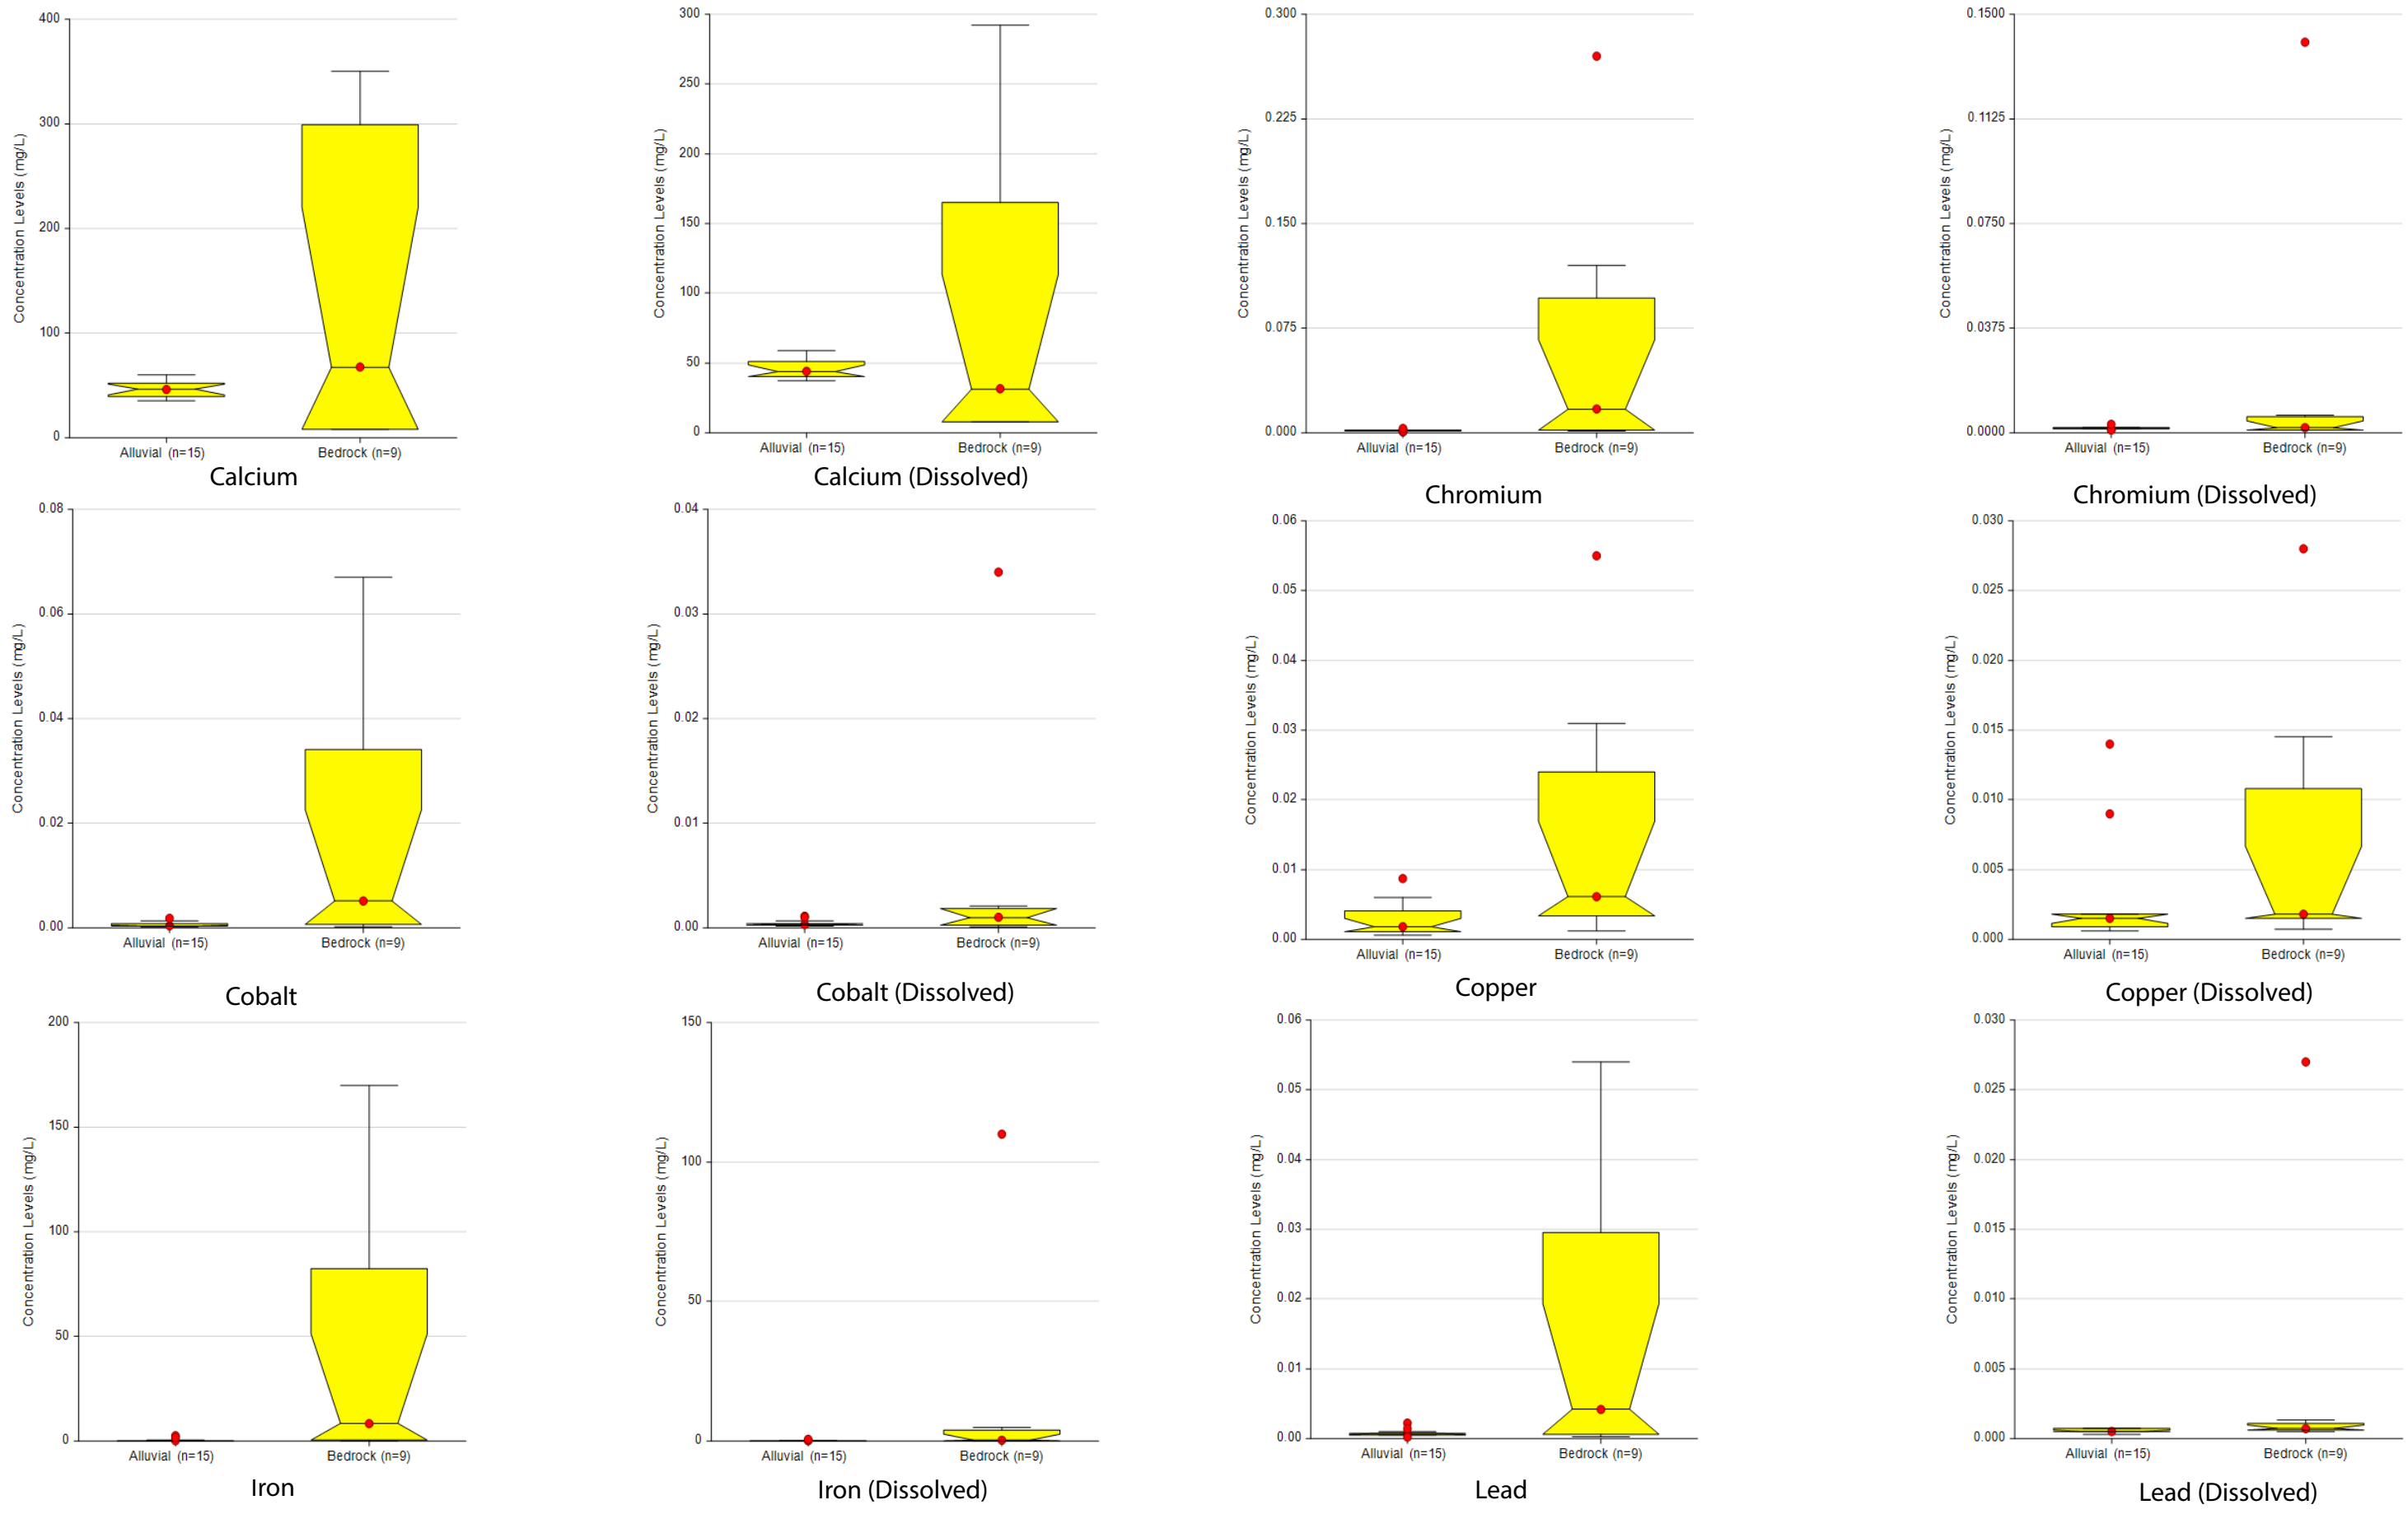


**Figure 4B**

BOX AND WHISKER PLOTS  
GROUNDWATER BACKGROUND EVALUATION  
FORT WINGATE DEPOT ACTIVITY MCKINLEY COUNTY, NEW MEXICO




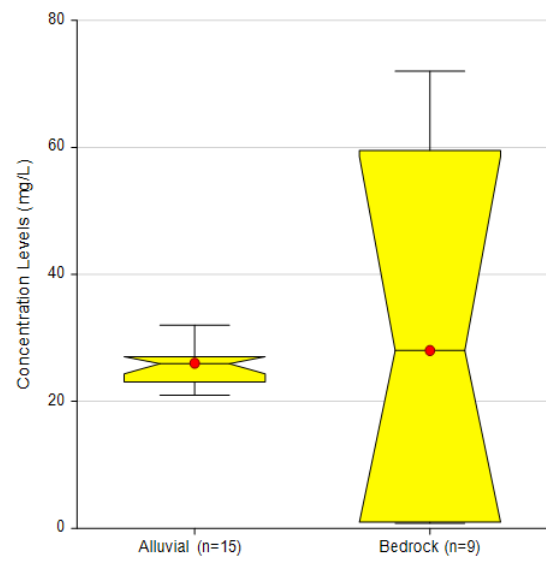


Magnesium

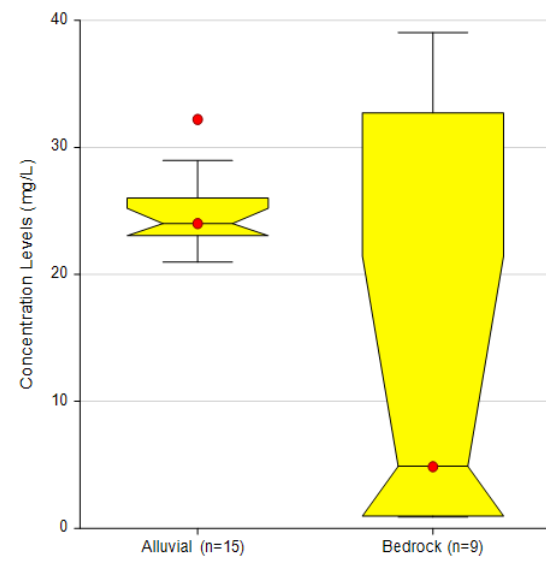


Magnesium (Dissolved)

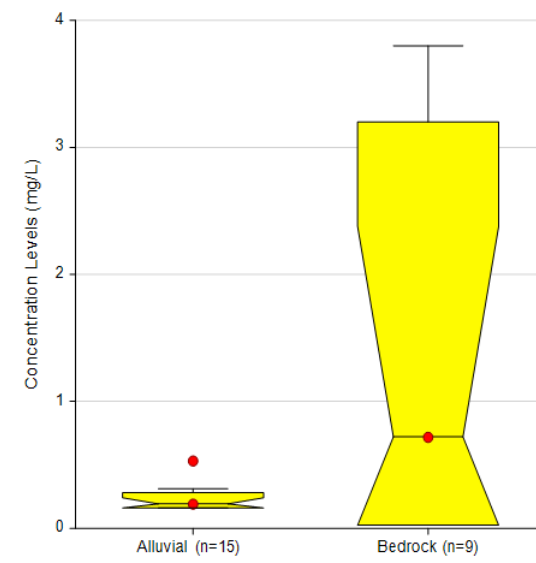


Manganese

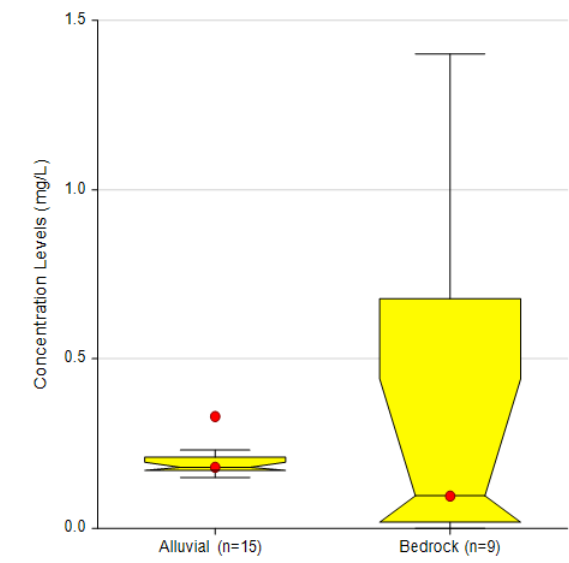


Manganese (Dissolved)

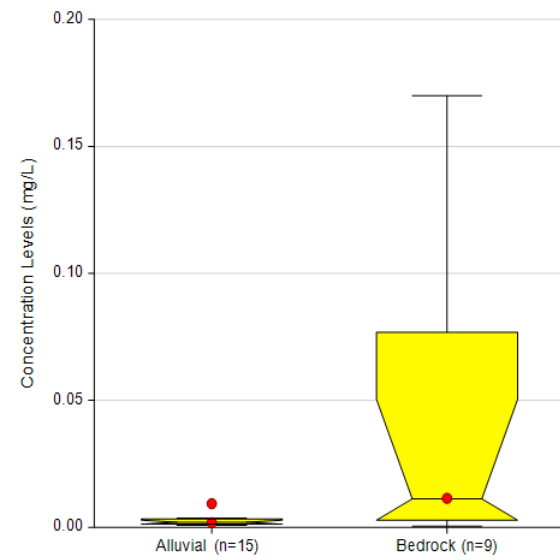


Nickel

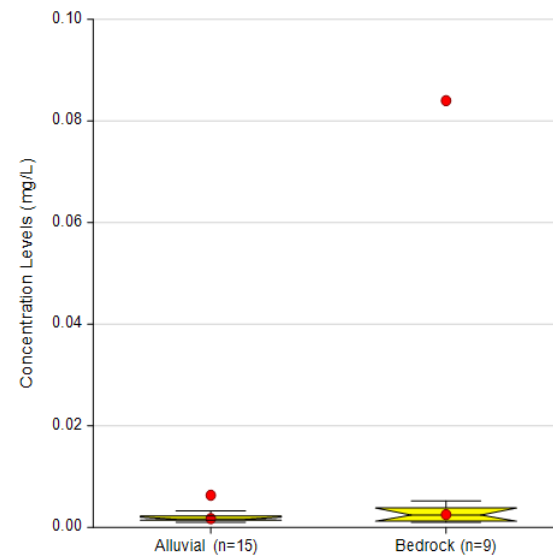


Nickel (Dissolved)

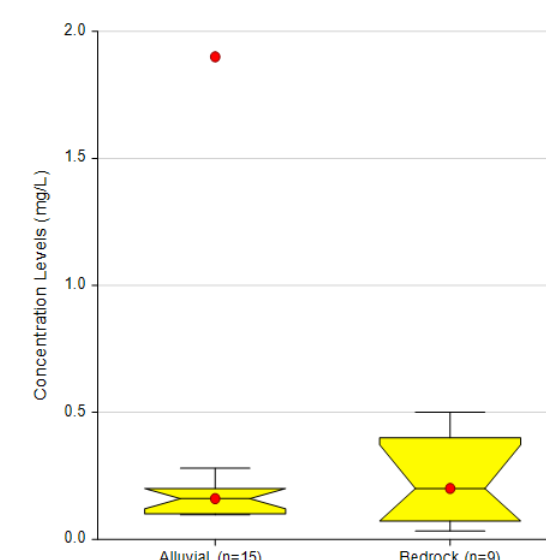


Nitrate

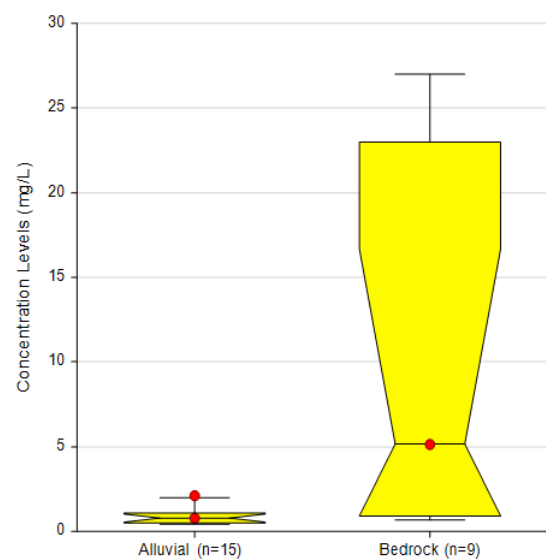


Potassium

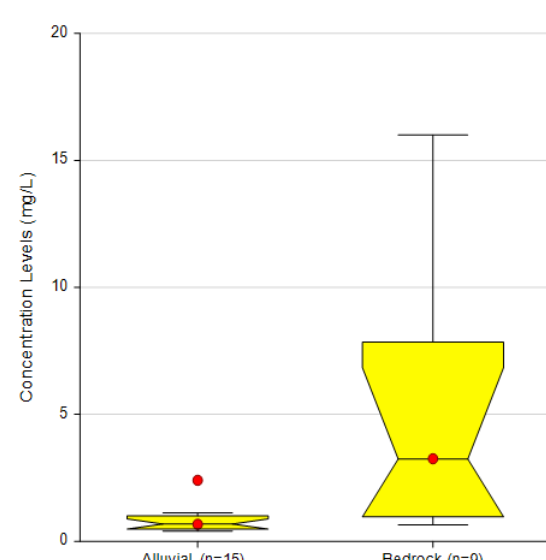

Potassium (Dissolved)

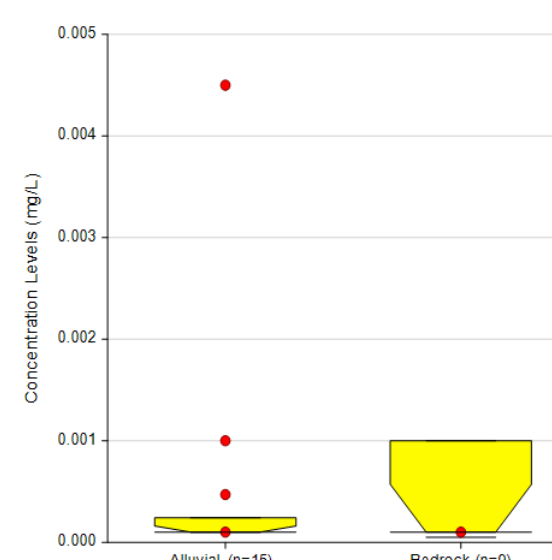

Silver

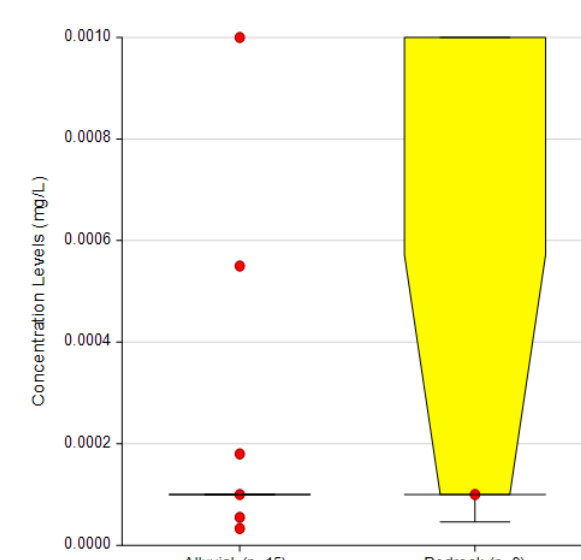

Silver (Dissolved)


Figure 4C

BOX AND WHISKER PLOTS


GROUNDWATER BACKGROUND EVALUATION

FORT WINGATE DEPOT ACTIVITY MCKINLEY COUNTY, NEW MEXICO




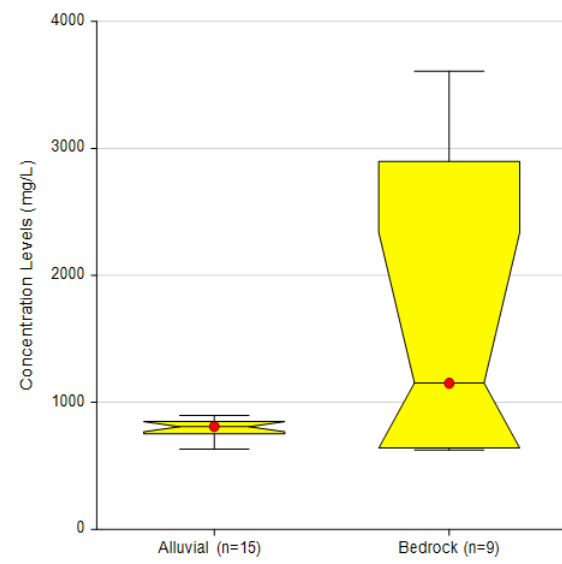


Sodium

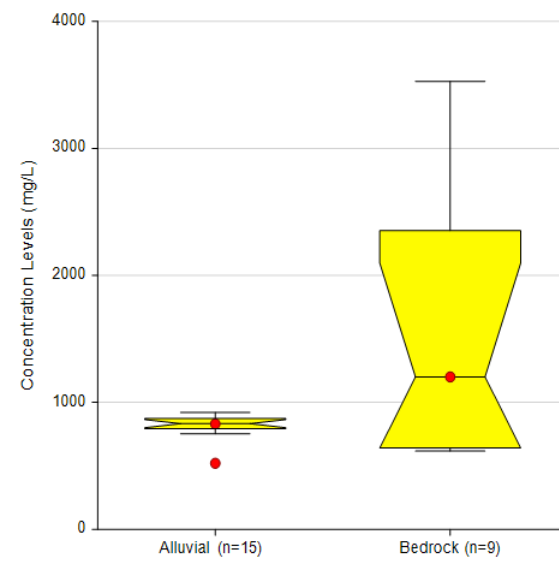


Sodium (Dissolved)

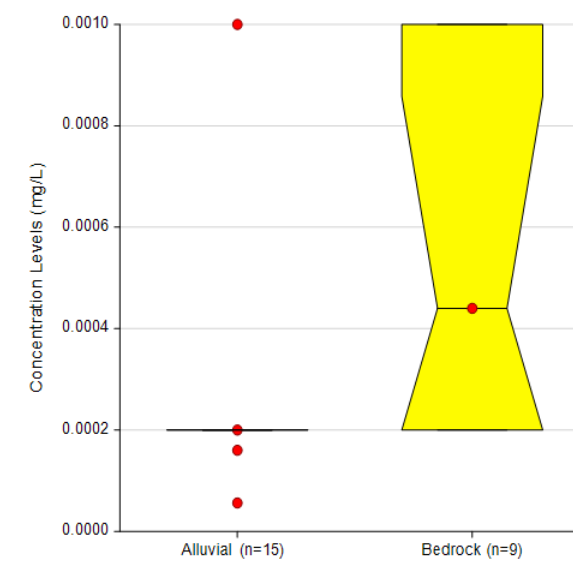


Thallium

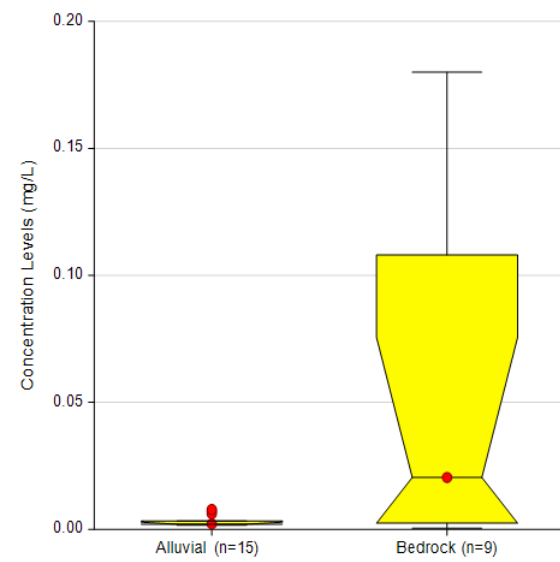


Vanadium

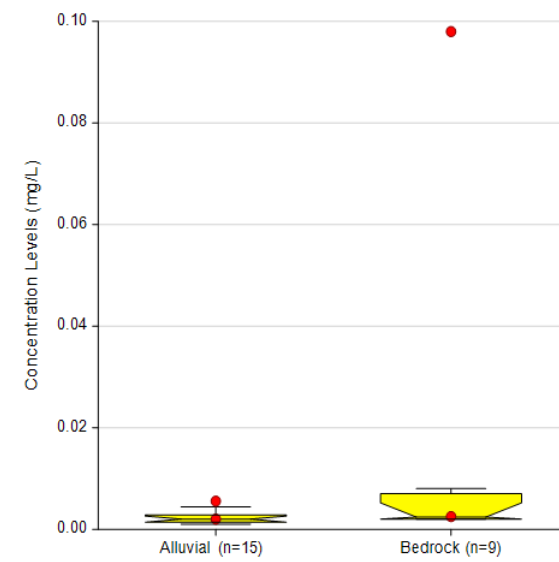

Vanadium (Dissolved)

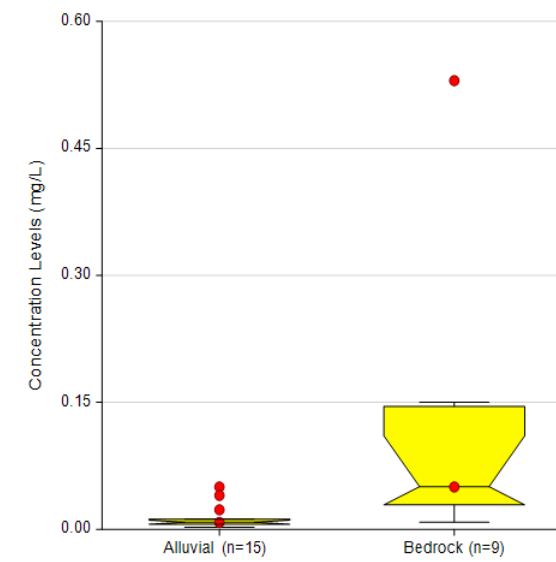

Zinc

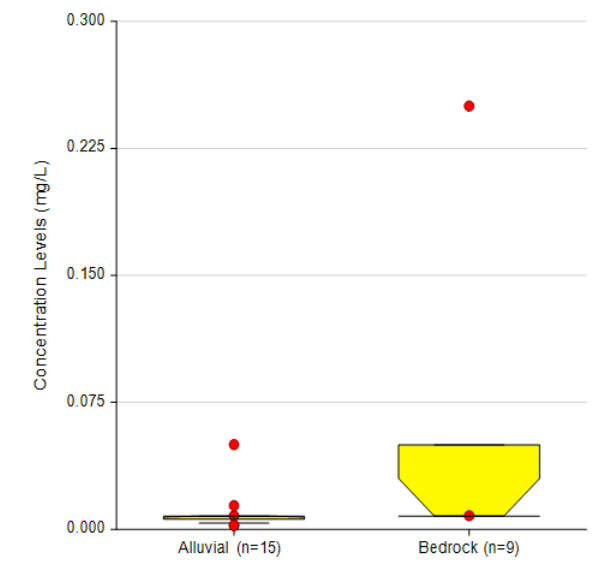

Zinc (Dissolved)



**Figure 4D**  
 BOX AND WHISKER PLOTS  
 GROUNDWATER BACKGROUND EVALUATION  
 FORT WINGATE DEPOT ACTIVITY MCKINLEY COUNTY, NEW MEXICO

# 1 Tables

1

**Table 1: Monitoring Wells Utilized for Statistical Analysis**

Background Wells <sup>1</sup>	
Alluvial	Bedrock
BGMW01	BGMW08
	BGMW09
	BGMW10
Downgradient Wells <sup>2</sup>	
Alluvial	Bedrock
MW01	TMW14A
MW02	TMW16
MW03	TMW17
MW18D	TMW18
MW18S	TMW19
MW22D	TMW30
MW22S	TMW32
SMW01	TMW36
TMW06	TMW38
TMW07	TMW39D
TMW08	TMW40D
TMW10	TMW41A
MW20	TMW48
TMW23	TMW49
TMW24	
TMW25	
TMW26	
TMW28	
TMW33	
TMW34	
TMW35	
TMW45	
TMW46	

2

<sup>1</sup> The analytical results from the background wells were used to compute the BTVs.

<sup>2</sup> The number of downgradient wells were used to determine the number of comparisons required between the BTVs and the analytical results from FWDA monitoring wells to achieve the target site-wide false positive rates.



1

**Table 2: Constituents Utilized for Statistical Analysis**

Dissolved Metals	Total Metals	Other Compounds
Aluminum	Aluminum	Nitrate
Antimony	Antimony	Perchlorate
Arsenic	Arsenic	
Barium	Barium	
Beryllium	Beryllium	
Cadmium	Cadmium	
Calcium	Calcium	
Chromium	Chromium	
Cobalt	Cobalt	
Copper	Copper	
Iron	Iron	
Lead	Lead	
Magnesium	Magnesium	
Manganese	Manganese	
Mercury	Mercury	
Nickel	Nickel	
Potassium	Potassium	
Selenium	Selenium	
Silver	Silver	
Sodium	Sodium	
Thallium	Thallium	
Vanadium	Vanadium	
Zinc	Zinc	

2

1 **Table 3: Descriptive Statistics for the Background Data Set**

Constituent	Aquifer	Unit	Sample Size	No. of NDs	With NDs=DLs Included				With NDs Removed			
					Minimum	Maximum	Mean	Median	Minimum	Maximum	Mean	Median
<b>Dissolved Metals</b>												
Aluminum	Alluvial	mg/L	15	10	0.00400	0.730	0.108	0.0700	0.00400	0.730	0.174	0.0200
Antimony	Alluvial	mg/L	15	13	0.000410	0.00250	0.000837	0.000600	0.000410	0.000530	0.000470	0.000470
Arsenic	Alluvial	mg/L	15	1	0.000660	0.00130	0.000857	0.000800	0.000660	0.00130	0.000829	0.000795
Barium	Alluvial	mg/L	15	0	0.0140	0.0260	0.0175	0.0160	0.0140	0.0260	0.0175	0.0160
Beryllium	Alluvial	mg/L	15	15	0.000240	0.00100	0.000319	0.000300	--	--	--	--
Cadmium	Alluvial	mg/L	15	15	0.000120	0.00100	0.000618	0.00100	--	--	--	--
Calcium	Alluvial	mg/L	15	0	37.0	58.6	45.6	44.0	37.0	58.6	45.6	44.0
Chromium	Alluvial	mg/L	15	13	0.000970	0.00300	0.00165	0.00150	0.000970	0.00300	0.00198	0.00198
Cobalt	Alluvial	mg/L	15	2	0.000200	0.00110	0.000417	0.000300	0.000210	0.00110	0.000388	0.000300
Copper	Alluvial	mg/L	15	6	0.000580	0.0140	0.00262	0.00150	0.000580	0.0140	0.00330	0.00110
Iron	Alluvial	mg/L	15	8	0.0220	0.560	0.0978	0.0480	0.0220	0.560	0.110	0.0290
Lead	Alluvial	mg/L	15	12	0.000280	0.000700	0.000560	0.000500	0.000280	0.000584	0.000401	0.000340
Magnesium	Alluvial	mg/L	15	0	21.0	32.2	25.1	24.0	21.0	32.2	25.1	24.0
Manganese	Alluvial	mg/L	15	0	0.150	0.330	0.195	0.180	0.150	0.330	0.195	0.180
Mercury	Alluvial	mg/L	15	15	0.0000520	0.000100	0.0000795	0.0000800	--	--	--	--
Nickel	Alluvial	mg/L	15	1	0.00100	0.00630	0.00207	0.00170	0.00100	0.00630	0.00204	0.00165
Potassium	Alluvial	mg/L	15	2	0.400	2.40	0.835	0.670	0.400	2.40	0.852	0.670
Selenium	Alluvial	mg/L	15	14	0.00150	0.00300	0.00203	0.00200	0.00300	0.00300	0.00300	0.00300
Silver	Alluvial	mg/L	15	12	0.0000330	0.00100	0.000188	0.000100	0.0000330	0.000550	0.000213	0.0000550
Sodium	Alluvial	mg/L	15	0	520	920	811	830	520	920	811	830
Thallium	Alluvial	mg/L	15	15	0.000100	0.00100	0.000244	0.000200	--	--	--	--
Vanadium	Alluvial	mg/L	15	1	0.00100	0.00554	0.00230	0.00200	0.00100	0.00554	0.00232	0.00185
Zinc	Alluvial	mg/L	15	10	0.00220	0.0500	0.00963	0.00800	0.00220	0.0140	0.00570	0.00340
Aluminum	Bedrock	mg/L	9	4	0.0490	130	16.1	0.200	0.0490	130	28.8	5.55
Antimony	Bedrock	mg/L	9	7	0.000860	0.00250	0.00152	0.00100	0.000860	0.00130	0.00108	0.00108

2

1 **Table 3: Descriptive Statistics for the Background Data Set (continued)**

Constituent	Aquifer	Unit	Sample Size	No. of NDs	With NDs=DLs Included				With NDs Removed			
					Minimum	Maximum	Mean	Median	Minimum	Maximum	Mean	Median
<b>Dissolved Metals</b>												
Arsenic	Bedrock	mg/L	9	4	0.000380	0.0100	0.00222	0.00125	0.000380	0.0100	0.00309	0.00193
Barium	Bedrock	mg/L	9	0	0.00678	0.670	0.0960	0.0158	0.00678	0.670	0.0960	0.0158
Beryllium	Bedrock	mg/L	9	7	0.000130	0.00550	0.00109	0.000300	0.000130	0.00550	0.00282	0.00282
Cadmium	Bedrock	mg/L	9	9	0.00100	0.00100	0.00100	0.00100	--	--	--	--
Calcium	Bedrock	mg/L	9	0	7.80	292	88.3	31.5	7.80	292	88.3	31.5
Chromium	Bedrock	mg/L	9	5	0.00100	0.140	0.0178	0.00180	0.00200	0.140	0.0384	0.00575
Cobalt	Bedrock	mg/L	9	3	0.0000670	0.0340	0.00458	0.00100	0.0000670	0.0340	0.00650	0.00125
Copper	Bedrock	mg/L	9	4	0.000700	0.0280	0.00688	0.00180	0.000700	0.0280	0.0103	0.00715
Iron	Bedrock	mg/L	9	4	0.0850	110	13.3	0.250	0.0880	110	23.7	3.17
Lead	Bedrock	mg/L	9	6	0.000500	0.0270	0.00366	0.000700	0.000874	0.0270	0.00972	0.00130
Magnesium	Bedrock	mg/L	9	0	0.876	39.0	14.3	4.85	0.876	39.0	14.3	4.85
Manganese	Bedrock	mg/L	9	1	0.000950	1.40	0.366	0.0950	0.0174	1.40	0.412	0.212
Mercury	Bedrock	mg/L	9	9	0.0000800	0.000100	0.0000867	0.0000800	--	--	--	--
Nickel	Bedrock	mg/L	9	5	0.00100	0.0840	0.0114	0.00250	0.00130	0.0840	0.0232	0.00382
Potassium	Bedrock	mg/L	9	0	0.645	16.0	4.80	3.25	0.645	16.0	4.80	3.25
Selenium	Bedrock	mg/L	9	9	0.00150	0.00200	0.00183	0.00200	--	--	--	--
Silver	Bedrock	mg/L	9	8	0.0000460	0.00100	0.000394	0.000100	0.0000460	0.0000460	0.0000460	0.0000460
Sodium	Bedrock	mg/L	9	0	618	3,530	1,523	1,200	618	3,530	1,523	1,200
Thallium	Bedrock	mg/L	9	8	0.000200	0.00100	0.000483	0.000200	0.000350	0.000350	0.000350	0.000350
Vanadium	Bedrock	mg/L	9	5	0.00200	0.0980	0.0143	0.00250	0.00523	0.0980	0.0293	0.00703
Zinc	Bedrock	mg/L	9	8	0.00800	0.250	0.0489	0.00800	0.250	0.250	0.250	0.250
<b>Total Metals</b>												
Aluminum	Alluvial	mg/L	15	2	0.0190	4.20	0.538	0.100	0.0190	4.20	0.603	0.100
Antimony	Alluvial	mg/L	15	13	0.000440	0.00250	0.000879	0.000600	0.000440	0.000530	0.000485	0.000485
Arsenic	Alluvial	mg/L	15	1	0.000610	0.00170	0.000928	0.000870	0.000610	0.00170	0.000905	0.000855

2

1 **Table 3: Descriptive Statistics for the Background Data Set (continued)**

Constituent	Aquifer	Unit	Sample Size	No. of NDs	With NDs=DLs Included				With NDs Removed			
					Minimum	Maximum	Mean	Median	Minimum	Maximum	Mean	Median
<b>Total Metals</b>												
Barium	Alluvial	mg/L	15	0	0.0140	0.0450	0.0209	0.0170	0.0140	0.0450	0.0209	0.0170
Beryllium	Alluvial	mg/L	15	13	0.000110	0.00100	0.000316	0.000300	0.000110	0.000140	0.000125	0.000125
Cadmium	Alluvial	mg/L	15	13	0.000120	0.00100	0.000634	0.00100	0.000140	0.000370	0.000255	0.000255
Calcium	Alluvial	mg/L	15	0	35.0	60.0	46.1	46.0	35.0	60.0	46.1	46.0
Chromium	Alluvial	mg/L	15	10	0.000620	0.00300	0.00164	0.00170	0.000620	0.00260	0.00149	0.00170
Cobalt	Alluvial	mg/L	15	2	0.000200	0.00180	0.000556	0.000360	0.000240	0.00180	0.000549	0.000360
Copper	Alluvial	mg/L	15	5	0.000590	0.00870	0.00264	0.00180	0.000590	0.00870	0.00278	0.00145
Iron	Alluvial	mg/L	15	2	0.0300	2.50	0.351	0.0810	0.0310	2.50	0.384	0.0810
Lead	Alluvial	mg/L	15	11	0.000190	0.00220	0.000762	0.000700	0.000190	0.00220	0.00111	0.00102
Magnesium	Alluvial	mg/L	15	0	21.0	32.0	25.6	26.0	21.0	32.0	25.6	26.0
Manganese	Alluvial	mg/L	15	0	0.160	0.530	0.226	0.190	0.160	0.530	0.226	0.190
Mercury	Alluvial	mg/L	15	15	0.0000270	0.000100	0.0000778	0.0000800	--	--	--	--
Nickel	Alluvial	mg/L	15	2	0.000900	0.00930	0.00250	0.00180	0.00100	0.00930	0.00262	0.00180
Potassium	Alluvial	mg/L	15	1	0.420	2.10	0.943	0.770	0.420	2.10	0.975	0.795
Selenium	Alluvial	mg/L	15	14	0.00150	0.00460	0.00227	0.00200	0.00460	0.00460	0.00460	0.00460
Silver	Alluvial	mg/L	15	11	0.000100	0.00450	0.000500	0.000100	0.000110	0.00450	0.00133	0.000355
Sodium	Alluvial	mg/L	15	0	630	894	794	810	630	894	794	810
Thallium	Alluvial	mg/L	15	14	0.0000560	0.00100	0.000241	0.000200	0.0000560	0.0000560	0.0000560	0.0000560
Vanadium	Alluvial	mg/L	15	2	0.00150	0.00780	0.00315	0.00210	0.00150	0.00780	0.00332	0.00220
Zinc	Alluvial	mg/L	15	10	0.00200	0.0500	0.0127	0.00800	0.00200	0.0400	0.0142	0.00320
Aluminum	Bedrock	mg/L	9	2	0.0700	260	74.5	14.2	0.560	260	95.7	78.0
Antimony	Bedrock	mg/L	9	8	0.00100	0.00380	0.00181	0.00100	0.00380	0.00380	0.00380	0.00380
Arsenic	Bedrock	mg/L	9	3	0.00100	0.0200	0.00576	0.00423	0.00144	0.0200	0.00810	0.00683
Barium	Bedrock	mg/L	9	0	0.00758	2.30	0.659	0.156	0.00758	2.30	0.659	0.156
Beryllium	Bedrock	mg/L	9	4	0.000300	0.0100	0.00312	0.00102	0.00102	0.0100	0.00510	0.00380

2

1 **Table 3: Descriptive Statistics for the Background Data Set (continued)**

Constituent	Aquifer	Unit	Sample Size	No. of NDs	With NDs=DLs Included				With NDs Removed			
					Minimum	Maximum	Mean	Median	Minimum	Maximum	Mean	Median
<b>Total Metals</b>												
Cadmium	Bedrock	mg/L	9	6	0.000300	0.00100	0.000813	0.00100	0.000300	0.000540	0.000440	0.000480
Calcium	Bedrock	mg/L	9	0	7.70	350	139	67.5	7.70	350	139	67.5
Chromium	Bedrock	mg/L	9	1	0.00100	0.270	0.0624	0.0170	0.00100	0.270	0.0701	0.0440
Cobalt	Bedrock	mg/L	9	2	0.000200	0.0670	0.0187	0.00511	0.000260	0.0670	0.0238	0.0240
Copper	Bedrock	mg/L	9	3	0.00120	0.0550	0.0149	0.00611	0.00120	0.0550	0.0204	0.0145
Iron	Bedrock	mg/L	9	1	0.0250	170	42.7	8.26	0.0250	170	48.0	24.1
Lead	Bedrock	mg/L	9	2	0.000210	0.0540	0.0154	0.00416	0.000210	0.0540	0.0196	0.0190
Magnesium	Bedrock	mg/L	9	0	0.870	72.0	29.6	28.0	0.870	72.0	29.6	28.0
Manganese	Bedrock	mg/L	9	0	0.0230	3.80	1.35	0.716	0.0230	3.80	1.35	0.716
Mercury	Bedrock	mg/L	9	8	0.0000260	0.000100	0.0000771	0.0000800	0.0000260	0.0000260	0.0000260	0.0000260
Nickel	Bedrock	mg/L	9	1	0.000420	0.170	0.0444	0.0114	0.000420	0.170	0.0496	0.0332
Potassium	Bedrock	mg/L	9	1	0.660	27.0	10.5	5.13	0.660	27.0	11.7	8.39
Selenium	Bedrock	mg/L	9	9	0.00150	0.00200	0.00183	0.00200	--	--	--	--
Silver	Bedrock	mg/L	9	7	0.0000460	0.00100	0.000394	0.000100	0.0000460	0.000100	0.0000730	0.0000730
Sodium	Bedrock	mg/L	9	0	623	3,610	1,647	1,150	623	3,610	1,647	1,150
Thallium	Bedrock	mg/L	9	6	0.000200	0.00100	0.000560	0.000440	0.000300	0.000700	0.000480	0.000440
Vanadium	Bedrock	mg/L	9	2	0.000560	0.180	0.0558	0.0204	0.000560	0.180	0.0712	0.0780
Zinc	Bedrock	mg/L	9	5	0.00800	0.530	0.120	0.0500	0.0910	0.530	0.228	0.145
<b>Other Compounds</b>												
Nitrate	Alluvial	mg/L	15	11	0.0970	1.90	0.269	0.160	0.0970	1.90	0.609	0.220
Nitrate	Bedrock	mg/L	9	8	0.0300	0.500	0.220	0.200	0.0870	0.0870	0.0870	0.0870
Perchlorate	Alluvial	mg/L	15	15	0.0000100	0.000100	0.0000287	0.0000200	--	--	--	--
Perchlorate	Bedrock	mg/L	9	6	0.00000570	0.0000500	0.0000236	0.0000100	0.00000570	0.00000950	0.00000760	0.00000760

Notes:

1. ND = not detected above the laboratory method detection limit.
2. DL = detection limit.
3. "--" indicates all results for the respective constituent were NDs. NDs were flagged but the laboratory did not provide a value for the DL.
4. Numbers are displayed using the same number of significant figures as reported by the laboratory, which is three significant figures.
5. If a constituent had 100% detections the descriptive statistics provided above are identical for the data including NDs and excluding NDs.
6. mg/L = milligram per liter

2  
3  
4  
5  
6  
7  
8

1 **Table 4: Dixon's Outlier Test Results**

Aquifer	Well	Constituent	Constituent Type	Potential Outlier Value	Units	Sampling Event	Sample Date
Alluvial	BGMW01	Aluminum (Dissolved)	Dissolved Metals	0.730	mg/L	April 2018	4/27/2018
		Cobalt (Dissolved)	Dissolved Metals	0.00110	mg/L	October 2012	10/26/2012
		Iron (Dissolved)	Dissolved Metals	0.560	mg/L	April 2018	4/27/2018
		Nickel (Dissolved)	Dissolved Metals	0.00630	mg/L	April 2014	4/15/2014
		Potassium (Dissolved)	Dissolved Metals	2.40	mg/L	April 2017	4/24/2017
		Sodium (Dissolved)	Dissolved Metals	520	mg/L	April 2016	4/15/2016
		Aluminum	Total Metals	4.20	mg/L	April 2018	4/27/2018
		Arsenic	Total Metals	0.00170	mg/L	April 2012	4/25/2012
		Barium	Total Metals	0.0450	mg/L	April 2018	4/27/2018
		Cobalt	Total Metals	0.00180	mg/L	April 2018	4/27/2018
		Iron	Total Metals	2.50	mg/L	April 2018	4/27/2018
		Manganese	Total Metals	0.530	mg/L	April 2018	4/27/2018
		Nickel	Total Metals	0.00930	mg/L	April 2014	4/15/2014
		Silver	Total Metals	0.00450	mg/L	April 2018	4/27/2018
		Nitrate	Other Compounds	1.90	mg/L	April 2012	4/25/2012
Bedrock	BGMW09	Aluminum (Dissolved)	Dissolved Metals	130	mg/L	April 2018	5/1/2018
		Arsenic (Dissolved)	Dissolved Metals	0.0100	mg/L	April 2018	5/1/2018
		Barium (Dissolved)	Dissolved Metals	0.670	mg/L	April 2018	5/1/2018
		Chromium (Dissolved)	Dissolved Metals	0.140	mg/L	April 2018	5/1/2018
		Cobalt (Dissolved)	Dissolved Metals	0.0340	mg/L	April 2018	5/1/2018
		Iron (Dissolved)	Dissolved Metals	110	mg/L	April 2018	5/1/2018
		Nickel (Dissolved)	Dissolved Metals	0.0840	mg/L	April 2018	5/1/2018
		Vanadium (Dissolved)	Dissolved Metals	0.0980	mg/L	April 2018	5/1/2018

2 Notes:

- 3 1. mg/L = milligrams per liter  
4 2. Only constituents from wells in the alluvial or bedrock aquifer that had statistically identified outliers are displayed

1 **Table 5: Data Distributions – Background**

Constituent	Aquifer	Sample Size	No. of NDs	Distribution Fit <sup>1</sup>
<i>Dissolved Metals</i>				
Aluminum	Alluvial	15	10	Nonparametric
Antimony	Alluvial	15	13	Nonparametric
Arsenic	Alluvial	15	1	Parametric
Barium	Alluvial	15	0	Parametric
Beryllium	Alluvial	15	15	Nonparametric
Cadmium	Alluvial	15	15	Nonparametric
Calcium	Alluvial	15	0	Parametric
Chromium	Alluvial	15	13	Nonparametric
Cobalt	Alluvial	15	2	Parametric
Copper	Alluvial	15	6	Nonparametric
Iron	Alluvial	15	8	Nonparametric
Lead	Alluvial	15	12	Nonparametric
Magnesium	Alluvial	15	0	Parametric
Manganese	Alluvial	15	0	Parametric
Mercury	Alluvial	15	15	Nonparametric
Nickel	Alluvial	15	1	Parametric
Potassium	Alluvial	15	2	Parametric
Selenium	Alluvial	15	14	Nonparametric
Silver	Alluvial	15	12	Nonparametric
Sodium	Alluvial	15	0	Parametric
Thallium	Alluvial	15	15	Nonparametric
Vanadium	Alluvial	15	1	Parametric
Zinc	Alluvial	15	10	Nonparametric
Aluminum	Bedrock	9	4	Parametric
Antimony	Bedrock	9	7	Nonparametric
Arsenic	Bedrock	9	4	Parametric
Barium	Bedrock	9	0	Parametric
Beryllium	Bedrock	9	7	Nonparametric
Cadmium	Bedrock	9	9	Nonparametric
Calcium	Bedrock	9	0	Parametric
Chromium	Bedrock	9	5	Nonparametric
Cobalt	Bedrock	9	3	Parametric
Copper	Bedrock	9	4	Parametric
Iron	Bedrock	9	4	Parametric
Lead	Bedrock	9	6	Nonparametric
Magnesium	Bedrock	9	0	Parametric

1 **Table 5: Data Distributions – Background (continued)**

Constituent	Aquifer	Sample Size	No. of NDs	Distribution Fit <sup>1</sup>
<i>Dissolved Metals</i>				
Manganese	Bedrock	9	1	Parametric
Mercury	Bedrock	9	9	Nonparametric
Nickel	Bedrock	9	5	Nonparametric
Potassium	Bedrock	9	0	Parametric
Selenium	Bedrock	9	9	Nonparametric
Silver	Bedrock	9	8	Nonparametric
Sodium	Bedrock	9	0	Parametric
Thallium	Bedrock	9	8	Nonparametric
Vanadium	Bedrock	9	5	Nonparametric
Zinc	Bedrock	9	8	Nonparametric
<i>Total Metals</i>				
Aluminum	Alluvial	15	2	Parametric
Antimony	Alluvial	15	13	Nonparametric
Arsenic	Alluvial	15	1	Parametric
Barium	Alluvial	15	0	Nonparametric
Beryllium	Alluvial	15	13	Nonparametric
Cadmium	Alluvial	15	13	Nonparametric
Calcium	Alluvial	15	0	Parametric
Chromium	Alluvial	15	10	Nonparametric
Cobalt	Alluvial	15	2	Nonparametric
Copper	Alluvial	15	5	Parametric
Iron	Alluvial	15	2	Nonparametric
Lead	Alluvial	15	11	Nonparametric
Magnesium	Alluvial	15	0	Parametric
Manganese	Alluvial	15	0	Nonparametric
Mercury	Alluvial	15	15	Nonparametric
Nickel	Alluvial	15	2	Parametric
Potassium	Alluvial	15	1	Parametric
Selenium	Alluvial	15	14	Nonparametric
Silver	Alluvial	15	11	Nonparametric
Sodium	Alluvial	15	0	Parametric
Thallium	Alluvial	15	14	Nonparametric
Vanadium	Alluvial	15	2	Nonparametric
Zinc	Alluvial	15	10	Nonparametric
Aluminum	Bedrock	9	2	Parametric
Antimony	Bedrock	9	8	Nonparametric



1 **Table 5: Data Distributions – Background (continued)**

Constituent	Aquifer	Sample Size	No. of NDs	Distribution Fit <sup>1</sup>
<i>Total Metals</i>				
Arsenic	Bedrock	9	3	Parametric
Barium	Bedrock	9	0	Parametric
Beryllium	Bedrock	9	4	Parametric
Cadmium	Bedrock	9	6	Nonparametric
Calcium	Bedrock	9	0	Parametric
Chromium	Bedrock	9	1	Parametric
Cobalt	Bedrock	9	2	Parametric
Copper	Bedrock	9	3	Parametric
Iron	Bedrock	9	1	Parametric
Lead	Bedrock	9	2	Parametric
Magnesium	Bedrock	9	0	Parametric
Manganese	Bedrock	9	0	Parametric
Mercury	Bedrock	9	8	Nonparametric
Nickel	Bedrock	9	1	Parametric
Potassium	Bedrock	9	1	Parametric
Selenium	Bedrock	9	9	Nonparametric
Silver	Bedrock	9	7	Nonparametric
Sodium	Bedrock	9	0	Parametric
Thallium	Bedrock	9	6	Nonparametric
Vanadium	Bedrock	9	2	Parametric
Zinc	Bedrock	9	5	Nonparametric
<i>Other Compounds</i>				
Nitrate	Alluvial	15	11	Nonparametric
Nitrate	Bedrock	9	8	Nonparametric
Perchlorate	Alluvial	15	15	Nonparametric
Perchlorate	Bedrock	9	6	Nonparametric

2 Notes:  
3 1. Best fit is based on detected data.  
4 Constituents are assigned a nonparametric distribution if they could not be fit to a discernible distribution (e.g gamma, lognormal,  
5 normal), have a high percentage of NDs, or are all NDs. Constituents that are not flagged as nonparametric follow a parametric  
6 distribution.

1

**Table 6: Trend Analysis Results**

Constituent <sup>1</sup>	Trend	
	Alluvial	Bedrock
<b>Dissolved Metals</b>		
Nickel	Decreasing	No Trend
<b>Total Metals</b>		
Arsenic	Decreasing	No Trend
Chromium	No Trend	Decreasing

2

---

<sup>1</sup> Only displays constituents that had a statistically significant trend in the alluvial or bedrock aquifer.

1 **Table 7: ANOVA Test Results for Differences in Monitoring Constituent Concentrations Between Alluvial & Bedrock Aquifers**

Constituent	Constituent Type	Unit	Mean		Median		Sample Size			Test	
			Alluvial	Bedrock	Alluvial	Bedrock	Alluvial	Bedrock	Total	Log ANOVA	Kruskal-Wallis
<b>Aluminum</b>	Dissolved Metals	mg/L	0.108	16.1	0.0700	0.200	15	9	24	✓	✓
	Total Metals	mg/L	0.538	74.5	0.100	14.2	15	9	24	✓	✓
<b>Antimony</b>	Dissolved Metals	mg/L	0.000837	0.00152	0.000600	0.00100	15	9	24	✓	✓
	Total Metals	mg/L	0.000879	0.00181	0.000600	0.00100	15	9	24	✓	✓
<b>Arsenic</b>	Dissolved Metals	mg/L	0.000857	0.00222	0.000800	0.00125	15	9	24	✓	✓
	Total Metals	mg/L	0.000928	0.00576	0.000870	0.00423	15	9	24	✓	✓
<b>Barium</b>	Dissolved Metals	mg/L	0.0175	0.0960	0.0160	0.0158	15	9	24		
	Total Metals	mg/L	0.0209	0.659	0.0170	0.156	15	9	24	✓	
<b>Beryllium</b>	Total Metals	mg/L	0.000316	0.00312	0.000300	0.00102	15	9	24	✓	✓
<b>Cadmium</b>	Total Metals	mg/L	0.000634	0.000813	0.00100	0.00100	15	9	24		
<b>Calcium</b>	Dissolved Metals	mg/L	45.6	88.3	44.0	31.5	15	9	24		
	Total Metals	mg/L	46.1	139	46.0	67.5	15	9	24		
<b>Chromium</b>	Dissolved Metals	mg/L	0.00165	0.0178	0.00150	0.00180	15	9	24		
	Total Metals	mg/L	0.00164	0.0624	0.00170	0.0170	15	9	24	✓	✓

2

1 **Table 7: ANOVA Test Results for Differences in Monitoring Constituent Concentrations Between Alluvial & Bedrock Aquifers**  
2 **(continued)**

Constituent	Constituent Type	Unit	Mean		Median		Sample Size			Test	
			Alluvial	Bedrock	Alluvial	Bedrock	Alluvial	Bedrock	Total	Log ANOVA	Kruskal-Wallis
<b>Cobalt</b>	Dissolved Metals	mg/L	0.000417	0.00458	0.000300	0.00100	15	9	24		
	Total Metals	mg/L	0.000556	0.0187	0.000360	0.00511	15	9	24	✓	✓
<b>Copper</b>	Dissolved Metals	mg/L	0.00262	0.00688	0.00150	0.00180	15	9	24		
	Total Metals	mg/L	0.00264	0.0149	0.00180	0.00611	15	9	24	✓	✓
<b>Iron</b>	Dissolved Metals	mg/L	0.0978	13.3	0.0480	0.250	15	9	24	✓	✓
	Total Metals	mg/L	0.351	42.7	0.0810	8.26	15	9	24	✓	✓
<b>Lead</b>	Dissolved Metals	mg/L	0.000560	0.00366	0.000500	0.000700	15	9	24		✓
	Total Metals	mg/L	0.000762	0.0154	0.000700	0.00416	15	9	24	✓	✓
<b>Magnesium</b>	Dissolved Metals	mg/L	25.1	14.3	24.0	4.85	15	9	24	✓	
	Total Metals	mg/L	25.6	29.6	26.0	28.0	15	9	24		
<b>Manganese</b>	Dissolved Metals	mg/L	0.195	0.366	0.180	0.0950	15	9	24		
	Total Metals	mg/L	0.226	1.35	0.190	0.716	15	9	24		
<b>Nickel</b>	Dissolved Metals	mg/L	0.00207	0.0114	0.00170	0.00250	15	9	24		
	Total Metals	mg/L	0.00250	0.0444	0.00180	0.0114	15	9	24	✓	✓
<b>Nitrate</b>	Other Compound	mg/L	0.269	0.220	0.160	0.200	15	9	24		

1 **Table 7: ANOVA Test Results for Differences in Monitoring Constituent Concentrations Between Alluvial & Bedrock Aquifers**  
2 **(continued)**

Constituent	Constituent Type	Unit	Mean		Median		Sample Size			Test	
			Alluvial	Bedrock	Alluvial	Bedrock	Alluvial	Bedrock	Total	Log ANOVA	Kruskal-Wallis
<b>Potassium</b>	Dissolved Metals	mg/L	0.835	4.80	0.670	3.25	15	9	24	✓	✓
	Total Metals	mg/L	0.943	10.5	0.770	5.13	15	9	24	✓	✓
<b>Silver</b>	Dissolved Metals	mg/L	0.000188	0.000394	0.000100	0.000100	15	9	24		
	Total Metals	mg/L	0.000500	0.000394	0.000100	0.000100	15	9	24		
<b>Sodium</b>	Dissolved Metals	mg/L	811	1,523	830	1,200	15	9	24	✓	
	Total Metals	mg/L	794	1,647	810	1,150	15	9	24	✓	
<b>Thallium</b>	Total Metals	mg/L	0.000241	0.000560	0.000200	0.000440	15	9	24	✓	✓
<b>Vanadium</b>	Dissolved Metals	mg/L	0.00230	0.0143	0.00200	0.00250	15	9	24	✓	✓
	Total Metals	mg/L	0.00315	0.0558	0.00210	0.0204	15	9	24	✓	
<b>Zinc</b>	Dissolved Metals	mg/L	0.00963	0.0489	0.00800	0.00800	15	9	24	✓	✓
	Total Metals	mg/L	0.0127	0.120	0.00800	0.0500	15	9	24	✓	✓

3 Notes:  
4 ✓Indicates test for differences was statistically significant at the 5 percent significance level.  
5 mg/L = milligrams per liter  
6 The following constituents were not tested as either the alluvial or bedrock aquifer observations had 100 percent NDs: dissolved beryllium, dissolved cadmium, total and dissolved  
7 mercury, and total and dissolved selenium.

1 **Table 8: Summary of Background Data Analysis**

Constituent	Aquifer	Statistical Outlier	Nonparametric Data Distribution	Trend
<i>Dissolved Metals</i>				
Aluminum	Alluvial	✓	✓	
Antimony	Alluvial		✓	
Beryllium	Alluvial		✓	
Cadmium	Alluvial		✓	
Chromium	Alluvial		✓	
Cobalt	Alluvial	✓		
Copper	Alluvial		✓	
Iron	Alluvial	✓	✓	
Lead	Alluvial		✓	
Mercury	Alluvial		✓	
Nickel	Alluvial	✓		✓
Potassium	Alluvial	✓		
Selenium	Alluvial		✓	
Silver	Alluvial		✓	
Sodium	Alluvial	✓		
Thallium	Alluvial		✓	
Zinc	Alluvial		✓	
Aluminum	Bedrock	✓		
Antimony	Bedrock		✓	
Arsenic	Bedrock	✓		
Barium	Bedrock	✓		
Beryllium	Bedrock		✓	
Cadmium	Bedrock		✓	
Chromium	Bedrock	✓	✓	
Cobalt	Bedrock	✓		
Iron	Bedrock	✓		
Lead	Bedrock		✓	
Mercury	Bedrock		✓	
Nickel	Bedrock	✓	✓	
Selenium	Bedrock		✓	
Silver	Bedrock		✓	
Thallium	Bedrock		✓	
Vanadium	Bedrock	✓	✓	
Zinc	Bedrock		✓	
<i>Total Metals</i>				
Aluminum	Alluvial	✓		
Antimony	Alluvial		✓	

2

1 **Table 8: Summary of Background Data Analysis (continued)**

Constituent	Aquifer	Statistical Outlier	Nonparametric Data Distribution	Trend
<i>Total Metals</i>				
Arsenic	Alluvial	✓		✓
Barium	Alluvial	✓	✓	
Beryllium	Alluvial		✓	
Cadmium	Alluvial		✓	
Chromium	Alluvial		✓	
Cobalt	Alluvial	✓	✓	
Iron	Alluvial	✓	✓	
Lead	Alluvial		✓	
Manganese	Alluvial	✓	✓	
Mercury	Alluvial		✓	
Nickel	Alluvial	✓		
Selenium	Alluvial		✓	
Silver	Alluvial	✓	✓	
Thallium	Alluvial		✓	
Vanadium	Alluvial		✓	
Zinc	Alluvial		✓	
Antimony	Bedrock		✓	
Cadmium	Bedrock		✓	
Chromium	Bedrock			✓
Mercury	Bedrock		✓	
Selenium	Bedrock		✓	
Silver	Bedrock		✓	
Thallium	Bedrock		✓	
Zinc	Bedrock		✓	
<i>Other Compounds</i>				
Nitrate	Alluvial	✓	✓	
Perchlorate	Alluvial		✓	
Nitrate	Bedrock		✓	
Perchlorate	Bedrock		✓	

- 2 Notes:
- 3 ✓ Constituent was flagged during the statistical analysis
- 4 Constituents are assigned a nonparametric distribution if they could not be fit to a discernible distribution (e.g gamma, lognormal,
- 5 normal), have a high percentage of NDs, or are all NDs. Constituents that are not flagged as nonparametric follow a parametric
- 6 distribution.

1 **Table 9: Background Threshold Values for Monitoring Constituents**

Constituent	Aquifer	Unit	No. of Verification Samples	BTV
				(UPL)
<b>Dissolved Metals</b>				
Aluminum	Alluvial	mg/L	4	0.730
Antimony	Alluvial	mg/L	4	0.000530
Arsenic	Alluvial	mg/L	2	0.00125
Barium	Alluvial	mg/L	2	0.0257
Beryllium	Alluvial	mg/L	NA	0.00100
Cadmium	Alluvial	mg/L	NA	0.00100
Calcium	Alluvial	mg/L	2	64.7
Chromium	Alluvial	mg/L	4	0.00300
Cobalt	Alluvial	mg/L	2	0.00103
Copper	Alluvial	mg/L	4	0.0140
Iron	Alluvial	mg/L	4	0.560
Lead	Alluvial	mg/L	4	0.000584
Magnesium	Alluvial	mg/L	2	32.3
Manganese	Alluvial	mg/L	2	0.310
Mercury	Alluvial	mg/L	NA	0.000100
Nickel	Alluvial	mg/L	2	0.00531
Potassium	Alluvial	mg/L	2	2.21
Selenium	Alluvial	mg/L	4	0.00300
Silver	Alluvial	mg/L	4	0.000550
Sodium	Alluvial	mg/L	2	1,048
Thallium	Alluvial	mg/L	NA	0.00100
Vanadium	Alluvial	mg/L	2	0.00772
Zinc	Alluvial	mg/L	4	0.0500
Aluminum	Bedrock	mg/L	3	71.6
Antimony	Bedrock	mg/L	6	0.00130
Arsenic	Bedrock	mg/L	3	0.00718
Barium	Bedrock	mg/L	3	0.720
Beryllium	Bedrock	mg/L	6	0.00550
Cadmium	Bedrock	mg/L	NA	0.00100
Calcium	Bedrock	mg/L	3	623
Chromium	Bedrock	mg/L	6	0.140
Cobalt	Bedrock	mg/L	3	0.0193
Copper	Bedrock	mg/L	3	0.0262
Iron	Bedrock	mg/L	3	55.9
Lead	Bedrock	mg/L	6	0.0270



1 **Table 9: Background Threshold Values for Monitoring Constituents (continued)**

Constituent	Aquifer	Unit	No. of Verification Samples	BTV
				(UPL)
<b>Dissolved Metals</b>				
Magnesium	Bedrock	mg/L	3	111
Manganese	Bedrock	mg/L	3	1.87
Mercury	Bedrock	mg/L	NA	0.000100
Nickel	Bedrock	mg/L	6	0.0840
Potassium	Bedrock	mg/L	3	28.1
Selenium	Bedrock	mg/L	NA	0.00200
Silver	Bedrock	mg/L	6	0.0000460
Sodium	Bedrock	mg/L	3	5,240
Thallium	Bedrock	mg/L	6	0.000350
Vanadium	Bedrock	mg/L	6	0.0980
Zinc	Bedrock	mg/L	6	0.250
<b>Total Metals</b>				
Aluminum	Alluvial	mg/L	2	3.43
Antimony	Alluvial	mg/L	4	0.000530
Arsenic	Alluvial	mg/L	2	0.00381
Barium	Alluvial	mg/L	4	0.0450
Beryllium	Alluvial	mg/L	4	0.000140
Cadmium	Alluvial	mg/L	4	0.000370
Calcium	Alluvial	mg/L	2	68.8
Chromium	Alluvial	mg/L	4	0.00300
Cobalt	Alluvial	mg/L	4	0.00180
Copper	Alluvial	mg/L	2	0.0179
Iron	Alluvial	mg/L	4	2.50
Lead	Alluvial	mg/L	4	0.00220
Magnesium	Alluvial	mg/L	2	34.3
Manganese	Alluvial	mg/L	4	0.530
Mercury	Alluvial	mg/L	NA	0.000100
Nickel	Alluvial	mg/L	2	0.00969
Potassium	Alluvial	mg/L	2	2.62
Selenium	Alluvial	mg/L	4	0.00460
Silver	Alluvial	mg/L	4	0.00450
Sodium	Alluvial	mg/L	2	986
Thallium	Alluvial	mg/L	4	0.0000560
Vanadium	Alluvial	mg/L	4	0.00780
Zinc	Alluvial	mg/L	4	0.0500

1 **Table 9: Background Threshold Values for Monitoring Constituents (continued)**

Constituent	Aquifer	Unit	No. of Verification Samples	BTV
				(UPL)
<b>Total Metals</b>				
Aluminum	Bedrock	mg/L	3	447
Antimony	Bedrock	mg/L	6	0.00380
Arsenic	Bedrock	mg/L	3	0.0221
Barium	Bedrock	mg/L	3	6.76
Beryllium	Bedrock	mg/L	3	0.0128
Cadmium	Bedrock	mg/L	6	0.000540
Calcium	Bedrock	mg/L	3	1,076
Chromium	Bedrock	mg/L	3	0.317
Cobalt	Bedrock	mg/L	3	0.0995
Copper	Bedrock	mg/L	3	0.0614
Iron	Bedrock	mg/L	3	258
Lead	Bedrock	mg/L	3	0.0828
Magnesium	Bedrock	mg/L	3	254
Manganese	Bedrock	mg/L	3	12.9
Mercury	Bedrock	mg/L	6	0.0000260
Nickel	Bedrock	mg/L	3	0.232
Potassium	Bedrock	mg/L	3	45.7
Selenium	Bedrock	mg/L	NA	<i>0.00200</i>
Silver	Bedrock	mg/L	6	0.000100
Sodium	Bedrock	mg/L	3	6,129
Thallium	Bedrock	mg/L	6	0.000700
Vanadium	Bedrock	mg/L	3	0.309
Zinc	Bedrock	mg/L	6	0.530
<b>Other Compounds</b>				
Nitrogen	Alluvial	mg/L	4.0	1.90
Perchlorate	Alluvial	mg/L	NA	<i>0.000100</i>
Nitrogen	Bedrock	mg/L	6	0.0870
Perchlorate	Bedrock	mg/L	6	0.00000950

2 Notes:

3 Italic concentration indicates background sample was 100% non-detect value and that the DQR is recommended for statistical  
4 evaluation of downgradient concentrations. The DQR states that a confirmed exceedance is registered if any well-constituent pair in  
5 the '100% ND' group exhibits quantified measurements in two consecutive sample and resample events.

6 NA – Not Applicable

7 mg/L = milligram per liter

8 The number of verification samples *m* is the maximum number of resamples permitted to confirm whether an observed exceedance  
9 from a given constituent in a given well and aquifer is actually an exceedance or an outcome of random variation. If the initial  
10 groundwater observation exceeds the BTV, then as many as *m* samples might be collected. If all *m* values are larger than the BTVs,  
11 then an exceedance is declared.

# 1 Appendix A: Statistical Summary Reports

2 APPENDICES PROVIDED SEPARATELY ON DISC

# 1 Appendix B: NCSS Output

# 1 Appendix C: ProUCL Output

# 1 Appendix D: SPSS Output