

2024 INTERIM NORTHERN AREA GROUNDWATER MONITORING PLAN

**Fort Wingate Depot Activity
Northern Area: Parcels 6, 7, 10, 11, 12, 13, 19, 21, and 22
McKinley County, New Mexico**

January 2024

Contract No. W912PP-15-D-0001
Task Order No. W912PP19F0001

Prepared for:



**US Army Corps
of Engineers®**

U.S. Army Corps of Engineers
Albuquerque District
4101 Jefferson Plaza, N.E.
Albuquerque, New Mexico 87109

REPORT DOCUMENTATION PAGE				Form Approved OMB No. 0704-0188	
Public reporting burden for this collection of information is estimated to average 1 hour per response, including the time for reviewing instructions, searching existing data sources, gathering, and maintaining the data needed, and completing and reviewing this collection of information. Send comments regarding this burden estimate or any other aspect of this collection of information, including suggestions for reducing this burden to Department of Defense, Washington Headquarters Services, Directorate for Information Operations and Reports (0704-0188), 1215 Jefferson Davis Highway, Suite 1204, Arlington, VA 22202-4302. Respondents should be aware that notwithstanding any other provision of law, no person shall be subject to any penalty for failing to comply with a collection of information if it does not display a currently valid OMB control number. PLEASE DO NOT RETURN YOUR FORM TO THE ABOVE ADDRESS.					
1. REPORT DATE (DD-MM-YYYY) 26-01-2024		2. REPORT TYPE Work Plan		3. DATES COVERED (From - To) January through December 2024	
4. TITLE AND SUBTITLE 2024 Interim Northern Area Groundwater Monitoring Plan Fort Wingate Depot Activity Northern Area: Parcels 6, 7, 10, 11, 12, 13, 19, 21, and 22 McKinley County, New Mexico				5a. CONTRACT NUMBER W912PP-15-D-0001	
				5b. GRANT NUMBER	
				5c. PROGRAM ELEMENT NUMBER	
6. AUTHOR(S) Estiri, Mohammad Ockerman, Jeff Surrency, Ross				5d. PROJECT NUMBER Eco-18-1237	
				5e. TASK NUMBER	
				5f. WORK UNIT NUMBER	
7. PERFORMING ORGANIZATION NAME(S) AND ADDRESS(ES) Eco & Associates, Inc. 18231 Irvine Boulevard, Suite 204 Tustin, CA 92780				8. PERFORMING ORGANIZATION REPORT NUMBER	
9. SPONSORING / MONITORING AGENCY NAME(S) AND ADDRESS(ES) U.S. Army Corps of Engineers 4101 Jefferson Plaza, N.E. Albuquerque, New Mexico 87109				10. SPONSOR/MONITOR'S ACRONYM(S) USACE	
				11. SPONSOR/MONITOR'S REPORT NUMBER(S)	
12. DISTRIBUTION / AVAILABILITY STATEMENT Approved for public release; distribution is unlimited.					
13. SUPPLEMENTARY NOTES This work plan was prepared for submittal to the New Mexico Environment Department-Hazardous Waste Bureau as required by Resource Conservation and Recovery Act permit number NM 6213820974.					
14. ABSTRACT This work plan proposes the activities for periodic groundwater monitoring at Fort Wingate Depot Activity. This plan is a revision from the latest previously approved groundwater monitoring plan and addresses groundwater monitoring in the Northern Area of the installation. The primary data quality objective is to monitor existing groundwater contaminant plumes. This plan presents field sampling methods, a revised monitoring schedule, laboratory analytical methods, and quality control procedures.					
15. SUBJECT TERMS Fort Wingate Depot Activity, groundwater, monitoring, nitrate, explosives, perchlorate, volatile organic compounds, semi-volatile organic compounds, petroleum hydrocarbons, solid waste management unit, area of concern.					
16. SECURITY CLASSIFICATION OF:			17. LIMITATION OF ABSTRACT	18. NUMBER OF PAGES	19a. NAME OF RESPONSIBLE PERSON George Cushman
a. REPORT UNCLASSIFIED	b. ABSTRACT UNCLASSIFIED	c. THIS PAGE UNCLASSIFIED	SAR	258	19b. TELEPHONE NUMBER (include area code) 703-455-3234

FINAL APPROVAL LETTER PLACEHOLDER

Upon approval by the New Mexico Environment Department – Hazardous Waste Bureau of this 2024 Interim Northern Area Groundwater Monitoring Plan, a copy of the signed approval letter will be placed here.


DOCUMENT CERTIFICATION

2024 Interim Northern Area Groundwater Monitoring Plan Fort Wingate Depot Activity, McKinley County, NM

40 CFR 270.11

January 2024

I certify under penalty of law that this document and all attachments were prepared under my direction or supervision in accordance with a system designed to assure that qualified personnel properly gather and evaluate the information submitted. Based on my inquiry of the person or persons who manage the system, or those persons directly responsible for gathering the information; the information submitted is, to the best of my knowledge and belief, true, accurate, and complete. I am aware that there are significant penalties for submitting false information, including the possibility of fine and imprisonment for knowing violations.



Mr. George H. Cushman IV

Base Realignment and Closure Division (BRAC), Environmental Coordinator
Fort Wingate Depot Activity, BRAC Operations Branch
DCS G-9, Environmental Division

2024 INTERIM NORTHERN AREA GROUNDWATER MONITORING PLAN

**Fort Wingate Depot Activity
Northern Area: Parcels 6, 7, 10, 11, 12, 13, 19, 21, and 22
McKinley County, New Mexico**

January 2024

Contract No. W912PP-15-D-0001
Task Order No. W912PP19F0001

Prepared for:
U.S. Army Corps of Engineers
Albuquerque District
4101 Jefferson Plaza, N.E.
Albuquerque, New Mexico 87109

Prepared by:
Eco & Associates, Inc.
18231 Irvine Boulevard, Suite 204
Tustin, CA 92780
Phone: (714) 289-0995
Fax: (714) 289-0965

Project No.: Eco-18-1237

DOCUMENT DISTRIBUTION LIST

2024 Interim Northern Area Groundwater Monitoring Plan

Fort Wingate Depot Activity Northern Area: Parcels 6, 7, 10, 11, 12, 13, 19, 21, and 22 McKinley County, New Mexico

Name (Organization)	Number of Printed Copies	Number of Electronic Copies (CD/DVD)
Ricardo Maestas, NMED HWB	2	2
Benjamin Wear NMED HWB	with Maestas	with Maestas
Michiya Suzuki, NMED HWB	with Maestas	with Maestas
Dale Thrush, EPA Region 6	0	1
George Cushman, FWDA BEC c/o Admin Record OH	1	1
FWDA c/o Admin Record NM	1	1
Ian Thomas, BRAC	0	1
Alan Soicher, USACE Albuquerque District	1	1
Saqib Khan, USACE PDT	0	1
Douglas Hickman, BIA Zuni	1	1
George Padilla, BIA-NRO	1	2
Sharlene Begay Platero, NN	1	7
Arden Kucate, Lt. Governor Zuni Tribe	1	8
Totals	9	26

ABBREVIATIONS & ACRONYMS

BEC	= Base Environmental Coordinator
BIA	= Bureau of Indian Affairs
BIA-NRO	= Bureau of Indian Affairs – Navajo Regional Office
BRAC	= U.S. Army Base Realignment and Closure Division
COR	= Contracting Officer's Representative
EPA	= U.S. Environmental Protection Agency
FWDA BEC	= Fort Wingate Depot Activity Base Realignment and Closure Environmental Coordinator
NM	= New Mexico
NMED HWB	= New Mexico Environment Department, Hazardous Waste Bureau
NN	= Navajo Nation
OH	= Ohio
PDT	= Project Delivery Team
USACE	= U.S. Army Corps of Engineers

TABLE OF CONTENTS

1	REPORT DOCUMENTATION PAGE.....	2
2	FINAL APPROVAL LETTER PLACEHOLDER	3
3	DOCUMENT CERTIFICATION	4
4	2024 INTERIM NORTHERN AREA GROUNDWATER MONITORING PLAN	5
5	DOCUMENT DISTRIBUTION LIST	6
6	TABLE OF CONTENTS	7
7	LIST OF FIGURES	10
8	LIST OF TABLES	11
9	LIST OF APPENDICES	12
10	LIST OF ABBREVIATIONS AND ACRONYMS	13
11	EXECUTIVE SUMMARY	ES-15
12	1.0 INTRODUCTION	17
13	1.1 PROJECT ORGANIZATION AND MANAGEMENT	17
14	1.2 REGULATORY BACKGROUND	17
15	1.3 PURPOSE	19
16	1.4 DATA QUALITY OBJECTIVES	19
17	1.5 DOCUMENT ORGANIZATION	22
18	2.0 SITE HISTORY AND BACKGROUND	23
19	2.1 GENERAL FACILITY DESCRIPTION	23
20	2.2 PREVIOUS INVESTIGATIONS.....	24
21	2.2.1 ENVIRONMENTAL SURVEY OF FWDA – 1981	25
22	2.2.2 GROUNDWATER INVESTIGATIONS AT BUILDING 6 UST AREA – 1993–1995 ...	25
23	2.2.3 REMEDIAL INVESTIGATION/FEASIBILITY STUDY REPORT AND RCRA	
24	CORRECTIVE ACTION PROGRAM DOCUMENT – 1997.....	25
25	2.2.4 MINIMUM SITE ASSESSMENT REPORT – 1998	26
26	2.2.5 RCRA INTERIM STATUS CLOSURE PLAN – OB/OD AREA PHASE 1B REPORT –	
27	1999	26
28	2.2.6 OB/OD GROUNDWATER MONITORING – 1999-2005	26
29	2.2.7 RCRA FACILITY INVESTIGATION REPORT OF THE TNT LEACHING BEDS AREA –	
30	2001	26
31	2.2.8 PHASE 1 RCRA FACILITY INVESTIGATION REPORT FOR BUILDINGS 600 AND	
32	542 – 2002.....	26
33	2.2.9 GROUNDWATER INVESTIGATION REPORT OF THE EASTERN LANDFILL – 2005	26
34	2.2.10 ADMINISTRATION AND TNT LEACHING BEDS AREAS SUPPLEMENTAL	
35	GROUNDWATER CHARACTERIZATION REPORT – 2006.....	27
36	2.2.11 PARCEL 11 RFI REPORT – 2011	27
37	2.2.12 PARCEL 22 RFI REPORT – 2011	27
38	2.2.13 MONITORING WELL INSTALLATION AND ABANDONMENT REPORT – 2011-2012	
39		27
40	2.2.14 FINAL RCRA FACILITY INVESTIGATION REPORT PARCEL 10B – 2012	28
41	2.2.15 APPROVED FINAL RCRA FACILITY INVESTIGATION PARCEL 21 – 2012	28

1	2.2.16	FINAL RCRA FACILITY INVESTIGATION PARCEL 6 – 2012	28
2	2.2.17	FINAL RCRA FACILITY INVESTIGATION PARCEL 23 – 2012	28
3	2.2.18	FINAL RELEASE ASSESSMENT REPORT PARCEL 4A REVISION 2.0 – 2012	28
4	2.2.19	FINAL PHASE 2 SOIL BACKGROUND REPORT – 2013.....	28
5	2.2.20	FINAL RELEASE ASSESSMENT REPORT PARCEL 24 – 2014	29
6	2.2.21	FINAL REVISION 1 RCRA FACILITY INVESTIGATION REPORT PARCEL 16 – 2014	
7			29
8	2.2.22	APPROVED FINAL INVESTIGATION AND REMEDIATION COMPLETION REPORT –	
9		PARCEL 18, SWMU 13 – 2014	29
10	2.2.23	FINAL REVISION 2.0 RCRA FACILITY INVESTIGATION REPORT PARCEL 22 –	
11		2015	29
12	2.2.24	GROUNDWATER SUPPLEMENTAL RCRA FACILITY INVESTIGATION – 2019 AND	
13		2020	30
14	2.3	SEMIANNUAL RCRA GROUNDWATER MONITORING REPORTS AND UPDATED	
15		GROUNDWATER MONITORING PLANS – ONGOING.....	30
16	3.0	CONCEPTUAL SITE MODEL	31
17	3.1	CLIMATE.....	31
18	3.2	SURFACE CONDITIONS	31
19	3.2.1	TOPOGRAPHY	31
20	3.2.2	VEGETATION	32
21	3.2.3	SOIL.....	32
22	3.3	GEOLOGY	32
23	3.3.1	REGIONAL GEOLOGY TECTONIC SETTING AND SITE-SPECIFIC STRUCTURE ...	32
24	3.3.2	STRATIGRAPHY.....	33
25	3.4	SURFACE WATER	34
26	3.4.1	REGIONAL SURFACE WATER	34
27	3.4.2	SITE-SPECIFIC SURFACE WATER.....	34
28	3.4.3	HYDROGEOLOGY	34
29	3.4.4	NORTHERN AREA ALLUVIAL GROUNDWATER SYSTEM.....	36
30	3.4.5	NORTHERN AREA BEDROCK GROUNDWATER SYSTEM.....	36
31	3.5	NATURE AND EXTENT OF GROUNDWATER CONTAMINATION	37
32	3.6	FATE AND TRANSPORT OF CONTAMINATION IN GROUNDWATER	38
33	3.7	CULTURAL RESOURCES.....	40
34	4.0	FIELD MONITORING AND SAMPLING METHODS	41
35	4.1	SCOPE OF ACTIVITIES	41
36	4.2	DEPTH TO GROUNDWATER MEASUREMENTS	41
37	4.3	GROUNDWATER SAMPLING	42
38	4.3.1	PRELIMINARY SITE ACTIVITIES.....	42
39	4.3.1.1	INITIAL INSPECTION.....	42
40	4.3.1.2	WATER-LEVEL MEASUREMENT AND WELL VOLUME CALCULATION .	43
41	4.3.2	LOW-FLOW PUMP PURGING	43
42	4.3.2.1	TRADITIONAL LOW-FLOW AND ZIST LOW-FLOW DEDICATED PUMPS	
43			44

1	4.3.3	GROUNDWATER SAMPLE COLLECTION BY LOW-FLOW PUMP	46
2	4.3.4	ALTERNATIVE GROUNDWATER PURGING AND SAMPLING PROCEDURES	46
3	4.3.4.1	DISPOSABLE BAILERS	47
4	4.3.4.2	REUSABLE SUBMERSIBLE PUMP	48
5	4.3.4.3	DEDICATED BENNETT PUMP	49
6	4.4	SAMPLE MANAGEMENT AND SAMPLE HANDLING	50
7	4.4.1	SAMPLE HANDLING PROCEDURES	50
8	4.4.2	COC REQUIREMENTS	51
9	4.4.3	SAMPLE SHIPPING	51
10	4.4.4	ANALYTICAL METHODS	51
11	4.5	DECONTAMINATION	51
12	4.6	WASTE MANAGEMENT PROCEDURES	52
13	4.7	QUALITY ASSURANCE PROCEDURES	52
14	4.7.1	FIELD EQUIPMENT CALIBRATION AND PREVENTATIVE MAINTENANCE	52
15	4.7.2	SAMPLE COLLECTION QUALITY CONTROL AND QUALITY ASSURANCE	53
16	4.7.3	DOCUMENTATION QUALITY ASSURANCE	53
17	4.7.3.1	LOGBOOKS	53
18	4.7.3.2	FIELD DATA RECORD FORMS	54
19	4.7.3.3	FINAL EVIDENCE FILE DOCUMENTATION	55
20	5.0	MONITORING AND SAMPLING PROGRAM	56
21	5.1	INTERIM GROUNDWATER MONITORING ANALYTICAL PROGRAM	56
22	5.2	MONITORING LOCATION AND FREQUENCY	57
23	5.2.1	NORTHERN AREA ALLUVIAL GROUNDWATER MONITORING DESIGN	58
24	5.2.2	NORTHERN AREA BEDROCK GROUNDWATER MONITORING DESIGN	59
25	5.3	DATA QUALITY EVALUATION	60
26	5.3.1	GENERAL DATA QUALITY REQUIREMENTS	60
27	5.3.2	ANALYTICAL DATA QUALITY REQUIREMENTS	61
28	5.4	ENVIRONMENTAL DATA MANAGEMENT	63
29	5.5	DATA EVALUATION	63
30	5.6	REPORTING	63
31	6.0	SCHEDULE	65
32	7.0	SAMPLING CHANGES FROM PREVIOUS PLAN	66
33	8.0	REFERENCES	70

LIST OF FIGURES

1	FIGURE 1-1	PROJECT SCREENING VALUE FLOW CHART
2	FIGURE 1-2	SITE LOCATION MAP
3	FIGURE 2-1	SITE PARCEL MAP
4	FIGURE 2-2	NORTHERN AREA SITE FEATURES
5	FIGURE 2-3	FWDA WELL LOCATIONS
6	FIGURE 2-4	NORTHERN AREA SITE WELLS
7	FIGURE 3-1	GROUNDWATER ELEVATIONS ALLUVIAL WELLS
8	FIGURE 3-2	GROUNDWATER ELEVATIONS BEDROCK WELLS
9	FIGURE 3-3	GROUNDWATER MONITORING ALLUVIAL WELLS – NITRATE
10	FIGURE 3-4	GROUNDWATER MONITORING ALLUVIAL WELLS – EXPLOSIVES
11	FIGURE 3-5	GROUNDWATER MONITORING ALLUVIAL WELLS – PERCHLORATE
12	FIGURE 3-6	GROUNDWATER MONITORING ALLUVIAL WELLS – METALS
13	FIGURE 3-7	GROUNDWATER MONITORING ALLUVIAL WELLS – VOCs
14	FIGURE 3-8	GROUNDWATER MONITORING ALLUVIAL WELLS – SVOCs
15	FIGURE 3-9	GROUNDWATER MONITORING ALLUVIAL WELLS – DRO
16	FIGURE 3-10	GROUNDWATER MONITORING ALLUVIAL WELLS – GRO
17	FIGURE 3-11	GROUNDWATER MONITORING BEDROCK WELLS – NITRATE, EXPLOSIVES,
18		METALS
19	FIGURE 3-12	GROUNDWATER MONITORING BEDROCK WELLS – PERCHLORATE
20	FIGURE 3-13	GROUNDWATER MONITORING BEDROCK WELLS – SVOCs

LIST OF TABLES

1	TABLE 2-1	NORTHERN AREA GROUNDWATER WELL CONSTRUCTION DETAILS
2	TABLE 2-2	NORTHERN AREA CONTAMINANTS OF POTENTIAL CONCERN BY SITE AND POINT
3		OF RELEASE
4	TABLE 2-3	NORTHERN AREA GROUNDWATER SAMPLING ANALYTE GROUPS WITH
5		SCREENING LEVEL EXCEEDANCES
6	TABLE 2-4	NORTHERN AREA MONITORING NETWORK BY SITE AND POINT OF RELEASE
7	TABLE 3-1	NORTHERN AREA WATER-LEVEL MEASUREMENTS BY GROUNDWATER ZONE
8	TABLE 4-1	NORTHERN AREA GROUNDWATER PURGE METHOD
9	TABLE 4-2	FIELD EQUIPMENT AND MATERIALS
10	TABLE 4-3	SAMPLE CONTAINERS, PRESERVATION, AND HOLDING TIME BY ANALYTICAL
11		METHOD
12	TABLE 5-1	GROUNDWATER SCREENING LEVELS, DETECTION LIMITS, AND CONTROL LIMITS
13	TABLE 5-2	NORTHERN AREA GROUNDWATER SAMPLING MATRIX
14		

LIST OF APPENDICES

1	APPENDIX A	RESPONSE TO NMED COMMENTS ON THE 2023 GROUNDWATER
2		MONITORING PLAN
3	APPENDIX B	SUMMARY OF PREVIOUS INVESTIGATION ANALYTICAL RESULTS
4		(ACCESS TO DATABASE IS PROVIDED ON CD)
5	TABLE B-1	SUMMARY OF INORGANIC ANIONS ANALYTICAL RESULTS
6	TABLE B-2	SUMMARY OF EXPLOSIVES ANALYTICAL RESULTS
7	TABLE B-3	SUMMARY OF PERCHLORATE ANALYTICAL RESULTS
8	TABLE B-4	SUMMARY OF VOC ANALYTICAL RESULTS
9	TABLE B-5	SUMMARY OF TPH AND SVOC ANALYTICAL RESULTS
10	TABLE B-6	SUMMARY OF DISSOLVED METALS ANALYTICAL RESULTS
11	TABLE B-7	SUMMARY OF TOTAL METALS ANALYTICAL RESULTS
12	APPENDIX C	FIELD FORMS

LIST OF ABBREVIATIONS AND ACRONYMS

1	°	degree (measurement of an angle)
2	°F	degrees Fahrenheit
3	µg/L	microgram per liter
4	ADR	automated data review
5	amsl	above mean sea level
6	AOC	area of concern
7	Army	U.S. Department of the Army
8	bgs	below ground surface
9	BIA	Bureau of Indian Affairs
10	BRAC	Base Realignment and Closure
11	CERCLA	Comprehensive Environmental Response, Compensation, and Liability Act
12		of 1980
13	CFR	Code of Federal Regulations
14	COC	Chain of Custody
15	COPC	contaminant of potential concern
16	COR	Contracting Officer's Representative
17	CSM	conceptual site model
18	DL	detection limit
19	DO	dissolved oxygen
20	DoD	U.S. Department of Defense
21	DOE	U.S. Department of Energy
22	DOI	U.S. Department of the Interior
23	DQE	data quality evaluation
24	DQO	data quality objective
25	DRO	diesel range organics
26	DTW	depth to water
27	Eco	Eco & Associates, Inc.
28	EDMS	Electronic Data Management System
29	ELAP	Environmental Laboratory Accreditation Program
30	EPA	U.S. Environmental Protection Agency
31	Eurofins	Eurofins Environment Testing
32	FTR	Functional Test Range
33	FWDA	Fort Wingate Depot Activity
34	GMP	groundwater monitoring program
35	GWMP	groundwater monitoring plan
36	gpm	gallons per minute
37	GRO	gasoline range organics
38	HWB	Hazardous Waste Bureau
39	HWMU	hazardous waste management unit
40	IDW	investigation-derived waste
41	LOD	limit of detection
42	LOQ	limit of quantitation
43	lpm	liters per minute
44	MCL	maximum contaminant level

1	mg/L	milligram per liter
2	mph	miles per hour
3	MS	matrix spike
4	MSD	matrix spike duplicate
5	NAD 83	North American Datum of 1983
6	NMAC	New Mexico Administrative Code
7	NMED	New Mexico Environment Department
8	NMED-HWB	NMED-Hazardous Waste Bureau
9	NM WQCC	New Mexico Water Quality Control Commission
10	OB/OD	Open Burn/Open Detonation
11	ORP	oxidation-reduction potential
12	PAH	polycyclic aromatic hydrocarbon
13	PARCCS	precision, accuracy, representativeness, completeness, comparability, and
14		sensitivity
15	Pb	lead
16	PCB	polychlorinated biphenyl
17	pH	scale used to measure the concentration of hydrogen atoms (acidity) of a sample
18	PMC	Program Management Company
19	PMR	groundwater periodic monitoring report
20	QA	quality assurance
21	QC	quality control
22	QSM	quality systems manual
23	RCRA	Resource Conservation and Recovery Act
24	RDX	hexahydro-1,3,5-trinitro-1,3,5-triazine
25	RFI	Resource Conservation and Recovery Act Facility Investigation
26	RSL	regional screening level
27	SSL	soil screening level
28	SVOC	semi-volatile organic compound
29	SWMU	solid waste management unit
30	TOC	top of casing
31	TNT	2,4,6-trinitrotoluene
32	TPH	total petroleum hydrocarbons
33	USACE	U.S. Army Corps of Engineers
34	USGS	U.S. Geological Survey
35	UST	underground storage tank
36	VOC	volatile organic compound
37	ZIST	zone isolation sampling technology

EXECUTIVE SUMMARY

Fort Wingate Depot Activity (FWDA) currently occupies approximately 24 square miles (15,277 acres) of land in western New Mexico in McKinley County. FWDA is located approximately 7 miles east of Gallup and 130 miles west of Albuquerque. The main entrance to FWDA is on U.S. Highway 66, west from Exit 33 off Interstate 40. FWDA includes 732 earth-covered igloos located throughout the installation, a Workshop Area, and various mission-support service structures located in the Administration Area.

Historical activities at FWDA that may have contributed to soil and groundwater contamination include munitions storage, maintenance, and disposal; the use and storage of petroleum fuels; and equipment maintenance (TPMC, 2008). As part of the planned property transfer to the U.S. Department of the Interior, FWDA has been divided into parcels, areas of concern (AOCs), and solid waste management units (SWMUs), as specified by the Resource Conservation and Recovery Act (RCRA) permit number NM 6213820974 originally issued in 2005 (New Mexico Environment Department [NMED], 2005) and revised in 2015 (NMED, 2015a).

This Interim Northern Area Groundwater Monitoring Plan (GWMP) for FWDA describes the proposed groundwater monitoring at the Northern Area of FWDA which includes Parcels 6, 7, 10, 11, 12, 13, 19, 21, and 22. This document has been prepared for submission to the NMED Hazardous Waste Bureau (HWB), as required by the RCRA permit.

The objectives for performing interim groundwater monitoring include:

- Monitor groundwater flow and water quality parameters that affect contaminant fate and transport,
- Monitor groundwater for the presence of contaminants of potential concern (COPCs) from known contaminant releases, and
- Monitor the migration and changes to groundwater contaminant plumes.

The groundwater monitoring program is designed to evaluate each COPC from the point of release to the existing groundwater contaminant plume boundary based on known or suspected releases to groundwater. Depth to groundwater is measured quarterly, and groundwater samples are collected on a semiannual monitoring frequency determined by seasonal variations in water levels and the current regulatory-approved monitoring program.

Low-flow purging and sampling is the preferred sampling method at FWDA. In addition, borehole purging is proposed at wells with poor recovery as is consistent with previously approved monitoring plans.

Groundwater samples will be analyzed for one or more of the following COPCs:

- Explosives by U.S. Environmental Protection Agency (EPA) Method 8330B
- Herbicides by EPA Method 8151A
- Major anions by EPA Method 9056

- Perchlorate by EPA Method 6860
- Total and dissolved metals including mercury by EPA Method 6020A/7470A
- Polychlorinated biphenyls (PCBs) by EPA Method 8082A
- Pesticides by EPA Method 8081B
- Volatile organic compounds (VOCs) by EPA Method 8260D
- Semi-volatile organic compounds (SVOCs) by EPA Method 8270D
- Total petroleum hydrocarbons (TPH) as gasoline range and diesel range organics (GRO and DRO) by EPA Method 8015C

This monitoring plan evaluates the COPCs in the Northern Area of FWDA. The known and suspected points of release to groundwater are as follows:

- Leaching Beds (Solid Waste Management Unit [SWMU] 1, Parcel 21) had releases of 2,4,6-trinitrotoluene (TNT) due to historical munitions activities.
- Building 528 Complex (SWMU 27, Parcel 22) had releases of nitrate, explosives, metals, and perchlorate due to historical munitions activities and propellant use.
- Building 6 Gas Station (SWMU 45, Parcel 11) had releases of GRO, DRO, VOCs, SVOCs, and lead (Pb) due to fueling and mechanical operations.
- Building 45 (SWMU 50, Parcel 11) had releases of GRO, DRO, VOCs, and Pb due to historical leaks from former underground storage tank (UST) 7.

Groundwater elevations will be measured quarterly, and groundwater sampling will be conducted on a semiannual basis. Under this GWMP, groundwater elevations will be measured in 102 monitoring wells and 10 piezometers in January, April, July, and October, and groundwater sampling events will be conducted in April and October for the 102 monitoring wells. Semiannual groundwater sampling will be performed from the designated monitoring wells to track plume migration and general range in COPC concentrations.

Results of each semiannual monitoring event will be submitted in a semiannual report prepared in accordance with NMED *General Reporting Guidelines Position Paper* (NMED, 2020).

The Interim Measures Groundwater Periodic Monitoring Report (PMR) will include tabulated field and laboratory analytical data. Analytical data will be screened against the FWDA screening levels established in the RCRA permit and EPA regional screening levels (RSLs) for chemicals where screening levels are not established. A discussion of the results, any sampling deviations, and proposed recommendations for future monitoring will be included in the PMR.

1.0 INTRODUCTION

This Interim Northern Area Groundwater Monitoring Plan (GWMP) provides guidance for the groundwater monitoring activities to be conducted during calendar year 2024 at Fort Wingate Depot Activity (FWDA) in McKinley County, New Mexico. This GWMP has been prepared in accordance with the performance work statement under contract number W912PP-15-D-0001.

This 2024 Interim Northern Area GWMP was prepared in accordance with the Resource Conservation and Recovery Act (RCRA) permit NM 6213820974, first issued in December 2005 (New Mexico Environment Department [NMED], 2005) and revised in February 2015 (NMED, 2015a). This 2024 Interim Northern Area GWMP is a revision to the Final 2022 Interim Northern Area Groundwater Monitoring Plan, Revision 2, dated May 21, 2021 (Eco, 2021). This 2024 Interim Northern Area GWMP provides guidance for the groundwater monitoring activities to be conducted in the Northern Area of the installation which includes Parcels 6, 7, 10, 11, 12, 13, 19, 21, and 22. The Open Burn/Open Detonation (OB/OD) areas in the southern portion of the installation within Parcel 3 are not included in this version of the Northern Area GWMP.

1.1 PROJECT ORGANIZATION AND MANAGEMENT

The groundwater monitoring program (GMP) at FWDA is managed by the U.S. Army Corps of Engineers (USACE) for the U.S. Department of the Army (Army), Base Realignment and Closure (BRAC) Division. Stakeholders for the GMP are as follows:

- Army, BRAC Division
- NMED-Hazardous Waste Bureau (NMED-HWB)
- Navajo Nation
- Zuni Tribe

USACE manages the program and subcontracts periodic groundwater monitoring with coordination and review by stakeholders on behalf of the Army. Eco & Associates, Inc. (Eco) is the USACE subcontractor responsible for planning and implementing the 2024 GWMP. Project plans and reports are submitted to stakeholders for review. NMED-HWB is the regulating authority for FWDA and has final approval of primary project documents.

1.2 REGULATORY BACKGROUND

Environmental restoration activities at FWDA began in 1989 under the Comprehensive Environmental Response, Compensation, and Liability Act (CERCLA) of 1980 guidelines as part of the Installation Restoration Program. Since that time, NMED has become the lead environmental regulatory agency for FWDA.

In 2002, NMED determined that the remediation pathway would be solely through a RCRA permit for post-closure care of the current OB/OD area with a RCRA corrective action module attached to address requirements for other solid waste management units (SWMUs) and areas of concern (AOCs). The RCRA permit became effective December 1, 2005 (NMED, 2005). Since the original permit issuance, the RCRA permit has been revised through NMED-issued modifications in 2011,

2014, and 2015. NMED-HWB identified one hazardous waste management unit (HWMU) within the current OB/OD area (Parcel 3) and a total of 93 SWMUs and AOCs in the RCRA permit. Environmental activities at FWDA are being conducted in accordance with the requirements of the 2015 revision of the RCRA permit, which includes the original permit and all subsequent modifications (NMED, 2015a). The Army developed a groundwater monitoring program as required by Section V.A (Interim Plan) of the RCRA permit. Groundwater monitoring, sampling, and reporting activities are conducted in compliance with the RCRA permit, applicable RCRA permit attachments, and the most recently approved version of the GWMP. NMED approved the initial GWMP in March 2008, with subsequent annual revisions to the plan. The latest NMED-approved Interim GWMP is the Final 2022 Interim Northern Area Groundwater Monitoring Plan, Revision 2 (Eco, 2021).

Attachment 7 of the RCRA permit (NMED, 2015a) provides a hierarchy for the selection of screening level criteria applicable to the FWDA. Groundwater analytical results are evaluated and compared to the Project Screening Value Flow Chart (Figure 1-1). The following documents and regulations are used to determine whether the concentration of a particular chemical constituent exceeds the RCRA permit screening level (NMED, 2015a), as summarized below:

1. New Mexico Water Quality Control Commission (NM WQCC) standards for the analytes listed in the New Mexico Administrative Code (NMAC) 20.6.2.7.VV having the values listed in NMAC 20.6.2.4103.A and B.
2. U.S. Environmental Protection Agency (EPA) drinking water maximum contaminant levels (MCLs) provided under 40 Code of Federal Regulations (CFR) 141 and 40 CFR 143.
3. If both a NM WQCC standard and an EPA MCL have been established for a contaminant of potential concern (COPC), the lowest value of 1. and 2. above will be selected.
4. If no NM WQCC standard or EPA MCL has been established for a carcinogenic hazardous constituent, values will be selected from the most recent version of the EPA regional screening levels (RSLs) for tap water, adjusted to a target excess cancer risk level of 1×10^{-5} .
5. If no NM WQCC standard or EPA MCL has been established for a non-carcinogenic hazardous constituent, values will be selected from the most recent version of the EPA RSLs for tap water with a target hazard index of 1.0.
6. No current NM WQCC standard is published for perchlorate. An EPA RSL standard of 14 micrograms per liter ($\mu\text{g/L}$) was published in November 2022, so this standard will be followed in accordance with Attachment 7 of the RCRA permit for FWDA (NMED, 2015a).
7. Although not in the RCRA permit, NMED has set a screening level of $16.7 \mu\text{g/L}$ for total petroleum hydrocarbons (TPH) as diesel range organics (DRO) and a screening level of $10.1 \mu\text{g/L}$ for TPH as gasoline range organics (GRO) in *Risk Assessment Guidance for Investigations and Remediation Volume 1* (NMED, 2019a).

For some analytes, screening values are selected for a compound with RSLs listed for both carcinogenic risks and non-carcinogenic hazards. In accordance with the RCRA permit, the RSLs for carcinogens are adjusted to a cancer risk of 1×10^{-5} and the lower of the adjusted carcinogenic and the non-carcinogenic RSLs will be selected.

Reporting requirements in this GWMP are in accordance with the RCRA permit and consistent with the NMED *General Reporting Guidelines Position Paper* (NMED, 2020).

1.3 PURPOSE

The objectives of performing interim groundwater monitoring at FWDA are as follows:

- Monitor groundwater flow and field water quality parameters that affect contaminant fate and transport.
- Monitor groundwater for the presence of COPCs from known contaminant releases.
- Monitor the migration and changes to known groundwater contaminant plumes.

1.4 DATA QUALITY OBJECTIVES

Data quality objectives (DQOs) are qualitative and quantitative statements that clarify the project objectives, specify the most appropriate types of data for project decisions, determine appropriate conditions from which to collect data, and specify tolerable limits on decision errors. DQOs are developed to satisfy specific project objectives in accordance with applicable USACE specifications and NMED and EPA guidance. The DQOs are based on the end uses of data determined through a seven-step process as described in *Guidance on Systematic Planning Using the Data Quality Objectives Process*, EPA QA/G-4 (EPA, 2006).

The DQOs defined for this GWMP along with the conceptual site model (CSM) information are used to determine the decision logic and provide an effective sampling design. The DQOs assist in identifying the required type, quality, and quantity of data needed for interim groundwater monitoring to meet investigation goals and regulatory requirements. The project DQOs are defined according to the logic presented sequentially in the sections below.

Step 1 – State the Problem

Groundwater contaminants need to be monitored in accordance with Section V.A of the RCRA permit.

Step 2 – Identify the Goals of the Study

Project data will be used to monitor the nature and extent of COPCs in groundwater and evaluate temporal trends.

The questions the project is intended to answer are the following:

- Are site-related COPCs present in FWDA groundwater at concentrations exceeding screening levels?

- What is the lateral and vertical extent of site-related COPCs, at concentrations exceeding screening levels in FWDA groundwater?
- How are contaminants in the groundwater migrating?
- How are COPC concentrations in groundwater changing over time?

Step 3 – Identify Information Inputs

Inputs considered during development of this GWMP include the following:

- The RCRA facility investigations (RFIs) for each FWDA parcel are used to determine the points of contaminant release or suspected points of contaminant release to groundwater.
- Lithologic information from previous boreholes and water elevations from existing groundwater monitoring wells provide data on hydrogeologic structural controls and groundwater flow.
- Historical analytical data from the previous investigations provide information on site conditions.
- Laboratory analytical results, field parameters, and groundwater elevations from ongoing interim monitoring are used to determine current site and groundwater contaminant conditions.
- Project screening levels are used to evaluate groundwater analytical data.

This information is used to determine the decision rules in Step 5.

Step 4 – Define Boundaries of the Study

Spatial. The FWDA boundary (Figure 1-2) is the study boundary for facility-wide monitoring. The current well network will be used to monitor groundwater contamination under the interim monitoring program. This GWMP covers the Northern Area of FWDA. Final characterization as defined by RFIs for each parcel will be used to determine whether the monitoring network is sufficient to assess the extent of groundwater contamination.

Temporal. The temporal boundaries of the investigation are long-term monitoring of groundwater contamination and groundwater flow patterns observable over 6-month intervals. Based on previous groundwater monitoring data from 2008 to 2022, the groundwater elevations are relatively stable and are not subject to wide seasonal fluctuations. Potential temporal contaminant concentration trends will be assessed by semiannual groundwater sample collection and quarterly measurement of groundwater elevations.

Step 5 – Develop the Analytical Approach

This step integrates the output from previous steps of the DQO process to design the interim measures groundwater monitoring program. Groundwater laboratory analytical results will be compared to the FWDA screening levels to monitor the extent and migration of COPCs.

Monitoring results will be submitted in Periodic Groundwater Monitoring Reports (PMRs). Corrective actions will be proposed if groundwater contaminant plumes migrate outside of the FWDA boundaries.

Step 6 – Specify Limits on Decision Errors

Analytical data quality will be compared to Quality Systems Manual (QSM) for Environmental Laboratories, Version 5.4 (QSM; U.S. Department of Defense [DoD]/U.S. Department of Energy [DOE], 2021) specifications for precision, accuracy, representativeness, completeness, comparability, and sensitivity (PARCCS). The analytical methods will provide the lowest available analytical reporting limits using standard USACE approved methods that allow the data to be screened against the FWDA screening levels.

Site visits, refining the CSM, and evaluating current and historical analytical data will minimize erroneous conclusions and maintain estimates within acceptable levels. Field measurements will be compared to quality criteria established by field standard operating procedures and by evaluation against previous measurements for representativeness.

Step 7 – Develop the Sampling Plan for Obtaining the Data

Groundwater monitoring will evaluate each groundwater contaminant from the point of release to the existing groundwater plume boundary along the property boundary. Each impacted groundwater zone (Northern Area alluvial and Northern Area bedrock) will be assessed for the presence of COPCs. The groundwater elevation data will be used to evaluate potential downgradient migration of contaminants in groundwater. Historical analytical data will be used when designating monitoring wells for release areas.

Background wells are outside the influence of the release/plume. Some monitoring points will be monitored for multiple COPCs when they are designated for multiple points of release, or when a single point of release is associated with multiple COPCs. Section 5 details point of release assessments for COPCs.

Groundwater monitoring will continue semiannually to be consistent with the monitoring frequency performed since 2008, and with previously approved GWMPs. Groundwater elevations will be measured quarterly to maintain a similar consistency. This will provide consistency of the data when being compared and evaluated with historical data.

The most recently published versions of the NMED-requested analytical methods with FWDA project-specific reporting limits will be used to provide quantitative analytical data to meet the FWDA RCRA permit requirements. Laboratories performing sample analyses will follow the current version of the DoD Environmental Field Sampling Handbook, Revision 1.0 (DoD, 2013) and the current version of the QSM (DoD/DOE, 2021). All laboratory analysis will be performed by independent analytical laboratories with DoD Environmental Laboratory Accreditation Program (ELAP) accreditation. In addition to DoD ELAP accreditation, the laboratory must hold the current accreditation for all appropriate fields of testing in New Mexico, which is accomplished by the laboratory holding a current national ELAP accreditation for appropriate fields of testing.

The independent analytical laboratory must have documentation of current accreditation/certification prior to sample acceptance. The analytical results will be validated in accordance with the current version of the QSM.

Optimization of Sampling Plan

Recommendations for optimization will be made through interim measures. Recommendations may include:

- Installation or abandonment of monitoring locations;
- Changes to field sampling or analytical methods; *and*
- Changes to monitoring frequency and location.

1.5 DOCUMENT ORGANIZATION

This Interim Northern Area GWMP is organized as follows:

Section 2 — presents the available site history and general description of FWDA and summarizes previous groundwater investigations.

Section 3 — presents the CSM with information about current site conditions and environmental setting of FWDA.

Section 4 — describes the methods and procedures for groundwater gauging, groundwater sample collection, decontamination, quality assurance (QA), and investigation-derived waste (IDW) characterization and disposal.

Section 5 — presents the groundwater monitoring program, and discusses data validation, data management, and reporting.

Section 6 — provides the projected monitoring schedule for calendar year 2024.

Section 7 — presents sampling changes from the previous Interim Northern Area GWMP.

Section 8 — presents a list of the works cited in this Interim Northern Area GWMP.

2.0 SITE HISTORY AND BACKGROUND

2.1 GENERAL FACILITY DESCRIPTION

FWDA currently occupies approximately 24 square miles (15,277 acres) of land in western New Mexico in McKinley County. FWDA is located approximately 7 miles east of Gallup and about 130 miles west of Albuquerque (Figure 1-2). The main entrance to FWDA is on U.S. Highway 66, west from Exit 33 off Interstate 40. FWDA is surrounded by tribal and federally-owned lands, including national forests, Zuni tribal lands, and Navajo tribal lands. North and west of FWDA are Navajo trust and Native American lands, to the east are lands administered by the Bureau of Indian Affairs (BIA), and to the south and southeast is the undeveloped Cibola National Forest.

Originally founded in 1860 as a cavalry post, the Army established Fort Wingate as a munition's storage depot in 1918. FWDA has had several missions from 1918 until 1993, including ordnance storage, testing, and demilitarization, as well as missile defense testing. The installation was closed in 1993 under the Defense Authorization Amendments and BRAC Act of 1988. In 2002, the Army reassigned many functions at FWDA to the BRAC Division, including property disposal, caretaker duties, managing caretaker staff, and performing environmental-restoration and compliance activities.

Approximately half of FWDA is currently leased to the Missile Defense Agency and is used for operations related to missile testing. Missile testing activities occur in northeastern and central portions of FWDA, in Parcel 16 and Parcel 19. The remaining FWDA operations are focused on assessing and remediating contamination before property transfer/reuse.

Historical activities at FWDA that may have contributed to soil and groundwater contamination include munitions storage, maintenance, and disposal; the use and storage of petroleum fuels; and equipment maintenance (TPMC, 2008). Efforts to remediate affected areas have concentrated on removing exploded and unexploded ordnance, in addition to characterizing soil across the installation and conducting semiannual groundwater monitoring. As part of the planned property transfer to the U.S. Department of the Interior (DOI), the installation has been divided into reuse parcels (Figure 2-1) with each site being addressed on a parcel-by-parcel basis, as specified by the RCRA permit (NMED, 2015a). Currently, Parcel 1, Parcel 4B, Parcel 5A, Parcel 5B, Parcel 8, Parcel 10A, Parcel 10B, Parcel 12, Parcel 14, Parcel 15, Parcel 17, Parcel 18, and Parcel 25 have been transferred to the DOI; these parcels are located near the northern, eastern, and southern boundaries of FWDA.

Facilities at FWDA include 732 earth-covered igloos located throughout the installation, two former OB/OD areas (Closed OB/OD area and Current OB/OD area), a Workshop Area, and various mission-support service structures located in the Administration Area. The installation can be divided into several areas based upon location and historical land use. Figure 2-2 shows the locations of various buildings and SWMUs and AOCs throughout the Northern Area of the installation. Major land use areas include the following:

The Administration Area is located in the northern portion of FWDA. This area consists of former office facilities, housing, equipment maintenance facilities, warehouse buildings, and

utility support facilities. Munitions storage and shipping, fuel storage and dispensary, and mechanical maintenance activities were performed in this area.

The Workshop Area is located south of the Administration Area. It is a former industrial area that contained ammunition maintenance and renovation facilities, the TNT washout facility, and the TNT Leaching Beds Area (SWMU 1). The buildings and other structures were demolished in 2010.

The Magazine (Igloo) Area is located in the central portion of FWDA. This area includes 10 igloo blocks (Igloo A through Igloo H, Igloo J, and Igloo K) that contain 732 earth-covered igloos and 241 earthen revetments previously used for munitions storage.

The OB/OD Area is located in the southwest and western portions of FWDA and separated into two sub-areas based on period of operation.

The closed OB/OD area includes inactive OB/OD SWMUs that were used to treat military munitions and explosives-contaminated waste from 1948 to 1955. The Closed OB/OD area includes the Old Burning Ground and Demolition Landfill Area and the Old Demolition Area (Program Management Company [PMC], 1999).

The current OB/OD area consists of an inactive OB/OD HWMU where burning and detonation operations were performed after 1955 until FWDA closure in 1993 (PMC, 1999). The Current OB/OD area contains the active OB/OD corrective action management unit identified in the recent RCRA permit updates.

Protection and Buffer Areas are located adjacent to the eastern, northern, and western boundaries of the installation. These areas consist of buffer zones surrounding the former magazine and demolition areas.

2.2 PREVIOUS INVESTIGATIONS

From 1980 through issuance of the RCRA permit in December 2005 (and revised February 2015), various environmental investigations were conducted by the Army and other parties (including EPA and DOI) under CERCLA and RCRA guidance (BRAC, 2010). These investigations have been conducted with multiple phases to characterize groundwater over time.

The 2005 RCRA permit identified one HWMU within the OB/OD area (Parcel 3) and 93 SWMUs and AOCs. As of January 2021, 153 groundwater monitoring wells and 10 piezometers have been installed to characterize the nature and extent of contamination across FWDA (Northern Area and OB/OD Area). As of September 2021, there are 102 active monitoring wells and 10 piezometers in the Northern Area and 27 active monitoring wells in the OB/OD area. FWDA well locations are presented in Figure 2-3 and site wells associated with the Northern Area are presented in Figure 2-4.

Groundwater investigation and characterization efforts have primarily focused on five areas:

1. TNT Leaching Beds Area (SWMU 1 located in Parcel 21);

2. Administration Area (multiple SWMUs and AOCs located in Parcel 6, Parcel 7, and Parcel 11);
3. Eastern Landfill (SWMU 13 located in Parcel 18);
4. Building 542 and Building 600 (SWMU 11 and SWMU 4 located in Parcel 6); and
5. OB/OD area (located in Parcel 3).

Well construction information for the Northern Area wells is included in Table 2-1. A summary of historical detections from 1992 through April 2022 are included as Appendix B on disk, and laboratory data for groundwater analytical results from October 2020 through April 2022 are included as tables in Appendix B.

Results from previous investigations are briefly discussed for each report in the following subsections, and COPCs by site and point of release are summarized in Table 2-2. A summary of groundwater detections and project screening value exceedances (historical through April 2022) per analyte group are provided in Table 2-3. The monitoring wells in Table 2-3 are organized by point of release from Table 2-2. The information in Table 2-2 and Table 2-3 has been used to develop the CSM in Section 3.0 and the sampling plan in Section 5.0. The monitoring network by site and point of release is provided in Table 2-4.

2.2.1 ENVIRONMENTAL SURVEY OF FWDA – 1981

In 1981, an environmental survey of FWDA (Environmental Science and Engineering, Inc., 1981) was conducted to determine the potential presence and extent of contamination caused by activities related to munitions storage, munitions recycling, and treatment.

Most of the wells completed during the 1981 environmental survey have historically lacked sufficient water for interim semiannual sampling as directed by the RCRA permit. The “FW” monitoring wells have either been abandoned or removed except for wells FW24, FW31, and FW35.

2.2.2 GROUNDWATER INVESTIGATIONS AT BUILDING 6 UST AREA – 1993–1995

In January 1993, six underground storage tanks (USTs) were removed from Building 6 within the Administration Area (USACE, 1995a) (Parcel 11). During UST removal, a fuel release was suspected, presumably from holes or cracks in the bottoms of several of the tanks or associated piping. USACE Albuquerque District conducted a site investigation for the Building 6 USTs, including soil borings and monitoring wells. Groundwater analytical data indicated benzene concentrations exceeding the FWDA screening level of 5 µg/L. The monitoring wells were resampled in 1995, and results indicated that the benzene concentrations had decreased to below the FWDA screening level (USACE, 1995b).

2.2.3 REMEDIAL INVESTIGATION/FEASIBILITY STUDY REPORT AND RCRA CORRECTIVE ACTION PROGRAM DOCUMENT – 1997

Environmental investigation activities across FWDA were implemented as part of FWDA closure in the fall of 1992 to determine the environmental impact (if any) from previously identified

SWMUs and AOCs, and to identify areas requiring environmental restoration before property transfer to DOI. Findings were generated in a 1997 Remedial Investigation/Feasibility Study and RCRA Corrective Action Program Document (ERM Program Management Company, 1997).

2.2.4 MINIMUM SITE ASSESSMENT REPORT – 1998

A Minimum Site Assessment Report (USACE, 1998) summarized the actions taken by USACE Albuquerque District to identify the horizontal and vertical extent of soil contamination and to determine whether groundwater was impacted by potential fuel releases at the UST site adjacent to Building 45. Analytical data from this assessment indicated that hydrocarbon contamination in the soil was limited to a small area.

2.2.5 RCRA INTERIM STATUS CLOSURE PLAN – OB/OD AREA PHASE 1B REPORT – 1999

Environmental characterization efforts to support closing the OB/OD area (Parcel 3) were conducted during 1996, 1997, 1998, and 1999.

2.2.6 OB/OD GROUNDWATER MONITORING – 1999-2005

Several quarterly sampling events have been completed in the OB/OD area (Parcel 3) since the RCRA Interim Status Closure Plan Phase 1B Report was issued. These events were documented in quarterly letter reports and an annual inclusive report for each year.

2.2.7 RCRA FACILITY INVESTIGATION REPORT OF THE TNT LEACHING BEDS AREA – 2001

From 1998 to 2001, additional groundwater investigations were completed in the TNT Leaching Beds Area (Parcel 21, SWMU 1) and the Administration Area (Parcel 11, various SWMUs and AOCs) (PMC, 2001b). During these investigations, groundwater was found to be impacted by explosives, metals, nitrate, nitrite, and volatile organic compounds (VOCs).

2.2.8 PHASE 1 RCRA FACILITY INVESTIGATION REPORT FOR BUILDINGS 600 AND 542 – 2002

In 2001, soil and groundwater were investigated to determine whether previous detections of explosives in TMW11 were the result of activities at Building 600 (Parcel 6, SWMU 4) and Building 542 (Parcel 6, SWMU 11) in the Workshop Area (PMC, 2002b). Six monitoring wells (TMW14A through TMW19) were completed near Building 600 and Building 542 (SWMU 4 and SWMU 11) to determine the source of the contamination at TMW11. One explosives constituent, hexahydro-1,3,5-trinitro-1,3,5-triazine (RDX), was detected at concentrations close to the laboratory reporting limit during five of six sampling events conducted between October 1998 and January 2000. Fluoride was detected at concentrations exceeding project screening levels. In addition, one VOC, explosives, perchlorate, nitrate, nitrite, and a variety of metals were also detected.

2.2.9 GROUNDWATER INVESTIGATION REPORT OF THE EASTERN LANDFILL – 2005

The Eastern Landfill (Parcel 18, SWMU 13) is located approximately one-half mile east of the Administration Area and is reported to have been used to dispose of municipal waste and

construction debris from the Administration Area. During the remedial investigation phase, the Eastern Landfill was located using a geophysical survey, and soil sampling and a soil gas survey were conducted. The soil analytical results indicated that lead, mercury, and barium were present at levels slightly above background levels. Pesticides, VOCs, and SVOCs were not detected. During a groundwater investigation conducted in 2005, concentrations of explosives, metals, pesticides, VOCs, SVOCs, nitrate, and nitrite were detected, with RDX, pesticides, and dissolved metals detected above project screening levels.

The Eastern Landfill waste material was subsequently excavated and removed in 2013, followed by backfilling with soil from an on-site borrow source. Upon review and approval of confirmation results, a final round of sampling of the four groundwater monitoring wells (EMW01 through EMW04) was performed. The groundwater laboratory results were submitted to NMED with a request for permission to abandon the wells. NMED granted the well abandonment request and the wells were abandoned in 2014.

2.2.10 ADMINISTRATION AND TNT LEACHING BEDS AREAS SUPPLEMENTAL GROUNDWATER CHARACTERIZATION REPORT – 2006

The purpose of the investigation was to gather additional information during 2002 and 2003 to address comments and discussions by members of the FWDA BRAC Cleanup Team regarding information presented in the Final RFI Report for the TNT Leaching Beds Area (Parcel 21, SWMU 1) (PMC, 2001b). Nine monitoring wells (TMW21 through TMW29) were installed in the alluvial aquifer of Parcel 11.

2.2.11 PARCEL 11 RFI REPORT – 2011

In November and December of 2009, the U.S. Geological Survey (USGS) conducted an RFI within Parcel 11, which contains most of the buildings and structures that made up the Administration Area. The RCRA permit lists 10 SWMUs and 9 AOCs in Parcel 11. The Army elected to include the SWMU 40 buildings and structures (which overlap the Parcel 7 and Parcel 11 boundaries) in this RFI.

2.2.12 PARCEL 22 RFI REPORT – 2011

The USGS conducted an RFI within three SWMUs in Parcel 22. Additionally, the Parcel 22 RFI Report (USGS, 2011c) contains information for four AOCs located in Parcel 22.

2.2.13 MONITORING WELL INSTALLATION AND ABANDONMENT REPORT – 2011-2012

During the fall and spring of 2011/2012, USACE installed 18 monitoring wells and abandoned 10 monitoring/temporary wells. The purpose of the well installation was to assess contaminant plumes and gather data to define background concentrations for metals in groundwater.

These new monitoring wells were added to the facility-wide groundwater monitoring program.

2.2.14 FINAL RCRA FACILITY INVESTIGATION REPORT PARCEL 10B – 2012

This report summarized investigations at AOC 44 and SWMU 26 that were done in accordance with the approved RFI Work Plan for Parcel 10B that was approved by NMED on September 9, 2010.

At AOC 44 and SWMU 26, it was concluded that there were no COPC detections greater than the screening limits, although there were some issues with the data quality. The Army recommended no further action for SVOCs, pesticides, or antimony (USACE, 2012a). The Army also recommended that arsenic values be reassessed when background levels are developed.

2.2.15 APPROVED FINAL RCRA FACILITY INVESTIGATION PARCEL 21 – 2012

This RFI Report for Parcel 21 summarized the investigation and restoration activities conducted in accordance with the RFI Work Plan approved by NMED with modifications. The RFI addressed five SWMUs and nine AOCs. The report did not address AOC 71 or AOC 87 because NMED approved no further action for these locations. Additionally, AOC 60 was not addressed in the RFI because sample collection will be completed with scheduled demolition at a future date.

2.2.16 FINAL RCRA FACILITY INVESTIGATION PARCEL 6 – 2012

This RFI Report for Parcel 6 summarized the investigation and restoration activities conducted in accordance with the RFI Work Plan for Parcel 6 approved by NMED with modifications. The RFI addressed four SWMUs and 10 AOCs.

2.2.17 FINAL RCRA FACILITY INVESTIGATION PARCEL 23 – 2012

At Parcel 23, soil investigations were conducted at SWMU 21 (Central Landfill) and AOC 73 (former buildings and structures along Road C3). Results of the RFI at SWMU 21 indicated that polycyclic aromatic hydrocarbons (PAHs) and arsenic were detected above project screening levels in subsurface soils. The Army proposed additional borings near SB08 to delineate SVOC concentrations in the soil at SWMU 21. Results of the RFI at AOC 73 did not indicate contamination was present (USGS, 2015a). The Army concluded the arsenic concentrations detected at SWMU 21 and AOC 73 were within a naturally occurring range.

2.2.18 FINAL RELEASE ASSESSMENT REPORT PARCEL 4A REVISION 2.0 – 2012

The Army conducted surface soil investigations for Igloo Block C and electrical transformers as part of the Parcel 4A release assessment. Results indicate metals and PCBs are present in surface soils at concentrations exceeding screening criteria.

2.2.19 FINAL PHASE 2 SOIL BACKGROUND REPORT – 2013

The purpose of this report was to conduct an additional background study to the 2010 initial background study conducted at FWDA. Samples were collected in 2012. This background study focused on arsenic and antimony because the Army believes that many arsenic exceedances across FWDA are due to naturally occurring concentrations.

2.2.20 FINAL RELEASE ASSESSMENT REPORT PARCEL 24 – 2014

The Final Release Assessment Report for Parcel 24 (USACE, 2014a) included AOC 18 and former World War I-era magazines. The results of the release assessment indicated that metals were present at AOC 18 at concentrations exceeding project screening levels.

2.2.21 FINAL REVISION 1 RCRA FACILITY INVESTIGATION REPORT PARCEL 16 – 2014

This RFI Report for Parcel 16 summarizes soil sampling activities at SWMU 16, AOC 41, and World War I-era magazines. These results are summarized below:

Functional Test Range (FTR) 2 and FTR 3 (SWMU 16). Based on the sampling results, no exceedances were found, and the Army recommended no further action (Toeroek and pH7, 2014).

X and Z Open Storage Areas (SWMU 16). The explosive TNT was detected above the screening level in one quadrant of open storage pad Z135. The Army recommended more sampling for explosives and a clearance/removal action if necessary (Toeroek and pH7, 2014).

Area K Igloo Block (AOC 41). Metals were detected at concentrations exceeding the soil screening level (SSLs) in surface soils. The Army recommended pipe and soil removal and more sampling at drain outfalls but no further action for igloo drainages and revetment areas (Toeroek and pH7, 2014).

World War I Magazine Sites. No exceedances were found for explosives at any of the World War I sample locations, and the Army recommended no further action (Toeroek and pH7, 2014).

2.2.22 APPROVED FINAL INVESTIGATION AND REMEDIATION COMPLETION REPORT – PARCEL 18, SWMU 13 – 2014

The report summarized the results of the investigation and remediation conducted at SWMU 13, the Eastern Landfill (AMEC Environment & Infrastructure, Inc., 2014). The data indicated that no additional corrective action was required for the Eastern Landfill. The report was approved in February 2015 in letter HWB-FWDA-14-009 giving permission to request change of status to corrective action complete without controls.

2.2.23 FINAL REVISION 2.0 RCRA FACILITY INVESTIGATION REPORT PARCEL 22 – 2015

The RCRA permit lists three SWMUs in Parcel 22. This report summarized the investigation activities at SWMU 12, SWMU 70, SWMU 27, AOC 30, AOC 69, AOC 75, and AOC 88.

Building 536 (Inspectors Workshop and Ammunition Renovation Depot) (SWMU 12). Based on the results of the investigation, SVOCs and PCBs were detected exceeding NMED SSLs in sediment samples from the Building 536 septic system (USGS, 2015b).

Building 528 Complex (SWMU 27, AOC 121, AOC 122, AOC 125, and AOC 126). Based on the laboratory results, benzo(a)pyrene, arsenic, and lead concentrations exceeded NMED SSLs in shallow soil (USGS, 2015b).

Buildings 517 to 521 and Structure 547, Disassembly Plant and TPL QA Test Area (SWMU 70). Based on the sampling results, the Army concluded that no constituents were detected above the project screening levels (USGS, 2015b).

Igloo Block D (AOC 30). Based on the laboratory results, metals concentrations exceeded NMED SSLs in surface soils (USGS, 2015b). The explosive 2,4-dinitrotoluene exceeded the project screening level in one sample (USGS, 2015b).

Standard Magazine Building 301, Building 302, and Building 312, and Building 316, Field Lunch Room (AOC 69). Based on the sampling results, DRO and PAHs exceeded NMED SSLs in soil to 3-feet below ground surface (bgs). Arsenic concentrations exceeded project screening levels; however, the Army concluded that arsenic values in this range are not indicative of contamination but rather are naturally occurring concentrations for the area (USGS, 2015b).

Electrical Transformers in Parcel 22 (AOC 75). Based on the laboratory results, soil samples collected in AOC 75 did not have detectable concentrations of PCBs and the Army recommended no further action (USGS, 2015b).

Former Buildings or Structures and Disposal Areas (AOC 88). Based on the sampling results, no soil samples collected in AOC 88 had detectable concentrations that exceeded project screening levels (USGS, 2015b).

2.2.24 GROUNDWATER SUPPLEMENTAL RCRA FACILITY INVESTIGATION – 2019 AND 2020

This RFI included the installation of 32 additional groundwater monitoring wells in 2019 and three additional groundwater monitoring wells in 2020 to further assess contaminant plumes and subsurface conditions in the alluvial and bedrock aquifers.

Based on the results of the RFI efforts, a follow up Phase 2 RFI is planned.

2.3 SEMIANNUAL RCRA GROUNDWATER MONITORING REPORTS AND UPDATED GROUNDWATER MONITORING PLANS – ONGOING

Since 2008, groundwater sampling has been conducted semiannually (April and October), and each event documented in semiannual PMRs. The Interim Facility-wide GWMP is updated annually and the Northern Area GWMP is submitted as a stand-alone document per NMED request dated October 22, 2018 (NMED, 2018a).

A database of the groundwater analytical results generated from the monitoring program for 1992 through April 2022 is available upon request and provided on disk. Appendix B contains a summary of laboratory data from October 2020 through April 2022. The conceptual site model in the following section provides a description of COPCs in alluvial and bedrock groundwater.

3.0 CONCEPTUAL SITE MODEL

This section summarizes the site conditions at FWDA, including historical land use, natural and man-made features, ecological setting, fate and transport information, and detailed surface and subsurface characterization. Site conditions are summarized from site-specific documents including RFI work plans, RFI reports, release assessment reports prepared for the individual parcels as specified in the RCRA permit, periodic groundwater monitoring reports, and groundwater monitoring plans.

3.1 CLIMATE

Northwestern New Mexico is characterized as a semiarid, continental climate with most precipitation occurring from June through September as localized, heavy, and brief monsoon storms. The climate for the FWDA area varies with elevation but is generally mild during the summer with temperatures ranging between 65 degrees Fahrenheit (°F) and 95 °F, and cold during the winter with average daily temperatures ranging between 30 °F and 35 °F. The warmest month is July, with an average maximum temperature of 89 °F, while the coldest month is December, with an average minimum temperature of 11 °F. Daily temperature variations can be considerable during the summer, with an average temperature difference of approximately 35 °F.

Mean annual rainfall for the area ranges between 10 and 16 inches, while the recorded average annual precipitation for FWDA is approximately 11 inches. The wettest month is August, with an average rainfall of approximately 2 inches. Most precipitation occurs as rain or hail during violent summer thunderstorms. The remainder of annual precipitation occurs as winter snowfall. Accumulated snow at higher elevations produces a slow release of snowmelt in the spring, which provides higher infiltration compared to the intense monsoon thunderstorms (Anderson et al., 2003).

The area has generally sunny weather with average relative humidity varying from 15% to 50% during dry seasons and the wet summer monsoon season, respectively. During spring, the area experiences extraordinarily strong winds originating from the west and southwest with an average wind speed of approximately 12 miles per hour (mph) and maximum gust speeds approaching 65 mph. These strong winds, high temperatures, and low relative humidity contribute to high evapotranspiration rates at FWDA.

3.2 SURFACE CONDITIONS

3.2.1 TOPOGRAPHY

FWDA can be divided into three topographic areas: 1) the rugged north-south trending Nutria Monocline (commonly referred to as the Hogback) along the western and the southwestern boundaries, 2) the hill slopes of the Zuni Mountain Range in the southern portion, and 3) the alluvial plains marked by bedrock mesas in the northern portion. The elevation of FWDA ranges from approximately 8,200-feet above mean sea level (amsl) in the south to 6,660-feet amsl in the north.

3.2.2 VEGETATION

Ground cover ranges from exposed bedrock and lithic soils to montane forest. Forest is present at higher elevations where more precipitation occurs. Mixed ponderosa pine and fir forest are present at elevations above 7,500-feet amsl. Piñon and juniper vegetation is present at elevations from 6,800 feet to 7,500 feet. Shrubs and grasses are present at elevations below 6,800 feet. Some areas with steep slopes and rocky ground lack vegetation.

3.2.3 SOIL

FWDA soil types range from a mixture of sand, silt, and clay. Alluvium most commonly found in arroyos consists of permeable sand and sandy loam clay mixtures that contain varying amounts of silt, gravel, and rock fragments, and low-permeability sandy clay. Soil types at FWDA are primarily alluvial materials except for the Hogback along the western border and the northern hill slopes of the Zuni Mountain Range in the southern portion. The alluvial materials do not typically have distinct soil horizons because they are relatively shallow and undeveloped. Organic soils have developed in some streambank deposits along major arroyos. The parent bedrock is either at or near the surface within more than a quarter of the installation.

High winds and water cause extensive soil erosion, especially where vegetation cover is absent. The more permeable, sandy soil typically found in arroyos accounts for the majority of local surface water infiltration. The thickness of the soil varies across FWDA. In the OB/OD area and at the eastern and southern perimeter of the Northern Area, the soil thickness is a thin veneer with parent bedrock at or near the surface. In most of the Northern Area, flat alluvial plains are dominant with thick soil overlying deeper, steeply dipping bedrock. In the Administration Area, alluvium can be up to 70-feet thick and is even thicker near the Rio Puerco.

3.3 GEOLOGY

3.3.1 REGIONAL GEOLOGY TECTONIC SETTING AND SITE-SPECIFIC STRUCTURE

FWDA is in an erosional basin within the Navajo section of the Colorado Plateau Physiographic Province and lies on the northwest apex of the Zuni Uplift. This basin is regionally bounded by the Gallup sag to the west, the Acoma sag and McCarty's syncline to the east, and the Chaco Slope to the north. The Zuni Uplift is an elongated north-northwest trending structural uplift that is primarily a result of vertical upward displacement followed by deformation resulting from horizontal compressive stress associated with the Laramide orogeny of Cretaceous age. The uplift has exposed tilted Mesozoic sedimentary strata within the southwestern portion of the installation, a majority of which are Triassic mudstones and sandstones.

The dominant topographic structural feature located on the southwest margin of the Zuni Uplift is the Nutria Monocline or Hogback. This steep structural feature is a monoclinal belt with dips ranging from 30 degrees (°) to 45° near FWDA. Dips commonly exceed 60° in the southern extension of the monocline, south of FWDA. The northern segment of the Nutria Monocline is exposed in the western portion of FWDA, where westerly dipping Mesozoic strata are exposed to

form a long, sharp-crested, north-to-south trending ridge. In areas east of the Hogback, the bedrock generally dips to the northwest.

3.3.2 STRATIGRAPHY

The geologic units exposed at FWDA were largely deposited in the Mesozoic Era and have been significantly modified by more recent erosion and redeposition. The lithified stratigraphic units are Triassic to Cretaceous in age with uplift and deformation occurring in the Cretaceous during the Laramide orogeny series of mountain-building events in western North America (McCraw et al., 2009). Quaternary alluvial and colluvial deposits unconformably overlie the Mesozoic bedrock in the lower elevation and northern portions of FWDA (Anderson et al., 2003).

In the northern portion of FWDA, the surface is covered by remnants of either the Triassic Chinle Group or Quaternary alluvial deposits. Alluvial deposits are present in the northern lowland areas between bedrock remnants. Alluvial deposits are also present along intermittent streams draining the Hogback and Zuni Mountains, which flow downgradient through the northern portion of FWDA before joining the South Fork of the Rio Puerco. Alluvium deposits range in grain size from clay to gravel, typical of braided stream deposits with texture and internal structure characterized by lateral and vertical heterogeneity (Malcolm Pirnie, Inc. 2000). Data from installed wells indicate alluvial deposits are thickest near major drainages such as the South Fork of the Rio Puerco where alluvial deposits can be up to 150-feet thick. Just east of FWDA, alluvial deposits are approximately 75-feet thick, and in the Administration Area deposit thickness varies from 30 feet to 70 feet.

The majority of FWDA is underlain by the Triassic-age Chinle Group composed of non-marine, red-bed siliciclastics. The Chinle Group consist of Shinarump, Bluewater Creek, Petrified Forest, and Owl Rock Formations (Anderson et al., 2003). The Petrified Forest Formation underlies much of the installation and is subdivided into three members: Blue Mesa, Sonsela, and Painted Desert. All three members of the Petrified Forest Formation crop out in various locations across the installation. The Blue Mesa, Sonsela, and Painted Desert lithologies are green-gray smectitic mudstone, light gray to yellowish-brown cross-bedded sandstone, and reddish-brown and grayish-red smectitic mudstone (McCraw et al., 2009). In the eastern portion of FWDA, the older Bluewater Creek and Shinarump Formations crop out intermittently between layers of Quaternary alluvium (McCraw et al., 2009).

The Chinle Group is underlain by the older Permian age: San Andres Limestone and Glorieta Sandstone. The San Andres Limestone consists of fossiliferous limestone that intertongues with the Glorieta Sandstone (Anderson et al., 2003). These two formations comprise the San Andres-Glorieta aquifer, which is the principal source of drinking water in the area (Malcolm Pirnie, Inc., 2000; Cooper and John, 1968).

3.4 SURFACE WATER

3.4.1 REGIONAL SURFACE WATER

Streams in the area are ephemeral and fed by rain and snowmelt from the Zuni Mountains and the Nutria Monocline. All drainages in the FWDA area are intermittent with flow only occurring during and after heavy rainfall events (summer) or snowmelt (spring). These streams transport sediment to low-lying areas in the northern portion of FWDA, creating thick and extensive alluvial deposits among remnants of Triassic strata of the Petrified Forest Formation. Main drainages at FWDA generally follow the dominant topography by flowing from south to north and discharging into the South Fork of the Rio Puerco in the northern portion of the installation. Surface drainage is relatively shallow near headwaters due to the nature of brief and heavy precipitation. Downward erosion intensifies as water moves downstream, resulting in a well-developed, steep-walled system of arroyos in the Quaternary alluvium.

3.4.2 SITE-SPECIFIC SURFACE WATER

The various drainage system surface water pathways (arroyos) throughout the installation are shown in Figure 2-3.

The three major drainage systems at FWDA can be identified as: 1) eastern drainage system in Parcels 5 through 12 and Parcels 21 through 23; 2) western drainage system in Parcels 14 through 20; and 3) southwestern corner drainage system in Parcels 2 and 3. These drainage systems are divided by either bedrock ridges or bedrock remnants. In the northwest portion of the installation, two artificial channels are present that were constructed during the 1940s to divert water away from Igloo Block A, Igloo Block B, and the Administration Area (DOE, 1990).

The eastern drainage system consists of washes that run in northwestern and northeastern directions off the slopes of the Zuni Mountains. Alluvial fans form in basins at the front of the slope as well as between bedrock remnants. In the northeast section of the installation, the drainage flows around bedrock remnants before joining the South Fork of the Rio Puerco.

The western drainage system (except for the southwest corner) consists primarily of two main drainages covering the western portion of FWDA. Tributaries of the western drainage system pass the demolition area, cross the Hogback, and deposit alluvium along the bedrock remnants (Herndon Solutions Group, 2011). The southwestern corner drainage system flows southwest and joins the Bread Springs Wash on the western side of the Hogback.

3.4.3 HYDROGEOLOGY

Groundwater is present in several rock units underlying FWDA. The Quaternary Quaternary alluvium and the Permian San Andres limestone and Glorieta sandstone are the predominant formations at FWDA capable of yielding more than a few gallons per minute (gpm) of groundwater. The Triassic-age members of the Chinle Group: The Painted Desert mudstone/claystone, the Shinarump conglomerate, and the Sonsela sandstone underlying the shallow alluvial aquifer produce minor amounts of groundwater.

The regional groundwater aquifer near FWDA is present in the Permian San Andres limestone and Glorieta sandstone formations (Cooper and John, 1968; Summers, 1972). The San Andres-Glorieta aquifer was utilized as the drinking water source for FWDA prior to the closure of the installation in 1993. Currently, Well 69 (screened in the San Andres-Glorieta aquifer) produces groundwater continuously; and it may be used for non-potable purposes occasionally. The top of the San Andres-Glorieta aquifer is approximately 1,100-feet bgs near the Administration Area. The San Andres-Glorieta aquifer is about 200-feet thick and under artesian pressure. Hydraulic conductivity values range from 0.05 foot per day to 150-feet per day from one location to another (Herndon Solutions Group, 2011). Groundwater flow in the San Andres-Glorieta aquifer is northward beneath FWDA and is separated from the shallow groundwater units by shales and claystones across much of FWDA (Anderson et al., 2003).

Shallow groundwater is present in the unconsolidated alluvium and the Mesozoic-age bedrock overlying the San Andres limestone and Glorieta sandstone formations. The Quaternary alluvial aquifer, which includes deposits in the Rio Puerco Valley along the northern edge of the installation is composed of gravel, sand, silt, and clay derived from Triassic- and Jurassic-age strata that border the valley. Along the northern border of the installation, hydraulic communication exists between groundwater and the Rio Puerco during periods of active stream flow. Groundwater flow in the alluvium occurs primarily in discontinuous, stream-deposited sand, and gravel units. Water yields from the bedrock units: Shinarump and Sonsela members, generally yield 5 to 50 gpm, and water quality is considered fair to poor.

The depth to water (DTW) at FWDA is generally between 10- and 100-feet bgs. Groundwater is present at shallow depths in the alluvium along drainages, including the Rio Puerco. DTW ranged from 14.35-feet bgs (in well MW23) to 79.29-feet bgs (in well TMW11) in the Northern Area alluvial aquifer monitoring wells during April 2022 (Table 3-1). Groundwater in the Northern Area bedrock aquifer monitoring wells have a DTW range from 17.72-feet bgs (in well BGMW07) to 65.39-feet bgs (in well TMW14A) in all but one well (BGMW08) during April 2022 (Eco, 2023).

Minimal precipitation infiltrates through unsaturated soil to recharge FWDA groundwater. The regional aquifer and shallow groundwater units are primarily recharged through precipitation and snowmelt-runoff infiltration through exposed bedrock uplands and faults south of FWDA. The Quaternary alluvial aquifer is primarily recharged from surface runoff, although some deposits in the southern part of the installation are recharged by springs from underlying bedrock aquifers. Recharge of groundwater within the alluvium occurs mainly during the wet seasons, specifically with the spring snowmelt.

Hydraulic properties differ between the unconsolidated alluvium and bedrock groundwater-bearing units. The Northern Area alluvial and bedrock groundwater-elevation contours from the April 2022 quarterly water-level measurements event are shown on Figure 3-1 and Figure 3-2. Flow directions are interpreted based on groundwater contours and surface topography for infiltration pathways.

Water-quality parameter readings collected at FWDA during interim-measure monitoring provide information on general groundwater conditions. Groundwater conditions depend on the formation and distance from a recharge source. Typically, groundwater adjacent to recharge sources, such as exposed bedrock uplands or surface-water drainage systems, have water with lower salinity and a higher dissolved oxygen (DO) content, indicating variable groundwater conditions. DO and redox potential values indicate a mixture of reducing and aerobic conditions. Reducing conditions indicate DO is less than 1.0 milligram per liter (mg/L) and are attributed to natural conditions present in formations with high organic-matter content, such as clays and shales and persistent in bedrock units and in some alluvial units.

3.4.4 NORTHERN AREA ALLUVIAL GROUNDWATER SYSTEM

Groundwater flow direction in the alluvium moves from a potentiometric high in the east, north, and south toward a potentiometric low, west of the Administration Area (Figure 3-1). From the Administration Area, the groundwater flow direction is generally to the west.

A small groundwater mound is present in the Administration Area near monitoring wells MW01, MW02, and MW03. This feature has been previously attributed to a leaking water storage cistern (USGS, 2011a). The cistern is no longer in service, and the groundwater mound was expected to attenuate over time. However, the groundwater mound is still observed in the water-level data for monitoring well MW02 as recent as October 2019. This mound may be attributed to leakage from artesian Well 69, which was installed to replace Well 68.

Wells 68 and 69 were each abandoned in September and October of 2023 (Dawson, 2024).

There is a widespread aquitard between the alluvial and bedrock groundwater units across much of the Northern Area. Lithologic information from previous investigations shows a mudstone (approximately 20- to 60-feet thick) between the saturated alluvial groundwater zone and the permeable bedrock groundwater units. This information indicates that communication between the alluvial and bedrock groundwater systems is limited to the upland recharge areas present in the southern portions of the Workshop Area and potentially east and south of the Northern Area monitoring well network.

3.4.5 NORTHERN AREA BEDROCK GROUNDWATER SYSTEM

Although groundwater flow direction has not been fully characterized in the bedrock aquifer beneath the Workshop Area, groundwater flow in the shallow bedrock is generally to the north and west in the Workshop Area (Figure 3-2). The general flow pattern in the bedrock aquifer is to the west according to data from the existing well network, but areas of preferential flow via small-scale faulting and sand lenses may exist as exhibited by perchlorate and other contaminant migration pathway data.

Two or three water-bearing sandstone units within the Painted Desert Member of the Petrified Forest Formation are likely to exist below the Workshop Area. The upper sandstone unit, designated as Bedrock Aquifer 2 (BR2), is evaluated by monitoring well TMW40D. The remaining bedrock monitoring wells are completed in the lower sandstone unit which is separated

from the upper unit by a thick sequence of shale. A third water-bearing sandstone unit is assumed since groundwater from well BGMW08 was measured at 100-feet lower than those of other bedrock wells.

Since January 2013, groundwater elevations in most of the bedrock monitoring wells have been relatively stable.

A comprehensive survey was performed in October 2019 for all the Northern Area groundwater-network monitoring wells by DePauli Engineering and Surveying LLC using the New Mexico State Plane West, Zone Grid North American Datum of 1983 (NAD 83). In general, most wells measured 0.7- to 1.1-foot higher with the new survey without changing any flow patterns.

3.5 NATURE AND EXTENT OF GROUNDWATER CONTAMINATION

Groundwater contamination from known sources is detected in groundwater contaminant plumes in the Northern Area in both alluvial and bedrock aquifers. Nitrate, perchlorate, explosives, one VOC, and metals are consistently detected in groundwater samples at concentrations above the screening levels. Thirteen groundwater contaminant plumes have been identified: two nitrate plumes, one in the alluvial aquifer and one in the bedrock aquifer; one explosives plume in the alluvial aquifer; two perchlorate plumes, one in the alluvial aquifer and one in the bedrock aquifer; one VOC plume for 1,2-DCA in the alluvial aquifer; two TPH-DRO plumes, one in the alluvial aquifer and one in the bedrock aquifer; one TPH-GRO plume in the alluvial aquifer; two chloride plumes, one in the alluvial aquifer and one in the bedrock aquifer; and two sulfate plumes, one in the alluvial aquifer and one in the bedrock aquifer (Eco, 2023). While metals are consistently detected in groundwater samples at concentrations above the screening levels, background groundwater concentrations have not been accepted for FWDA and it cannot be demonstrated whether the detected concentrations are a result of natural conditions or anthropogenic sources. Therefore, the metals concentrations have not been mapped as contaminant plumes.

Figure 3-1 and Figure 3-2 present the alluvial and bedrock groundwater elevations generated from the April 2022 water-level measurement event. Plume boundaries defined by iso-concentration contours at the contaminant screening-level concentration were generated from the April 2022 monitoring event. Northern Area alluvial contaminant plumes for select contaminant concentrations that can be contoured are provided in Figures 3-3 through 3-10; and Figures 3-11 through 3-13 cover the Northern Area bedrock groundwater contaminant plumes. Analytical results corresponding to the contaminant plumes are presented in Appendix B.

The nitrate plume in the alluvial aquifer appears to originate from the TNT Leaching Beds (SWMU 1) (Figure 3-3). The bedrock nitrate plume is also present near the TNT Leaching Beds (SWMU 1) (Figure 3-11) and likely migrated from the alluvial aquifer. A portion of the bedrock nitrate plume is collocated with the bedrock perchlorate plume (Figure 3-12).

RDX is the primary explosives compound of interest. This compound is consistently detected in groundwater at concentrations above the project screening value in the Workshop Area and eastern Administration Area (Figure 3-4). The widespread detection of RDX allows this compound to serve as an indicator compound for explosives compounds across FWDA. The explosives plume

in the alluvial groundwater aquifer appears to originate from the TNT Leaching Beds (SWMU 1) in the Workshop Area and assume a northern trajectory due to the inferred geologic substructure. The explosives plume in bedrock appears to have the same potential source areas as nitrate and metals, which originate near the TNT Leaching Beds (SWMU 1) and Building 528 Complex (SWMU 27) (Figure 3-11).

The highest perchlorate concentrations are detected in groundwater samples from the bedrock aquifer in the Workshop Area (Eco, 2023) (Figure 3-12). The alluvial perchlorate plume is in the same vicinity as the bedrock perchlorate plume.

One VOC was detected in groundwater samples at concentrations exceeding project screening values. The compound 1,2-DCA was historically used as a gasoline additive and degreasing solvent. The 1,2-DCA plume in the alluvial aquifer (Figure 3-7) is limited to a group of wells near a former fueling facility (SWMU 45, Building 6 Gas Station) and SWMU 50 (Structure 35, UST 7) in the Administration Area (Eco, 2021). The VOC 1,2-DCA was not detected in the bedrock aquifer.

Some SVOCs such as 2,4-dinitrophenol are periodically detected at concentrations above the project screening values and are associated with degradation of explosives compounds. Some SVOCs such as PAHs are associated with petroleum products used in industrial operations and are also periodically detected. SVOCs were released to soil at SWMU 6 (Building 11, Former Locomotive Shop) and SWMU 45 (Building 6 Gas Station) (Figure 3-8 and Figure 3-13).

Background metals concentrations in groundwater have not been established for FWDA, thus, it cannot clearly be demonstrated whether the detected concentrations are a result of natural conditions or anthropogenic sources. A proposed alluvial monitoring network for 2024 sampling events is presented on Figure 3-6 and a bedrock monitoring network is presented on Figure 3-11.

Petroleum hydrocarbons such as DRO and GRO have been sporadically detected in multiple groundwater samples. DRO was released to soil at SWMU 6 (Building 11, former Locomotive Shop), SWMU 7 (Fire Training Ground), SWMU 45 (Building 6 Gas Station), and SWMU 50 (Structure 35, UST 7) (Figure 3-9). GRO was released to soil at SWMU 45 (Building 6 Gas Station) and SWMU 50 (Structure 35, UST 7) (Figure 3-10).

Dioxins, furans, herbicides, white phosphorous, pesticides, and PCBs have not been detected above project screening values since interim measure groundwater monitoring began in 2008. Pesticide detections were attributed to surface pesticide applications (Innovar Environmental, Inc., 2016). No points of release to groundwater were identified for dioxins, furans, herbicides, pesticides, white phosphorous, or PCBs; therefore, these compound groups are not considered primary groundwater COPCs.

3.6 FATE AND TRANSPORT OF CONTAMINATION IN GROUNDWATER

Groundwater contamination has been identified in the northern Administration Area and Workshop Area in alluvial and bedrock aquifers. The known and suspected points of release to groundwater are as follows:

- The TNT Leaching Beds (SWMU 1, Parcel 21) and the Building 528 Complex (SWMU 27, Parcel 22) in the Workshop Area had releases of nitrate, explosives, and metals due to historical munitions activities (Sections 2.2.7, 2.2.10, 2.2.12, 2.2.15, 2.2.26, and 2.3).
- The Building 528 Complex (SWMU 27, Parcel 22) in the Workshop Area had releases of perchlorate due to demilitarization and recycling of munitions (Sections 2.2.12, 2.2.26, and 2.3).
- The Building 6, Gas Station (SWMU 45, Parcel 11) and the former UST 7 at Building 45 (SWMU 50, Parcel 11) in the Administration Area had releases of GRO and VOCs, and suspected release of lead due to historical leaks from USTs (Sections 2.2.11 and 2.3).
- The Building 6, Gas Station (SWMU 45, Parcel 11) had suspected releases of DRO and SVOCs from historical fueling and mechanical operations (Sections 2.2.11 and 2.3).
- The Fire Training Ground (SWMU 7, Parcel 21) had suspected releases of DRO due to historical fire-fighting operations (Sections 2.2.15).
- The Pesticide and Field Battery Workshop (SWMU 8, Parcel 6) had suspected release of SVOCs (Sections 2.2.16).

For the purposes of periodic groundwater monitoring, points of releases are defined as known sources of groundwater impact identified from RFIs. All the above-listed points of release were to surface or shallow subsurface soils.

The primary transport mechanism to groundwater is leaching from shallow soils. There are sufficient permeable pathways to allow infiltration to reach the water table across much of the Northern Area. Highly insoluble compounds, such as PCBs, may be bound to soil materials rather than leach to groundwater.

Migration is largely controlled by the groundwater flow direction once contamination has reached alluvial groundwater. Alluvial groundwater flow is generally to the west and is controlled by the bedrock structural features in the Northern Area.

Groundwater flow across much of FWDA is believed to be slow due to low hydraulic conductivity of the alluvial and bedrock units. Groundwater monitoring from 2008 to present demonstrate that groundwater contaminant plumes are relatively stable.

Natural attenuation by diffusion, dispersion, and mineralization are believed to occur at FWDA. Mineralization, volatilization, chemical degradation, and biological degradation are potential mechanisms for contaminant degradation. Aerobic degradation and volatilization may be acting on some organic COPCs, such as VOCs and SVOCs. Aerobic conditions do not predominate in many groundwater units, and this degradation pathway is believed to be limited to small areas of shallow alluvial groundwater. Reductive chemical and chemical degradation may be acting on some COPCs such as nitrate, perchlorate, and explosives, but such degradation of COPCs has yet to be significantly demonstrated.

1 Source characterization and removal activities are being performed under interim measures at
2 various locations across FWDA. Interim groundwater monitoring will continue pending final
3 characterization and selection of an appropriate remedy.

4 **3.7 CULTURAL RESOURCES**

5 Traditional cultural properties and other cultural resources have been documented within FWDA
6 boundaries. Existing groundwater monitoring wells and access routes are not located within
7 identified archaeological sites. Since groundwater sampling activities are non-intrusive and
8 confined to a small area immediately surrounding a given well, cultural resource monitoring will
9 not be required during proposed sampling activities at existing wells.

4.0 FIELD MONITORING AND SAMPLING METHODS

4.1 SCOPE OF ACTIVITIES

Field activities proposed under this Interim Northern Area GWMP include DTW measurements and groundwater sample collection from the Northern Area monitoring wells at FWDA. The different types of sampling and purging methods described in this section are identified in Table 4-1. The field gauging and sampling equipment are listed in Table 4-2.

This Interim Northern Area GWMP is designed to evaluate each COPC from the point of release to the existing groundwater-contaminant plume boundary based on known or suspected releases to groundwater. Depth to groundwater will be measured quarterly, and groundwater samples will be collected on a semiannual monitoring frequency.

Low-flow purging and sampling is the preferred sampling method at FWDA. In addition, borehole purging is proposed at wells with poor recovery as is consistent with previously approved monitoring plans.

Groundwater samples will be analyzed for one or more of the following COPCs:

- Explosives by U.S. Environmental Protection Agency (EPA) Method 8330B
- Herbicides by EPA Method 8151A
- Major anions by EPA Method 9056
- Perchlorate by EPA Method 6860
- Total and dissolved metals including mercury by EPA Method 6020A/7470A
- Polychlorinated biphenyls (PCBs) by EPA Method 8082A
- Pesticides by EPA Method 8081B
- Volatile organic compounds (VOCs) by EPA Method 8260D
- Semi-volatile organic compounds (SVOCs) by EPA Method 8270D
- Total petroleum hydrocarbons (TPH) as gasoline range and diesel range organics (GRO and DRO) by EPA Method 8015C

4.2 DEPTH TO GROUNDWATER MEASUREMENTS

DTW is measured quarterly. Groundwater elevations are then calculated based on the DTW measurement, less the surveyed top of casing (TOC) measurement. The groundwater elevations are used to calculate hydraulic gradients and determine groundwater flow direction. All groundwater measurements will be collected during a 48-hour period from the Northern Area alluvium and Northern Area bedrock monitoring wells depicted in Figure 2-4. DTW measurements will be compared to previous measurements for consistency.

The DTW will be measured with an electronic water-level meter following these steps:

1. Starting with a clean water-level meter, lower the measurement probe down the well casing until the indicator lights or chimes. The indicator lights and chimes when the probe has encountered water. The measurement probe will be raised

above the water, then again lowered 2–3 times. The reading will be considered accurate when three consecutive readings agree (the same). The water-level measurement will be read at the surveyed reference notch (typically north side of top of well casing).

2. The DTW measurement will be compared to the DTW reading from the previous quarter. If the measurement differs from the previous measurement by more than 1.0 foot, the measurement will be performed a second time.

3. Record the measurement to the nearest 0.01 foot to the top of casing reference notch and document in the field form or logbook. Monitoring wells and piezometers that do not contain more than 6 inches of water column in the well screen interval are identified as dry.

4. Remove the water-level probe from the well casing and decontaminate with non-phosphate detergent and distilled water as described in Section 4.4.

4.3 GROUNDWATER SAMPLING

Monitoring well sampling at FWDA involves a variety of purging and sampling methods, as shown in Table 4-1. Wells are sampled either with dedicated low-flow pumps (i.e., BESST and Zone Isolation Sampling Technology [ZIST]), high-volume dedicated pumps (Bennett), portable submersible pump, or hand bail. Each purging and sampling method is described in subsequent sections. As described below, only low-flow dedicated pumps by BESST and ZIST require water quality parameter stabilization. The other methods of purging and sampling require that three well volumes be removed prior to collecting a water sample. If well yield does not allow for three well volumes, the well will be pumped dry and sampled the following day as formation water enters the well.

Low-flow purging and sampling is the preferred method at FWDA, in accordance with the NMED guidance document on low-flow sampling titled *Use of Low-Flow and Other Non-Traditional Sampling Techniques for RCRA Compliant Groundwater Monitoring* (NMED-HWB, 2001). Field sample methods, equipment, and sample handling information are presented in Table 4-2 and Table 4-3. Field procedures for sample collection and handling are provided in Section 4.3. Water generated during purging activities and excess groundwater from sampling will be collected in designated containers and managed as IDW following the procedures described in Section 4.5. Monitoring wells that do not contain more than 6 inches of water column in the well screen interval are identified as dry. Wells identified as dry will not be sampled.

4.3.1 PRELIMINARY SITE ACTIVITIES

4.3.1.1 Initial Inspection

Upon arrival at each monitoring well, the field team will inspect the wellhead and exposed casing, and will record observations in the field form or logbook. The USACE will be notified if there appears to be evidence of tampering or other damage to the well. After initial inspection of the monitoring well, the field team will implement preventive measures to reduce risk of contamination to the ground surface and sampling equipment by placing plastic sheeting or other

materials such as absorbent pads or shallow plastic tubs around each wellhead. A staging area will be designated for equipment decontamination which includes a non-phosphate detergent cleaning solution, reusable dedicated decontamination buckets and brushes, and a plastic sheet, absorbent pads, or plastic tubs, as appropriate. Field personnel will wear disposable nitrile (or comparable) gloves for all activities when in contact with purge water, purge equipment, or sample bottles and their preservatives.

4.3.1.2 Water-Level Measurement and Well Volume Calculation

DTW will be measured from the top of the well casing reference notch and recorded to the nearest 0.01 foot by following the procedure described in Section 4.1. Well volume is the cross-sectional area of the interior of the casing multiplied by the height of the water column in the well (Depth to bottom of casing minus DTW).

One well volume can be calculated using the following equation (Ohio EPA Technical Guidance Manual for Hydrogeologic Investigations and Ground Water Monitoring Programs, June 1993):

$$V = H \times F$$

where:

V = one well volume,

H = the difference between the depth of well and DTW (ft.)

F = factor for volume of 1-foot section of casing (gallons)

Note that F can also be calculated from the formula:

$$F = \pi (D/2)^2 \times 7.48 \text{ gallons per cubic foot (gal/ft}^3\text{)}$$

where:

D = the inside diameter of the well casing (ft.)

Volume of Water in 1-Foot Section of Well Casing

Diameter of Casing/Tubing (inches)	F Factor (gallons)
2	0.16
2.5	0.25
4	0.65

Groundwater elevation and well volume calculations will be recorded in the field logbook or on the Groundwater Sampling Field Data Sheet (Appendix C).

4.3.2 LOW-FLOW PUMP PURGING

Low-flow pump purging for wells designated as low-flow in Table 4-1 is performed using dedicated pneumatic displacement pumps. The low-flow equipment consists of a flow-control system connected to the wellhead tubing which applies pneumatic pressure to a dedicated two-valve pneumatic displacement pump suspended within the well screen interval of the well. This low-flow pump system is powered by pressurized nitrogen-gas cylinders. Dedicated pumps

are constructed of Delrin™ (acetal homopolymer) plastic, or stainless steel, and the tubing is Teflon™-lined polyethylene. Tubing fittings that contact the sample stream are stainless steel.

Pumps and gas control devices are operated and maintained in accordance with manufacturer specifications. Pneumatic power is applied by a compressed nitrogen-gas cylinder. Nitrogen gas is selected due to its inert properties and fewer impurities (as compared to compressed air). Electrical power for controller boxes is generated by a marine battery, power inverter, portable generator, or equivalent power source.

Dedicated low-flow pumps are designed to produce water-flow rates with minimal drawdown in compliance with low-flow guidance (NMED-HWB, 2001). Water-quality parameters and DTW readings are recorded during purging to assure representative sample collection. Well purging and stabilization is conducted in accordance with standard practice and site-specific methods implemented by USACE.

4.3.2.1 Traditional Low-Flow and ZIST Low-Flow Dedicated Pumps

Low hydraulic-conductivity conditions exist in many monitoring locations, which result in poor well yield. Bedrock wells TMW14A and TMW17 (installed in 2001) contain a ZIST packer system manufactured by BESST, Inc. to maintain the general low-flow methodology. Because these two wells have lengthy standing-water columns (40 feet and 80 feet, respectively) and are low yield, the constant drawdown without the ZIST packer system would prevent stabilization required for traditional low-flow. The ZIST packer system creates a seal above the well screen to minimize drawdown and produce water directly from the bedrock aquifer formation. The pump intake is locked into the packers before purging operations and is unsealed after sample collection to allow for representative DTW measurements.

The ZIST packer system have not proven to be consistently effective in the long-term, and to not consistently provide an appropriate seal. The Army proposes removal of the ZIST system from TMW14A and TMW17, and sampling in accordance with Section 4.3.4 (see on following page).

Traditional Low-Flow

The following steps will be performed for purging with traditional low-flow pumps:

1. Measure and record initial DTW.
2. Connect pump-controller pressure line, discharge tubing to well head, and connect nitrogen cylinder to control box with intermediary pressure regulator (pressure at 0 psi).
3. Connect inline flow-through cell and water quality meter to discharge hose from well head. Discharge hose from flow-through cell should be directed to suitable container to collect the purge water for transfer to evaporation tank.
4. Slowly increase pressure to inlet side of controller box.
5. Start pump at the lowest pressure setting as calculated from DTW and slowly increase until discharge occurs. Start with pressure/vent cycle timing previously used for that well.

6. Measure the DTW again.
7. Adjust pumping rate until there is little or no water-level drawdown. It is preferable to make any necessary adjustments to pumping rates within the first 15 minutes of purging. Reduce pumping rates as needed. If the static water level is above the well screen, avoid lowering the water level into the screen, if possible. Note that it is allowable for water levels to stabilize below the level of initial DTW. Measure the flow rate using a container of known volume vs time.
8. Monitor and record DTW, purge volume, purging rate, and field parameters approximately every 2 to 5 minutes during purging on the Groundwater Sampling Field Data Sheet (Appendix C). Calculate flow rate by timing and measuring discharge into a graduated cylinder or other measuring device. The time between each parameter measurement should allow the flow-through cell to completely evacuate the purge water from the previous reading. Measure the following parameters during purging:
 - Turbidity
 - Temperature
 - Specific conductivity
 - Hydrogen ion activity (pH)
 - Dissolved oxygen (DO)
 - Oxidation-reduction potential (ORP)
9. Purging is considered complete and sampling may begin when the field parameters have stabilized. Stabilization for traditional low-flow has occurred when three consecutive readings are within the following limits:
 - Temperature $\pm 10\%$ in degrees centigrade
 - pH ± 0.5 standard units
 - Specific conductivity $\pm 10\%$ in millisiemens per centimeter
 - DO $\pm 10\%$ or less than 1.0 mg/L
 - Turbidity $\pm 10\%$ or less than 1 nephelometric turbidity unit
 - ORP ± 10 millivolt
 - Water level = 0.00 to 0.33 foot (or 4 inches) or less drawdown during the stabilized water-quality readings.
10. Once water quality readings are stabilized (Step 9), the established water-level drawdown must not be more than 4 inches/0.33 foot from stabilization until the end of sample collection.
11. If stabilization of water quality readings is not reached within 1 hour, and at least eight water-quality readings have been collected, samples will be collected from the well at this time.

4.3.3 GROUNDWATER SAMPLE COLLECTION BY LOW-FLOW PUMP

After stabilizing field parameters, groundwater samples will be collected in accordance with the following steps:

1. During sample collection, maintain the pump at approximately the same flow rate as during purging and stabilization of field parameters.
2. Disconnect the water-quality sensor flow-through cell and collect samples directly from the pump-discharge tubing by allowing the discharge to flow gently down the inside of the sample container to minimize turbulence. Do not allow the tubing to touch the inside of the sample container.
3. Continue to monitor DTW to assure that the water level does not decrease more than 0.33 foot (4-inches) from the established pumping level during sampling (not for ZIST-equipped wells).
4. Fill sample containers in sequence from most volatile sample type to least. Reduce pressure to avoid splash in VOC containers, if necessary. Do not over fill preserved containers. Sample filtering and preservation will be performed in accordance with laboratory and method requirements as listed in Table 4-3.
5. To filter groundwater samples in the field for dissolved metals analysis, use a 0.45-micron filter attached to the end of the discharge tubing, or fill an intermediate container and filter using clean disposable syringe (follow laboratory SOPs).
6. To filter groundwater samples in the field for perchlorate analysis, use a 0.20-micron filter. A 0.45-micron filter may be used to filter water before using the 0.20-micron filter for wells with high turbidity. Fill the perchlorate container only to between half and two thirds volume to allow proper headspace for the sample. This can be done using a clean disposable syringe and attached filter.
7. After filling each sample container, immediately seal, label, and place container into an iced cooler in accordance with the sample management procedures discussed in Section 4.3.
8. Manage all liquid and solid IDW as described in Section 4.5.

4.3.4 ALTERNATIVE GROUNDWATER PURGING AND SAMPLING PROCEDURES

Some wells at FWDA require alternative methods of purging and sampling due to extremely low-yield/low-water levels. For these wells, purging and sampling are performed by hand bailing with disposable bailers, a submersible pump, or a dedicated piston pump. The methods required for purging and sampling are identified for each well in Table 4-1, and the type of equipment used is identified in Table 4-2. The sampling method used for each well will be recorded on the individual Groundwater Sampling Field Data Sheet for each well or field logbook.

These procedures emphasize the need to remove a sufficient volume of water from each well, so the sampled groundwater is representative of the surrounding formation. To achieve this, three borehole volumes will be removed from the well, wherever possible. If the well yield is insufficient

to generate three borehole volumes, then the well will be purged dry and allowed to recharge with sufficient volume prior to collecting the groundwater sample.

Field parameters will be monitored at a time interval determined by the purge rate. A minimum of three parameter values will be recorded on the Groundwater Sampling Field Data Sheet (Appendix C). Prior to purging, an additional DO measurement with a downhole probe will be collected on all wells without a dedicated pump. DO is the only parameter that shows a potential affect from pumping the water through a flow-through cell by possible introduction of air into the system. No other parameter has empirically been shown to be affected by pumping water through a flow-through cell. Purging is considered complete after evacuating three well volumes or when the well is emptied due to extremely slow water-level recovery. Groundwater samples must be collected within 48 hours of purging the well dry.

Groundwater samples from these wells with low yield will be collected with disposable bailers as described below.

4.3.4.1 Disposable Bailers

The following steps describe purging and collecting groundwater samples with disposable bailers:

1. Measure and record initial DTW.
2. Attach a clean stainless-steel wire to the bailer and lower it into the monitoring well; allow bailer to fill with groundwater. Try to avoid allowing bottom of bailer to come into contact with bottom of well casing unless bailing well is dry.
3. Slowly and steadily raise bailer out of the monitoring well and empty purge water into a calibrated container or storage vessel designated for IDW. Record volume of water bailed on field data sheet or logbook.
4. Periodically collect and record the following groundwater parameters. Collect at least three groundwater parameter measurements and record all readings. Measure the following parameters during purging:
 - Turbidity
 - Temperature
 - Specific conductivity
 - pH
 - DO
 - ORP
5. Repeat process until the calculated volume of groundwater has been purged from the monitoring well (three times the well volume) or until well is dry.
6. Use a new bailer for sample collection if the well was bailed dry.
7. Collect groundwater samples with the disposable bailer by pouring the collected water from the bailer directly into the sample containers.

8. To filter groundwater samples for dissolved metals and/or perchlorates analysis, use a clean disposable syringe and filter. An intermediary container may be used to collect the groundwater sample prior to filtering. Sample filtering and preservation will be performed in accordance with laboratory and method requirements as listed in Table 4-3.

4.3.4.2 Reusable Submersible Pump

A portable submersible pump can be used to purge wells that may not have sufficient recharge to support low-flow pumping but contain more water than can be efficiently bailed. A portable submersible pump can also be used to purge a well with a dedicated pump in the event the dedicated pump has failed. This deviation must be clearly identified on the Groundwater Sampling Field Data Sheet for each well or field logbook. Table 4-1 indicates which wells have sufficient water for low-flow sampling methods using submersible pumps. If the well becomes dry during purging, allow well to recharge, and collect the groundwater sample with a disposable bailer. Based on current water-level conditions in the field, the following procedures for purging with a submersible pump and collecting groundwater samples using low-flow or disposable bailer are described below:

1. Measure and record initial DTW.
2. Attach clean, unused tubing to the pump and secure the tubing to pump.
3. Lower the pump into the well to approximately 6 inches from the bottom of the well. Avoid disturbing the bottom of the well casing as this may disturb sediments.
4. Secure the tubing and lead line, then attach tubing to flow-through cell and lead line to control box, and then secure the control box to the power source.
5. Begin purging at a flow rate of between 0.5 to 2 gpm (2 liters per minute [lpm] to 8 lpm). During well purging, record DTW and monitor and record a minimum of three field-parameter readings and record all readings. Measure the following parameters during purging.
 - Turbidity
 - Temperature
 - Specific conductivity
 - pH
 - DO
 - ORP
6. Measure and record purge volume. Once three casing volumes have been removed, the well may be sampled. Reduce the flow rate of the pump to less than 0.2 gpm.
7. Disconnect the water-quality sensor flow-through cell and collect samples directly from the pump discharge by allowing the discharge to flow gently down the inside of the sample container to minimize turbulence.

8. If the well has been purged dry, remove pump and tubing. Allow water levels to recharge as described in Section 4.2.4 and sample with a disposable bailer following steps 6, 7, and 8 in Section 4.2.4.1.
9. Decontaminate the pump after purging is complete as described in Section 4.4.
10. Remove and dispose of tubing after purging is complete at each monitoring well. Do not reuse the pump discharge tubing. Manage all liquid and solid IDW as described in Section 4.5.

4.3.4.3 Dedicated Bennett Pump

The Bennett sample pump system consists of automatic reciprocating piston motors operated by compressed nitrogen gas to power a double-acting piston fluid pump. The Bennett pump has four polyethylene tubes attached to the top of the well casing. The pressurized nitrogen gas is inserted through one tube, a second tube returns groundwater to the surface, a third tube is a gas exhaust, and the fourth tube is used as a water-level indicator. Bennett pumps are installed in seven wells (MW23, MW24, TMW16, TMW18, TMW19, TMW36, and TMW37), as shown in Table 4-1. The Bennett pump intake was placed approximately 2 feet from the bottom of each monitoring well. Procedures for using a Bennett pump to purge and collect groundwater samples are as follows:

1. Measure and record initial DTW.
2. Connect the air intake tubing from the dedicated pump to the pressurized nitrogen-gas cylinder. Connect the discharge tubing to the flow-through cell.
3. Turn on gas flow from the nitrogen cylinder. Use initial pumping rates previously established for borehole volume purging based on specific well yield.
4. Monitor and record all adjustments to pumping rate. Measure and record flow rate and volume of purge. Collect a minimum of three field parameters at a rate of between one per 3 minutes to one per 15 minutes depending on the purge volume and record all readings. The time between each parameter measurement should allow the flow-through cell to completely evacuate the purge water from the previous reading. Measure the following parameters during purging:
 - Turbidity
 - Temperature
 - Specific conductivity
 - pH
 - DO
 - ORP
5. If three casing volumes have been removed, the well may be sampled. Reduce the flow rate of the pump by slowly reducing the pump drive pressure so the discharge rate is below 0.2 gpm.
6. If the well is purged dry, allow for recharge following requirements in Section 4.2.4.

7. Disconnect the water-quality sensor flow-through cell and collect samples directly from the pump discharge by allowing the discharge to flow gently down the inside of the sample container to minimize turbulence.
8. After filling each sample container, immediately seal, label, and place container into an iced cooler in accordance with the sample management procedures discussed in Section 4.3.
9. Manage all liquid and solid IDW as described in Section 4.5.

4.4 SAMPLE MANAGEMENT AND SAMPLE HANDLING

Proper sample handling, shipment packaging, and chain-of-custody (COC) documentation will generate quality field data and provide validity and defensibility to the sample results. Sample handling protocols, careful sample packaging, and COC requirements will be followed completely, accurately, and consistently. All samples shipped to the laboratory will be accompanied by a properly completed COC form (Appendix C).

The unique sample identifiers and descriptive information (i.e., sample location, date, and collection time) will be listed on the COC form. Individuals relinquishing or receiving possession of samples will sign, date, and note the time on the COC form in the “relinquished by” or “received by” boxes, respectively. The signed COC forms establish the transfer of sample custody from the field sampler to the laboratory.

4.4.1 SAMPLE HANDLING PROCEDURES

After filling each sample container, the container will be immediately sealed, labeled, and placed into an iced cooler for the remainder of the day’s sampling activities before packaging the samples for shipment. Groundwater samples may also be transported and stored in coolers with ice at a predetermined secure refrigerator prior to delivery to the laboratory. Samples will be transported daily via FedEx or other common courier for samples with holding times of less than 3 days. If one or more groundwater sample is collected after sample packing and shipment is completed for the day, the sample(s) will be held overnight and placed on ice in sample cooler or secure refrigerator, pending the samples’ laboratory holding time. Sample containers, preservation, and holding times are presented in Table 4-3 by analytical method.

Container lids will be checked to verify they are sealed tight to prevent a leak during transport. The samples will be individually packaged in resealable plastic bags and positioned within the cooler in a manner to prevent damage. Sample containers may also be bubble wrapped to maintain sample integrity and added protection during transport to the laboratory.

Groundwater samples will be transported in rigid plastic coolers or ice chests. Coolers or ice chests will be lined with clean plastic bags. The bagged samples will be secured within the plastic bag liner inside the cooler and ice will be placed inside the plastic bag liner within a secondary plastic bag or resealable plastic bag within the cooler or ice chest. The samples and ice will be sealed in their respective plastic bags to prevent leakage and contact during transportation to the laboratory.

4.4.2 COC REQUIREMENTS

The following information will be included on the COC forms:

- Site name and project name or number;
- Sample identification code, sample collection date, sample collection time (in 24-hour format);
- Total number of containers for each sample, the analyses, and associated number of sample bottles for each analysis;
- Signature of the sample team leader or sample collector;
- Carrier service (e.g., FedEx or UPS), air bill number, and custody seal number, if applicable; and
- Signature, date, and time in the “relinquished by” section.

The signed COC form will be placed in a plastic bag and taped to the inside of the lid in each cooler or ice chest. Each cooler or ice chest will have its own documentation and will be closed and secured with strapping tape and custody seal. Clear tape will be placed over the custody seal to prevent damage to the seal. When the cooler or ice chest is opened, the custody seal will be broken. The completed and signed COC forms will become part of the project record.

4.4.3 SAMPLE SHIPPING

Samples will be transported to Eurofins Environment Testing (Eurofins) located at 4955 Yarrow Street in Arvada, Colorado for analytical testing. If requested by USACE, a second laboratory (chosen by USACE) will be used to analyze triplicate samples.

4.4.4 ANALYTICAL METHODS

Sample analysis will be performed by Eurofins, a DoD ELAP-certified laboratory. Table 4-3 provides the analytical methods, container (number, size, and types), preservation, and holding times. Selected analysis for each well is presented in Section 5. Analytical methods are selected in accordance with the most recent QSM (DoD/DOE, 2021) and consistent with RCRA regulations. The most recent EPA SW-846 solid waste methods were determined to be appropriate methods to meet DQOs as well as conform to RCRA regulations and DoD guidance.

4.5 DECONTAMINATION

Non-dedicated and non-disposable equipment and sampling supplies such as water-level meters and submersible pumps will be decontaminated before and after each use. Water-level meters will be decontaminated during extraction from monitoring wells using distilled water and a non-phosphate detergent cleaning solution. Submersible pumps will be decontaminated using the following procedures:

1. Remove particulate matter or debris using a brush or handheld sprayer filled with distilled water.

2. Scrub the surfaces of the equipment using distilled water and a non-phosphate detergent-cleaning solution and reusable-dedicated decontamination brushes.
3. Rinse the equipment thoroughly with distilled water.
4. Place the equipment on a clean surface and allow to air dry.
5. Containerize all decontamination liquids and manage as IDW, as described in Section 4.5.
6. The area where the equipment is stored prior to reuse will be free of contaminants.

If decontaminated equipment is transported between wells or other locations, the equipment will be protected from potential sources of cross contamination as appropriate. Sampling equipment dedicated for use at specific wells will not require decontamination before use. Disposable sampling equipment that is used once and then disposed of will not require decontamination before use, provided it is wrapped in the manufacturer's packaging or otherwise protected from inadvertent contamination before use.

4.6 WASTE MANAGEMENT PROCEDURES

Purged groundwater, excess sample water from monitoring wells, decontamination liquids (non-hazardous soap and water), and solid waste (disposable sampling equipment and personal protective equipment) are typical IDW generated during the FWDA groundwater sampling events.

Purged groundwater, decontamination water, and other non-hazardous liquid IDW will be containerized at the sample collection location in appropriate containers, such as buckets with a watertight lid or polyethylene drums with a sealing bung. Water from multiple wells may be consolidated into one or more containers depending on volume. Liquid IDW containers will be emptied into one of two low-density polyethylene-lined evaporation tanks at the end of each day. The evaporation tanks are located at the site of former Building 542 in Parcel 6.

Solid waste (e.g., disposable sampling equipment, personal protective equipment, and general refuse) will be allowed to dry and placed in plastic trash bags. Small quantities of waste will be disposed of in trash containers (dumpsters) located in the Administration Area. Larger quantities of waste material (that will not fit in the dumpsters) will be transported off site for disposal as municipal waste.

4.7 QUALITY ASSURANCE PROCEDURES

4.7.1 FIELD EQUIPMENT CALIBRATION AND PREVENTATIVE MAINTENANCE

Field instruments will be calibrated, operated, and maintained in accordance with the manufacturer's instructions. Daily on-site field instrument calibrations will be performed before and during each day's use by trained technicians using certified standards. Instrument calibrations will be recorded in logbooks dedicated to calibration data and will include field instrument identification, serial number, date of calibration, standards used, and calibration results.

If there is equipment malfunction, the instrument will be removed from service, tagged, and substituted with another piece of equipment. Equipment that fails calibration or becomes inoperable during use will be tagged and removed from service. Equipment that cannot be recalibrated or repaired will be replaced. Backup equipment will be available for use in the field in case of a malfunction.

Preventive maintenance procedures for field instruments will be conducted in accordance with procedures outlined by the manufacturer's equipment manuals. All records of inspection and maintenance will be dated and documented in the appropriate field logbook. Critical spare parts for field instruments will be included in the sampling kits to minimize downtime. Backup meters will be available, when needed. Spare parts will be purchased from accepted vendors. Daily inspections of field equipment will be performed to ensure proper function. If inspection results deem a piece of field equipment faulty or not usable, replacement equipment will be cleaned, calibrated, and used in place of the faulty equipment.

4.7.2 SAMPLE COLLECTION QUALITY CONTROL AND QUALITY ASSURANCE

In compliance with the most recent version of the QSM (DoD/DOE, 2021) several types of field quality control (QC) samples will be submitted to the analytical laboratory to assess the validity of the data. Quality control samples include the following: field duplicates, trip blanks, equipment rinsate blanks, matrix spike (MS), and matrix spike duplicate (MSD) samples.

Field duplicate samples will be collected at a frequency of at least one per 10 environmental samples. The MS/MSD samples will be collected at a frequency of at least one per 20 environmental samples. Additional sample volume will be collected at specified sample locations in order to include one MS/MSD pair to be submitted to the analytical laboratory for every 20 environmental samples. Quality assurance (QA) split samples may be generated at the Army's discretion to check the contractor's laboratory quality performance. Field equipment rinsate blanks are collected at the start of the sampling event, one per 20 environmental samples, and/or one at the end of the sampling event (minimum of 2 samples per event), on non-dedicated equipment.

Each shipment that contains VOC sample analyses will include a trip blank. The trip blank will be placed in the cooler containing samples designated for VOC analysis and will stay with the cooler during transportation to the analytical laboratory.

Due to recurring detections of bis(2-ethylhexyl) phthalate, a plasticizer and a common laboratory and sampling contaminant, the use of materials containing bis(2-ethylhexyl) phthalate will be avoided in the field and laboratory.

4.7.3 DOCUMENTATION QUALITY ASSURANCE

Field documentation will consist of one or more job- or area-specific field logbooks, field forms, sample COC forms, and sample logs/labels.

4.7.3.1 Logbooks

Field logbooks provide a daily handwritten record of field activities. Logbooks will be permanently bound and have a hard cover. Logbooks will be ruled or gridded, with sequentially

numbered pages. All entries into field logbooks will be made with indelible ink. Field logbooks are detailed daily records that are kept in real time and are assigned to specific activities, positions, or areas within the site. Separate logbooks will be used for each sampling event and field team.

Documentation in field logbooks will include the following (as necessary):

- Location
- Date and time
- Names of field crew
- Names of subcontractors
- Weather conditions during field activity
- Sample type and sampling method
- Location of sample
- Sample identification number
- Decontamination procedures
- Health and safety briefings
- Sampling notes (e.g., well condition, unexpected maintenance, or work stoppage).

A separate logbook dedicated to calibration records will be maintained and will include the following information:

- Equipment or device make, model, and serial number (or another unique identifier)
- Date and time
- Calibration results
- Adverse trends in instrument calibration behavior
- Field instrument identification, date of calibration, and standards used.

Field logbook corrections will be made by crossing out mistakes with a single line, writing in the correction, initialing, and dating the entry. The use of correction fluid is not permitted. The team lead will review each page of the logbook for errors and omissions after each field day and will date and sign each reviewed page.

4.7.3.2 Field Data Record Forms

In addition to the field notebooks, field log forms will be used. These field forms will include DTW measurement forms and purging and sampling forms. These forms ensure all required data and observations are recorded in a consistent manner. Information recorded on the field log forms is not intended to be a double entry, meaning that if the information is recorded on the field log form, it need only be referenced in the field logbook, not duplicated. No blank spaces will be left; all non-applicable items will be marked “not applicable.” Forms will include well sampling forms and COC forms, as provided in Appendix C.

1 **4.7.3.3 Final Evidence File Documentation**

- 2 Evidential file documentation will be maintained under an internal project file system. The
- 3 USACE Contracting Officer's Representative (COR) will ensure that all project documentation
- 4 and QA records are safely stored and retrievable.

5.0 MONITORING AND SAMPLING PROGRAM

Interim groundwater monitoring and sampling at FWDA allows the Army to track contaminant plume concentrations and migration at previously identified groundwater impact areas while the remedial facility investigation (RFI) and corrective measures study (CMS) are completed, and the final remedy is selected. The current monitoring well network is based on the current understanding of site conditions. All analytical-data summary tables will include data from the three previous monitoring events as required by Section V.A.2 of the FWDA RCRA permit.

5.1 INTERIM GROUNDWATER MONITORING ANALYTICAL PROGRAM

The Army has identified COPCs for interim groundwater monitoring based on existing groundwater data and point of release assessments. Sample analytical methods were selected based upon the COPCs and the DQOs. The groundwater analytical program complies with the RCRA permit (NMED, 2015a) and the QSM requirements (DoD/DOE, 2021).

Attachment 7 of the RCRA permit (NMED, 2015a) provides a hierarchy to select screening level criteria applicable to the FWDA groundwater monitoring program. Table 5-1 presents the list of analytes with screening values and the contracted laboratory limits for these methods and individual analytes.

Analytes without risk screening values have been assigned the screening values for surrogate analytes that are structurally similar or that provide a conservative estimate of toxicity, as identified on Table 5-1. Six analytes listed on Table 5-1 do not have an assigned risk screening level and do not have a surrogate analyte as identified in italics below.

4-bromophenyl phenyl ether, 4-chlorophenyl phenyl ether, acenaphthylene, benzo[g,h,i]perylene, phenanthrene, and dichloropropene: Surrogate analytes were not selected for these compounds. These analytes do not have a WQCC, MCL, or EPA RSL value. If these analytes are detected in groundwater samples collected while implementing this GWMP, additional review for appropriate surrogate compounds will be conducted.

Eurofins is the contracted DoD ELAP-certified laboratory selected to analyze samples from FWDA. Forty-two analytes in Table 5-1 have screening values lower than the laboratory limit of quantitation (LOQ), or limit of detection (LOD); thus, are identified as data quality exceptions. USACE is currently evaluating options to achieve lower LOQs for the remaining few compounds using enhanced analytical procedures (USACE, 2023).

The following list identifies the data quality exceptions:

- DRO (C10–C28) CAS No. 68334-30-5
- GRO (C6–C10) CAS No. 8006-61-9
- 1,2,3-Trichloropropane CAS No. 96-18-4
- 1,2-Dibromo-3-Chloropropane CAS No. 96-12-8
- 1,2-Dibromoethane CAS No. 106-93-4
- Hexachlorobutadiene CAS No. 87-68-3
- 1,2,4,5-Tetrachlorobenzene CAS No. 95-94-3

- 1,2-Diphenylhydrazine CAS No. 122-66-7
- 2,4-Dinitrotoluene CAS No. 121-14-2
- 2,6-Dinitrotoluene CAS No. 606-20-2
- 3,3-Dichlorobenzidine CAS No. 91-94-1
- 4,6-Dinitro-2-methylphenol CAS No. 534-52-1
- 4-Chloroaniline CAS No. 106-47-8
- Benzidine CAS No. 92-87-5
- Benzo[a]anthracene CAS No. 56-55-3
- Benzo[a]pyrene CAS No. 50-32-8
- Benzo[b]fluoranthene CAS No. 205-99-2
- Bis-(2-Chloroethyl)ether CAS No. 111-44-4
- Bis-(2-Ethylhexyl)phthalate CAS No. 117-81-7
- Dibenz(a,h)anthracene CAS No. 53-70-3
- Dibenzofuran CAS No. 132-64-9
- Hexachlorobenzene CAS No. 118-74-1
- Hexachloroethane CAS No. 67-72-1
- Indeno(1,2,3-cd)pyrene CAS No. 193-39-5
- Nitrobenzene CAS No. 98-95-3
- N-Nitrosodimethylamine CAS No. 62-75-9
- N-Nitrosodi-n-propylamine CAS No. 621-64-7
- Pentachlorophenol CAS No. 87-86-5
- Phenol CAS No. 108-95-2
- Nitroglycerin CAS No. 55-63-0
- Pentaerythritol tetranitrate (PETN) CAS No. 78-11-5
- 4,4-DDD CAS No. 72-54-8
- Aldrin CAS No. 309-00-2
- alpha-BHC CAS No. 319-84-6
- Dieldrin CAS No. 60-57-1
- PCB-1221 CAS No. 11104-28-2
- PCB-1232 CAS No. 11141-16-5
- PCB-1242 CAS No. 53469-21-9
- PCB-1248 CAS No. 12672-29-6
- PCB-1254 CAS No. 11097-69-1
- PCB-1260 CAS No. 11096-82-5
- MCPA CAS No. 94-74-6

Other related difficulties associated with sampling that can lead to data quality exceptions include the lack of recharge in select wells, the high turbidity in select wells, and the potential for matrix interference.

5.2 MONITORING LOCATION AND FREQUENCY

The GWMP was designed for each point of release in accordance with the DQOs and decision criteria described in Section 1.4. Groundwater monitoring activities consist of DTW measurements

on a quarterly basis and groundwater sample collection on a semiannual basis consistent with the current groundwater monitoring program at FWDA.

Review of groundwater monitoring data from 2008 to current data identifies relatively stable groundwater contaminant plume configurations and predictable groundwater flow directions and gradients. Table 5-2 contains the sampling matrix in accordance with this GWMP.

5.2.1 NORTHERN AREA ALLUVIAL GROUNDWATER MONITORING DESIGN

Nitrate and Nitrite Plume

The points of release for the groundwater nitrate/nitrite plume in the Northern Area appear to originate from SWMU 1 (TNT Leaching Beds, which have been removed) and SWMU 27 (Building 528 Complex). As shown on Figure 3-3, the plume extends across the Workshop Area and Administration Area. Wells TMW03, TMW34, TMW40S, and TMW46 have historically had the highest nitrate concentrations within the plume and are designated as downgradient relative to SWMU 1 (TNT Leaching Beds) and SWMU 27 (Building 528 Complex). Starting in 2021, all wells sampled for nitrate and nitrite are also sampled for additional major anions to include chloride, fluoride, sulfate, phosphate, and bromide.

Explosives Plume

The suspected points of release for the groundwater explosives plume in the Northern Area are SWMU 1 (TNT Leaching Beds) and SWMU 27 (Building 528 Complex). The alluvial aquifer explosives plume extends northward across the Workshop Area (Figure 3-4).

Perchlorate Plume

The point of release for the groundwater perchlorate plume in the Northern Area is SWMU 27 (Building 528 Complex). Groundwater samples from wells TMW01, TMW31S, and TMW39S have historically had the highest perchlorate concentrations within the plume (Figure 3-5). To monitor plume migration along the downgradient boundary of the plume, TMW03, TMW13, and TMW41 are designated for perchlorate analysis.

Metals Monitoring

The points of release for metals in the Northern Area are SWMU 1 (TNT Leaching Beds), SWMU 27 (Building 528 Complex), and SWMU 50 (UST 7 at Building 45). Groundwater metals plumes have not been identified at FWDA pending determination of groundwater background concentrations.

Other Organics Monitoring

The points of release for the groundwater VOC plume in the Northern Area are SWMU 45 (Building 6 Gas Station) and SWMU 50 (Structure 35, UST 7 at Building 45). The 1,2-DCA plume is adjacent to SWMU 45. Groundwater samples from wells MW18D, MW20, MW22D, and

TMW33 have consistent concentrations of 1,2-DCA. Monitoring wells MW01, MW02, and MW03 are hydraulically upgradient of SWMU 45 but downgradient of SWMU 50 (Figure 3-7).

The points of release for the SVOCs in the Northern Area include SWMU 6 (Building 11, former Locomotive Shop) and SWMU 45 (Building 6 Gas Station). There are no groundwater SVOC plumes identified at FWDA.

The points of release for the DRO in the Northern Area are SWMU 6 (Building 11, former Locomotive Shop), SWMU 45 (Building 6 Gas Station), and SWMU 7 (Fire Training Ground).

The points of release for the GRO in the Northern Area are SWMU 45 (Building 6 Gas Station) and SWMU 50 (Structure 35, UST 7). The GRO releases are monitored by wells MW01, MW02, MW03, MW18D, MW20, MW22D, and TMW33.

5.2.2 NORTHERN AREA BEDROCK GROUNDWATER MONITORING DESIGN

Nitrate and Nitrite Plume and Explosives and Metals Monitoring

The points of release for the bedrock aquifer nitrate/nitrite, explosives plumes and suspected metals releases in the Northern Area are SWMU 1 (TNT Leaching Beds) and SWMU 27 (Building 528 Complex) (Figure 3-11). Two nitrate plumes are present in the bedrock aquifer across the Workshop Area. To monitor known and suspected releases from SWMU 27 (Building 528 Complex) wells TMW30, TMW31D, TMW32, TMW39D, and TMW48 are downgradient of SWMU 27. To monitor known and suspected releases from SWMU 1 (TNT Leaching Beds), wells TMW36, TMW38, and TMW40D are designated as downgradient wells. Upgradient monitoring wells have not been installed due to dry and impermeable shale bedrock present in this area. Starting in 2021, all wells sampled for nitrate and nitrite are also sampled for additional major anions to include chloride, fluoride, sulfate, phosphate, and bromide.

Perchlorate Plume

The point of release for the bedrock groundwater perchlorate plume in the Northern Area is SWMU 27 (Building 528 Complex). Although the extent of the perchlorate plume has not been fully defined, the contamination is located in the eastern portion of the Workshop Area (Figure 3-12). Wells TMW30, TMW31D, and TMW48 have consistent elevated groundwater perchlorate concentrations. To monitor the plume boundary wells TMW32, TMW36, TMW38, TMW39D, and TMW40D are designated as downgradient wells. Additional wells were installed in 2019 to further assess the perchlorate plume.

Other Organic COPCs Monitoring

The suspected point of release for SVOCs in bedrock aquifer of the Northern Area is SWMU 8 (Building 537, removed). There are no identified groundwater SVOC plumes at FWDA and no site related SVOC concentrations exceeding screening levels in groundwater samples that are attributable to historical site activities. Upgradient monitoring wells have not been installed due to dry and impermeable shale bedrock present in this area. VOC detections in the bedrock aquifer

have included carbon disulfide in previous monitoring events. The Army has confirmed that this compound was not used at the facility.

5.3 DATA QUALITY EVALUATION

The data quality evaluation (DQE) process is instituted to ensure the suitability of the data to meet DQOs. The DQE process consists of three steps: Step 1 is verification of the data obtained from the project activities to be complete; Step 2 is validation of the field and analytical procedures performed relative to the contract and work plan requirements; and Step 3 is assessment of usability of the data to be suitable to meet DQOs.

Field data are assessed by the project team through a series of internal reviews. The field team lead is responsible for implementation of the correct field procedures during data collection. Senior technical review staff and USACE will evaluate completeness of the field data, determine whether the field procedures outlined in this GWMP are being followed, and verify data quality is suitable for use in groundwater monitoring. Rejected data will be qualified or removed from the database.

Laboratory analytical DQEs follow a specific process defined by the current version of the QSM (DoD/DOE, 2021), *General Data Validation Guidelines* (Environmental Data Quality Workgroup, 2019) and *Guidance for Evaluating Performance-Based Chemical Data* (USACE, 2005). Laboratories performing sample analyses will hold current DoD ELAP accreditation and state of New Mexico accreditation/National Environmental Laboratory Accreditation Program accreditation for all appropriate fields of testing. Laboratories will also need to meet NMED and EPA standards, as required. Laboratories will submit accreditation certificates to the USACE COR.

5.3.1 GENERAL DATA QUALITY REQUIREMENTS

DQEs for all project data and deliverables will consist of the following:

1. Verification that the data produced corresponds to the data scope of work (completeness check)
2. Verification of the procedures/methods used
3. Verification that documentation/deliverables are complete
4. Verification that hard copy and electronic versions of the data are identical
5. Verification that the data seem reasonable based on analytical methodologies
6. Evaluation and qualification of laboratory analytical results based on sample receipt (sample temperature and preservation) and holding-time compliance
7. Evaluation and qualification of laboratory results based on precision and accuracy
8. Verification that analytical instrument calibration is in accordance with required instrument and method criteria
9. Evaluation and qualification of analytical results based on field and laboratory QA/QC of sample results.

5.3.2 ANALYTICAL DATA QUALITY REQUIREMENTS

Analytical data generated for FWDA will be subjected to 100% Level II validation with 10% subjected to Level III validation. Data qualifiers will be used to indicate: 1) blank contamination; 2) sample analytical anomalies associated with a constituent; 3) analytical results that fall between the detection limit (DL) and the LOQ; 4) data qualified because of an exceedance of method-specific holding times, cooler temperatures exceeding 4 °C, or other significant QA/QC data deficiencies; and 5) data results that exceed the upper calibration curve limit for that constituent and associated analytical instrument. The data quality indicators include the PARCCS parameters. These indicators are described below. The validation process ensures a completeness of 95% in QA/QC reporting and 100% in sample result reporting.

Precision

Precision is the degree to which a set of measurements, obtained under similar conditions, conforms to itself. Precision data indicate the consistency and reproducibility of field sampling and/or analytical processes. Precision is usually expressed as a percentage difference or standard deviation, in either absolute or relative terms. Overall project precision is measured by the analysis of field sample/duplicate pairs and MS/MSD pairs. The relative percent difference of field duplicates, laboratory duplicates, and MS/MSD pairs will be calculated and evaluated with the limits included in Table 5-1.

Accuracy and Bias

Accuracy is the degree of agreement between a sample result and a reference value. Bias refers to the systematic inaccuracy associated with a measurement process. Analytical accuracy is determined by adding a known concentration of target analyte(s) or surrogate analyte(s) (those with properties that mimic analytes of interest, but unlikely to be found in environmental samples) to a standard reference material or a laboratory control sample consisting of an analyte-free matrix and performing the prescribed method on the reference material or laboratory control sample.

Bias introduced by the sample matrix is determined by adding a known concentration of target analyte(s) or surrogate analyte(s) to an aliquot of field sample, referred to as an MS sample, and performing the prescribed method on the spiked sample aliquot. The percentage recovery of laboratory control samples and MS samples will be evaluated with the percentage limits in Table 5-1.

Representativeness

Representativeness is a qualitative measure of the degree to which a sampling and analysis program reflects the conditions of a site. Representativeness describes the adequacy of the sample collection process and the analysis process, as determined by sample matrix homogeneity and the consistency with which analytical procedures are performed. Method blank results will meet acceptance criteria if no analytes are detected at concentrations greater than half of the LOQ, or

10% of sample results. Representativeness of normal analytical samples will be assessed by the technical lead based on previous detections and the CSM.

Completeness

Completeness is a measure of the amount of valid data collected compared to the expected amount of total data. Overall completeness will be inferred from a records review and documented data validation. Sampling completeness is assessed by evaluating the total number of samples proposed for collection compared to the actual number of samples collected and analyzed. Analytical completeness is evaluated by comparing the number of usable data points collected compared to the total number of data points generated for each analyte and sample.

Comparability

Comparability is the degree to which separate data sets can be represented as similar. The documentation and use of standardized operating procedures in the field and laboratory will help assure the comparability of measurements. Also, field triplicate samples may be collected if directed by USACE, sent to a different laboratory (to be determined), and results compared to the field results. Data will be considered in disagreement if the difference in values exceeds criteria for relative percent difference listed in Table 5-1.

Sensitivity

Sensitivity refers to the ability of an analytical method or instrument to detect target analytes at a specified concentration. The QSM (DoD/DOE, 2021) has defined the following terms associated with the analysis and reporting of environmental data:

DL. The smallest amount or concentration of a substance that can be demonstrated to be different from zero or a blank concentration with 99% confidence. At the DL, the false positive rate (Type I error) is 1%. A DL may be used as the lowest concentration for reliably reporting a detection of a specific analyte in a specific matrix with a specific method with 99% confidence.

Limit of Detection (LOD). The smallest concentration of a substance must be present in a sample in order to be detected at the DL with 99% confidence. At the LOD, the false negative rate (Type II error) is 1%. An LOD may be used as the lowest concentration for reliably reporting a non-detect of a specific analyte in a specific matrix with a specific method at 99% confidence.

LOQ. The smallest concentration that produces a quantitative result with known and recorded precision and bias. For DoD/DOE projects, the LOQ will be set at or above the concentration of the lowest initial calibration standard and within calibration range.

Reporting Limit. The lowest concentration value that meets project requirements for quantitative data with known precision and bias for a specific analyte in a specific matrix.

The LOQ will be used to evaluate sensitivity requirements. The applicable groundwater standard for each chemical is presented in Table 5-1.

5.4 ENVIRONMENTAL DATA MANAGEMENT

After review and approval, the analytical and field data will be loaded into the FWDA Electronic Data Management System (EDMS) database. An EDMS (or comparable) database is maintained for all interim groundwater monitoring results from 2008 to present. The sample result electronic data deliverables will be loaded into the automated data review (ADR) software for data validation. After validation, data output files from the ADR (or comparable) software will be exported to the FWDA database. The FWDA database will be used to prepare the validated data table output presented in reporting documents.

5.5 DATA EVALUATION

Groundwater sample laboratory results will be used to evaluate groundwater contaminant conditions at FWDA. The data evaluation will determine groundwater contaminant plume size and migration as well as general groundwater flow conditions. As described in Section 1.2 and Section 1.3, groundwater data generated during groundwater monitoring will be evaluated with respect to screening levels described in Attachment 7 of the RCRA permit (NMED, 2015a). The project screening value decision process is presented in Figure 1-1.

5.6 REPORTING

Analytical results will be submitted in a semiannual report prepared in accordance with *General Reporting Requirements for Routine Groundwater Monitoring at RCRA Sites* (NMED, 2003). The interim measures PMR will be submitted to NMED not more than 120 calendar days after the end of the semiannual monitoring period.

The PMR will describe the activities performed and current findings of the investigation. The PMR will include the following:

- Description of field monitoring and maintenance activities performed
- Deviations from work plan
- Evaluation of monitoring results
- DQE results
- Recommendations for subsequent monitoring
- Tabulated results of field data
- Tabulated results of analytical data
- Groundwater elevation maps
- Groundwater contaminant plume maps

- 1 A DQE report will evaluate usability of the data with respect to the project objectives. The project
- 2 chemist will describe variances, describe rejected data, and present final data qualifiers in the DQE
- 3 report.

1 **6.0 SCHEDULE**

2 The first sample collection under this Interim Northern Area GWMP took place in April 2008 and
3 has continued each April and October to date. The schedule of planned groundwater sampling will
4 be consistent with the ongoing interim measure schedule.

5 Groundwater elevation data will be collected on a quarterly basis in January, April, July, and
6 October. Groundwater sampling is scheduled semiannually in April and October after measuring
7 groundwater elevations.

7.0 SAMPLING CHANGES FROM PREVIOUS PLAN

The 35 wells installed in 2019 and 2020 (BGMW11, BGMW12, MW13S, MW13D, MW25, MW26, MW27, MW28, MW29, MW30, MW31, MW32, MW33, MW34, MW35, MW36S, MW36D, MW37, MW38, MW39, TMW50, TMW51, TMW52, TMW53, TMW54, TMW55, TMW56, TMW57, TMW58, TMW59, TMW60, TMW61, TMW62, TMW63, and TMW64) were sampled for the full analytical suite for four consecutive events during 2021 and 2022, as well as 2023 sampling events. Starting in 2024, these wells are proposed to be sampled for analytes based upon proximity to known contaminant plumes and based on analyte detections.

The revised analytical program is listed in Table 5-2.

Wells where the laboratory did not detect a given analytical group in four or more of the most recent sampling events (except for VOCs) are proposed for removal of that analytical group from the well, unless the well is in proximity to an existing plume for that analytical group. Although there are data quality exceptions for specific analytes for SVOCs, explosives, PCBs, pesticides, and herbicides, removal of these analytical groups for specific wells is proposed if no detections of any analytes for these analytical groups are reported.

Wells with detections of explosives or TPH-DRO are proposed to be analyzed for SVOCs in the subsequent sampling event.

No changes are proposed for VOCs, TPH-DRO, TPH-GRO or metals analyses.

Proposed changes to the analytical program for alluvial wells are described below:

- **BGMW01, BGMW02, BGMW03:** Remove analyses for explosives, SVOCs, and pesticides based on no detections above screening levels for four or more sampling events.
- **BGMW11, BGMW12, BGMW13D, BGMW13S:** Remove analyses for pesticides, PCBs, and herbicides based on no detections above screening levels for four or more sampling events.
- **FW31:** Remove analyses for explosives, SVOCs, and pesticides based on no detections above screening levels for four or more sampling events.
- **MW01, MW02:** Remove analyses for explosives, perchlorate, and pesticides based on no detections above screening levels for four or more sampling events.
- **MW03:** Remove analyses for explosives and perchlorate based on no detections above screening levels for four or more sampling events.
- **MW18D:** Remove analyses for explosives and perchlorate based on no detections above screening levels for four or more sampling events.
- **MW20:** Remove analyses for explosives, SVOCs, and pesticides based on no detections above screening levels for four or more sampling events.

- 1 • **MW22D:** Remove analyses for explosives, SVOCs, and pesticides based on no detections
2 above screening levels for four or more sampling events.
- 3 • **MW23:** Remove analyses for explosives, major anions, SVOCs, and pesticides based on
4 no detections above screening levels for four or more sampling events.
- 5 • **MW24:** Remove analyses for explosives, major anions, perchlorate, SVOCs, and
6 pesticides based on no detections above screening levels for four or more sampling events.
- 7 • **MW25 through MW39:** Remove analyses for pesticides, PCBs, and herbicides based on
8 no detections above screening levels for four or more sampling events.
- 9 • **SMW01:** Remove analyses for explosives, major anions, perchlorate, and SVOCs based
10 on no detections above screening levels for four or more sampling events.
- 11 • **TMW01:** Remove analysis for explosives based on no detections above screening levels
12 for four or more sampling events.
- 13 • **TMW03, TMW04, TMW06:** Remove analysis for SVOCs based on based on no
14 detections above screening levels for four or more sampling events.
- 15 • **TMW07:** Remove analysis for explosives based on no detections above screening levels
16 for four or more sampling events.
- 17 • **TMW08:** Remove analyses for perchlorate and pesticides based on no detections above
18 screening levels for four or more sampling events.
- 19 • **TMW10:** Remove analyses for explosives and perchlorate based on no detections above
20 screening levels for four or more sampling events.
- 21 • **TMW11:** Add analyses for SVOCs because the well is monitored for explosives.
- 22 • **TMW15:** Remove analyses for explosives, perchlorate, and SVOCs based on no detections
23 above screening levels for four or more sampling events.
- 24 • **TMW21:** Remove analysis for explosives based on no detections above screening levels
25 for four or more sampling events.
- 26 • **TMW22:** Remove analyses for explosives, perchlorate, and SVOCs based on no detections
27 above screening levels for four or more sampling events.
- 28 • **TMW23:** Remove analyses for perchlorate and pesticides based on no detections above
29 screening levels for four or more sampling events. Add analyses for SVOCs because the
30 well is monitored for explosives.
- 31 • **TMW24:** Remove analyses for explosives, perchlorate, and pesticides based on no
32 detections above screening levels for four or more sampling events.
- 33 • **TMW25:** Remove analysis for explosives based on no detections above screening levels
34 for four or more sampling events.

- **TMW26:** Remove analyses for explosives and perchlorate based on no detections above screening levels for four or more sampling events.
- **TMW27:** Remove analysis for perchlorate based on no detections above screening levels for four or more sampling events.
- **TMW29:** Remove analysis for explosives based on no detections above screening levels for four or more sampling events.
- **TMW31S:** Remove analyses for explosives, SVOCs, and pesticides based on no detections above screening levels for four or more sampling events.
- **TMW33:** Remove analysis for SVOCs based on no detections above screening levels for four or more sampling events.
- **TMW35:** Remove analyses for SVOCs and pesticides based on no detections above screening levels for four or more sampling events.
- **TMW39S:** Remove analyses for explosives, SVOCs, and pesticides based on no detections above screening levels for four or more sampling events.
- **TMW40S:** Remove analyses for pesticides based on no detections above screening levels for four or more sampling events.
- **TMW41:** Remove analyses for pesticides based on no detections above screening levels for four or more sampling events.
- **TMW43:** Remove analyses for pesticides based on no detections above screening levels for four or more sampling events.
- **TMW44:** Remove analyses for explosives, SVOCs, and pesticides based on no detections above screening levels for four or more sampling events.
- **TMW45:** Remove analyses for explosives, perchlorate, SVOCs, and pesticides based on no detections above screening levels for four or more sampling events.
- **TMW46:** Remove analyses for explosives, SVOCs, and pesticides based on no detections above screening levels for four or more sampling events.
- **TMW47:** Remove analyses for perchlorate and pesticides based on no detections above screening levels for four or more sampling events.
- **TMW57, TMW59, TMW61, TMW62:** Remove analyses for pesticides, PCBs, and herbicides based on no detections above screening levels for four or more sampling events.

Proposed changes to the analytical program for bedrock wells are described below:

- **BGMW07:** Remove analyses for explosives, major anions, perchlorate, SVOCs, pesticides, and PCBs based on no detections above screening levels for four or more sampling events.

- **BGMW08, BGMW09, BGMW10:** Remove analyses for explosives, perchlorate, SVOCs, pesticides, and PCBs based on no detections above screening levels for four or more sampling events.
- **TMW14A:** Remove analyses for explosives, major anions, and SVOCs based on no detections above screening levels for four or more sampling events.
- **TMW16:** Remove analyses for explosives, perchlorate, and SVOCs based on no detections above screening levels for four or more sampling events.
- **TMW17:** Remove analyses for major anions based on no detections above screening levels for four or more sampling events.
- **TMW18:** Remove analyses for explosives, perchlorate, and SVOCs based on no detections above screening levels for four or more sampling events.
- **TMW19:** Remove analyses for explosives, perchlorate, and SVOCs based on no detections above screening levels for four or more sampling events.
- **TMW30:** Remove analyses for pesticides based on no detections above screening levels for four or more sampling events.
- **TMW31D, TMW32:** Remove analyses for explosives, SVOCs, and pesticides based on no detections above screening levels for four or more sampling events.
- **TMW36:** Remove analyses for explosives, SVOCs, and pesticides based on no detections above screening levels for four or more sampling events.
- **TMW37:** Remove analyses for explosives, perchlorate, SVOCs, and pesticides based on no detections above screening levels for four or more sampling events.
- **TMW38:** Remove analyses for pesticides based on no detections above screening levels for four or more sampling events.
- **TMW39D, TWM40D, TMW48:** Remove analyses for explosives, SVOCs, and pesticides based on no detections above screening levels for four or more sampling events.
- **TMW49:** Remove analyses for pesticides based on no detections above screening levels for four or more sampling events.
- **TMW50, TMW51, TMW52, TMW53, TMW55, TMW58, TMW63, TMW64:** Remove analyses for pesticides, PCBs, and herbicides based on no detections above screening levels for four or more sampling events.

8.0 REFERENCES

- Amec Foster Wheeler Environment & Infrastructure, Inc., 2014. *Final Investigation and Remediation Report, Parcel 18, Solid Waste Management Unit 13 (Eastern Landfill), Fort Wingate Depot Activity, McKinley County, New Mexico*. December.
- Amec Foster Wheeler Environment & Infrastructure, Inc., 2015. *Final Permittee-Initiated Interim Measures Work Plan, Parcel 6, Revision 1.0, Fort Wingate Depot Activity, McKinley County, New Mexico*. May.
- Anderson, O.J., C.H. Maxwell, and S.G. Lucas, 2003. *Geology of Fort Wingate Quadrangle, McKinley County, New Mexico*. Open-file Report 473.
- Base Realignment and Closure (BRAC), 2010. *Fort Wingate Depot Activity, Base Realignment and Closure Installation Action Plan*. September.
- Cooper, J.B., and E.C. John, 1968. *Geology and Ground-Water Occurrence in Southeastern McKinley County, New Mexico*. Technical Report 35. New Mexico State Engineer.
- Dawson Solutions, LLC, 2024. *Field Summary Report, Abandon and Plug Artesian Wells #68 and #69*. Fort Wingate Depot Activity, McKinley County, New Mexico.
- Eco & Associates, Inc. (Eco), 2021. *Final 2022 Interim Northern Area Groundwater Monitoring Plan, Revision 2*. May 21.
- Eco, 2023. *Final Groundwater Periodic Monitoring Report January through June 2012*. March 10.
- Environmental Science and Engineering, Inc., 1981. *Final Report, Environmental Survey of Ft. Wingate Depot Activity, Gallup, New Mexico*. Document number 80-3. Administrative Record FW 81-1. September.
- Environmental Data Quality Workgroup, 2019. *General Data Validation Guidelines*, U.S. Department of Defense, November 4, 2019, Revision 1.
- ERM Program Management Company, 1997. *Final Remedial Investigation/Feasibility Study & RCRA Corrective Action Program Document, Fort Wingate Depot Activity, Gallup, New Mexico*. Document number 97-5. Administrative Record 97-8. November.
- Herndon Solutions Group, 2011. *Interim Measures Facility-Wide Groundwater Monitoring Plan, Fort Wingate Depot Activity, McKinley County, New Mexico*. July.
- Innovar Environmental, Inc., 2016. *Final 2016 Interim Measures Facility-wide Groundwater Monitoring Plan, Version 9, Fort Wingate Depot Activity, McKinley County New Mexico*. September.
- Malcolm Pirnie, Inc., 2000. *Soil Background Concentration Report of Fort Wingate Depot Activity, New Mexico*. September.
- McCraw, D.J., A.S. Read, J.R. Lawrence, F. Goff, and C.J. Goff, 2009. *Preliminary Geologic Map of the San Mateo Quadrangle, McKinley and Cibola Counties, New Mexico*. Open-File Digital Geologic Map OF GM 194. Scale 1:24,000. New Mexico Bureau of Geology and Mineral Resources. In coordination with the U.S. Geological Survey and National Cooperative Geologic Mapping Program (STATEMAP). May.

- 1 New Mexico Environment Department (NMED), 2005. Resource Conservation and Recovery
2 Act Permit, Fort Wingate Depot Activity, McKinley County EPA ID No. NM
3 6213820974, New Mexico Environment Department Hazardous Waste Bureau.
4 December 1.
- 5 NMED, 2015a. Resource Conservation and Recovery Act Permit, Fort Wingate Depot Activity,
6 McKinley County EPA ID No. NM 6213820974, New Mexico Environment
7 Department Hazardous Waste Bureau. (Revised February 2015).
- 8 NMED, 2015b. Approval Class 3 Permit Modification for the Hazardous Waste Facility Permit,
9 Fort Wingate Depot Activity, EPA ID No. NM6213820974, New Mexico
10 Environment Department Hazardous Waste Bureau, February 25, 2015.
- 11 NMED, 2018a. *Approval with Modifications Final 2017 Interim Facility-Wide Groundwater*
12 *Monitoring Plan, Version 10 Revision 1*. Fort Wingate Depot Activity, McKinley
13 County, New Mexico EPA ID No. NM 6213820974. HWB-FWDA-17-007. Letter
14 dated October 22, 2018.
- 15 NMED, 2018b, Disapproval Final RCRA Facility Investigation Parcel 6, Fort Wingate Depot
16 Activity, McKinley County, New Mexico, EPA ID No. NM6213820974, New Mexico
17 Environment Department Hazardous Waste Bureau, October 28, 2020.
- 18 NMED, 2019a. *Risk Assessment Guidance for Investigations and Remediation Volume 1*
19 February 2019, Rev 2. (June 19, 2019).
- 20 NMED, 2019b. *Approval with Modifications Final 2017 Interim Facility-Wide Groundwater*
21 *Monitoring Plan, Version 10 Revision 1, Response to NMED Approval with*
22 *Modifications Letter Dated October 22, 2018. Fort Wingate Depot Activity McKinley*
23 *County, New Mexico EPAID# NM6213820974 HWB-FWDA-17-007*. Letter dated
24 May 21, 2019.
- 25 NMED, 2020. *General Reporting Guidelines*. Position Paper. New Mexico Environment
26 Department, Hazardous and Radioactive Materials Bureau.
- 27 NMED, 2021. *Final 2022 Interim Northern Area Groundwater Monitoring Plan Revision 2,*
28 *Army's Response to the Approval with Modifications Dated March 8, 2021, Fort*
29 *Wingate Depot Activity, McKinley County, New Mexico, EPA ID# NM6213820974*
30 *HWB-FWDA-20-004*. Letter dated August 3, 2021.
- 31 NMED-Hazardous Waste Bureau (NMED-HWB), 2001. *Use of Low-Flow and Other Non-*
32 *Traditional Sampling Techniques for RCRA Compliant Groundwater Monitoring.*
33 (Position Paper). October.
- 34 Program Management Company (PMC), 1999. *Fort Wingate Depot Activity, Gallup, New*
35 *Mexico: Final Open Burning/Open Detonation Area RCRA Interim Status Closure*
36 *Plan Phase IB – Characterization and Assessment of the Site Conditions for the*
37 *Ground Water Matrix*. December.
- 38 PMC, 2001a. *Fort Wingate Depot Activity Ground Water Data, Fort Wingate Depot Activity,*
39 *Gallup, New Mexico*. (Memorandum). August 14.
- 40 PMC, 2001b. *Final RCRA Facility Investigation Report, TNT Leaching Beds Area, Fort Wingate*
41 *Depot Activity, Gallup, New Mexico*. September.

- 1 PMC, 2002a. *Fort Wingate OB/OD Area Ground Water Sampling, Fort Wingate Depot Activity,*
2 *Gallup, New Mexico.* (Letter). August 9.
- 3 PMC, 2002b. *Final Phase 1 RCRA Facility Investigation Report, Buildings 600 and 542, Fort*
4 *Wingate Depot Activity, Gallup, New Mexico.* Publication month unknown.
- 5 PMC, 2003. *Final Ground Water Monitoring Report, Fort Wingate Depot Activity, Gallup, New*
6 *Mexico.* (Letter). October 6.
- 7 Summers, W.K., 1972. *Hydrogeology and Water Supply of the Pueblo of Zuni, McKinley and*
8 *Valencia Counties, New Mexico.* Open File Report 33. New Mexico Bureau of Mines
9 and Mineral Resources. September.
- 10 Sundance, 2014. *Final Version 1, Technical Memorandum, Groundwater Background*
11 *Evaluation for Fort Wingate Depot Activity, McKinley County, New Mexico.*
12 September.
- 13 TerranearPMC (TPMC), 2005. *Ground Water Monitoring Report, Fort Wingate Depot Activity,*
14 *Gallup, New Mexico.* August.
- 15 TPMC, 2006. *Administration and TNT Leaching Beds Areas Supplemental Ground Water*
16 *Characterization Report, Fort Wingate Depot Activity, Gallup, New Mexico.* March.
- 17 TPMC, 2008. *Interim Facility-Wide Ground Water Monitoring Plan, Version 2, Fort Wingate*
18 *Depot Activity, Gallup, New Mexico.* March.
- 19 TPMC, 2012. *Approved Final RCRA Facility Investigation Report Parcel 21 Fort Wingate*
20 *Depot Activity, Gallup, New Mexico.* August.
- 21 Tetra Tech NUS, Inc., 2005. *Groundwater Investigation Report, Eastern Landfill, Fort Wingate*
22 *Depot Activity, McKinley County, New Mexico.* April.
- 23 Toeroek Associates, Inc. and pH7 Logistics & Support, 2014. *Final Revision 1 RCRA Facility*
24 *Investigation Report Parcel 16, Fort Wingate Depot Activity, McKinley County,*
25 *New Mexico.* May.
- 26 U.S. Department of Defense (DoD), 2013. *DoD Environmental Field Sampling Handbook,*
27 *Revision 1.0.* April.
- 28 DoD/U.S. Department of Energy (DOE), 2021. *Quality Systems Manual (QSM) for*
29 *Environmental Laboratories, Version 5.4.*
- 30 DOE, 1990. *Master Environmental Plan: Fort Wingate Depot Activity, Gallup, New Mexico.*
31 *ANL/EAIS/TM-37.* December.
- 32 U.S. Army Corps of Engineers (USACE), 1995a. *1st Quarterly Report on Ground Water*
33 *Monitoring at UST Bldg. 6 Area, Fort Wingate Army Depot Activity, New Mexico.*
34 November.
- 35 USACE, 1995b. *2nd Quarterly Report on Ground Water Monitoring at UST Bldg. 6 Area,*
36 *Fort Wingate Army Depot Activity, New Mexico.* December.
- 37 USACE, 1998. *Minimum Site Assessment Report, Fort Wingate Army Depot Activity,*
38 *New Mexico.* February.

- 1 USACE, 2005. *Guidance for Evaluating Performance-Based Chemical Data*. Engineer Manual
2 200-1-10. June.
- 3 USACE, 2012a. *Final RCRA Facility Investigation Report Parcel 10B, Fort Wingate Army*
4 *Depot Activity, New Mexico*. March.
- 5 USACE, 2012b. *Final RCRA Facility Investigation Report Parcel 6, Fort Wingate Army Depot*
6 *Activity, New Mexico*. September.
- 7 USACE, 2012c. *Release Assessment Report Parcel 4A, Revision 2.0, Fort Wingate Army Depot*
8 *Activity, New Mexico*. October.
- 9 USACE, 2013. *Final Phase 2 Soil Background Report, Fort Wingate Army Depot Activity, New*
10 *Mexico*. February.
- 11 USACE, 2014a. *Final Release Assessment Report, Parcel 24, Fort Wingate Depot Activity,*
12 *McKinley County, New Mexico*. January.
- 13 USACE, 2014b. *Final Investigation and Remediation Completion Report, Parcel 18, Solid*
14 *Waste Management Unit 13 (Eastern Landfill), Fort Wingate Army Depot Activity,*
15 *New Mexico*. December.
- 16 USACE, 2023. *Phase 3, Limit of Detection / Limit of Quantitation Submission in Support of*
17 *Analytical Performance Concerns at FWDA, Fort Wingate Depot Activity, McKinley*
18 *County, New Mexico*. EPA# NM6213820974. April 24.
- 19 U.S. Environmental Protection Agency (EPA), 2006. *Guidance on Systematic Planning Using*
20 *the Data Quality Objectives Process, EPA QA/G-4*. EPA/240/B-06/001. February.
- 21 EPA, 2010. *ProUCL Version 4.1.00 Technical Guide (Draft)*. EPA/600/R-07/041. May.
- 22 U.S. Geological Survey (USGS), 1971. Document No. 71-2 Drilling and Testing of Well 69, Fort
23 Wingate Army Depot, McKinley County, New Mexico Open File Report, J.W. Mercer
24 and E.G. Lappala. November.
- 25 USGS, 2011a. *Fort Wingate Depot Activity Monitoring Well Installation and Abandonment*
26 *Work Plan, McKinley County, New Mexico*. April.
- 27 USGS, 2011b. *Final RCRA Facility Investigation Report Parcel 11, Fort Wingate Depot Activity*
28 *McKinley County, New Mexico*. July.
- 29 USGS, 2011c. *Final RCRA Facility Investigation Report Parcel 22, Fort Wingate Depot Activity*
30 *McKinley County, New Mexico*. December.
- 31 USGS, 2015a. *Final RCRA Facility Investigation Report, Parcel 23, Revision 1.0, Fort Wingate*
32 *Depot Activity, McKinley County, New Mexico*. February.
- 33 USGS, 2015b. *Final RCRA Facility Investigation Report, Parcel 22, Revision 2.0, Fort Wingate*
34 *Depot Activity, McKinley County, New Mexico*. May.
- 35 Code of Federal Regulations, 40 CFR Part 141. "National Primary Drinking Water Regulations,"
36 Title 40, Protection of Environment, Chapter I, Environmental Protection Agency,
37 Subchapter D, Water Programs. December 24, 1975.

- 1 40 CFR Part 143. “National Secondary Drinking Water Regulations,” Title 40, Protection of
2 Environment, Chapter 1, Environmental Protection Agency, Subchapter D, Water
3 Programs. July 19, 1979.
- 4 40 CFR Part 264.101. “Corrective action for solid waste management units,” Title 40, Protection
5 of Environment, Chapter I, Environmental Protection Agency, Subchapter I, Solid
6 Wastes, Part 264, Standards for Owners and Operators of Hazardous Waste Treatment,
7 Storage, and Disposal Facilities, Subpart F, Releases from Solid Waste Management
8 Units. July 15, 1985, as amended July 14, 2006.
- 9 New Mexico Administrative Code (NMAC) 19.27.4: Title 19, Natural Resource and Wildlife;
10 Chapter 27, Underground Water; Part 4, Well Driller Licensing, Construction, Repair,
11 and Plugging of Wells. June 30, 2017.
- 12 NMAC 20.4.1.500: Title 20, Environmental Protection; Chapter 4, Hazardous Waste; Part 1,
13 Hazardous Waste Management; 500, Adoption of 40 CFR Part 264. June 14, 2000.
- 14 NMAC 20.6.2.3103: Title 20, Environmental Protection; Chapter 6, Water Quality; Part 2
15 Ground and Surface Water Protection; 3013, Standards for Ground Water of 10,000
16 mg/L TDS Concentration or Less. December 1, 1995; revised November 15, 1996.
- 17 NMAC 20.6.2.7.WW: Title 20, Environmental Protection; Chapter 6, Water Quality; Part 2
18 Ground and Surface Water Protection; 7, Definitions; WW, Toxic pollutants. January
19 15, 2001.

FIGURES

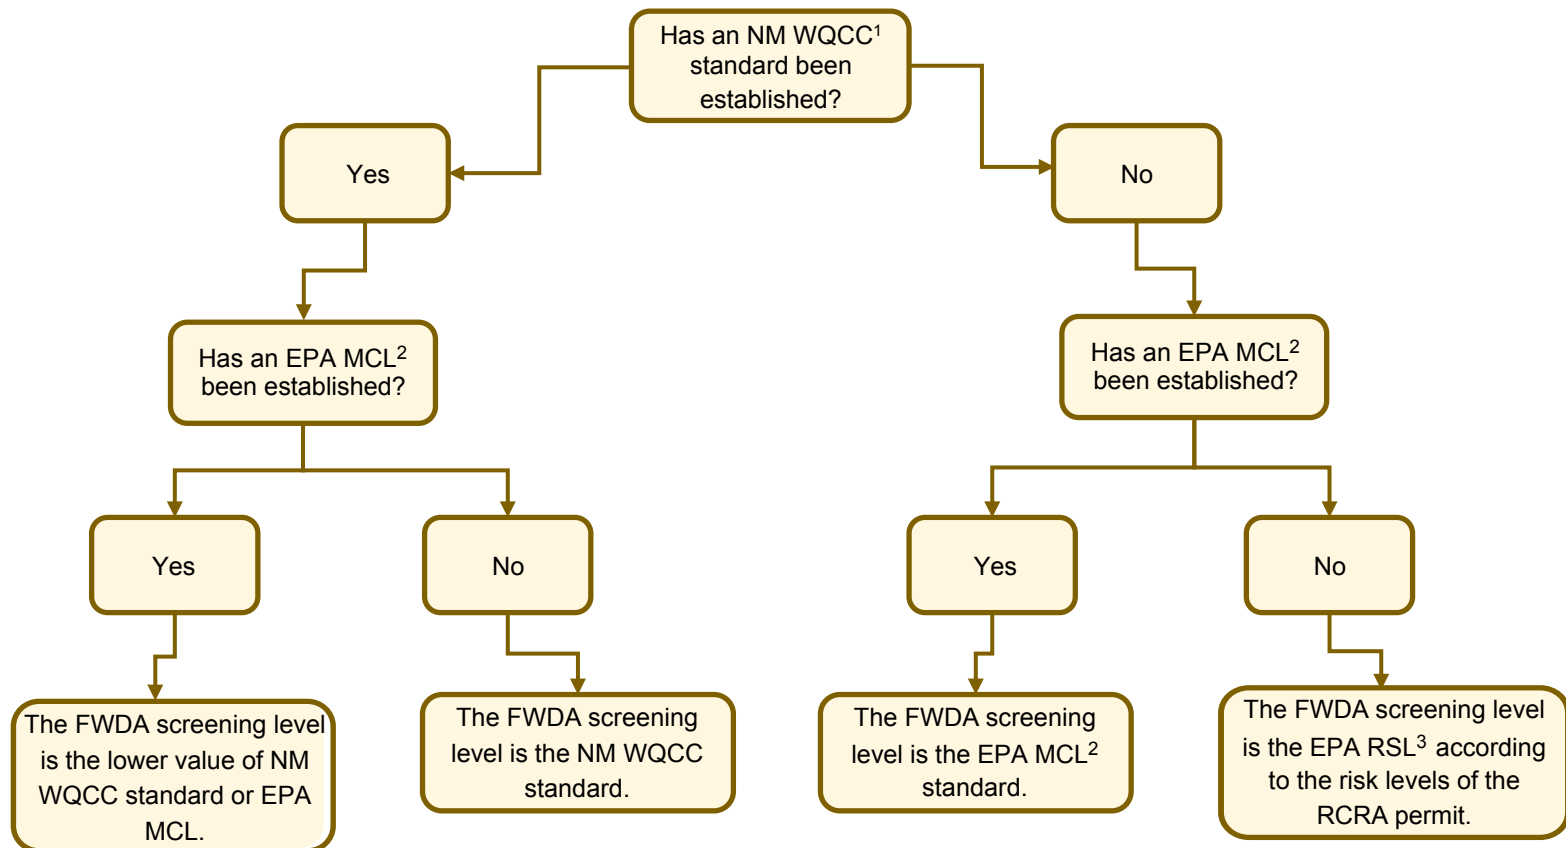



FIGURE 1-1
PROJECT SCREENING VALUE FLOW CHART
 Interim Northern Area Groundwater Monitoring Plan
 Fort Wingate Depot Activity, McKinley County, New Mexico

NOTES:


¹ New Mexico Water Quality Control Commission (NM WQCC) standards in New Mexico Administrative Code 20.6.2.4103.


² U.S. Environmental Protection Agency (EPA) drinking water maximum contaminant level (MCL) under 40 Code of Federal Regulations Parts 141 and 143.


³ Pending the development and approval of cleanup criteria, the EPA regional screening levels (based on a cancer risk of 10^{-5} and a non-cancer hazard index of 1.0) are used as temporary screening criteria in accordance with the risk criteria of the RCRA permit. The lower of the cancer and non-cancer screening levels will be used. Perchlorate screening levels are selected from the May 2020 EPA MCL.

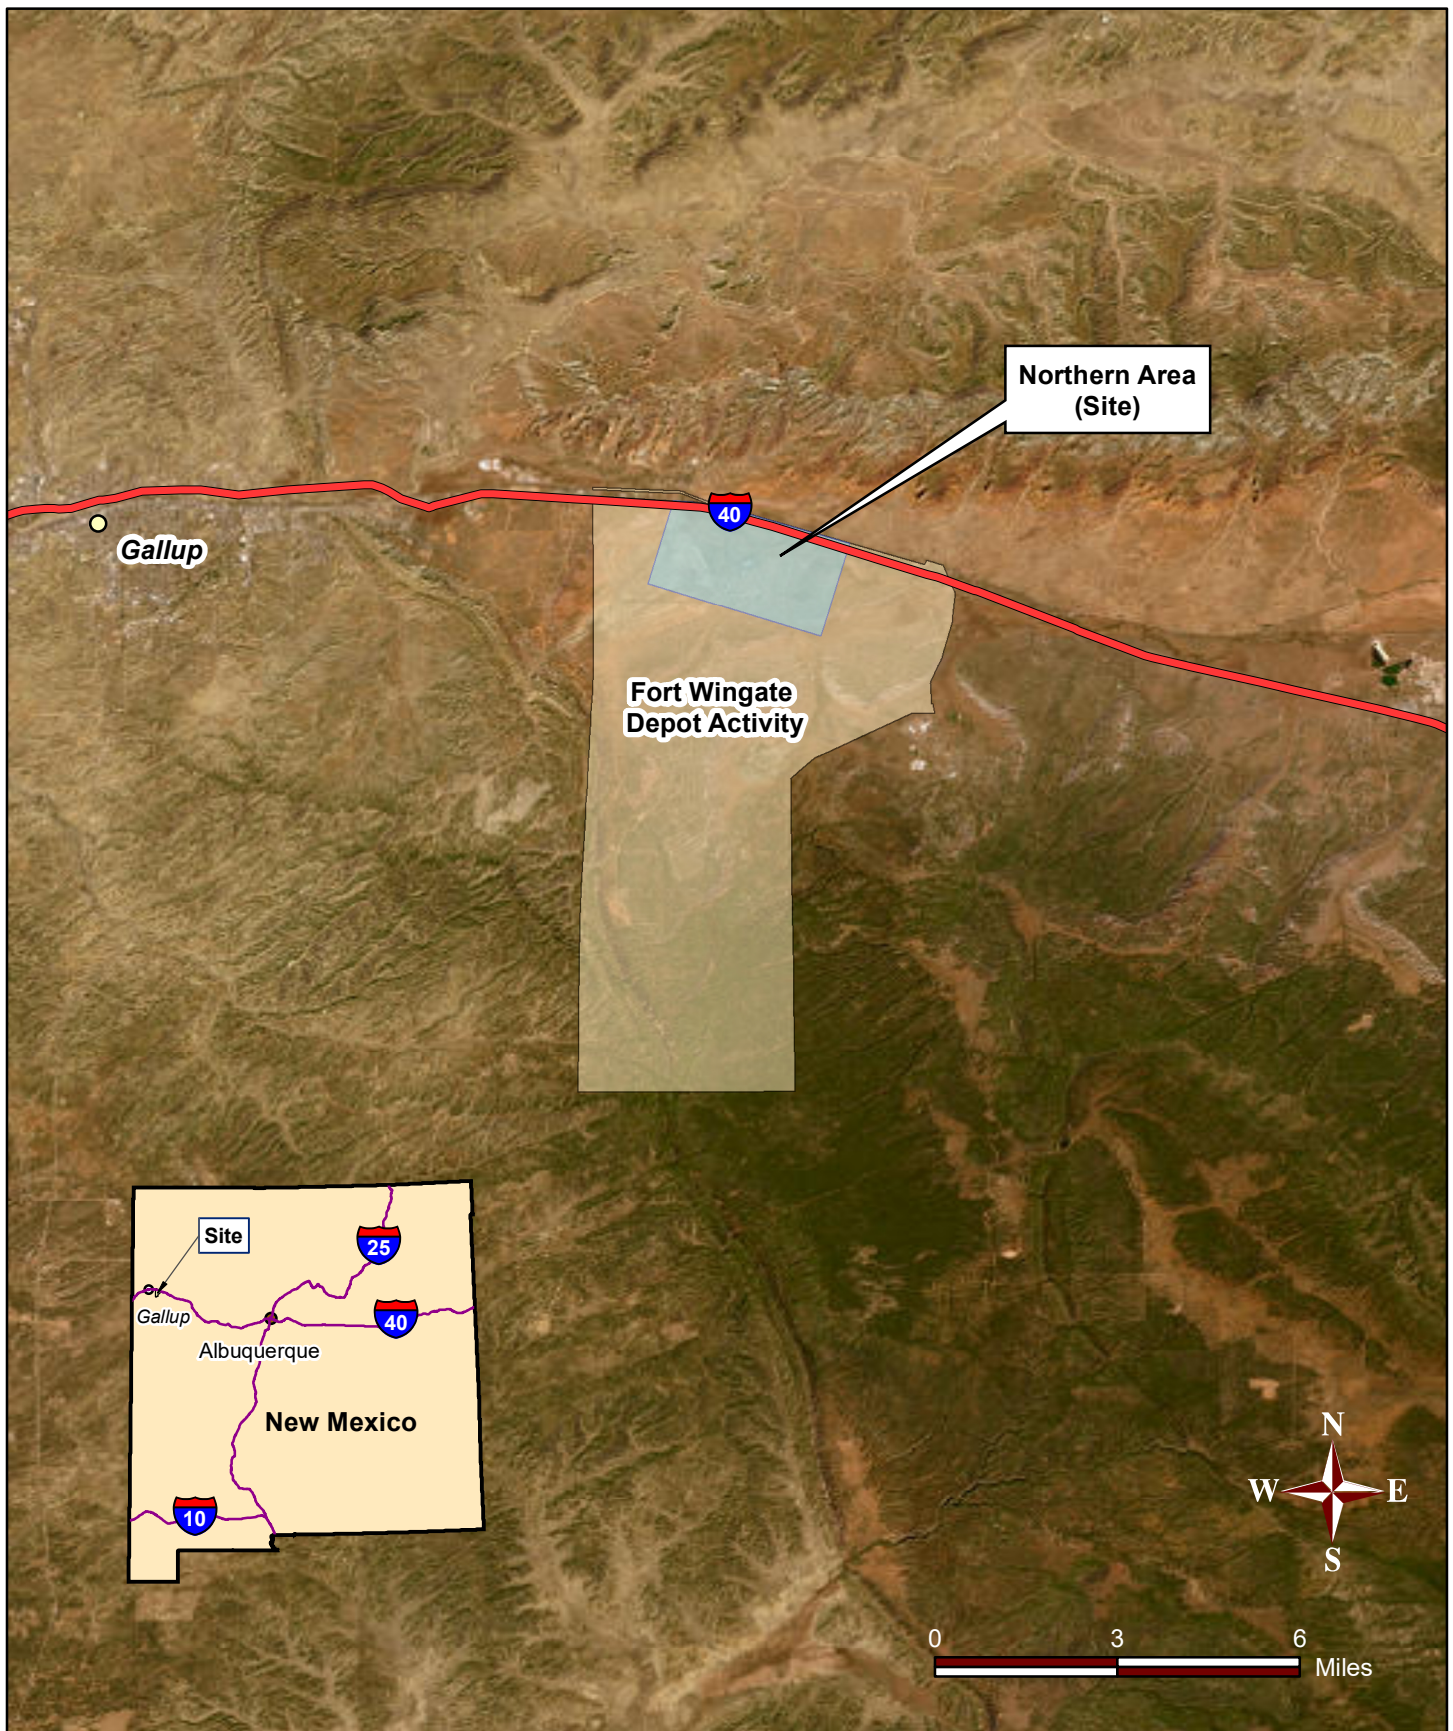

Environmental Excellence 	Eco & Associates, Inc. 18231 Irvine Boulevard, Ste 204 Tustin, CA 92780 Phone: 714.289.0995 Fax: 714.289.0965	SITE LOCATION MAP Fort Wingate Depot Activity McKinley County, New Mexico	FIGURE 1-2
---	--	--	--

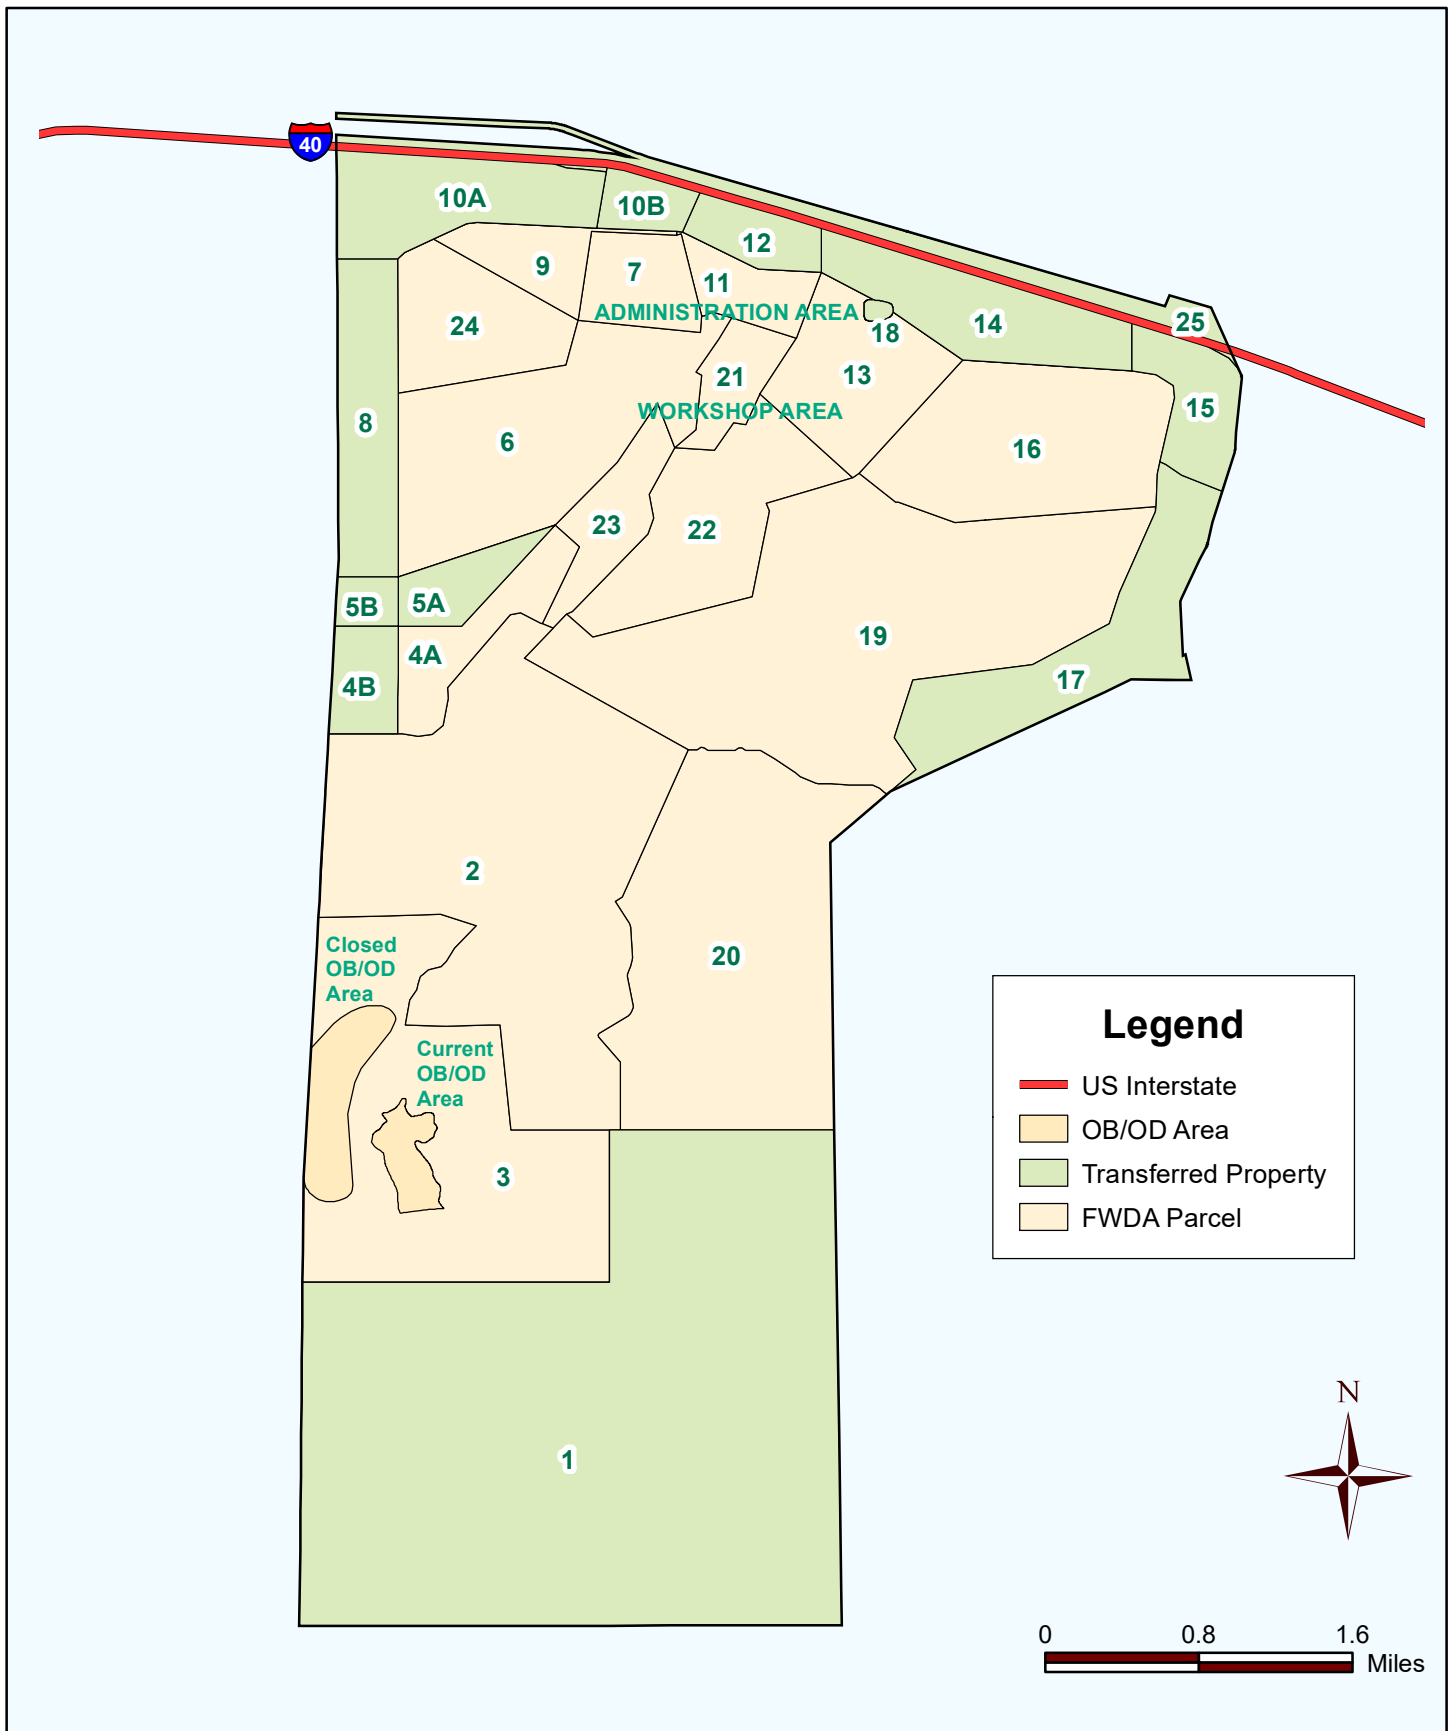

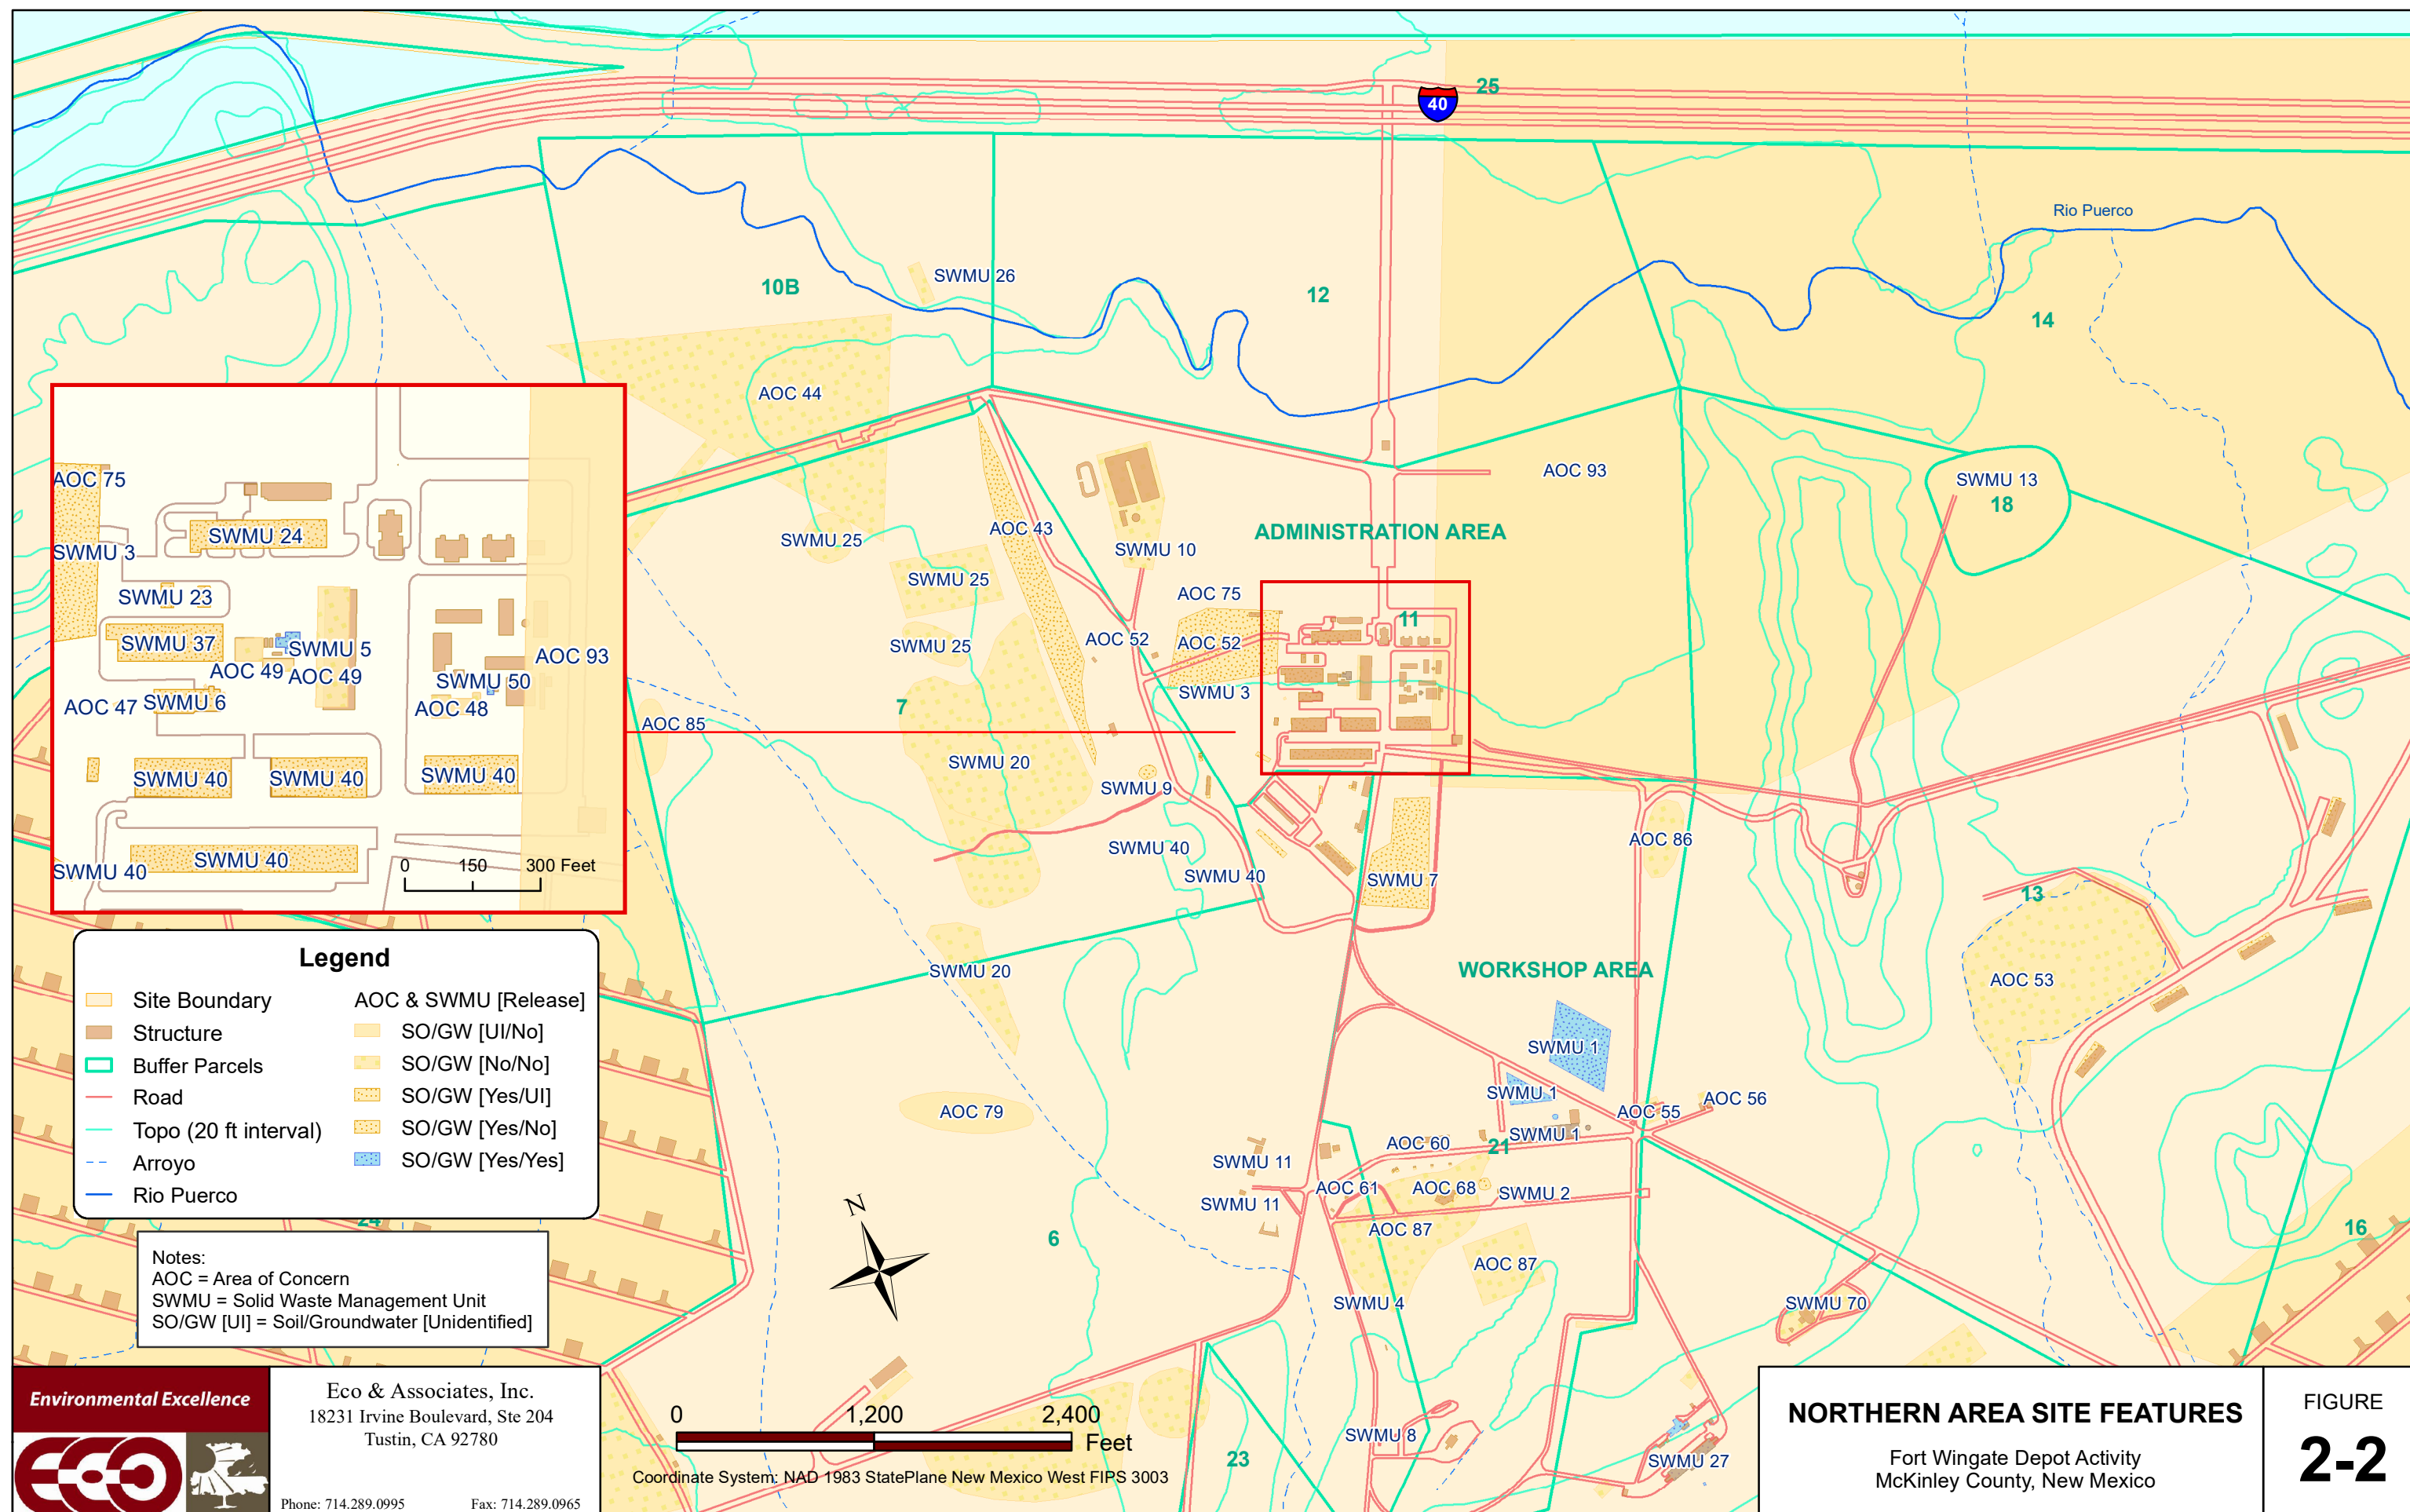


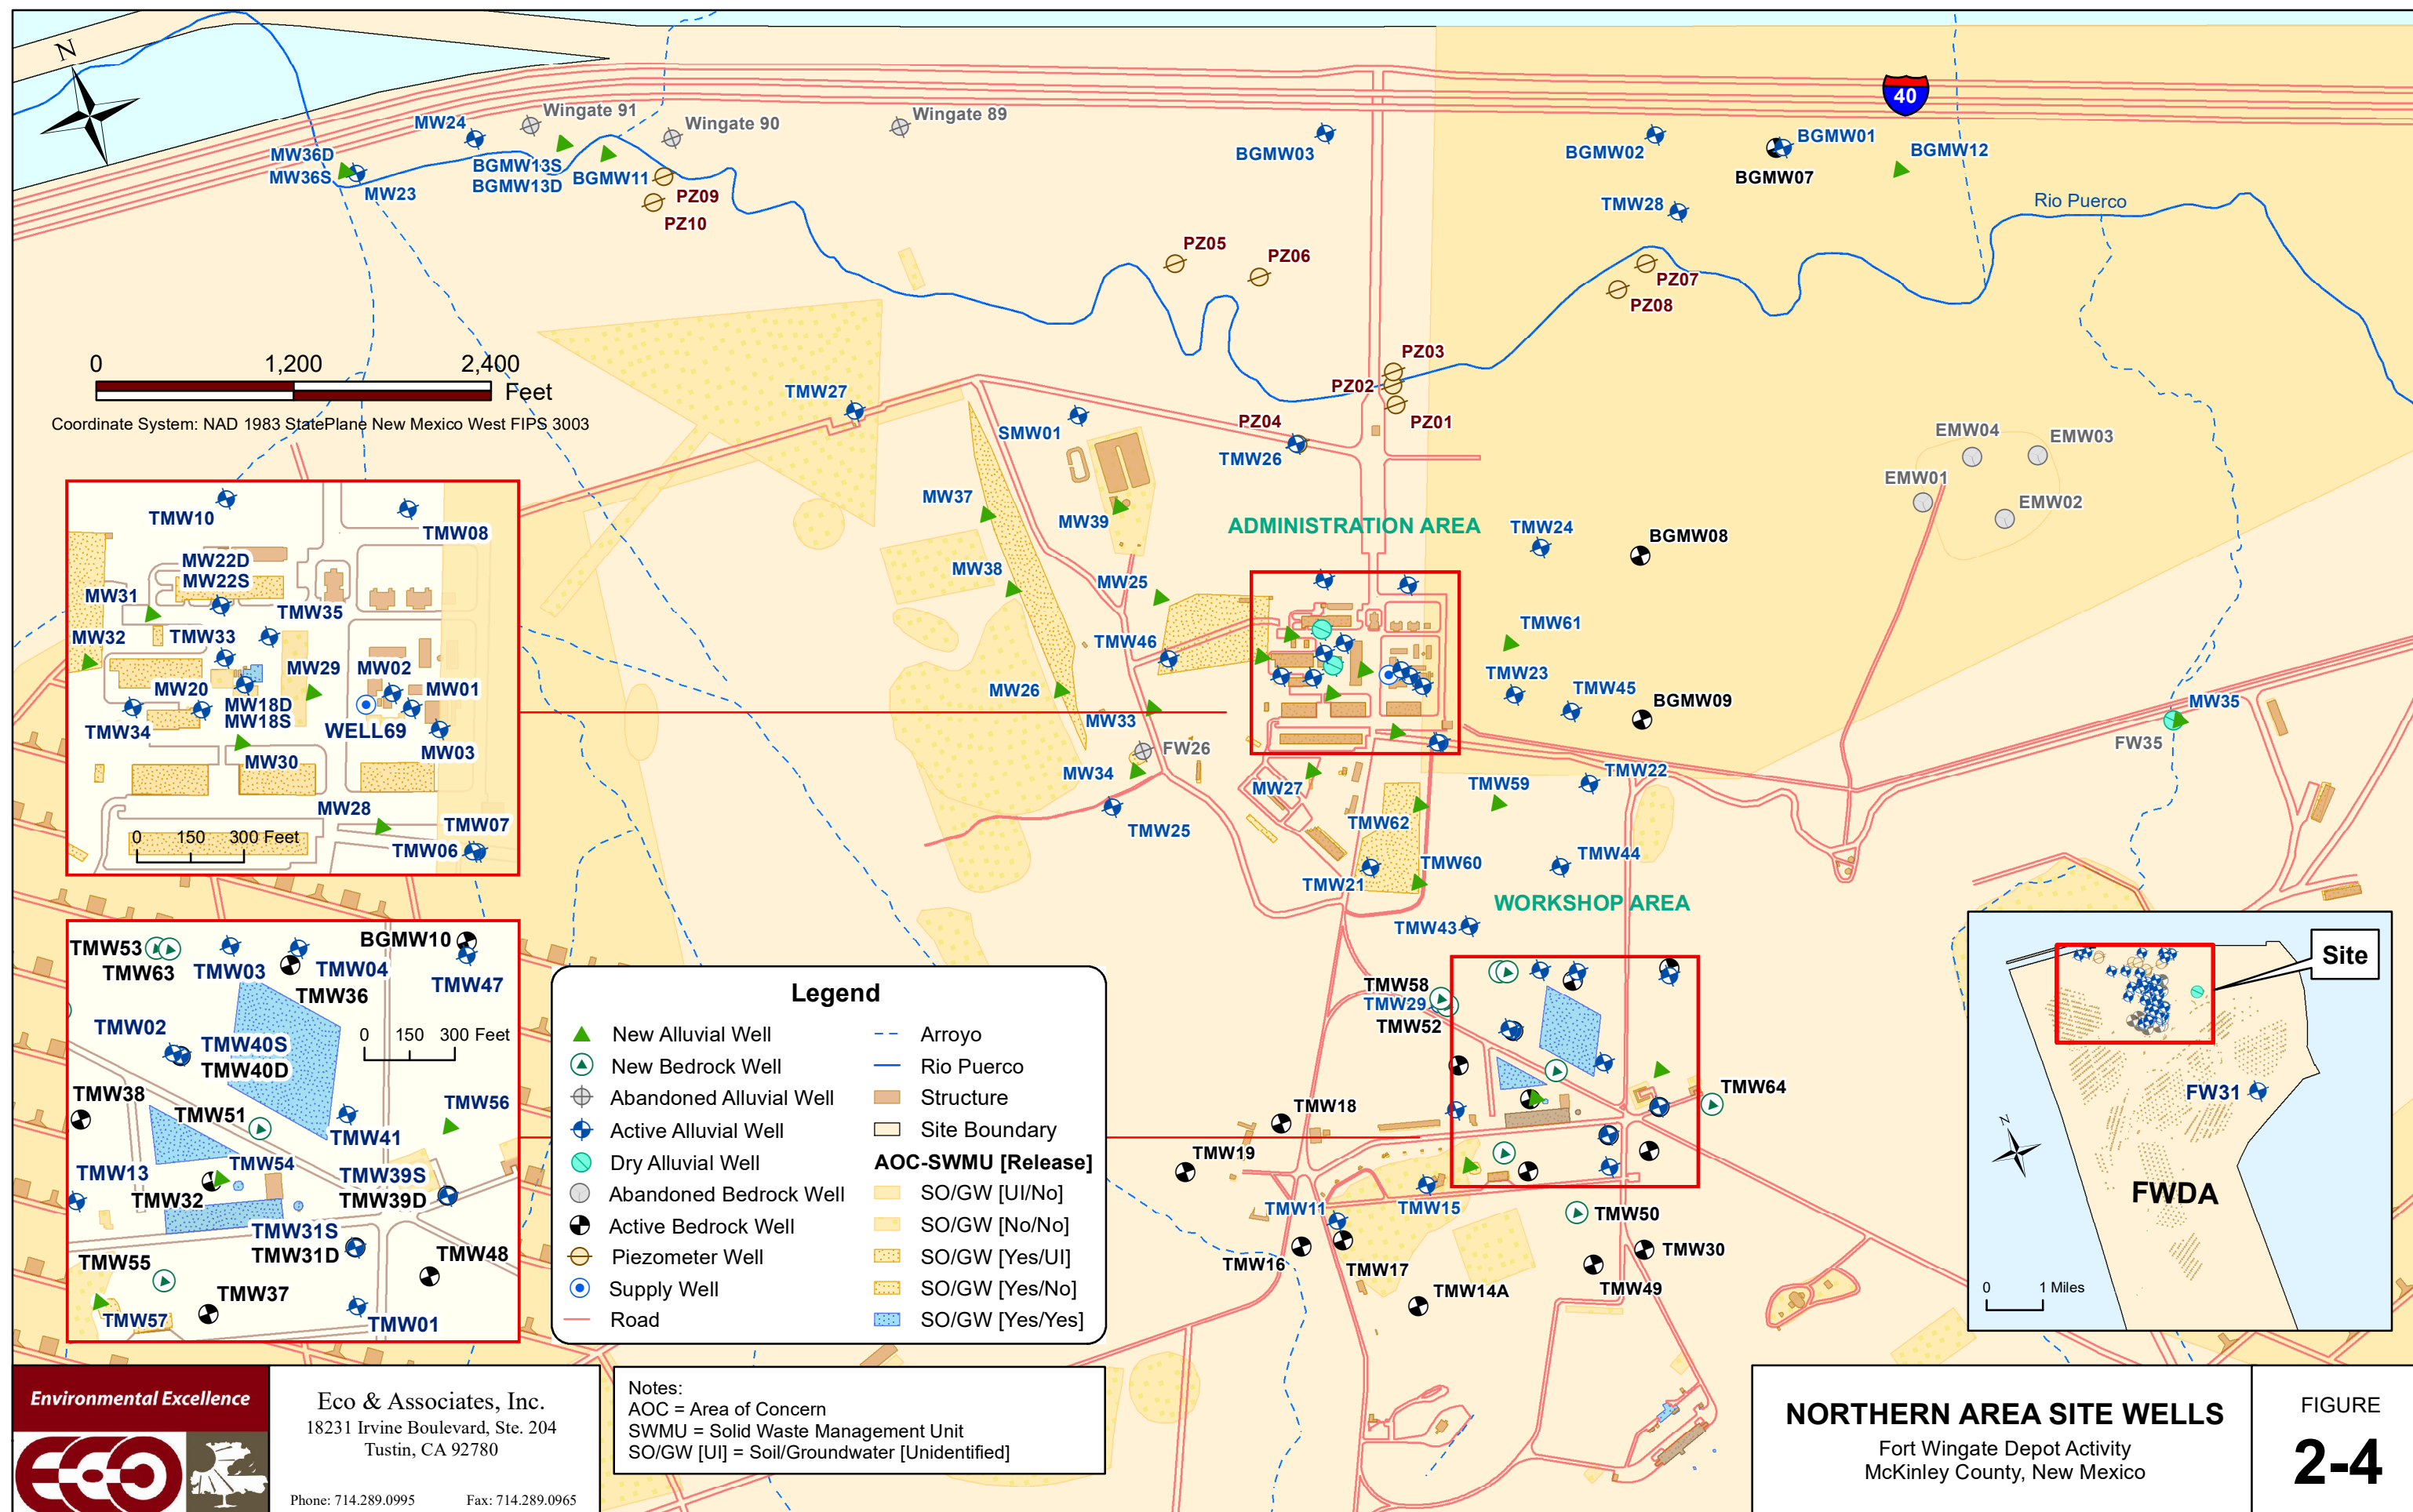

Environmental Excellence

Eco & Associates, Inc.
 18231 Irvine Boulevard, Ste. 204
 Tustin, CA 92780

Phone: 714.289.0995 Fax: 714.289.0965

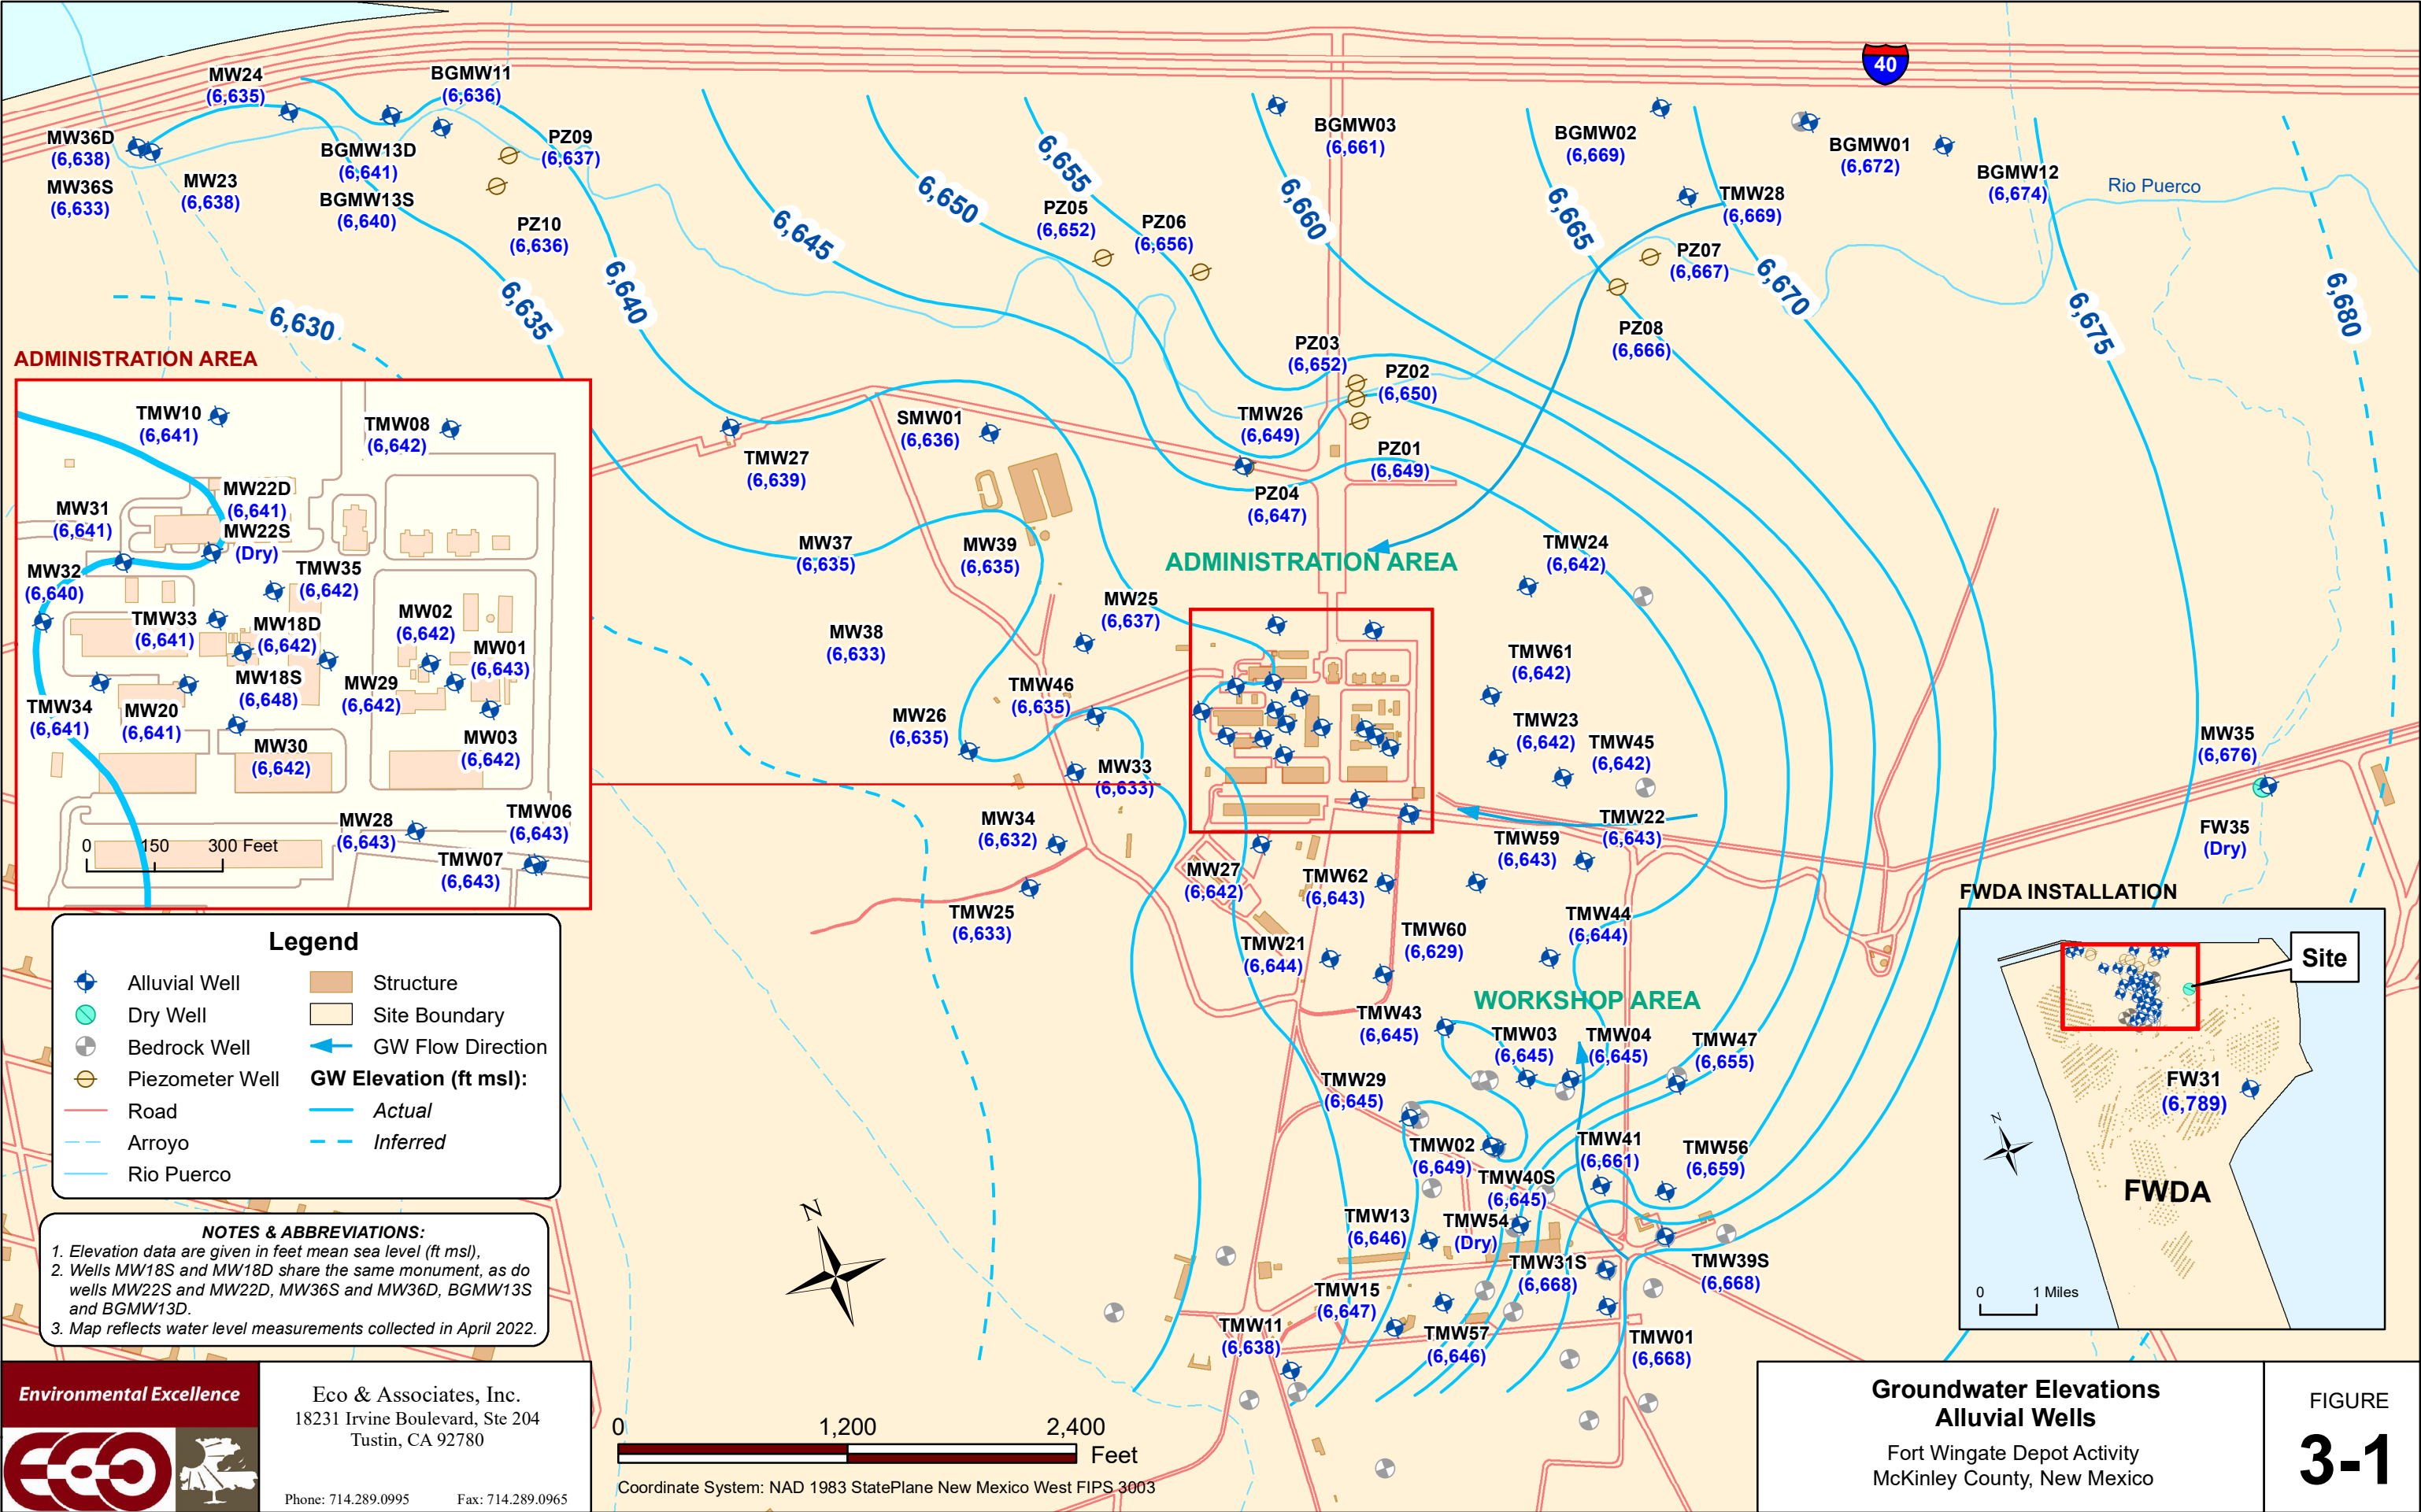



Eco & Associates, Inc.
18231 Irvine Boulevard, Ste 204
Tustin, CA 92780

Phone: 714.289.0995 Fax: 714.289.0965

0 1,200 2,400 Feet

Coordinate System: NAD 1983 StatePlane New Mexico West FIPS 3003

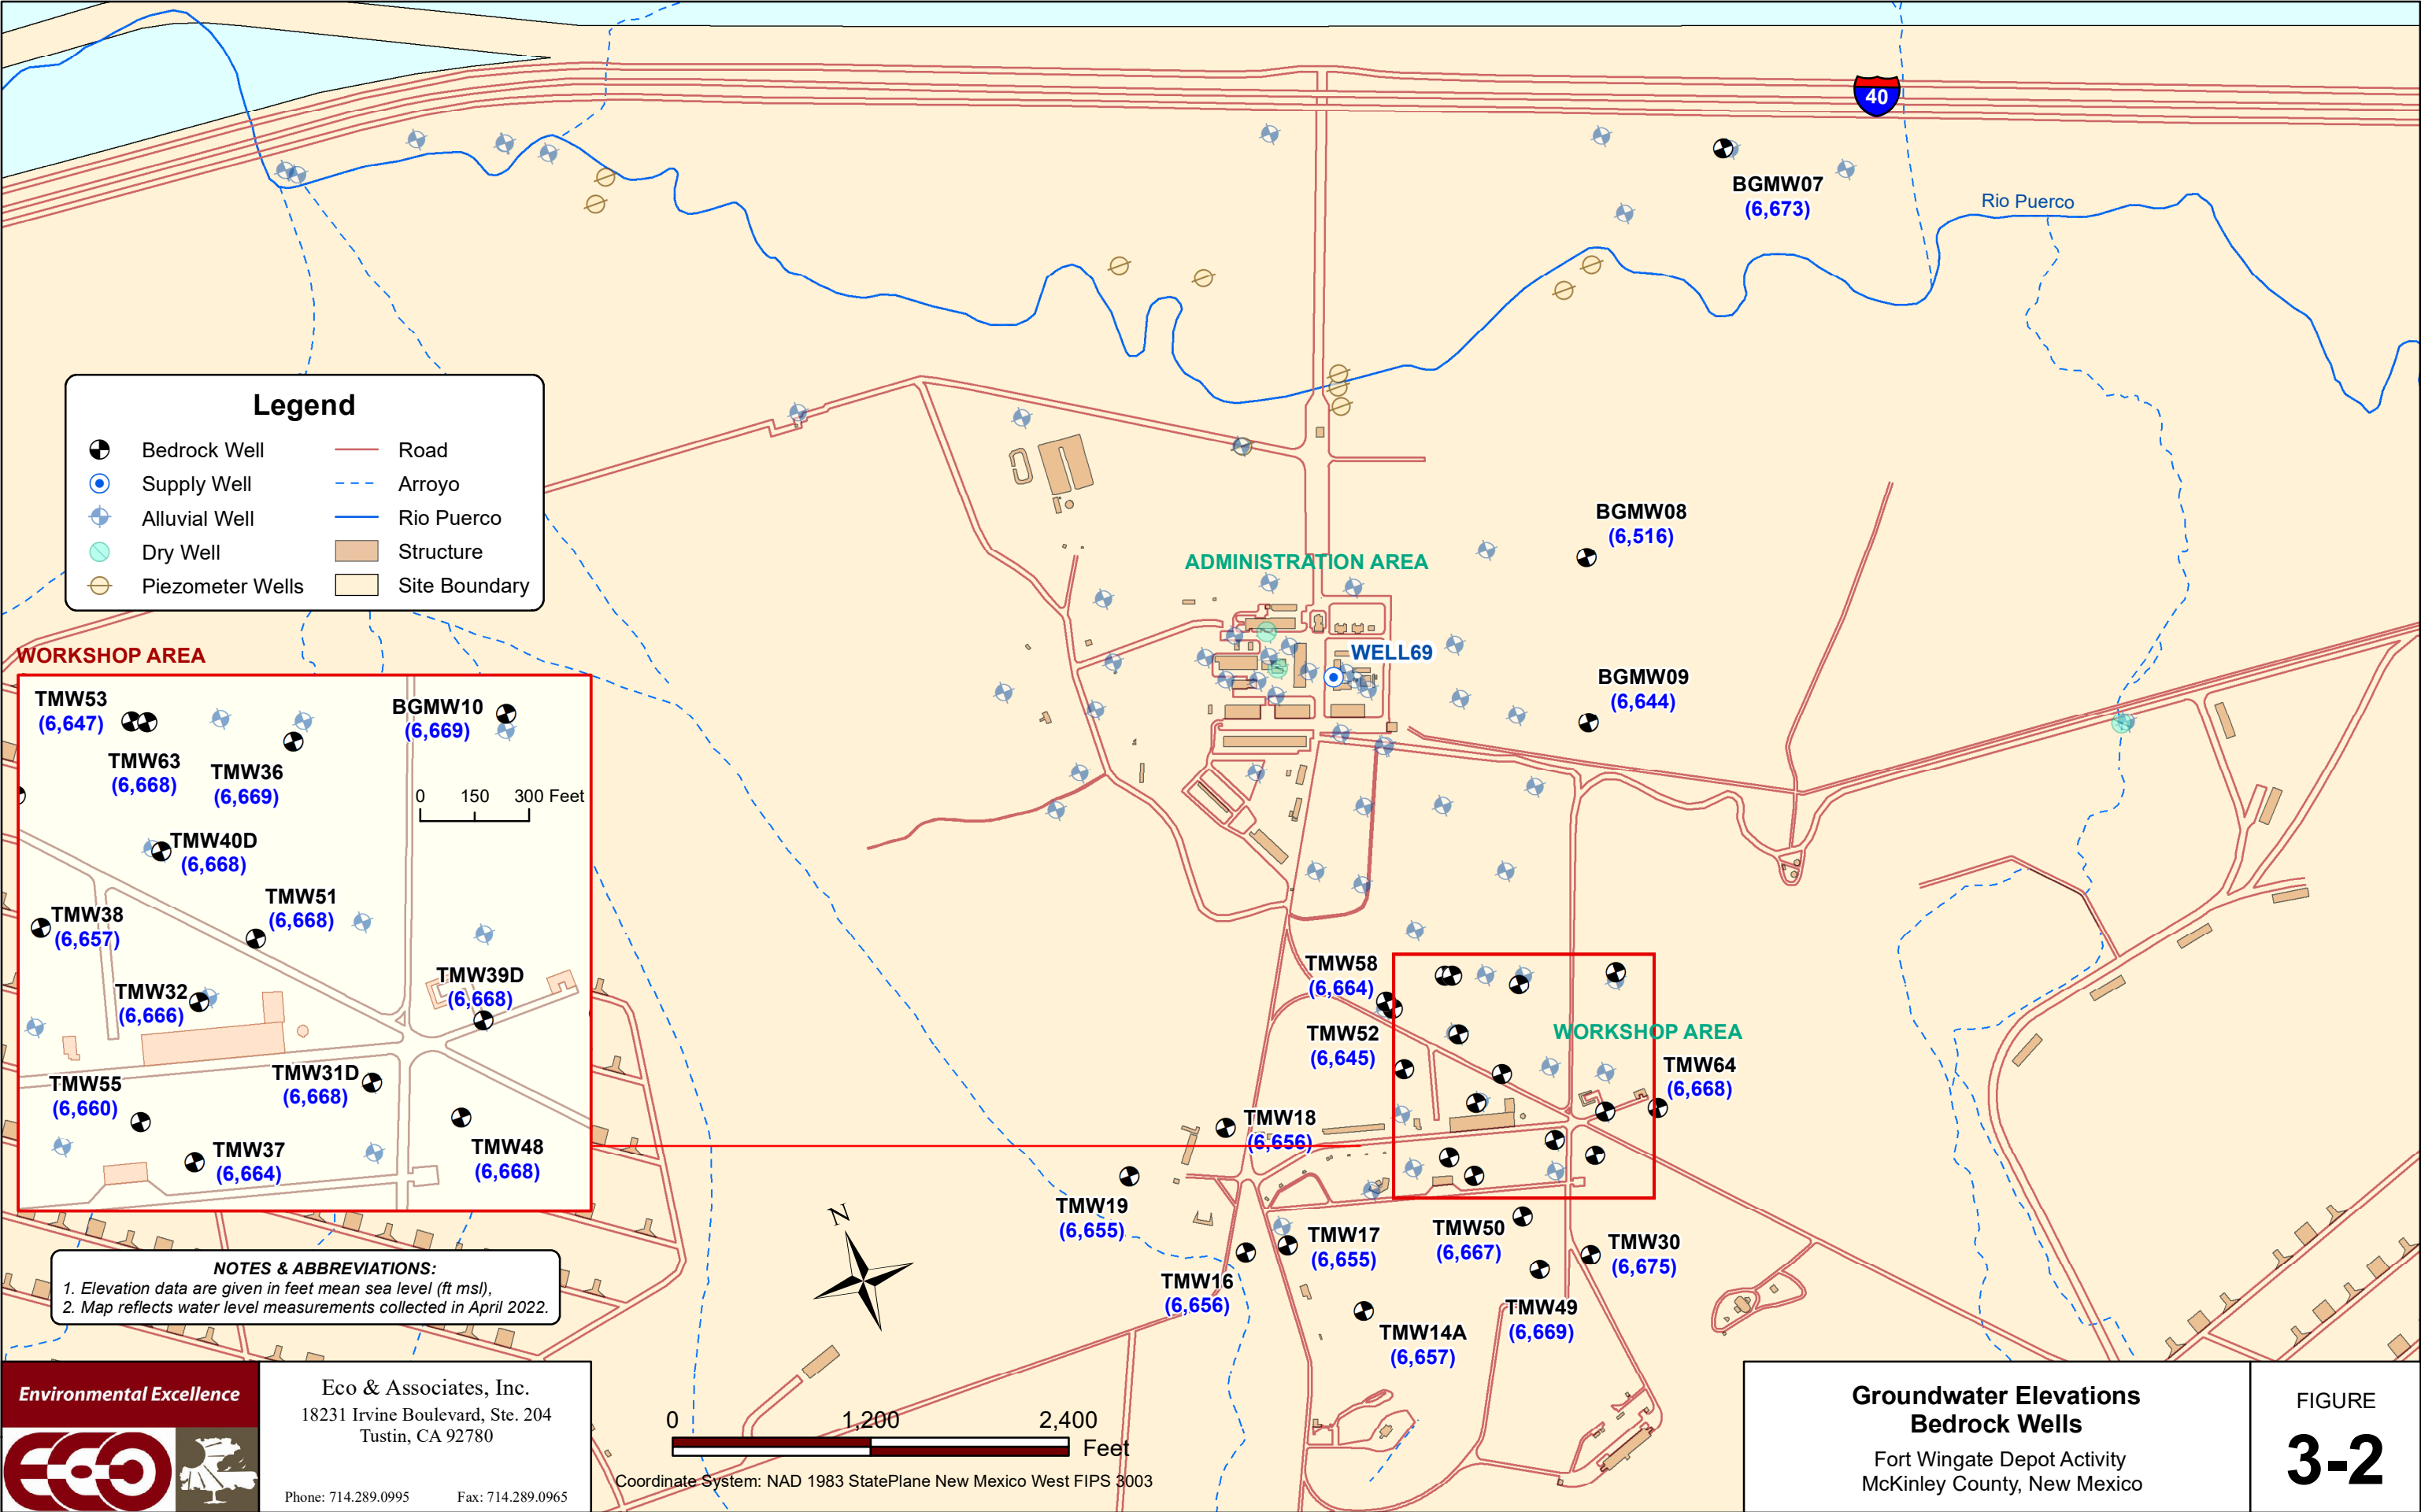


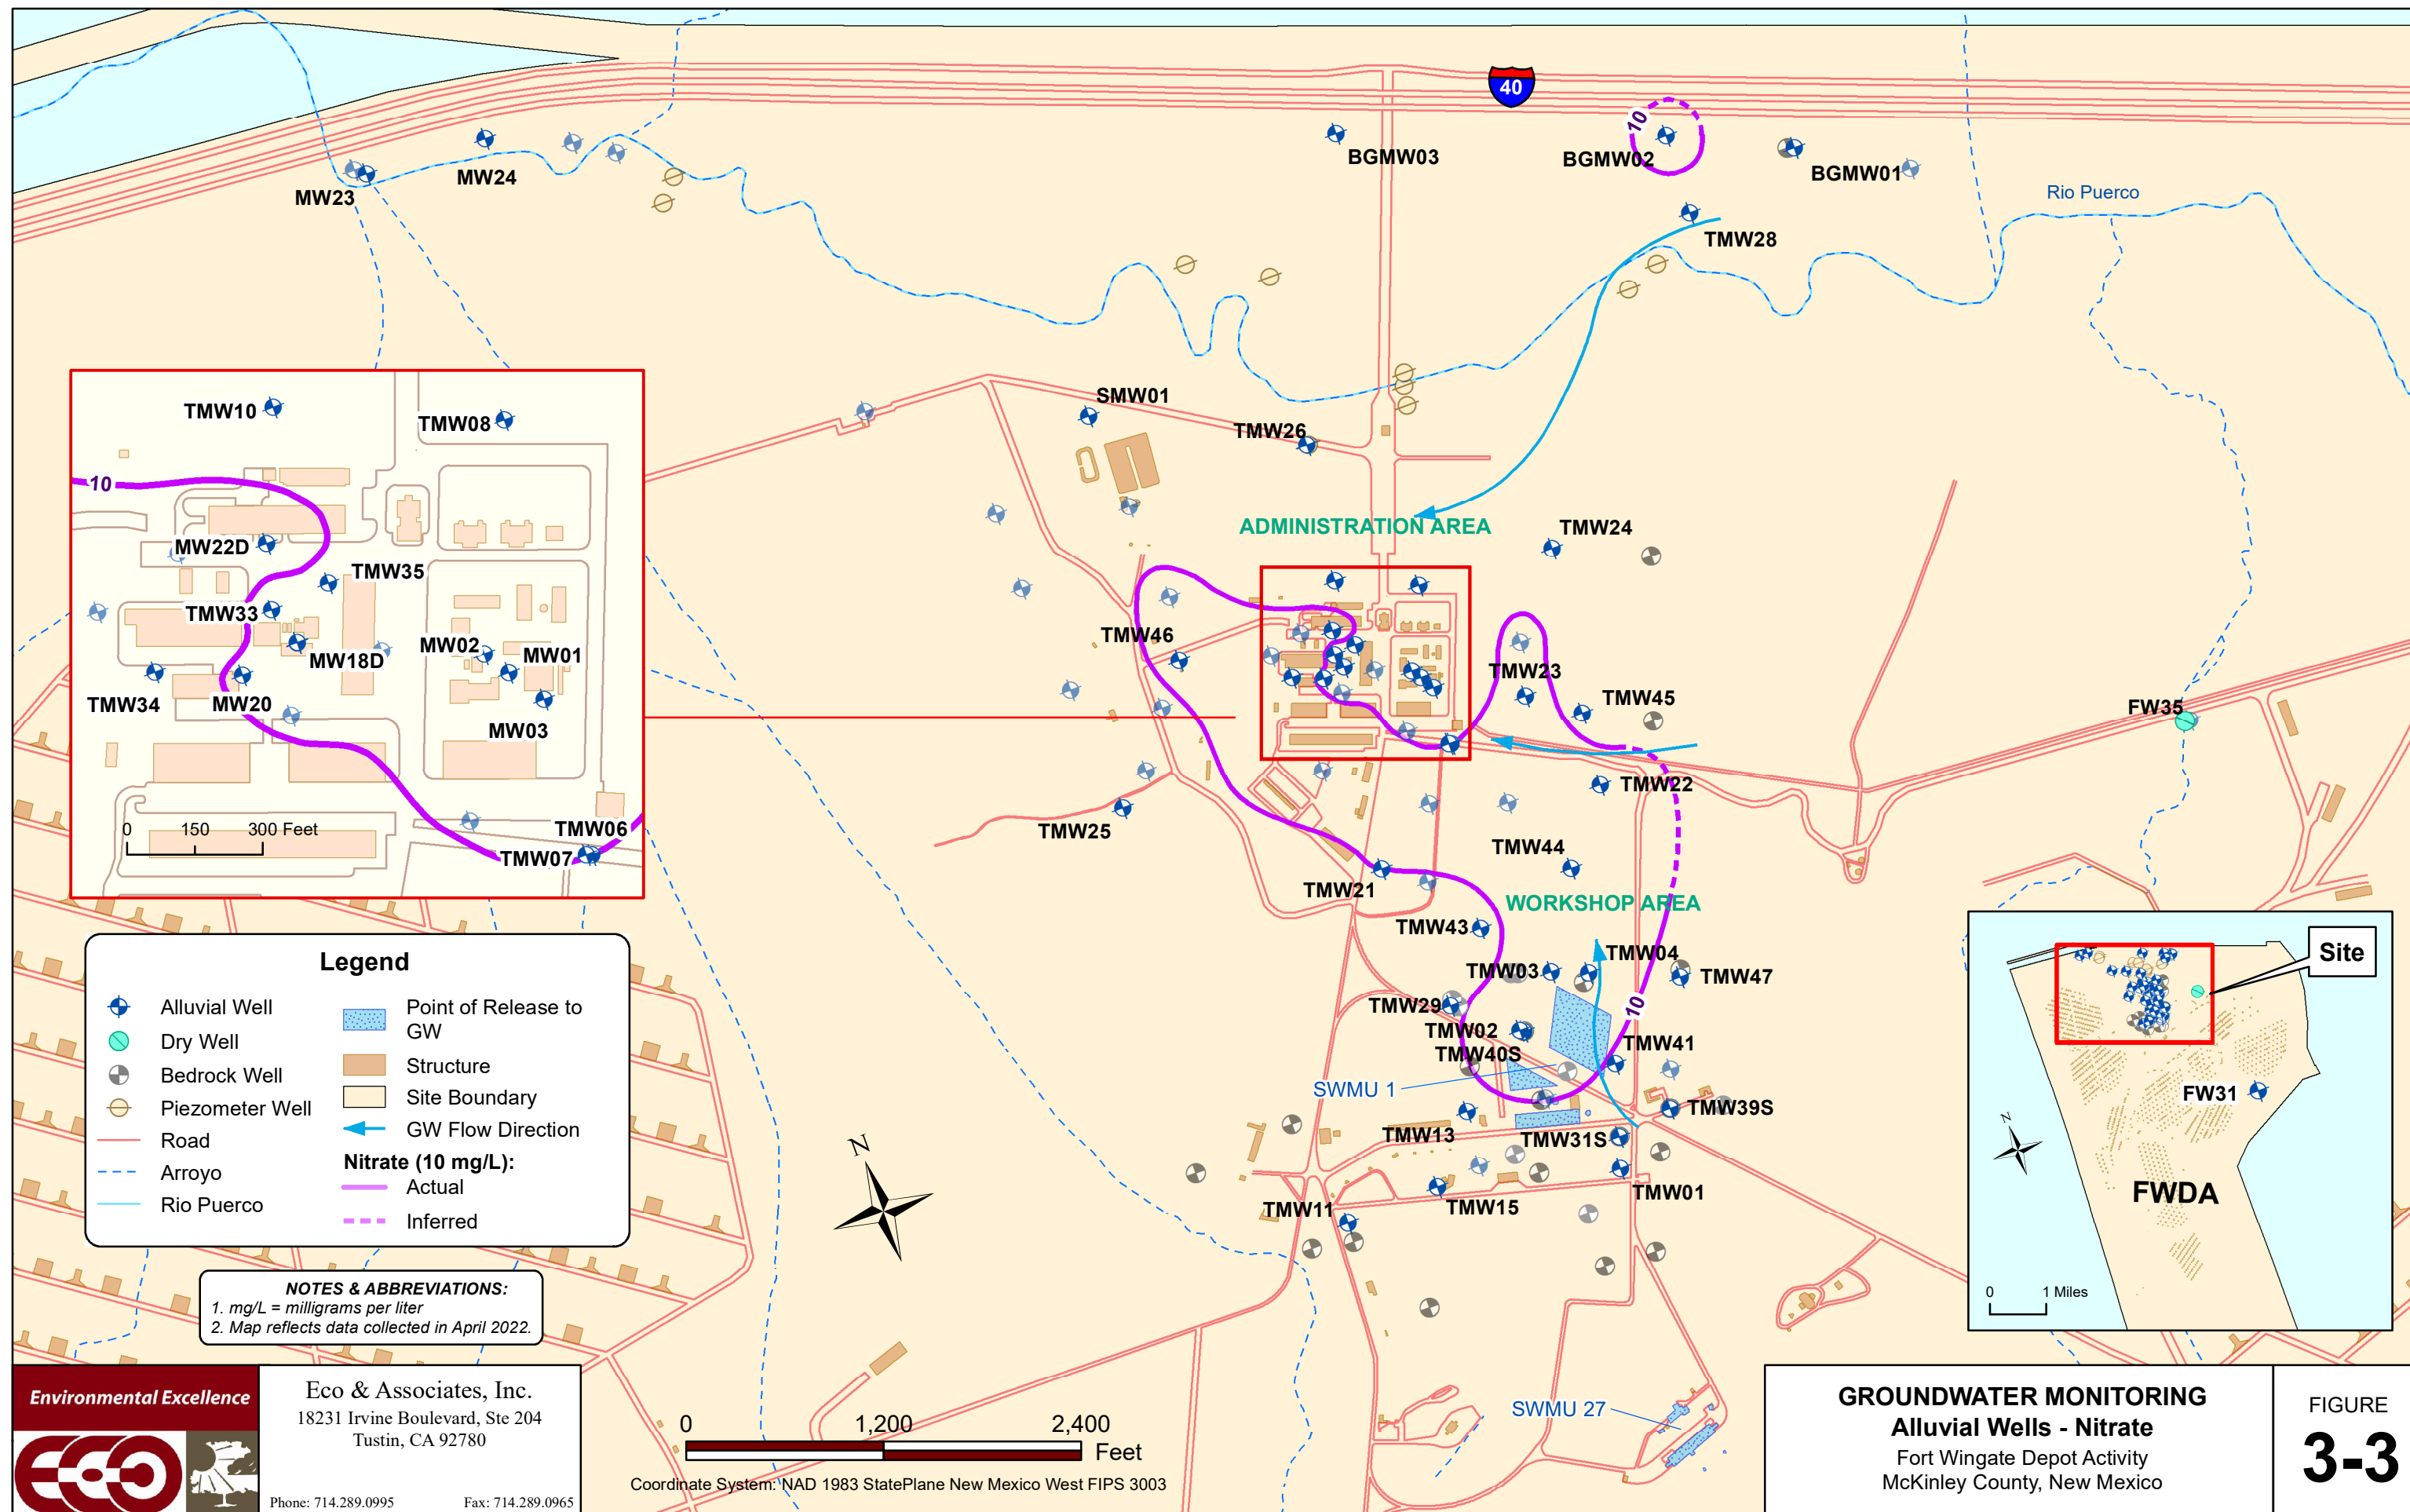

Environmental Excellence

Eco & Associates, Inc.
 18231 Irvine Boulevard, Ste 204
 Tustin, CA 92780

Phone: 714.289.0995 Fax: 714.289.0965

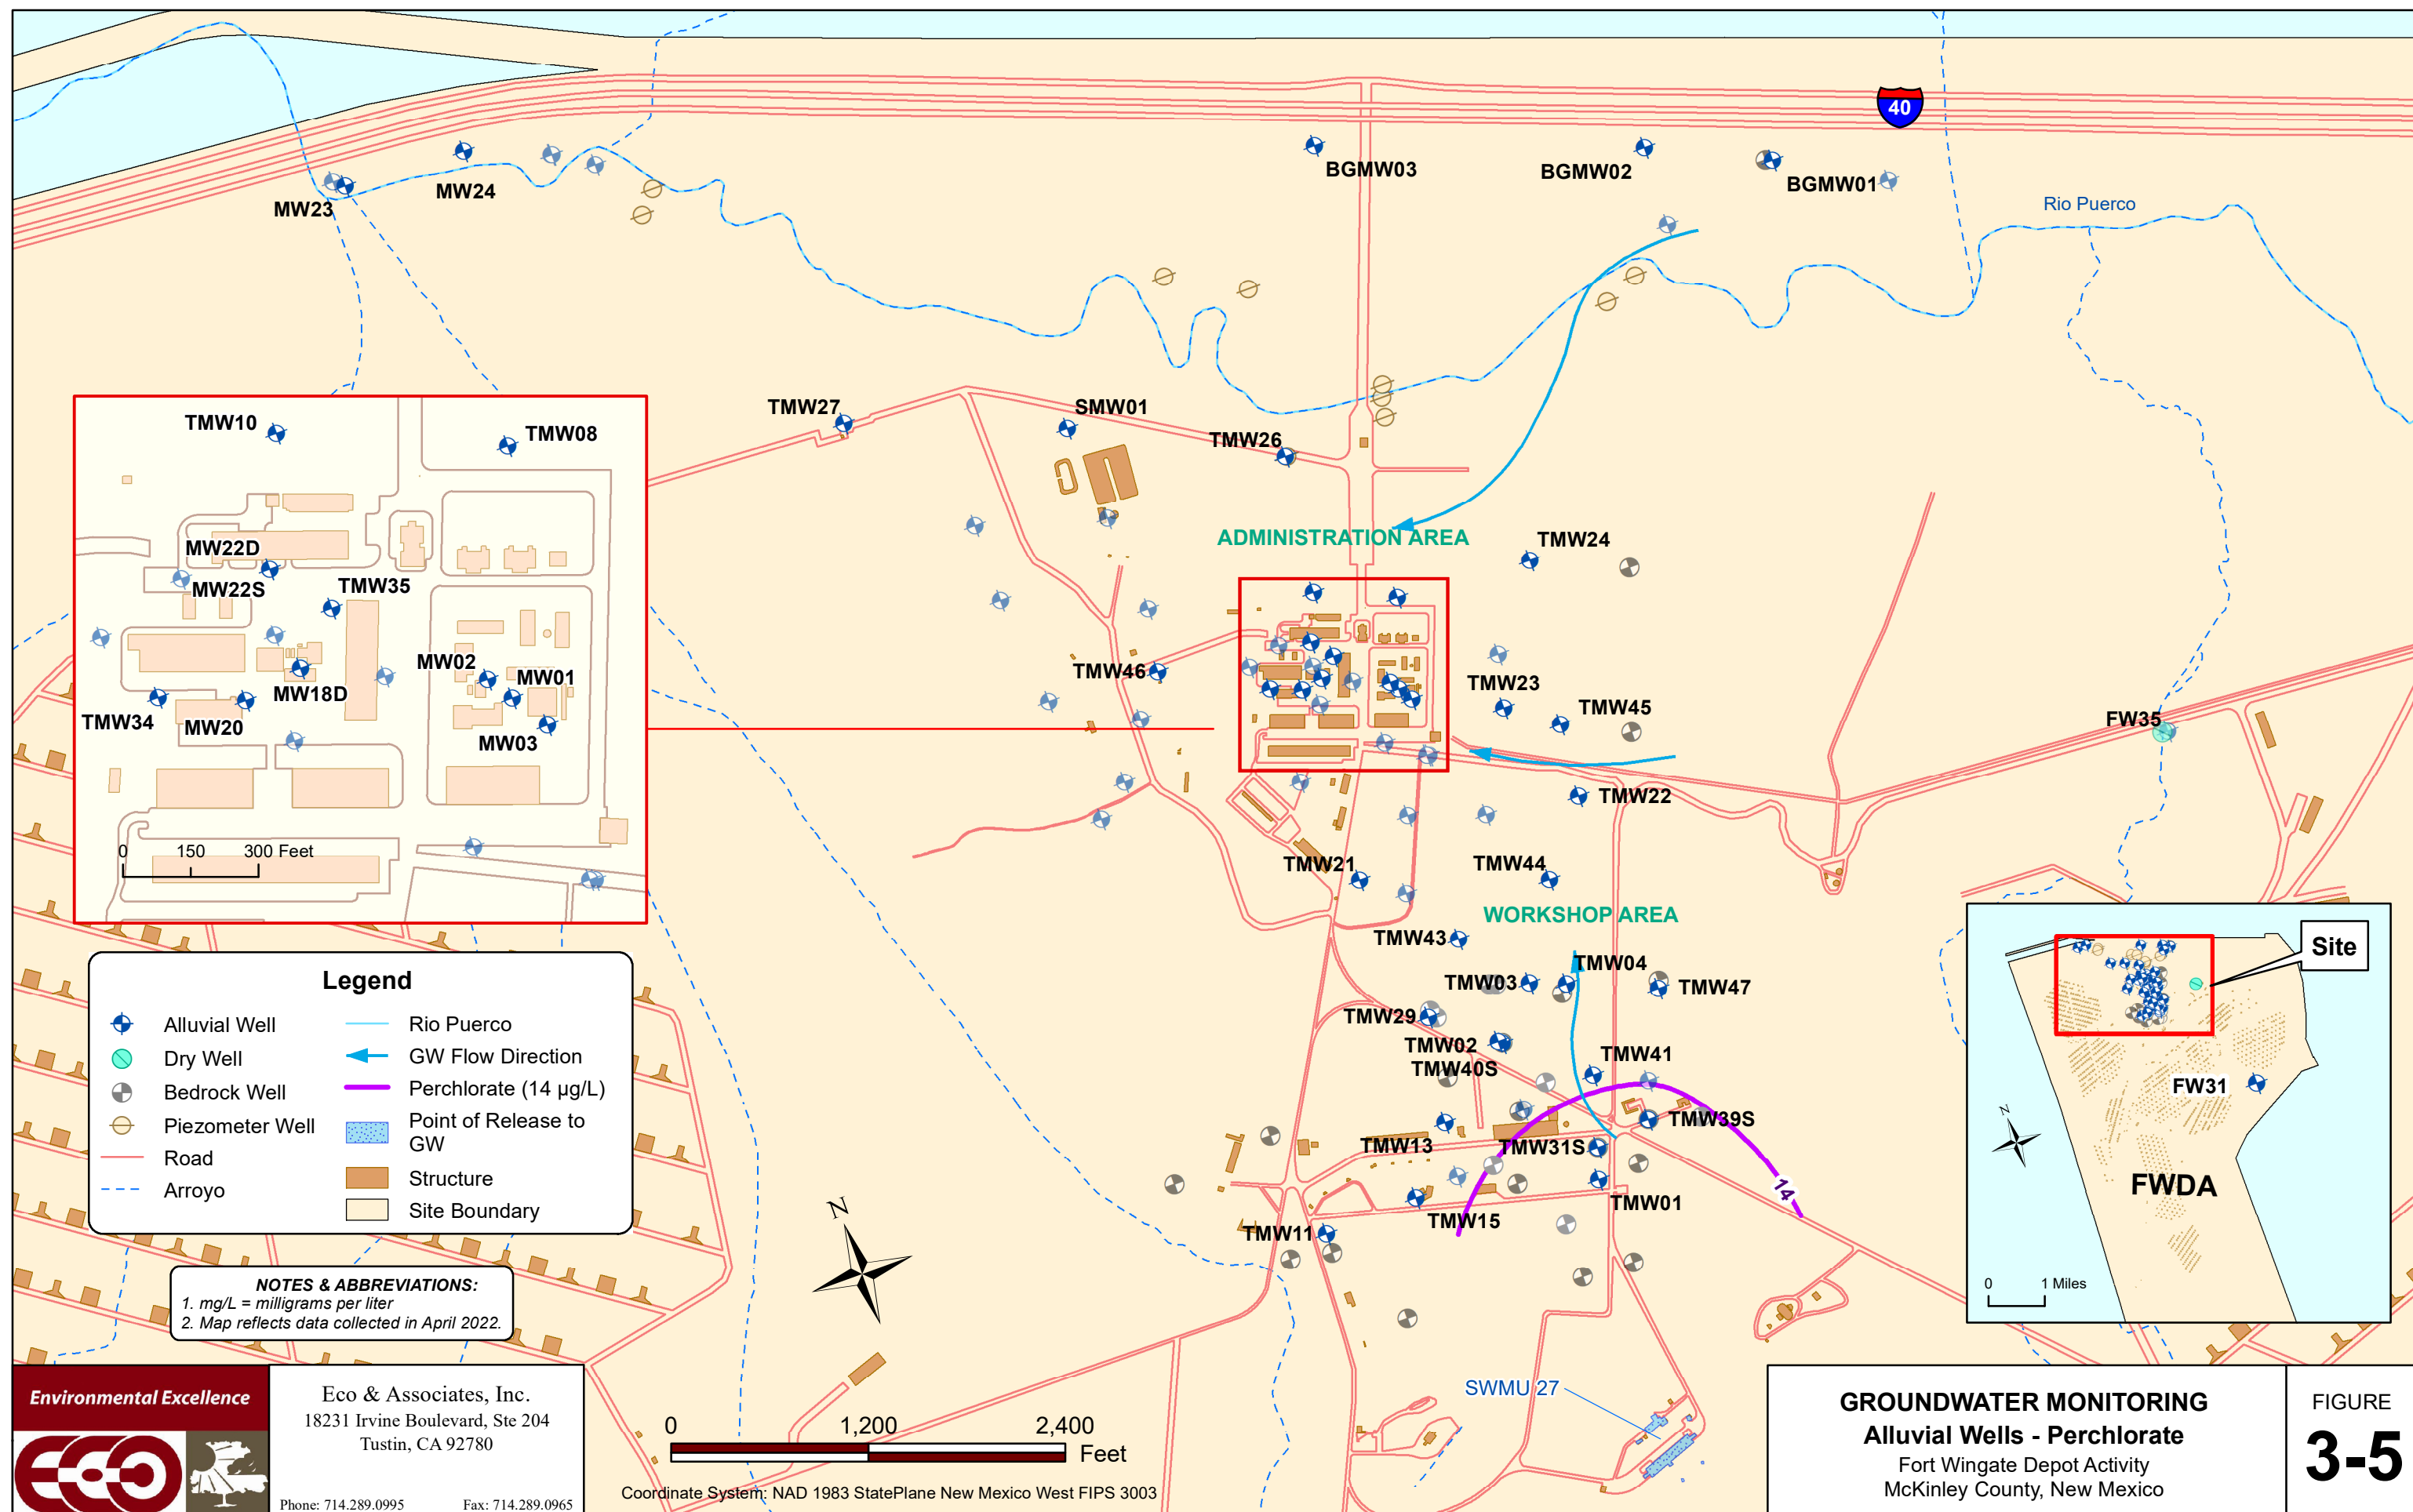


Environmental Excellence

Eco & Associates, Inc.
18231 Irvine Boulevard, Ste 204
Tustin, CA 92780

Phone: 714.289.0995 Fax: 714.289.0965

GROUNDWATER MONITORING
Alluvial Wells - Perchlorate
Fort Wingate Depot Activity
McKinley County, New Mexico

FIGURE
3-5

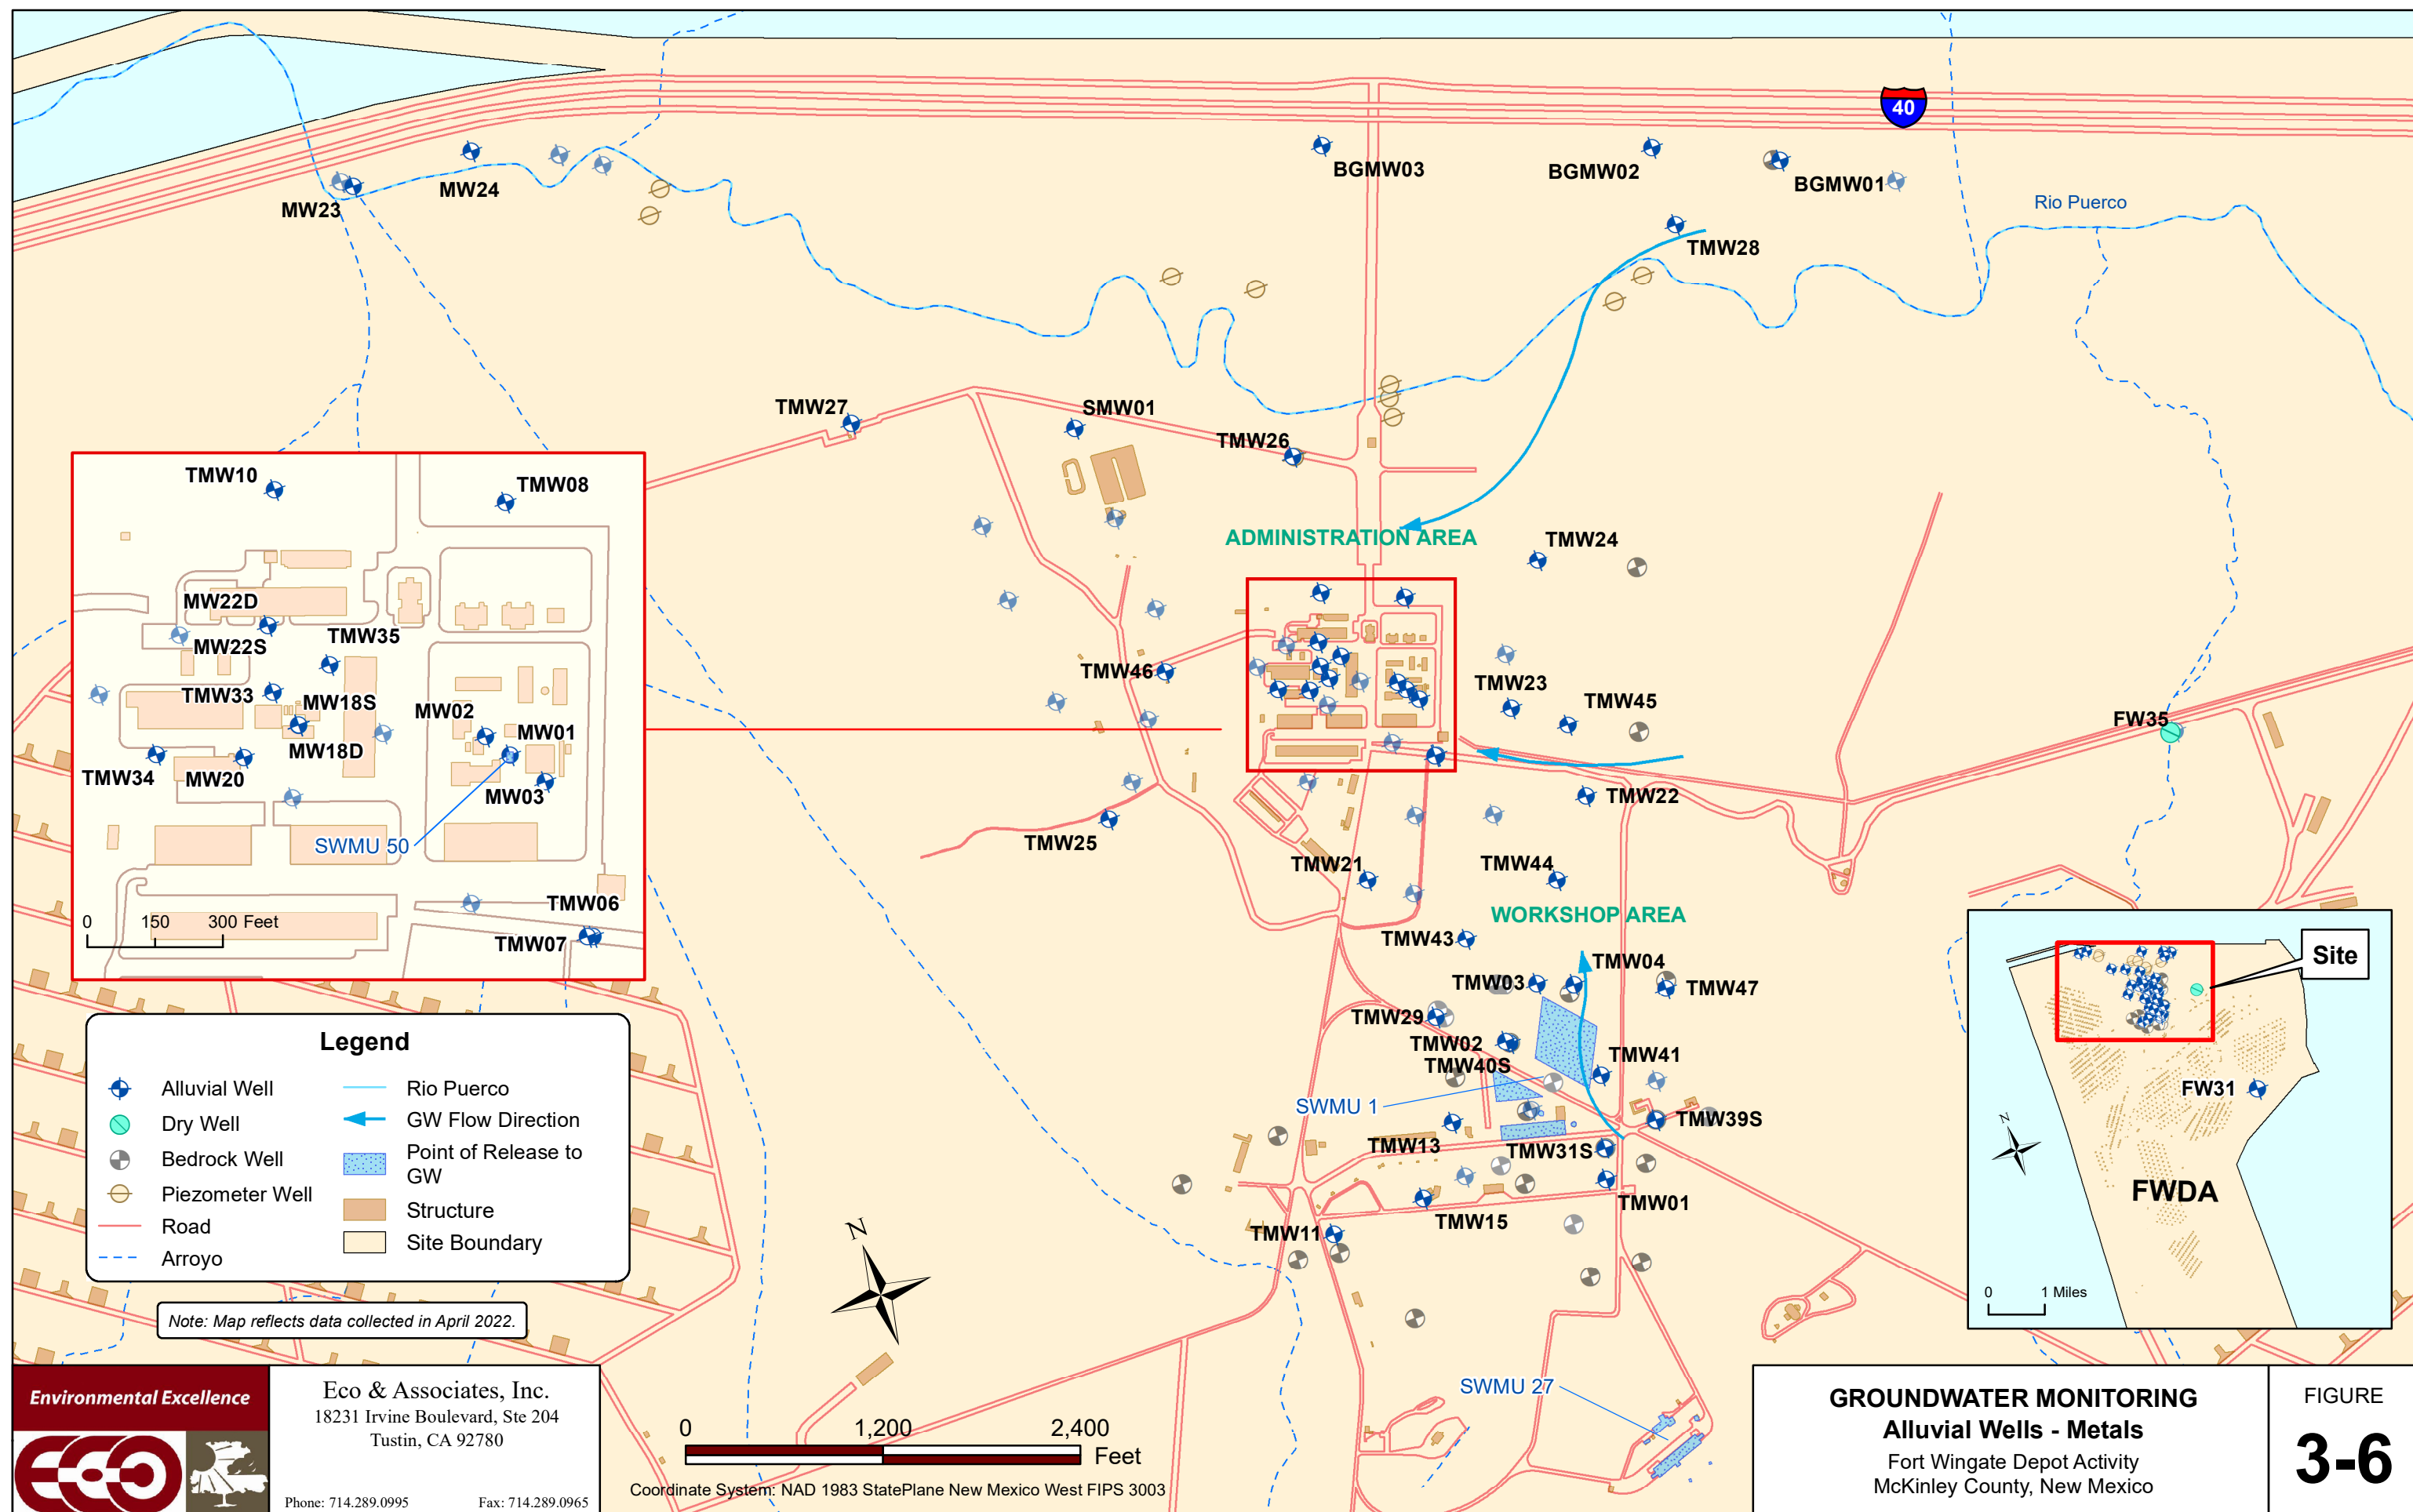


Environmental Excellence

Eco & Associates, Inc.
18231 Irvine Boulevard, Ste 204
Tustin, CA 92780

Phone: 714.289.0995 Fax: 714.289.0965

GROUNDWATER MONITORING
Alluvial Wells - Metals
Fort Wingate Depot Activity
McKinley County, New Mexico

FIGURE
3-6

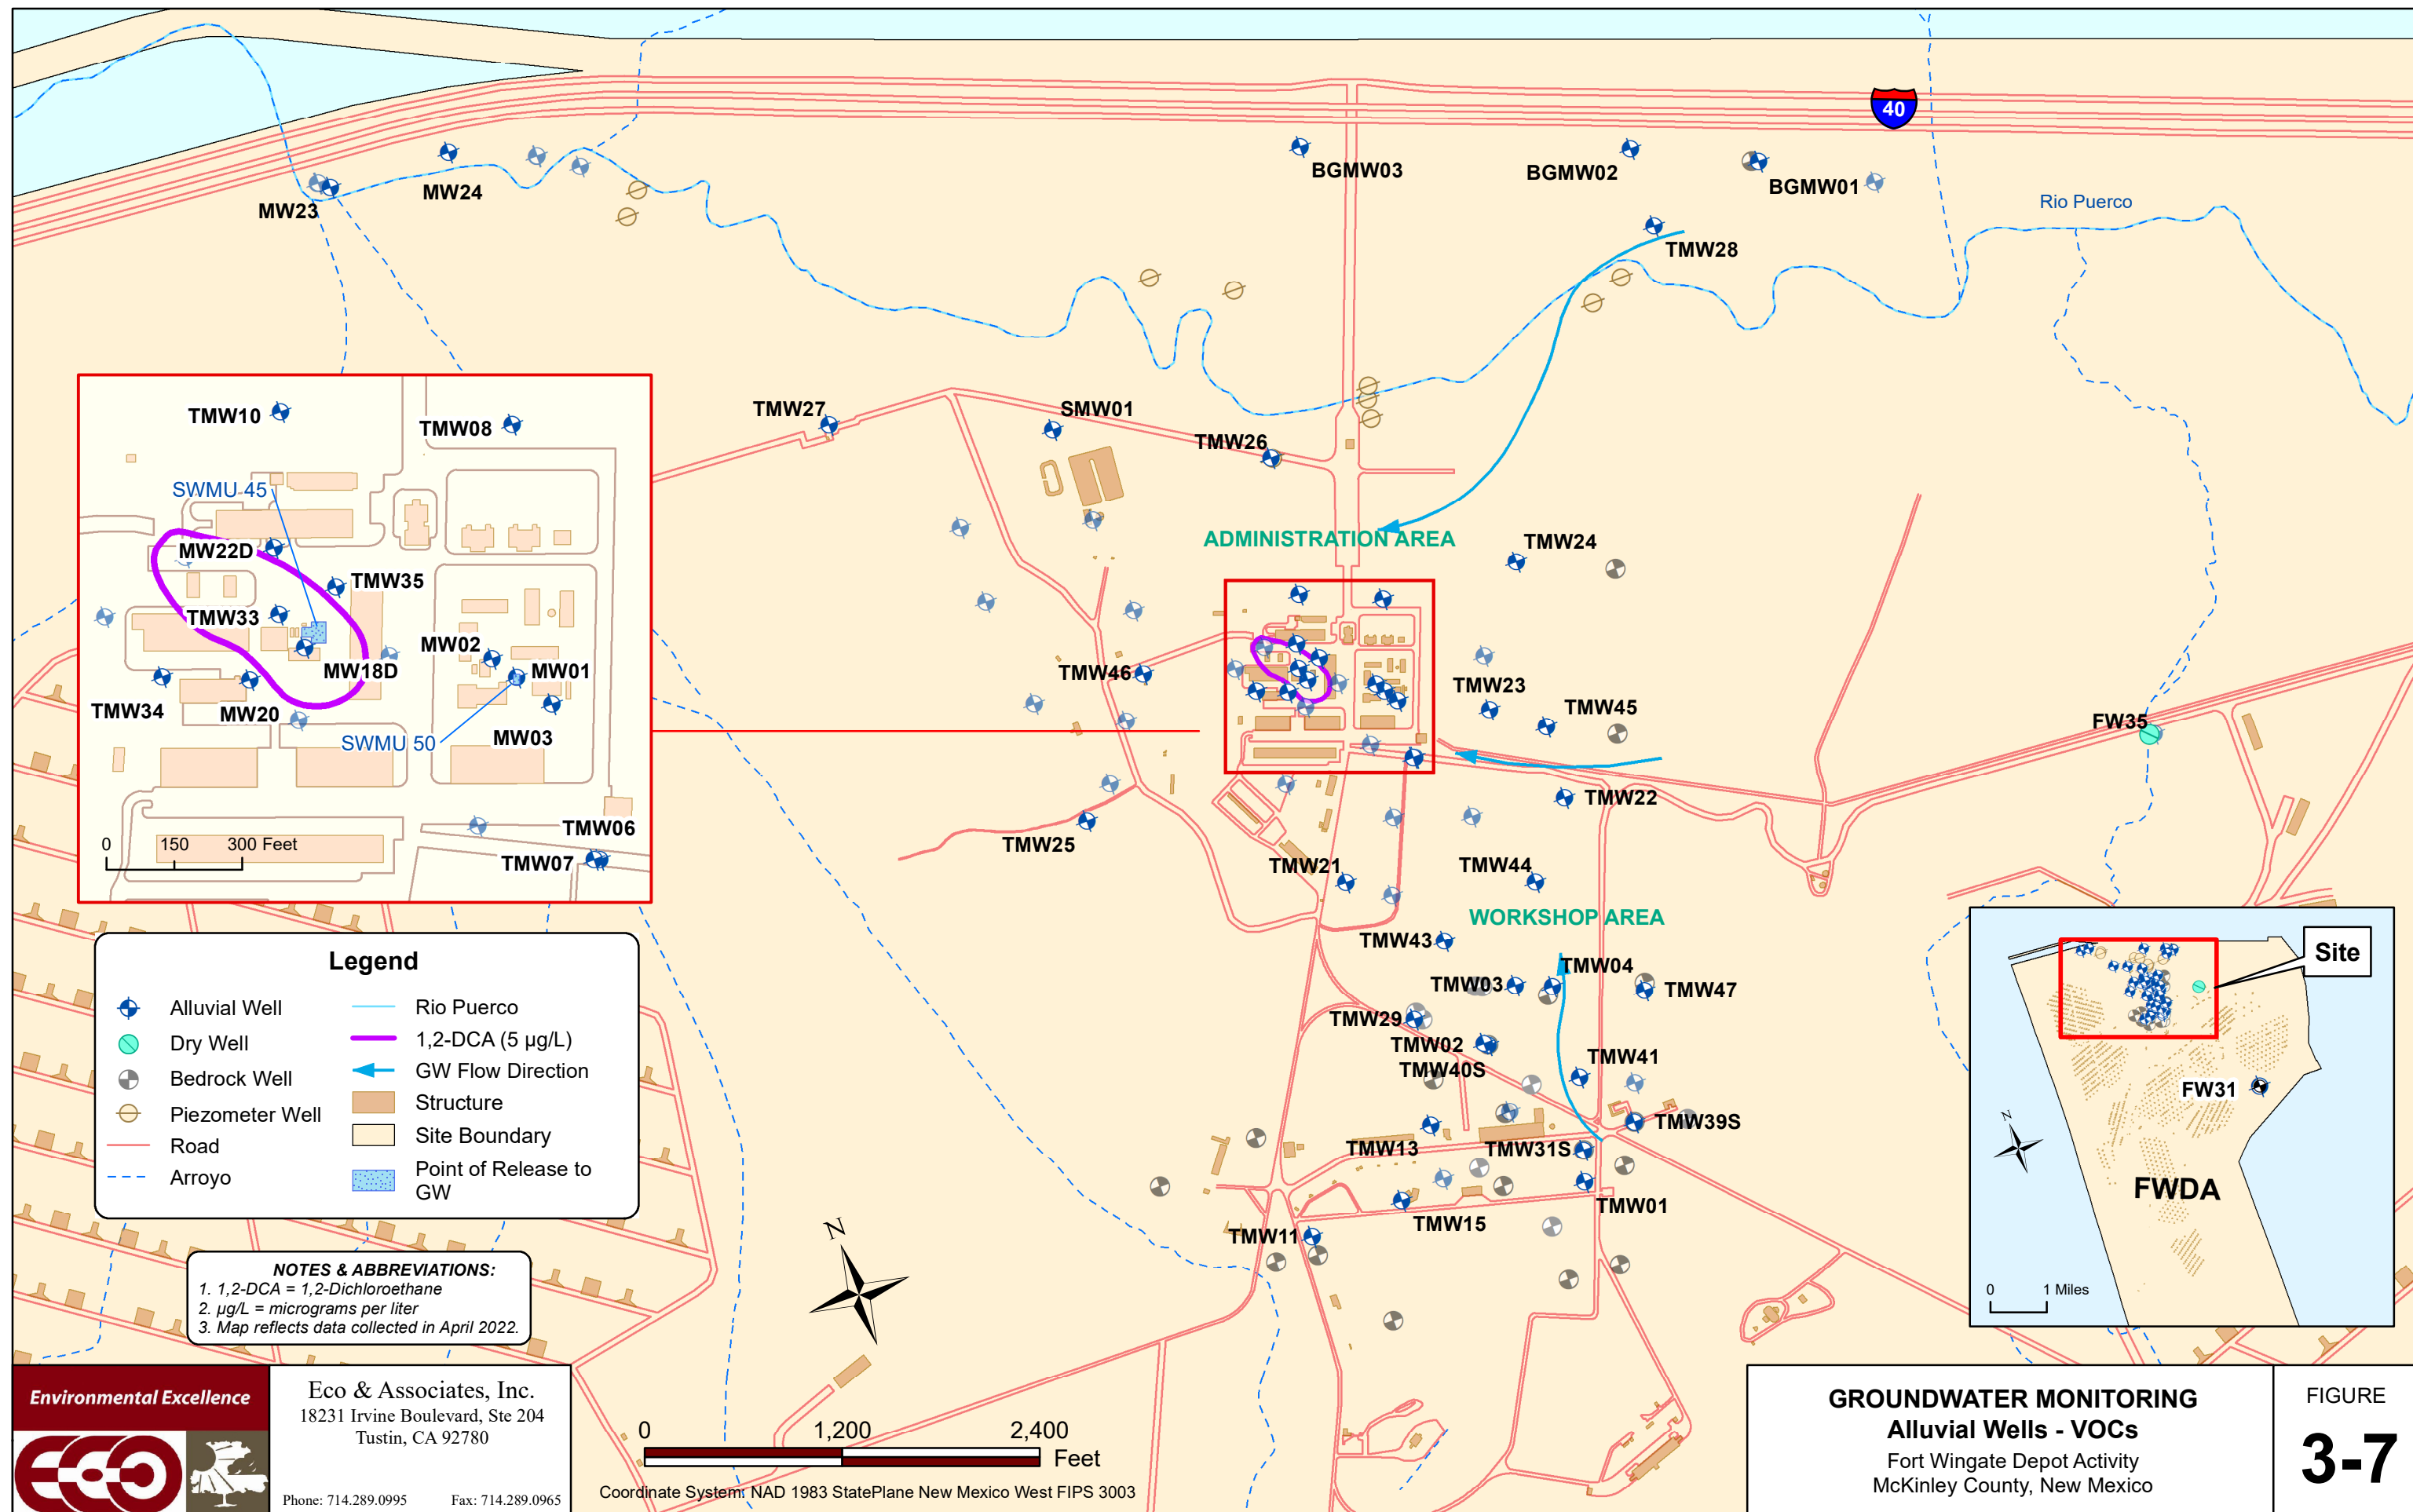


GROUNDWATER MONITORING
Alluvial Wells - VOCs
 Fort Wingate Depot Activity
 McKinley County, New Mexico

FIGURE
3-7



Eco & Associates, Inc.
 18231 Irvine Boulevard, Ste 204
 Tustin, CA 92780


Phone: 714.289.0995 Fax: 714.289.0965

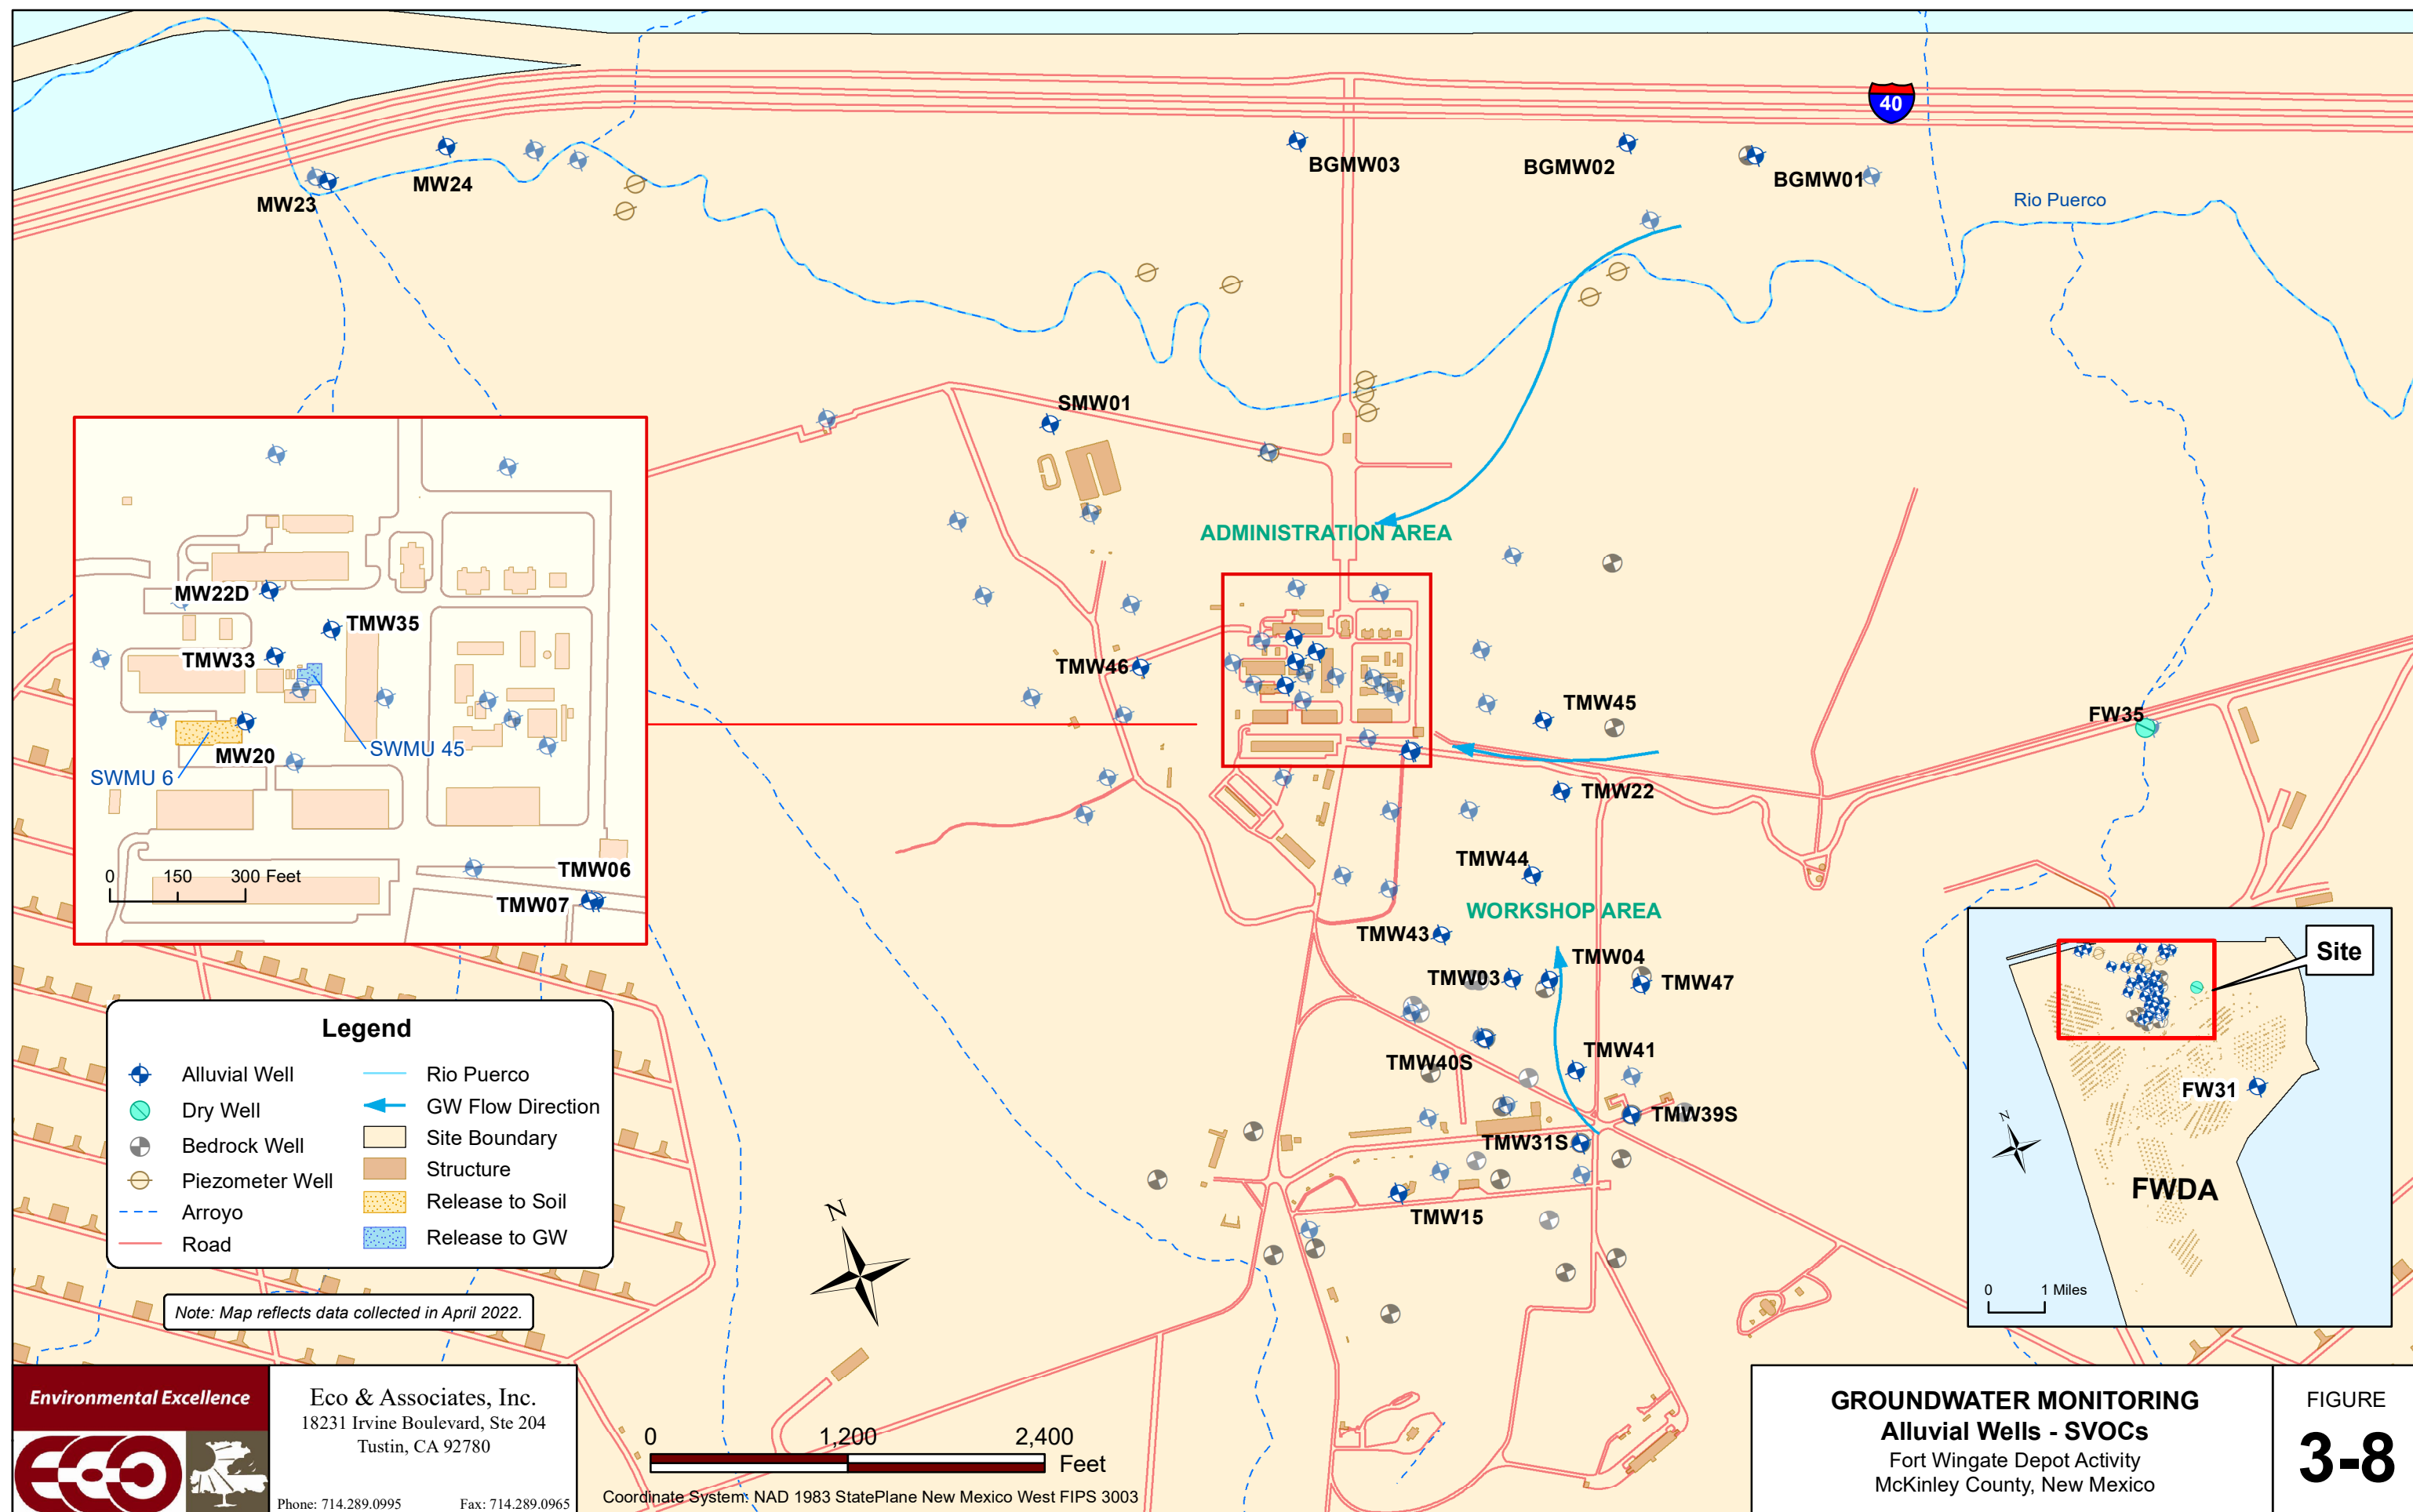



Environmental Excellence

Eco & Associates, Inc.
 18231 Irvine Boulevard, Ste 204
 Tustin, CA 92780
 Phone: 714.289.0995 Fax: 714.289.0965

GROUNDWATER MONITORING
Alluvial Wells - SVOCs
 Fort Wingate Depot Activity
 McKinley County, New Mexico

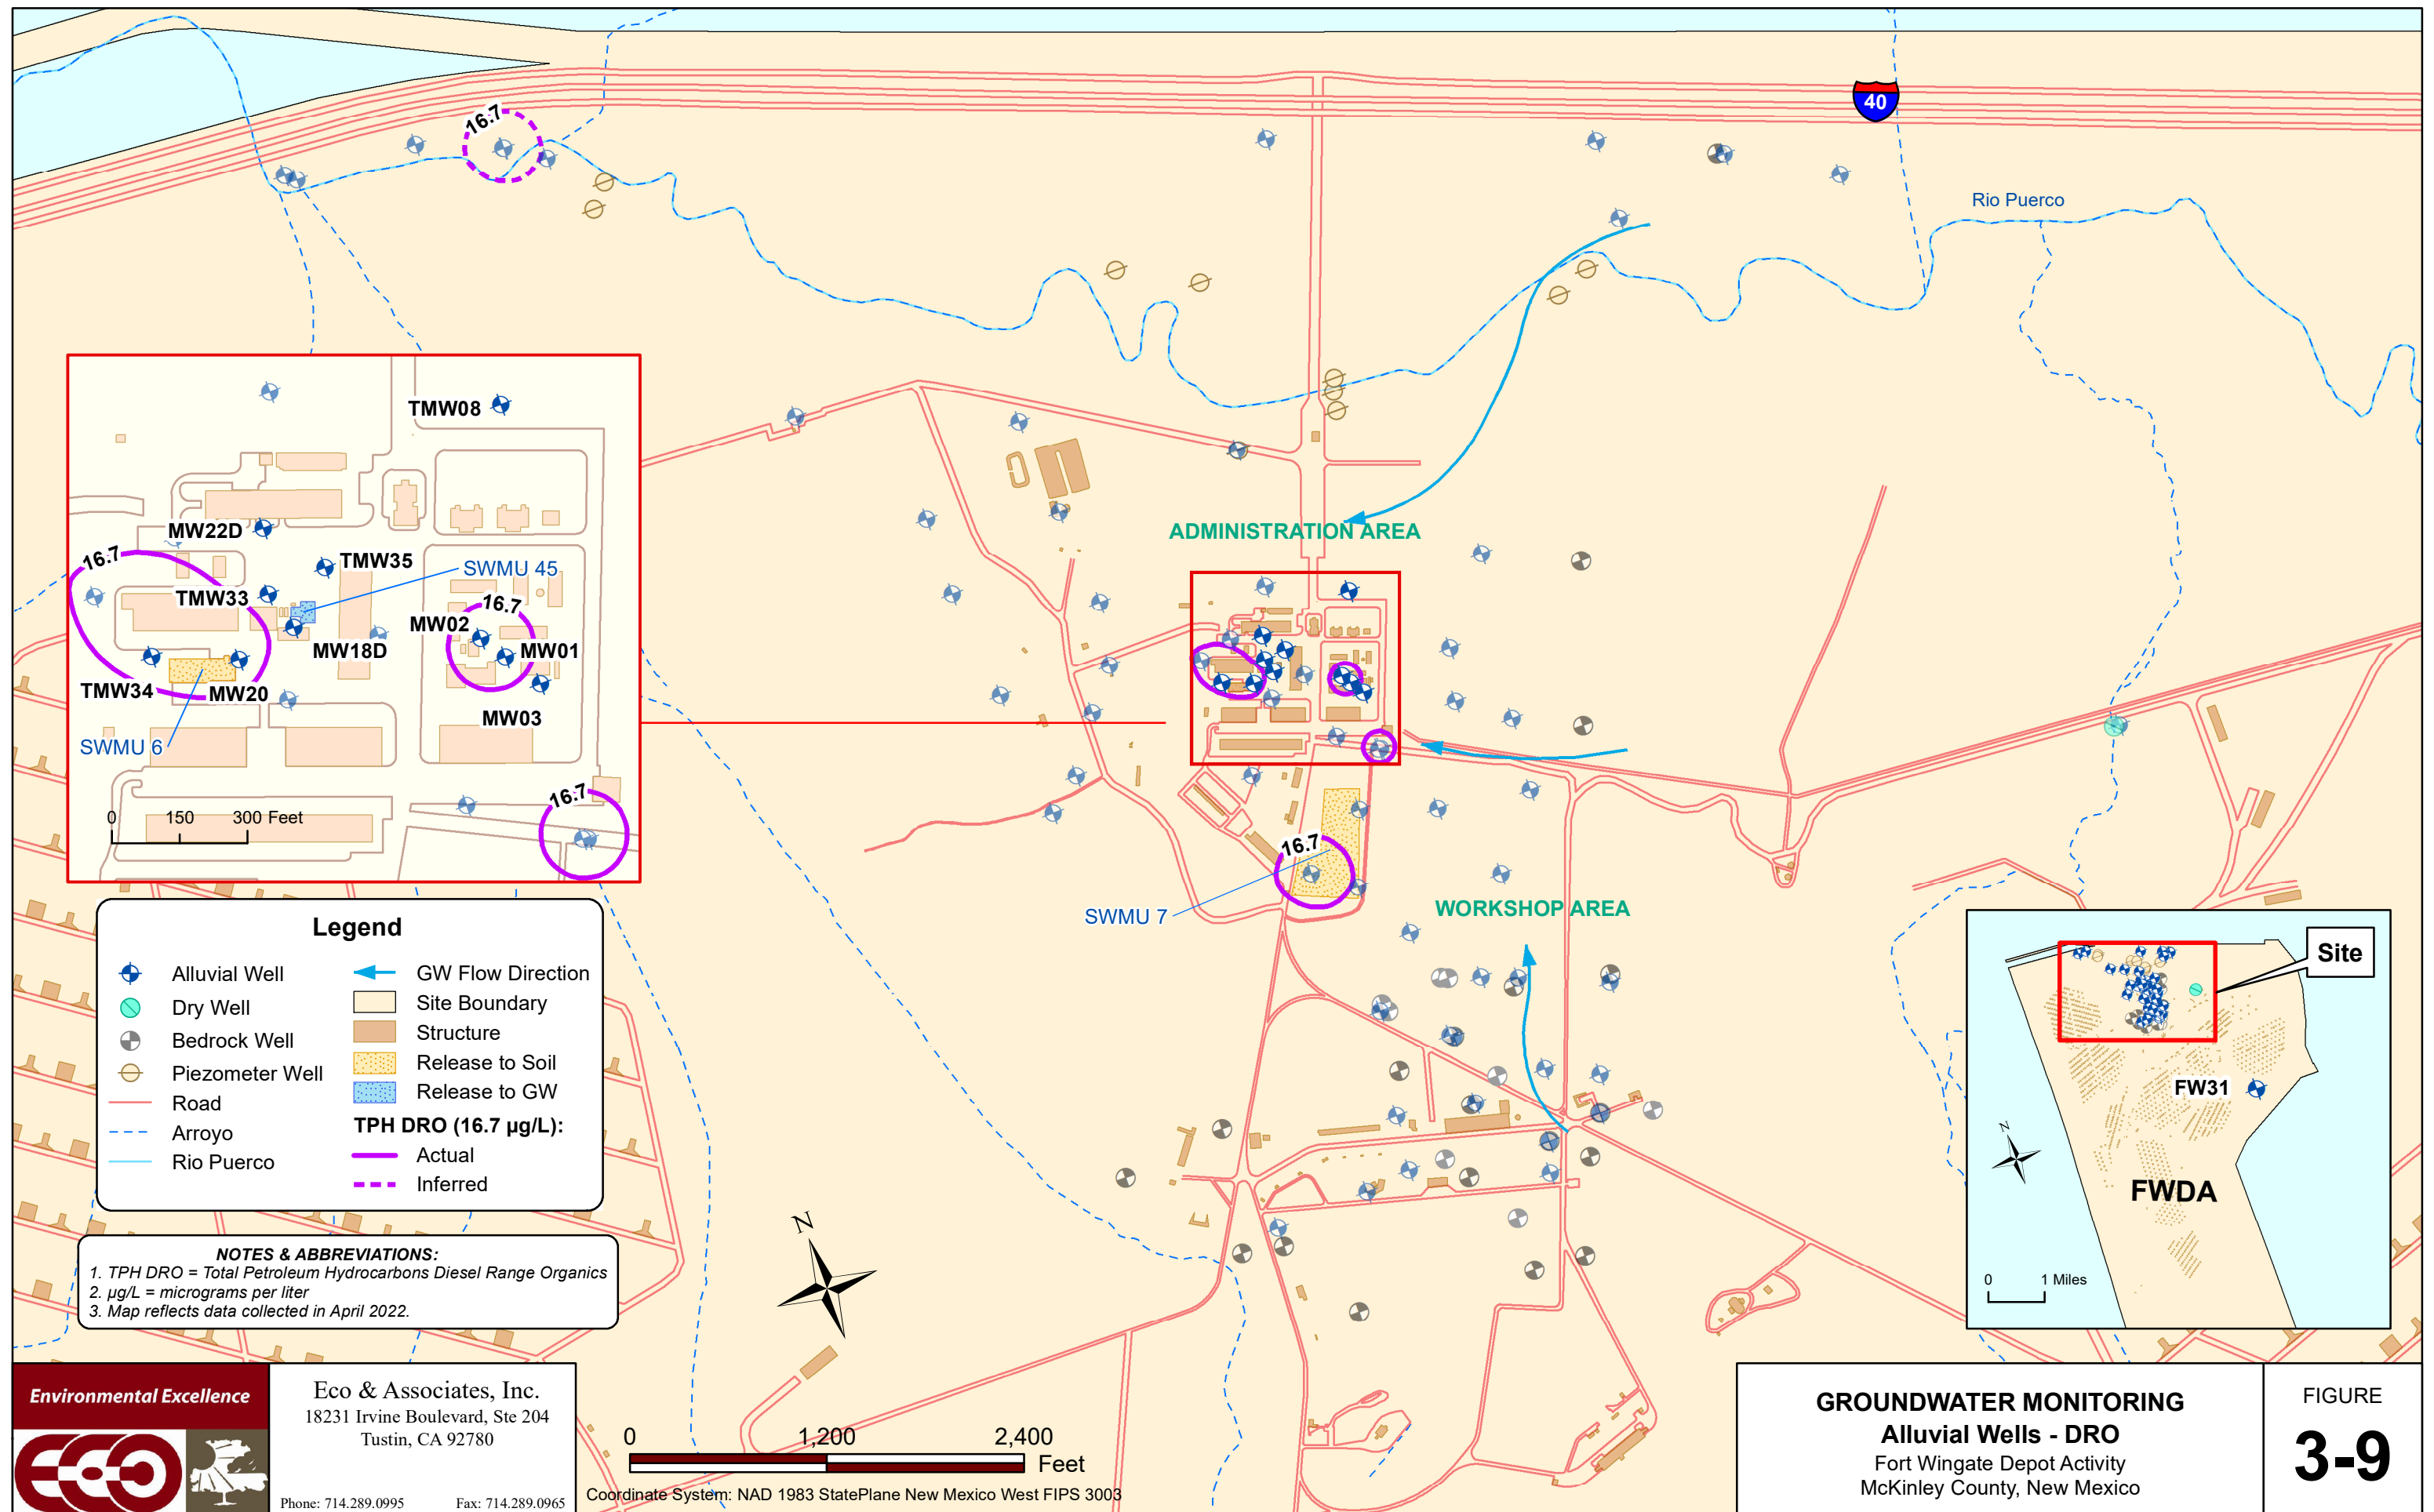

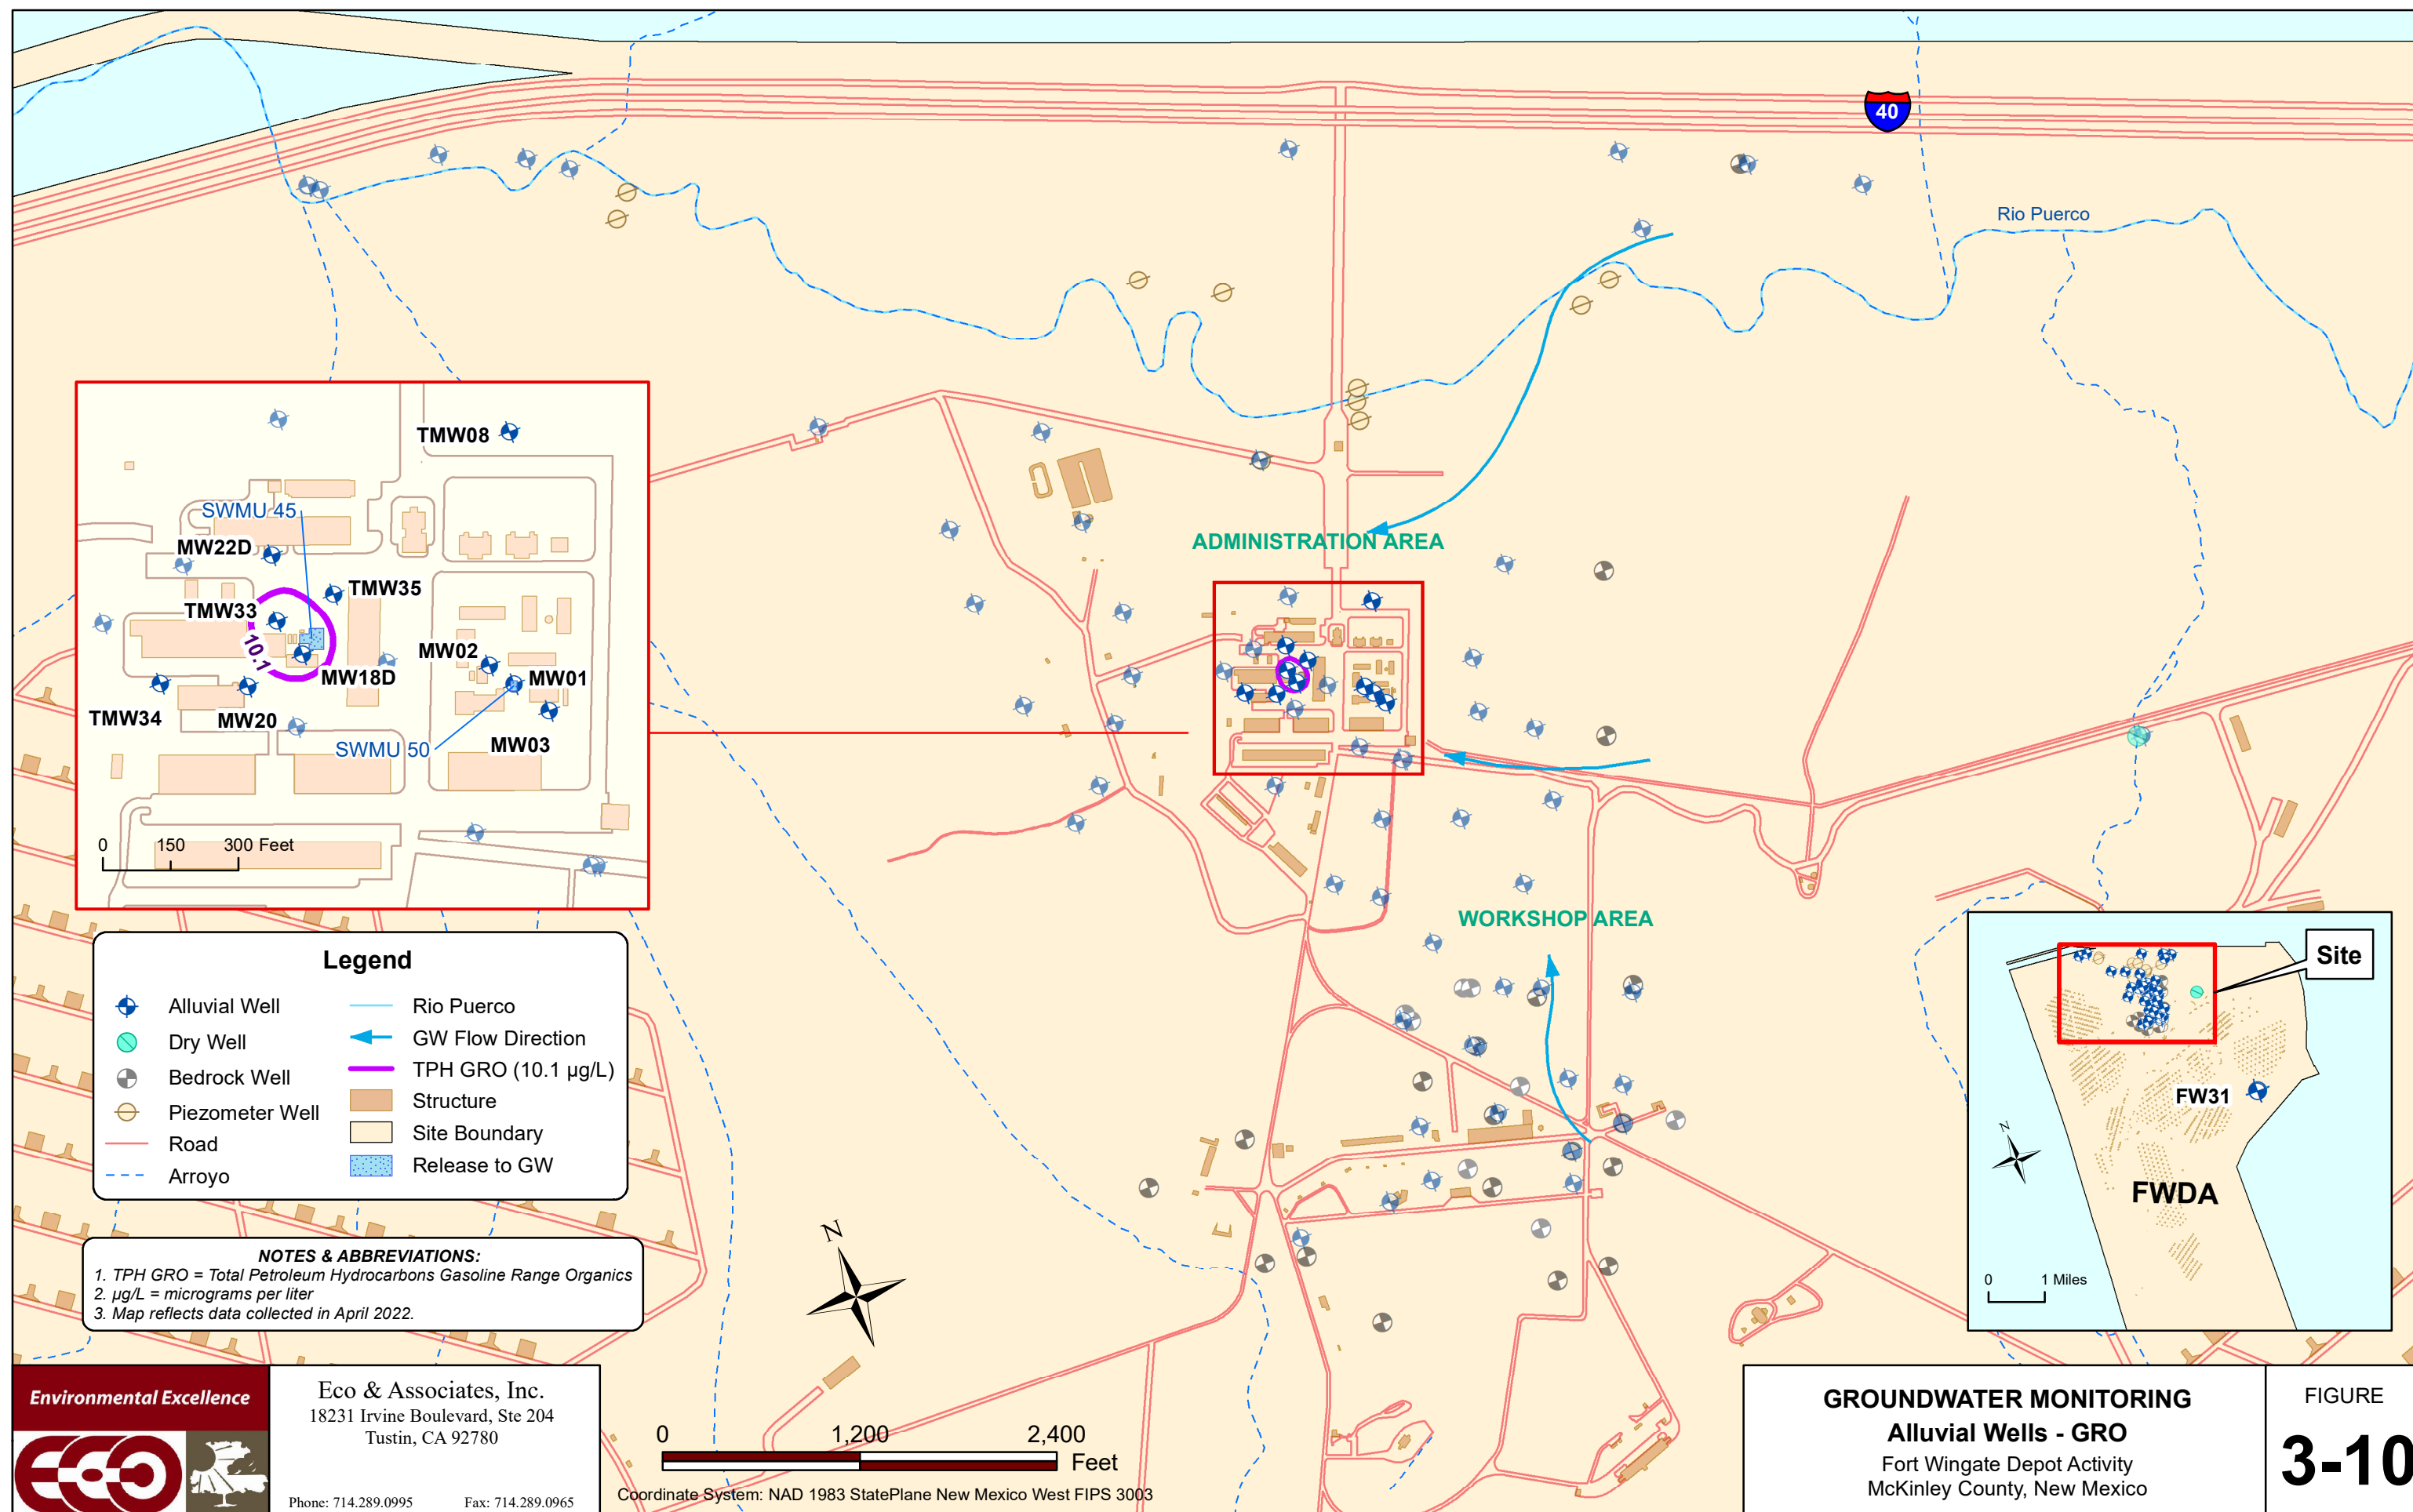

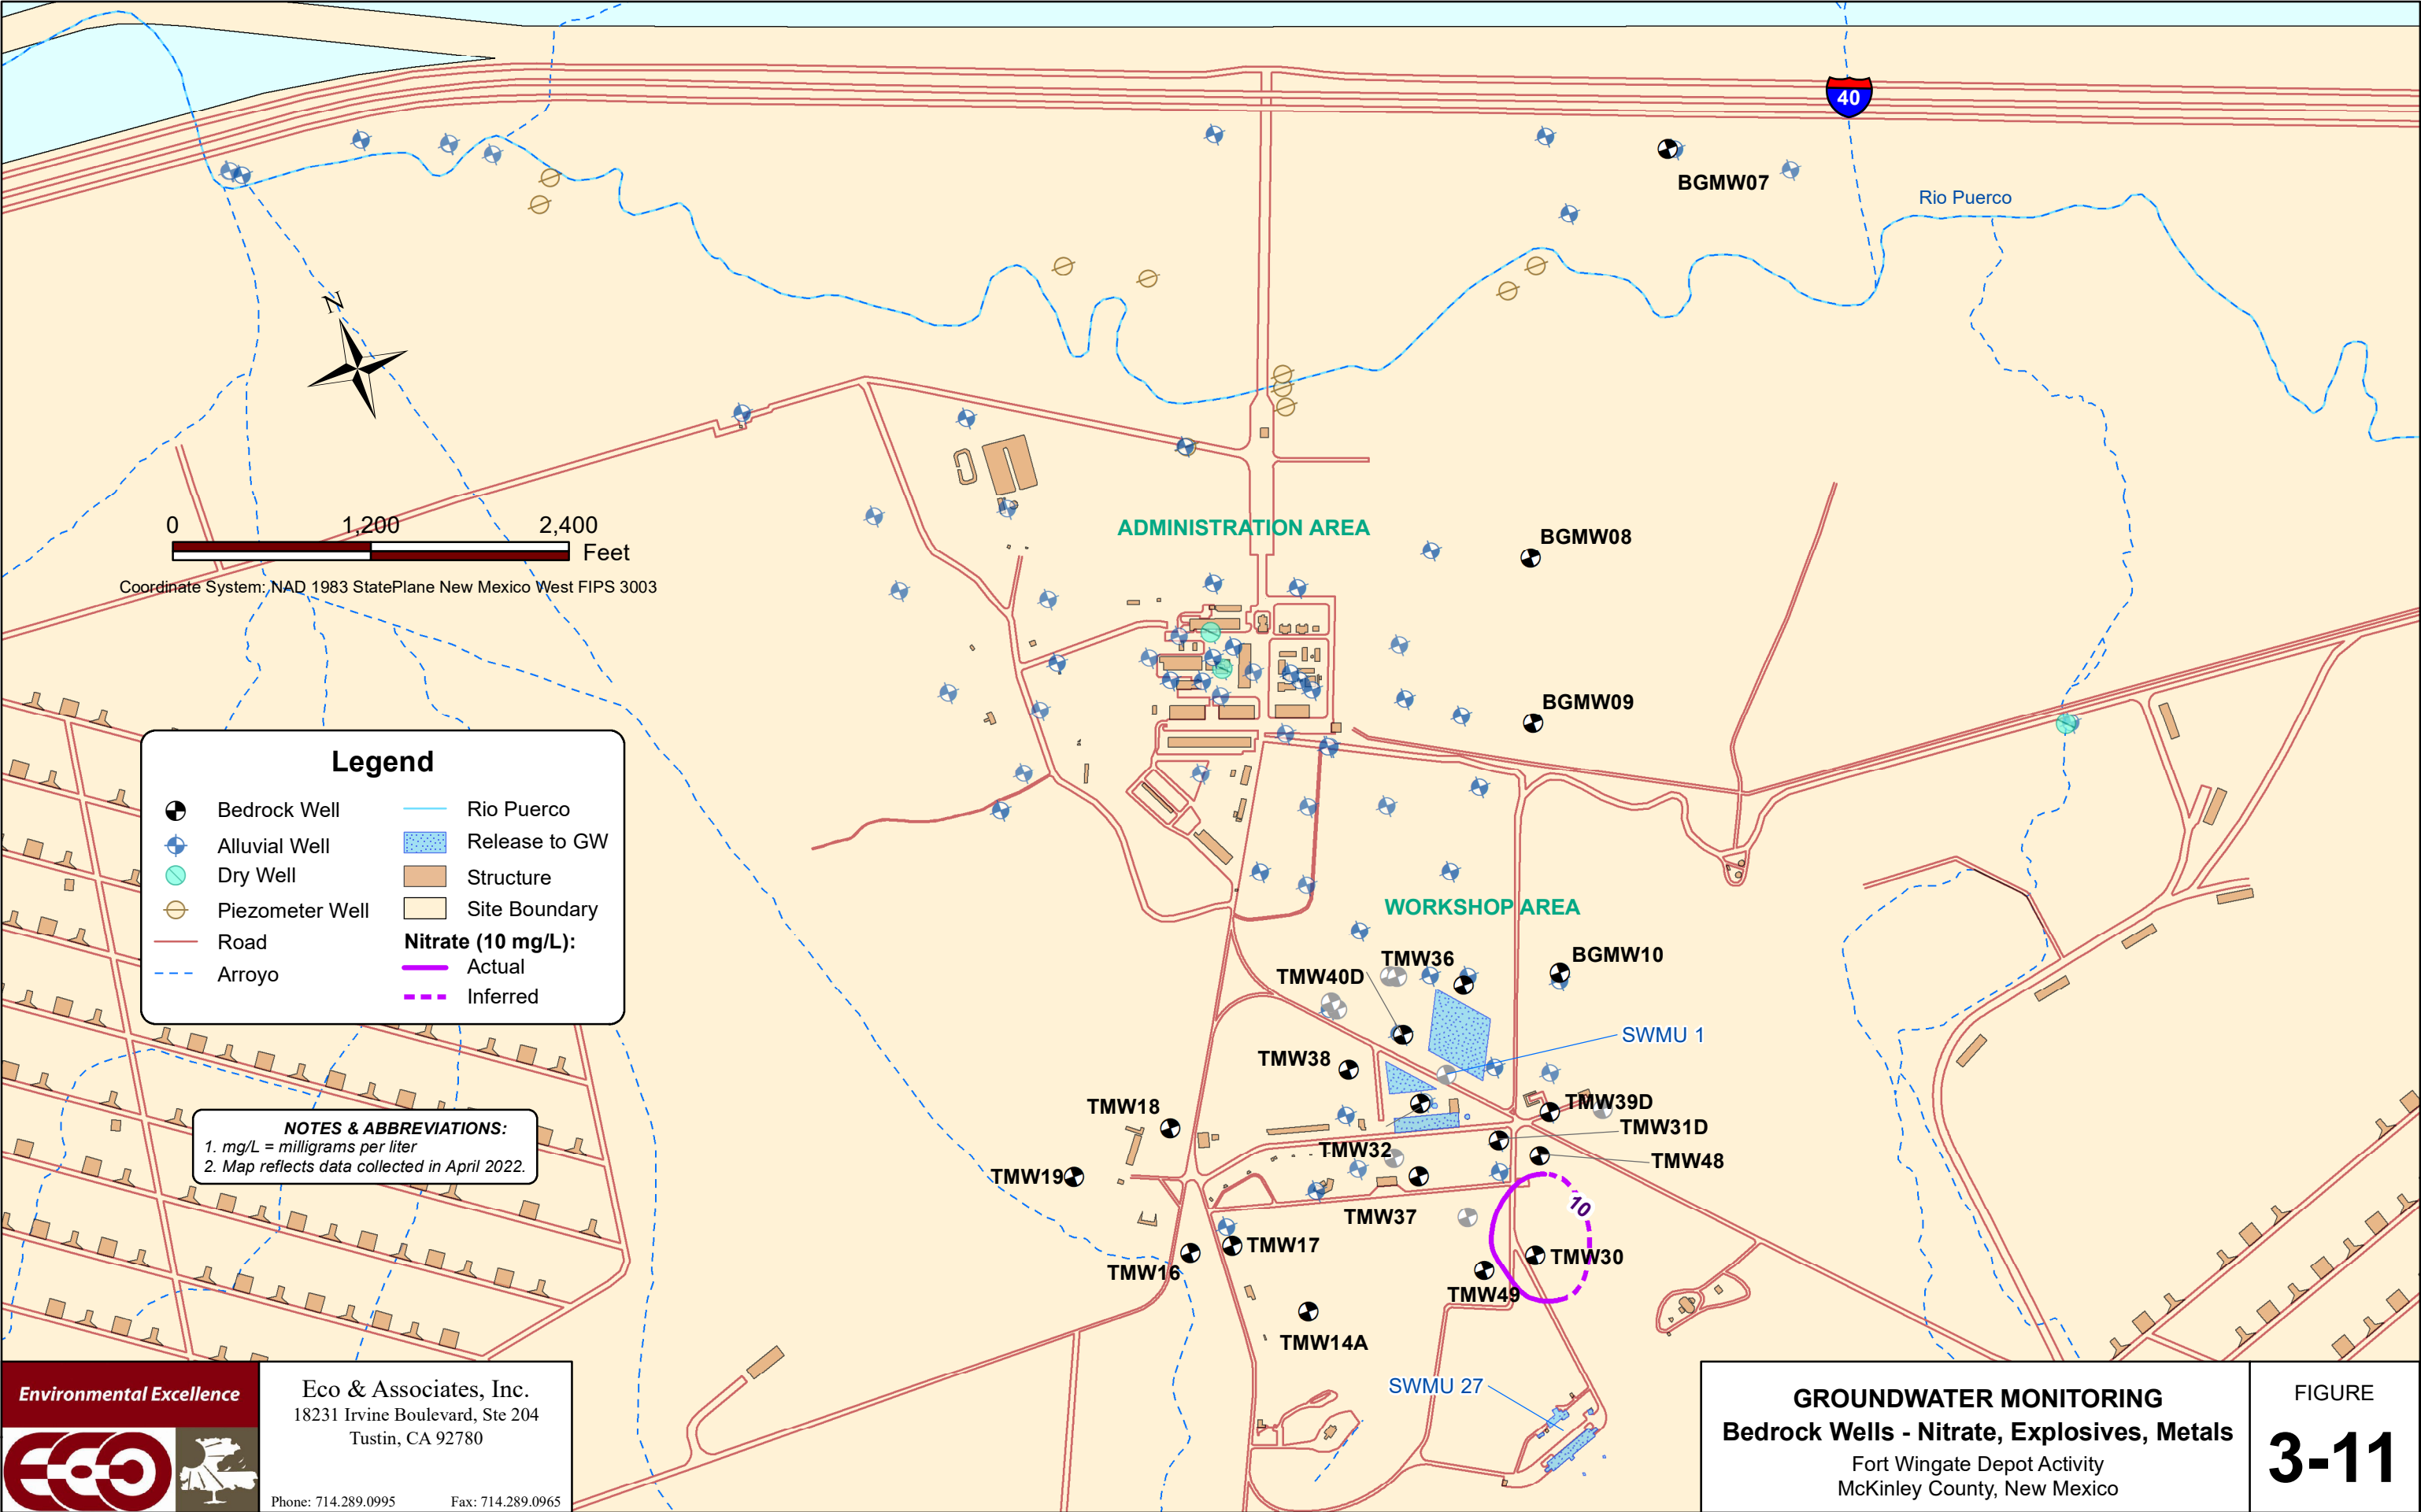


Environmental Excellence



Eco & Associates, Inc.
18231 Irvine Boulevard, Ste 204
Tustin, CA 92780

Phone: 714.289.0995 Fax: 714.289.0965

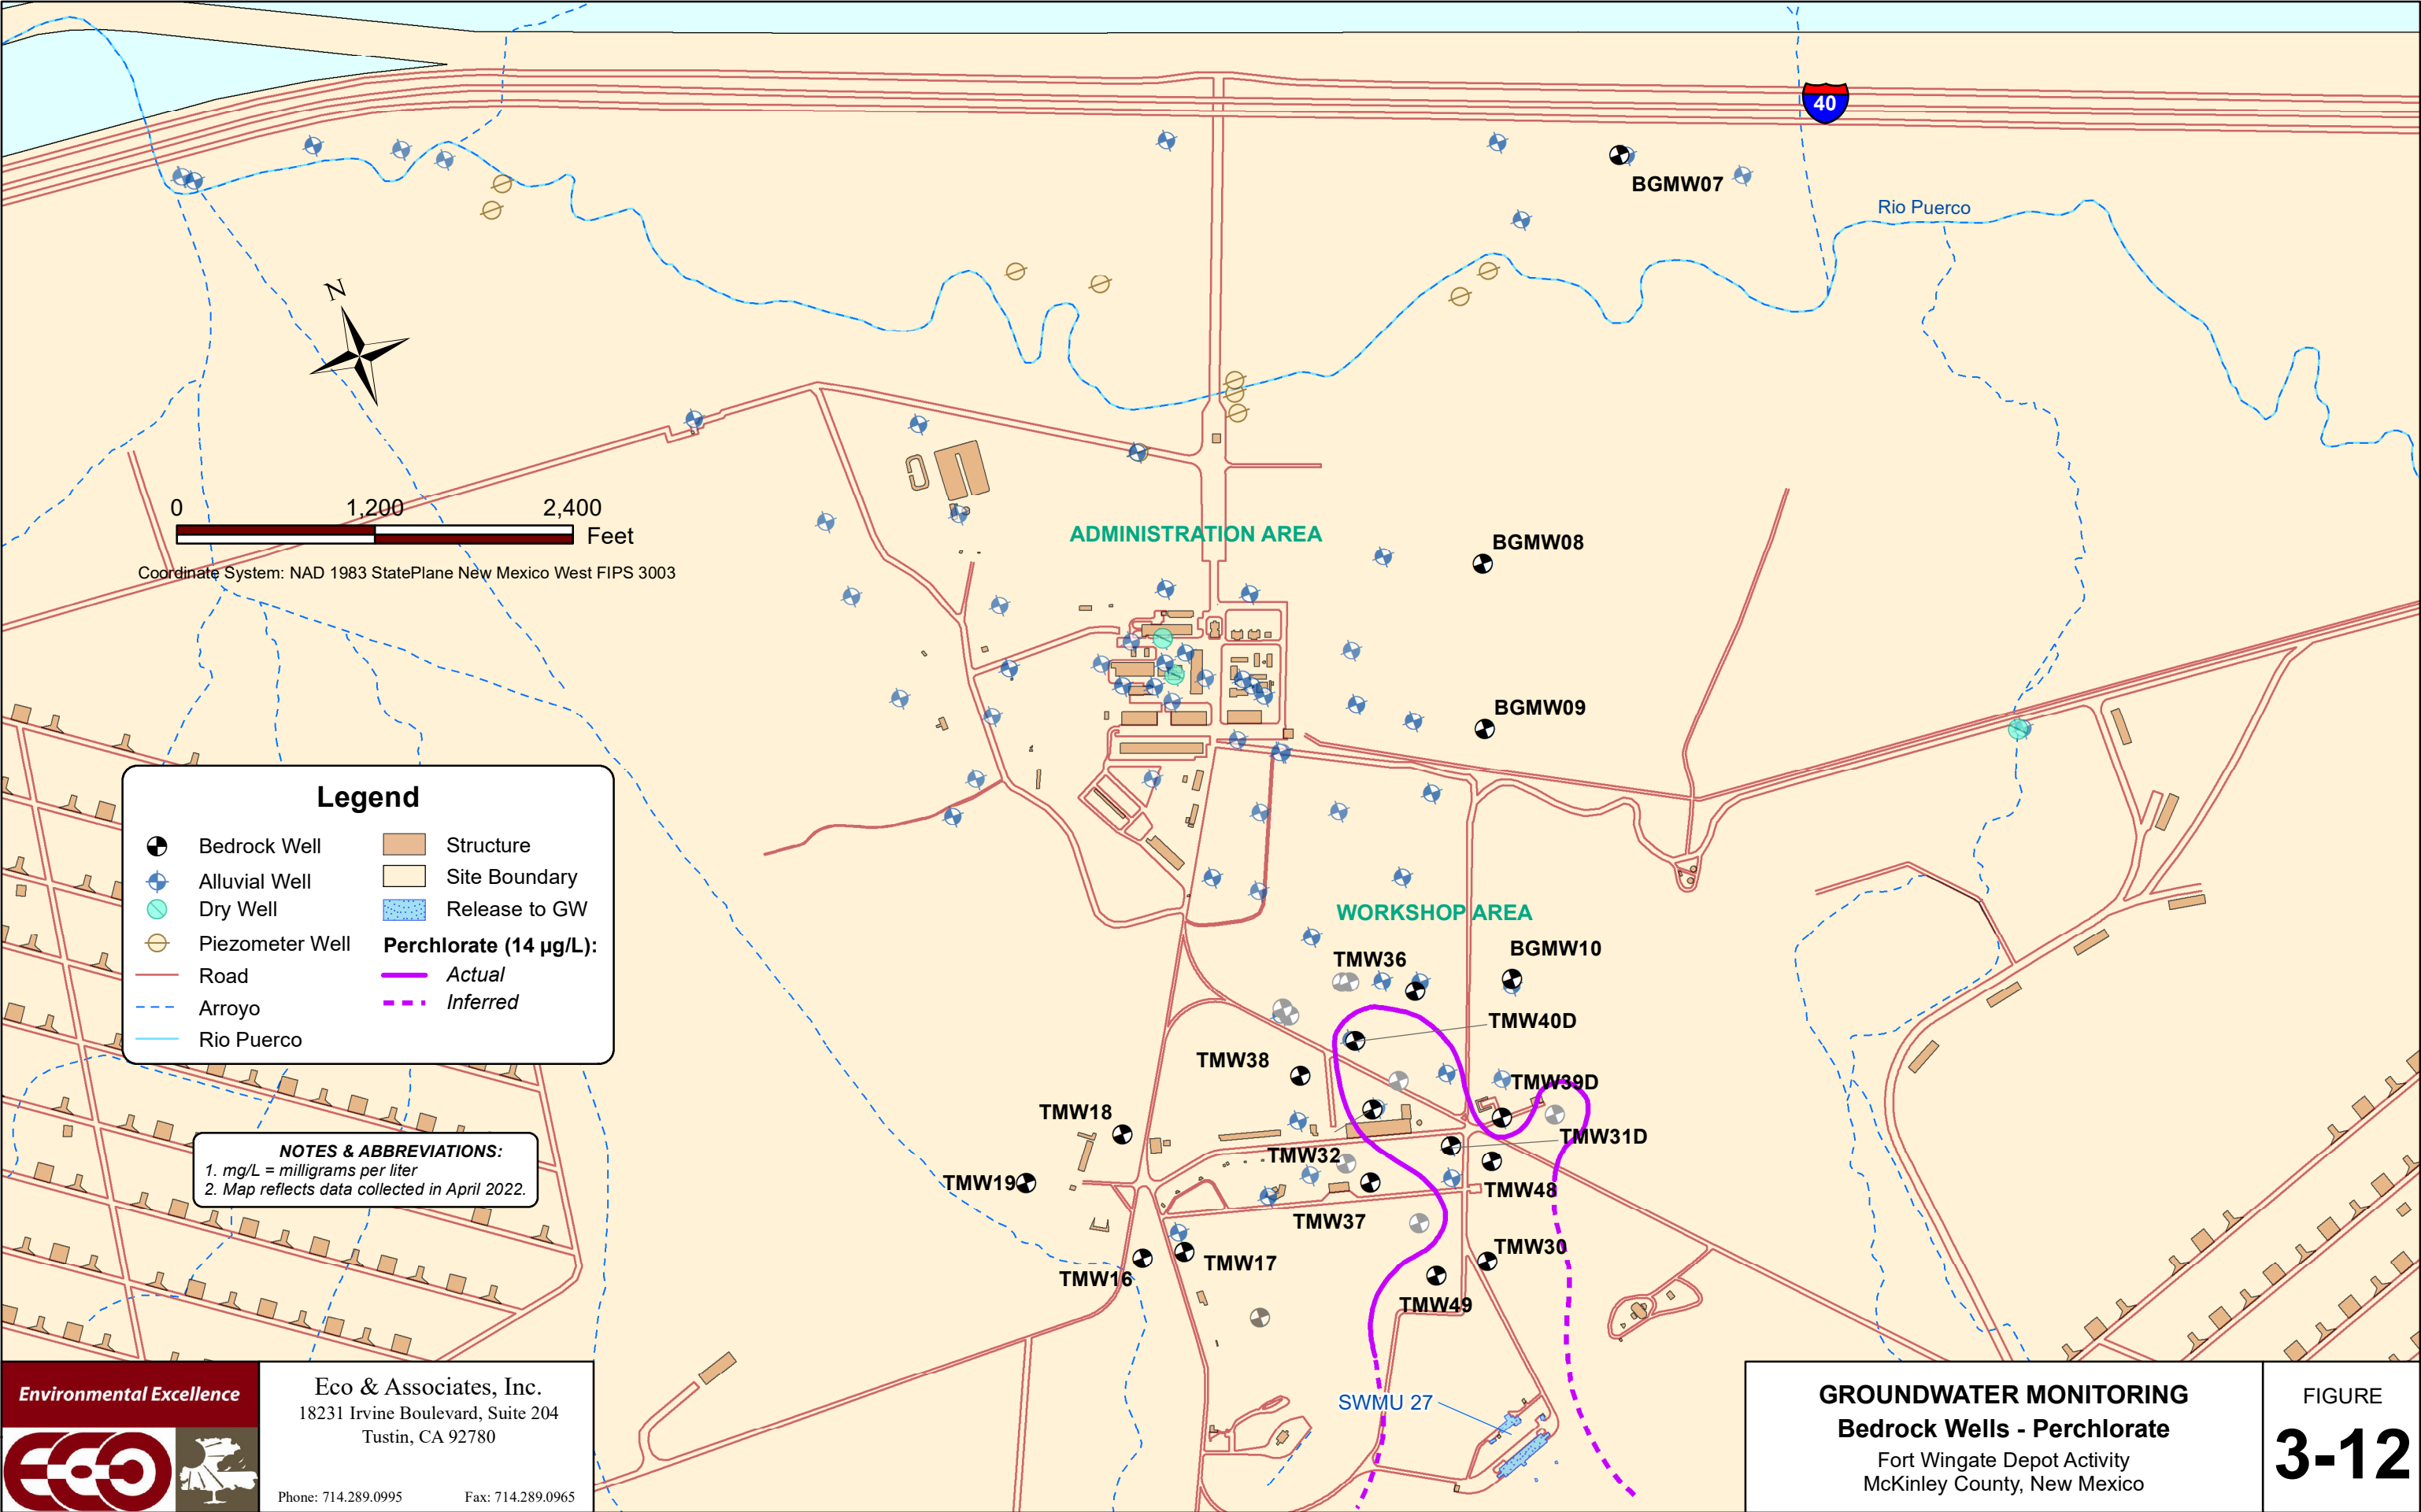

Environmental Excellence




Eco & Associates, Inc.
18231 Irvine Boulevard, Suite 204
Tustin, CA 92780

Phone: 714.289.0995 Fax: 714.289.0965

GROUNDWATER MONITORING
Bedrock Wells - Perchlorate
Fort Wingate Depot Activity
McKinley County, New Mexico

FIGURE
3-12

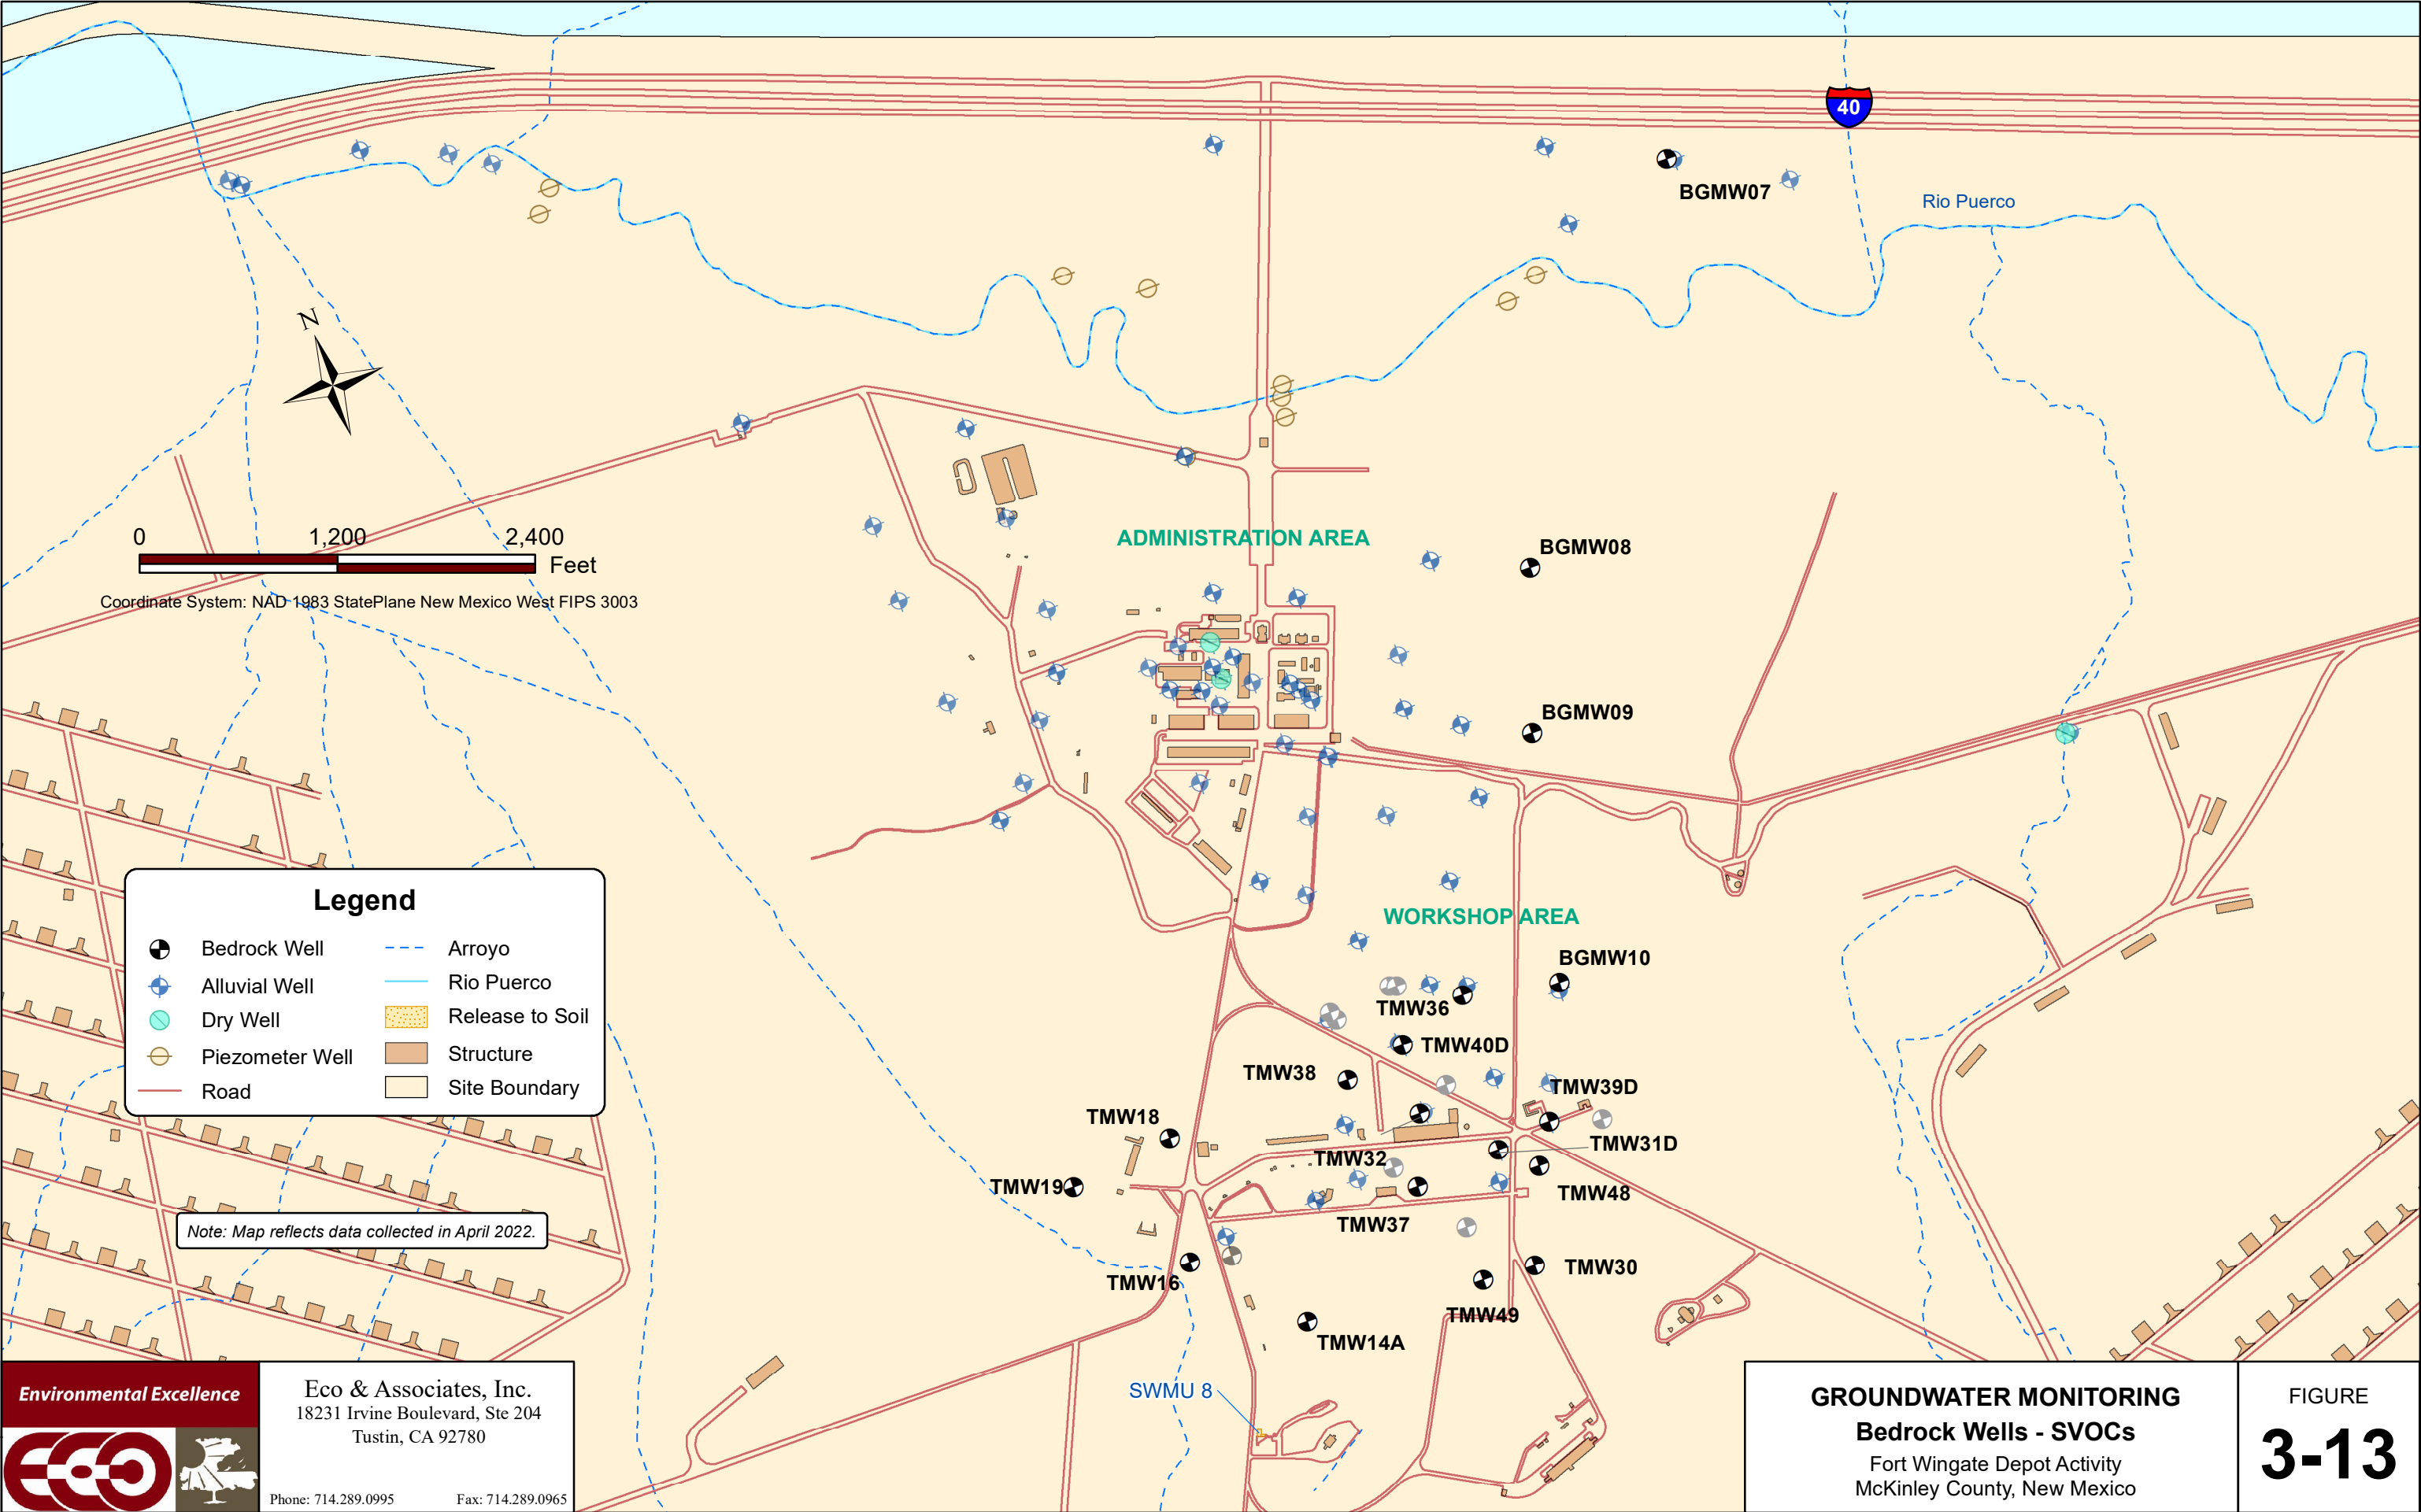

Environmental Excellence



Eco & Associates, Inc.
18231 Irvine Boulevard, Ste 204
Tustin, CA 92780

Phone: 714.289.0995 Fax: 714.289.0965

GROUNDWATER MONITORING
Bedrock Wells - SVOCs
Fort Wingate Depot Activity
McKinley County, New Mexico

FIGURE
3-13

TABLES

TABLE 2-1: NORTHERN AREA GROUNDWATER WELL CONSTRUCTION DETAILS
2024 INTERIM NORTHERN AREA GROUNDWATER MONITORING PLAN
Fort Wingate Depot Activity, New Mexico

Well ID	FWDA Parcel	Date Installed	Drilling Method	PREVIOUS SURVEY DATA (OLD)				OCT. 2019 SURVEY DATA (NEW)				Well Depth (ft bgs)	Boring Diameter (in)	Casing Diameter (in)	Casing/ Screen Type	Screen Length (ft)	Screened Interval (ft bgs)	Screened Interval (ft amsl)	Status	Screened Formation	Description
				NORTHING ^a	EASTING ^a	GROUND ELEVATION (ft amsl) ^b	POINT ELEVATION (ft amsl) ^b	NORTHING ^a	EASTING ^a	GROUND ELEVATION (ft amsl) ^b	POINT ELEVATION (ft amsl) ^b										
BGMW01	14	02/06/2012	HSA	1645977.85	2501983.61	6690.28	6692.68	1645977.80	2501983.54	6690.82	6693.23	33	8	2.5	PVC	20.0	12.5 – 32.5	6,678.32 – 6,658.32	Active	Alluvium	Sandy Silt
BGMW02	14	02/09/2012	HSA	1646314.67	2501276.54	6689.20	6691.99	1646314.79	2501276.51	6689.73	6692.57	34	8	2.5	PVC	20.0	13.5 – 33.5	6,676.23 – 6,656.23	Active	Alluvium	Silt/Sand/Clay
BGMW03	12	02/05/2012	HSA	1647012.12	2499392.83	6677.79	6680.57	1647015.35	2499394.46	6676.63	6679.39	29	8	2.5	PVC	20.0	8.5 – 28.5	6,668.13 – 6,648.13	Active	Alluvium	Clay
BGMW07	14	22/03/2018	Sonic	1645991.80	2501943.17	6691.63	6691.63	1645985.40	2501940.79	6689.77	6692.03	300	8	2	PVC	40.0	215 – 255	6,474.77 – 6,434.77	Active	Bedrock	Silt/Sand/Clay
BGMW08	11	23/03/2018	Sonic	1643942.73	2500318.10	6685.02	6685.02	1643937.41	2500318.25	6681.72	6683.42	275	8	2	PVC	20.0	165 – 185	6,516.72 – 6,496.72	Active	Bedrock	Silt/Sand/Clay
BGMW09	11	24/03/2018	Sonic	1642995.48	2499987.66	6692.27	6692.27	1642989.21	2499987.69	6689.83	6692.01	220	8	2	PVC	30.0	106 – 136	6,583.83 – 6,553.83	Active	Bedrock	Silt/Sand/Clay
BGMW10	13	25/03/2018	Sonic	1641517.67	2499626.14	6701.49	6701.49	1641512.13	2499625.34	6699.50	6701.83	150	8	2	PVC	30.0	106 – 136	6,593.50 – 6,563.50	Active	Bedrock	Silt/Sand/Clay
BGMW11	10	07/23/2019	Sonic	–	–	–	–	1648394.59	2495240.70	6653.27	6655.56	40	6	2	PVC	20.0	20 – 40	6,633.27 – 6,613.27	Active	Alluvium	Silt/Sand/Clay
BGMW12	10	07/23/2019	Sonic	–	–	–	–	1645620.83	2502603.45	6692.40	6695.21	32	6	2	PVC	20.0	12 – 32	6,680.40 – 6,660.40	Active	Alluvium	Silt/Sand/Clay
BGMW13S	10	09/14/2019	HSA	–	–	–	–	1648541.90	2495015.20	6659.05	6661.97	69	8	2	PVC	20.0	49 – 69	6,610.05 – 6,590.05	Active	Alluvium	Silt/Sand/Clay
BGMW13D	10	09/12/2019	Sonic	–	–	–	–	1648543.12	2495010.21	6659.08	6661.83	104	6	2	PVC	20.0	84 – 104	6,575.08 – 6,555.08	Active	Alluvium	Sand/Clay/Gravelly Sand
EMW01	18	07/14/2004	HSA	1643655.61	2502045.53	6716.06	6718.38	–	–	–	–	120.7	7.8	2	PVC	15.0	105 – 120	6,611.06 – 6,596.06	Abandoned	Abandoned	Siltstone/Claystone
EMW02	18	07/19/2004	HSA/AR	1643391.22	2502476.99	6699.94	6702.49	–	–	–	–	120	6	2	PVC	15.0	93 – 108	6,606.94 – 6,591.94	Abandoned	Abandoned	Siltstone/Claystone
EMW03	18	07/21/2004	HSA/AR	1643687.88	2502800.30	6698.63	6701.09	–	–	–	–	100	6	2	PVC	15.0	78 – 93	6,620.63 – 6,605.63	Abandoned	Abandoned	Siltstone
EMW04	18	07/23/2004	HSA/AR	1643815.18	2502419.30	6705.68	6708.30	–	–	–	–	120	6	2	PVC	15.0	100 – 115	6,605.68 – 6,590.68	Abandoned	Abandoned	Claystone
FW07	21	11/22/1980	HSA	1640839.18	2498075.06	6713.00	6714.90	–	–	–	–	30.5	8	4	PVC	20.5	10 – 31	6,703.00 – 6,682.50	Abandoned	Alluvium	Silty Sand
FW08	21	11/21/1980	HSA/AR	1640572.50	2498132.47	6713.00	6714.90	–	–	–	–	51	8	4	PVC	40.0	9 – 49	6,704.00 – 6,664.00	Abandoned	Alluvium	Silty Sand/Sand/Clay
FW10	21	11/20/1980	HSA	1640848.95	2498936.89	6706.76	6708.38	–	–	–	–	51.5	10	4	PVC	40.0	9 – 49	6,697.76 – 6,657.76	Abandoned	Alluvium	Silty Sand/Silty Clay
FW11	21	11/21/1980	HSA	1641334.02	2499124.16	6701.20	6703.50	–	–	–	–	28	8	4	PVC	20.0	8 – 28	6,693.20 – 6,673.20	Abandoned	Alluvium	Clayey Sand
FW12	21	11/22/1980	HSA	1641609.82	2499038.13	6700.00	6702.00	–	–	–	–	29	8	4	PVC	20.0	9 – 29	6,691.00 – 6,671.00	Abandoned	Alluvium	Clayey Sand
FW13	21	11/22/1980	HSA	1641688.39	2498830.01	6701.20	6702.30	–	–	–	–	30.5	8	4	PVC	20.0	10.5 – 30.5	6,690.70 – 6,670.70	Abandoned	Alluvium	Clay
FW26	7	11/19/1980	HSA	1643853.34	2497067.39	6672.20	6674.40	–	–	–	–	31	8	4	PVC	20.0	11 – 31	6,661.20 – 6,641.20	Abandoned	Alluvium	Silt/Sand/Clay
FW27	9	11/17/1980	HSA	1646461.42	2494395.93	6657.75	6656.49	–	–	–	–	32	8	4	PVC	20.0	10 – 30	6,647.75 – 6,627.75	Abandoned	Alluvium	Silty Sand/Silty Clay/Clay
FW28	9	11/18/1980	HSA	1646584.14	2493050.57	6656.53	6657.50	–	–	–	–	33	8	4	PVC	23.0	10 – 33	6,646.53 – 6,623.53	Abandoned	Alluvium	Silt/Clay
FW29	11	11/16/1980	HSA	1645804.02	2497681.98	6669.17	6670.96	–	–	–	–	32	8	4	PVC	20.0	10 – 30	6,659.17 – 6,639.17	Abandoned	Alluvium	Gravel/Clay
FW31	19	11/19/1980	HSA	1631192.98	2505201.31	6830.72	6832.49	1631192.71	2505201.84	6830.96	6832.70	50	8	4	PVC	40.0	10 – 50	6,820.96 – 6,780.96	Active	Alluvium	Clay
FW35	13	11/15/1980	HSA	1641888.44	2503025.94	6709.17	6711.11	1641888.76	2503025.75	6709.13	6711.31	30	8	4	PVC	20.0	10 – 30	6,699.13 – 6,679.13	Active	Alluvium	Clay
MW01	11	11/22/1996	HSA	1643726.78	2498748.62	6686.03	6685.94	1643726.81	2498748.48	6686.98	6686.79	55	10.5	2	PVC	20.0	33.6 – 53.6	6,653.38 – 6,633.38	Active	Alluvium	Sand/Silty Clay
MW02	11	11/25/1996	HSA	1643783.35	2498712.23	6685.78	6685.22	1643783.24	2498712.23	6685.60	6685.13	48	10.5	2	PVC	10.0	37 – 47	6,648.60 – 6,638.60	Active	Alluvium	Clayey Sand/Clay
MW03	11	11/26/1996	HSA	1643644.43	2498801.96	6687.50	6689.53	1643644.51	2498801.86	6687.81	6690.26	53	10.5	2	PVC	10.0	43 – 53	6,644.81 – 6,634.81	Active	Alluvium	Silty Sand/Clay
MW18S	11	11/01/1994	HSA	1643948.08	2498331.62	6684.67	6686.61	1643948.10	2498331.51	6685.30	6687.26	39	8	2	PVC	10.0	27 – 37	6,658.30 – 6,648.30	Active	Alluvium	NA
MW18D	11	11/01/1994	HSA	1643947.99	2498331.32	6684.94	6686.32	1643947.87	2498331.42	6685.30	6687.11	59.9	8	2	PVC	10.0	47 – 57	6,638.30 – 6,628.30	Active	Alluvium	NA
MW20	11	11/01/1994	HSA	1643922.12	2498193.80	6685.34	6687.67	1643922.23	2498193.78	6685.84	6688.35	59.4	8	2	PVC	10.0	47 – 57	6,638.84 – 6,628.84	Active	Alluvium	NA
MW22S	11	11/01/1994	HSA	1644178.59	2498343.06	6682.69	6684.69	1644178.49	2498343.07	6683.28	6685.33	43.5	8	2	PVC	10.0	31 – 41	6,652.28 – 6,642.28	Active	Alluvium	NA
MW22D	11	11/01/1994	HSA	1644178.39	2498343.15	6682.69	6684.55	1644178.41	2498343.14	6683.28	6685.34	58.6	8	2	PVC	10.0	47 – 57	6,636.28 – 6,626.28	Active	Alluvium	NA
MW23	25	06/30/2011	HSA	1648792.02	2493767.75	6652.46	6654.50	1648790.51	2493766.00	6652.99	6655.09	134	8	2.5	PVC	70.0	63.5 – 133.5	6,589.49 – 6,519.49	Active	Alluvium	Sand/Clay
MW24	25	07/02/2011	HSA	1648746.52	2494518.24	6655.09	6657.08	1648745.01	2494516.22	6655.72	6657.57	66.5	8	2.5	PVC	50.0	16 – 66	6,639.72 – 6,589.72	Active	Alluvium	Sand/Clay
MW25	11	09/10/2019	HSA	–	–	–	–	1644706.19	2497481.54	6676.18	6679.05	65.5	8	2	PVC	20.0	45.5 – 65.5	6,630.68 – 6,610.68	Active	Alluvium	Silty Sand/Clayey Sand
MW26	7	09/11/2019	HSA	–	–	–	–	1644381.65	2496720.38	6670.96	6673.93	60	8	2	PVC	20.0	40 – 60	6,630.96 – 6,610.96	Active	Alluvium	Silty Clay/Clay
MW27	6	07/15/2019	Sonic	–	–	–	–	1643397.69	2497991.57	6690.94	6693.40	63	6	2	PVC	20.0	43 – 63	6,647.94 – 6,627.94	Active	Alluvium	Silt/Sand/Clay
MW28	11	07/14/2019	Sonc	–	–	–	–	1643447.37	2498556.11	6689.51	6692.17	60	6	2	PVC	20.0	40 – 60	6,649.51 – 6,629.51	Active	Alluvium	Silt/Sand/Clay
MW29	11	07/08/2019	Sonic	–	–	–	–	1643867.32	2498500.48	6684.49	6687.14	57	6	2	PVC	20.0	37 – 57	6,647.49 – 6,627.49	Active	Alluvium	Silt/Sand/Clay
MW30	11	07/11/2019	Sonic	–	–	–	–	1643801.66	2498264.94	6686.83	6689.57	60	6	2	PVC	20.0	40 – 60	6,646.83 – 6,626.83	Active	Alluvium	Silt/Sand/Clay
MW31	11	07/12/2019	Sonic	–	–	–	–	1644225.28	2498152.69	6681.76	6684.45	56	6	2	PVC	20.0	36 – 56	6,645.76 – 6,625.76	Active	Alluvium	Silt/Sand/Clay
MW32	11	07/13/2019	Sonic	–	–	–	–	1644161.49	2497939.74	6684.84	6687.37	60	6	2	PVC	20.0	40 – 60	6,644.84 – 6,624.84	Active	Alluvium	Silt/Sand/Clay
MW33	7	09/12/2019	HSA	–	–	–	–	1644089.19	2497207.31	6675.98	6679.00	57	8	2	PVC	20.0	37 – 57	6,638.98 – 6,618.98	Active	Alluvium	Clay
MW34	7	09/13/2019	HSA	–	–	–	–	1643763.23	2496986.41	6672.91	6675.80	60	8	2	PVC	20.0	40 – 60	6,632.91 – 6,612.91	Active	Alluvium	Silt/Sand/Clay
MW35	13	07/16/2019	Sonic	–	–	–	–	1641887.83	2503055.82	6708.96	6711.38	61	6	2	PVC	20.0	41 – 61	6,667.96 – 6,647.96	Active	Alluvium	Clay/Silty Clay
MW36S	10	09/18/2019	Sonic	–	–	–	–	1648841.60	2493708.06	6653.54	6656.31	50	6	2	PVC	20.0	30 – 50	6,623.54 – 6,603.54	Active	Alluvium	Clay/Sandy Clay
MW36D	10	09/16/2019	Sonic	–	–	–	–	1648842.22	2493703.47	6653.48	6656.23	75	6	2	PVC	20.0	55 – 75	6,598.48 – 6,578.48	Active	Alluvium	Silt/Sand/Clay
MW37	7	08/18/2020	HSA	1645540.92	2496663.06	6663.34	6666.02	1645540.92	2496663.06	6663.34	6666.02	45	10	2	PVC	20.0	25 – 45	6638.34-6618.34	Active	Alluvium	Silty Clay/Sandy Clay
MW38	7	08/18/2020	HSA	1645062.25	2496653.35	6665.48	6667.91	1645062.25	2496653.35	6665.48	6667.91	50	10	2	PVC	20.0	30 – 50	6635.48-6615.48	Active	Alluvium	Silty Clay/Sandy Clay

TABLE 2-1: NORTHERN AREA GROUNDWATER WELL CONSTRUCTION DETAILS
2024 INTERIM NORTHERN AREA GROUNDWATER MONITORING PLAN
Fort Wingate Depot Activity, New Mexico

Well ID	FWDA Parcel	Date Installed	Drilling Method	PREVIOUS SURVEY DATA (OLD)				OCT. 2019 SURVEY DATA (NEW)				Well Depth (ft bgs)	Boring Diameter (in)	Casing Diameter (in)	Casing/ Screen Type	Screen Length (ft)	Screened Interval (ft bgs)	Screened Interval (ft amsl)	Status	Screened Formation	Description
				NORTHING ^a	EASTING ^a	GROUND ELEVATION (ft amsl) ^b	POINT ELEVATION (ft amsl) ^b	NORTHING ^a	EASTING ^a	GROUND ELEVATION (ft amsl) ^b	POINT ELEVATION (ft amsl) ^b										
MW39	7	08/20/2020	HSA	1645308.17	2497437.13	6670.64	6673.24	1645308.17	2497437.13	6670.64	6673.24	50	10	2	PVC	20.0	30 – 50	6640.64-6620.64	Active	Alluvium	Silty Clay/Sandy Clay
SMW01	11	07/29/1996	HSA	1645908.54	2497392.99	6668.41	6669.94	1645906.77	2497393.13	6668.68	6670.05	50.2	8	2	PVC	20.0	29.9 – 49.9	6,638.78 – 6,618.78	Active	Alluvium	Silty Sand/Sandy Clay
TMW01	21	07/31/1996	HSA	1640504.34	2498872.04	6709.79	6711.84	1640504.25	2498872.00	6710.79	6712.50	60	8	2	PVC	15.0	44 – 59	6,666.79 – 6,651.79	Active	Alluvium	Clay with Sand Layer
TMW02	21	07/31/1996	HSA	1641503.03	2498583.97	6703.34	6705.35	1641503.17	2498584.02	6704.51	6706.03	85	8	2	PVC	14.0	67.9 – 81.9	6,636.61 – 6,622.61	Active	Alluvium	Sandstone
TMW03	21	07/25/1996	HSA	1641773.65	2498883.04	6700.37	6702.43	1641773.76	2498883.05	6701.35	6703.22	70.1	8	2	PVC	20.0	49.8 – 69.8	6,651.55 – 6,631.55	Active	Alluvium	Silty Clay/Clayey Sand
TMW04	21	07/26/1996	HSA	1641690.11	2499095.25	6699.00	6700.86	1641690.08	2499095.21	6699.85	6701.65	70.5	8	2	PVC	20.0	50 – 70	6,649.85 – 6,629.85	Active	Alluvium	Upper Sand/Lower Clay
TMW05	22	07/23/1998	HSA/AR	1639949.83	2498884.78	6712.64	6714.67	–	–	–	–	37.4	5.5	2	PVC	10.0	25 – 35	6,687.64 – 6,677.64	Abandoned	Bedrock	Sandstone/Siltstone
TMW06	11	08/27/1998	HSA	1643285.82	2498783.81	6689.08	6690.63	1643285.93	2498783.92	6689.87	6691.34	57	8.8	2	PVC	10.0	45 – 55	6,644.87 – 6,634.87	Active	Alluvium	Sandy Silt
TMW07	11	07/24/1998	HSA/AR	1643289.14	2498772.33	6689.08	6690.47	1643289.29	2498772.27	6689.84	6691.23	76	5.5	2	PVC	10.0	65 – 75	6,624.84 – 6,614.84	Active	Alluvium	Sandy Silt
TMW08	11	08/29/1998	HSA	1644255.04	2498930.01	6678.55	6680.31	1644254.96	2498930.01	6679.56	6681.05	62	8.8	2	PVC	30.0	30 – 60	6,649.56 – 6,619.56	Active	Alluvium	Silty Sand/Clay
TMW10	11	08/20/1998	HSA	1644455.63	2498459.83	6677.74	6680.04	1644455.54	2498459.70	6678.85	6680.76	65	8.8	2	PVC	30.0	28 – 58	6,650.85 – 6,620.85	Active	Alluvium	Silty Sand/Clay
TMW11	6	09/09/1998	HSA	1640758.33	2497201.28	6716.16	6718.28	1640758.59	2497201.10	6717.32	6719.13	82	8.8	2	PVC	25.0	55 – 80	6,662.32 – 6,637.32	Active	Alluvium	Silty Gravel/Sand
TMW13	21	08/11/1998	HSA	1641150.12	2498112.40	6705.42	6707.49	1641150.09	2498112.43	6706.75	6708.21	72.5	8.8	2	PVC	10.0	60.7 – 70.7	6,646.05 – 6,636.05	Active	Alluvium	Sandy Clay/Silt
TMW14A	21	01/25/2001	AR	1640105.58	2497489.30	6721.08	6723.54	1640105.73	2497489.60	6722.53	6724.73	110	6	2	PVC	15.0	94.25 – 109.25	6,628.28 – 6,613.28	Active	Bedrock	Sandstone
TMW15	21	12/09/2001	AR	1640779.84	2497787.12	6710.80	6713.89	1640779.81	2497787.09	6711.71	6714.68	82	6	2	PVC	15.0	56 – 71	6,655.71 – 6,640.71	Active	Alluvium	Silty Gravel/Sand
TMW16	6	12/05/2001	AR	1640687.46	2496941.08	6711.65	6714.15	1640687.43	2496941.03	6712.72	6715.21	142	6	2	PVC	15.0	123 – 138	6,589.72 – 6,574.72	Active	Bedrock	Sandstone
TMW17	6	12/13/2001	AR	1640639.74	2497193.66	6717.40	6719.89	1640640.08	2497193.61	6718.53	6721.07	152	6	2	PVC	15.0	112 – 127	6,606.53 – 6,591.53	Active	Bedrock	Sandstone
TMW18	6	12/14/2001	AR	1641437.52	2497083.23	6710.14	6713.49	1641437.58	2497083.17	6711.48	6714.56	220	6	2	PVC	10.0	150 – 160	6,561.48 – 6,551.48	Active	Bedrock	Sandstone
TMW19	6	12/03/2001	AR	1641357.45	2496433.25	6697.57	6700.52	1641357.52	2496433.25	6698.93	6701.67	187	6	2	PVC	15.0	169 – 184	6,529.93 – 6,514.93	Active	Bedrock	Sandstone
TMW21	21	08/09/2002	HSA	1642714.59	2498128.03	6692.75	6695.14	1642714.81	2498128.03	6693.75	6695.86	72	8	2	PVC	10.0	48 – 58	6,645.75 – 6,635.75	Active	Alluvium	Sand/Silt/Clay
TMW22	21	08/08/2002	HSA	1642741.03	2499552.37	6689.80	6691.74	1642741.06	2499552.33	6690.90	6692.51	77	8	2	PVC	10.0	52 – 62	6,638.90 – 6,628.90	Active	Alluvium	Sand/Silt/Clay
TMW23	11	08/06/2002	HSA	1643402.27	2499309.65	6685.37	6687.66	1643402.25	2499309.78	6686.50	6688.61	72	8	2	PVC	10.0	46 – 56	6,640.50 – 6,630.50	Active	Alluvium	Clay/Sand
TMW24	11	08/03/2003	HSA	1644192.07	2499766.39	6678.52	6680.42	1644192.20	2499766.31	6679.40	6681.14	75	8	2	PVC	10.0	44 – 54	6,635.40 – 6,625.40	Active	Alluvium	Silty Sand/Silt/Sand
TMW25	7	08/01/2002	HSA	1643599.42	2496775.99	6671.09	6672.88	1643598.33	2496776.40	6671.61	6673.17	74	8	2	PVC	10.0	42.5 – 52.5	6,629.11 – 6,619.11	Active	Alluvium	Silty Sand/Clay
TMW26	11	07/30/2002	HSA	1645294.52	2498581.83	6674.88	6677.71	1645294.87	2498581.76	6675.79	6678.43	64.8	8	2	PVC	10.0	45 – 55	6,630.79 – 6,620.79	Active	Alluvium	Silt/Sand/Clay
TMW27	9	07/26/2002	HSA	1646400.43	2496126.29	6665.45	6668.13	1646399.49	2496126.68	6666.40	6668.51	102.2	8	2	PVC	10.0	60 – 70	6,606.40 – 6,596.40	Active	Alluvium	Sandy Clay/Silt
TMW28	14	07/24/2002	HSA	1645827.16	2501250.48	6686.77	6689.17	1645827.17	2501250.56	6688.08	6690.35	72.5	8	2	PVC	10.0	37 – 47	6,651.08 – 6,641.08	Active	Alluvium	Silty Sand/Sand/Clay
TMW29	21	08/19/2002	HSA	1641786.37	2498235.92	6700.31	6702.88	1641786.16	2498235.65	6701.36	6703.84	69	8	2	PVC	10.0	49 – 59	6,652.36 – 6,642.36	Active	Alluvium	Sand/Sandy Clay
TMW30	21	11/15/2009	HSA/AR	1639957.87	2498898.99	6712.35	6714.59	1639957.89	2498900.63	6713.42	6715.66	51.5	6	2	PVC	10.0	35 – 45	6,678.42 – 6,668.42	Active	Bedrock	Sandstone
TMW31S	21	11/17/2009	HSA/AR	1640689.53	2498931.95	6708.53	6710.20	1640688.54	2498932.87	6710.19	6711.45	61	6	2	PVC	10.0	50 – 60	6,660.19 – 6,650.19	Active	Alluvium	Silty Sand/Sand/Clay
TMW31D	21	11/16/2009	HSA/AR	1640689.53	2498931.95	6708.53	6710.44	1640688.10	2498933.07	6710.19	6711.99	111.5	6	2	PVC	30.0	77 – 107	6,633.19 – 6,603.19	Active	Bedrock	Sandstone
TMW32	21	11/18/2009	HSA	1641059.71	2498559.18	6707.09	6709.31	1641045.04	2498554.46	6709.03	6710.88	139.1	6	2	PVC	20.0	117 – 137	6,592			

TABLE 2-1: NORTHERN AREA GROUNDWATER WELL CONSTRUCTION DETAILS
2024 INTERIM NORTHERN AREA GROUNDWATER MONITORING PLAN
Fort Wingate Depot Activity, New Mexico

Well ID	FWDA Parcel	Date Installed	Drilling Method	PREVIOUS SURVEY DATA (OLD)				OCT. 2019 SURVEY DATA (NEW)				Well Depth (ft bgs)	Boring Diameter (in)	Casing Diameter (in)	Casing/ Screen Type	Screen Length (ft)	Screened Interval (ft bgs)	Screened Interval (ft amsl)	Status	Screened Formation	Description
				NORTHING ^a	EASTING ^a	GROUND ELEVATION (ft amsl) ^b	POINT ELEVATION (ft amsl) ^b	NORTHING ^a	EASTING ^a	GROUND ELEVATION (ft amsl) ^b	POINT ELEVATION (ft amsl) ^b										
TMW52	21	08/20/2019	Sonic	–	–	–	–	1641766.56	2498279.77	6701.71	6704.36	115	6	2	PVC	20.0	95 – 115	6,606.71 – 6,586.71	Active	Bedrock	Sandstone/Claystone/Mudstone
TMW53	21	08/13/2019	Sonic	–	–	–	–	1641849.46	2498650.53	6699.77	6702.34	117	6	2	PVC	10.0	107 – 117	6,592.77 – 6,582.77	Active	Bedrock	Sandstone/Claystone/Mudstone
TMW54	21	09/10/2019	Sonic	–	–	–	–	1641063.23	2498589.12	6708.77	6711.23	41.4	6	2	PVC	20.0	21.4 – 41.4	6,687.37 – 6,666.37	Active	Alluvium	Clay/Clayey Sand
TMW55	21	07/29/2019	Sonic	–	–	–	–	1640803.10	2498296.35	6711.13	6713.82	121	6	2	PVC	20.0	101 – 121	6,610.13 – 6,590.13	Active	Bedrock	Silt/Sand/Clay/Sandstone
TMW56	13	07/24/2019	Sonic	–	–	–	–	1640967.41	2499363.34	6705.44	6708.32	50	6	2	PVC	20.0	30 – 50	6,675.44 – 6,655.44	Active	Alluvium	Silt/Sand/Clay
TMW57	21	07/25/2019	Sonic	–	–	–	–	1640814.83	2498070.01	6710.76	6713.19	70	6	2	PVC	10.0	60 – 70	6,650.76 – 6,640.76	Active	Alluvium	Silt/Sand/Clay
TMW58	21	08/22/2019	Sonic	–	–	–	–	1641819.82	2498257.71	6700.79	6703.54	185	6	2	PVC	40.0	145 – 185	6,555.79 – 6,515.79	Active	Bedrock	Sandstone/Claystone
TMW59	21	07/30/2019	Sonic	–	–	–	–	1642827.23	2498987.06	6690.38	6692.90	62	6	2	PVC	20.0	42 – 62	6,648.38 – 6,628.38	Active	Alluvium	Silt/Sand/Clay
TMW60	21	09/11/2019	Sonic	–	–	–	–	1642542.05	2498365.51	6694.17	6696.66	66	6	2	PVC	20.0	46 – 66	6,648.17 – 6,628.17	Active	Alluvium	Silt/Sand/Clay
TMW61	11	07/29/2019	Sonic	–	–	–	–	1643720.94	2499390.24	6684.51	6687.07	61	6	2	PVC	20.0	41 – 61	6,643.51 – 6,623.51	Active	Alluvium	Silt/Sand/Clay
TMW62	21	08/07/2019	Sonic	–	–	–	–	1642984.23	2498536.37	6691.39	6693.95	60	6	2	PVC	20.0	40 – 60	6,651.39 – 6,631.39	Active	Alluvium	Silt/Sand/Clay
TMW63	21	08/08/2019	Sonic	–	–	–	–	1641833.31	2498690.15	6699.83	6702.58	180	6	2	PVC	40.0	140 – 180	6,559.83 – 6,519.83	Active	Bedrock	Sandstone/Claystone/Mudstone/Siltstone
TMW64	13	09/25/2019	Sonic	–	–	–	–	1640652.26	2499587.26	6705.50	6708.20	100	6	2	PVC	20.0	80 – 100	6,625.50 – 6,605.50	Active	Bedrock	Sandstone
PZ01 ^c	12	Fall 2012	HSA	1645310.72	2499236.22	6674.71	6677.29	1645310.79	2499235.92	6675.61	6678.18	45.7	ND	1	PVC	20.0	25.7 – 45.7	6,649.91 – 6,629.91	Active	Alluvium	Undifferentiated CL/S/ML
PZ02 ^c	12	Fall 2012	HSA	1645426.78	2499258.64	6672.50	6674.95	1645426.52	2499258.36	6673.57	6675.99	52.7	ND	1	PVC	20.0	32.7 – 53.7	6,640.87 – 6,619.87	Active	Alluvium	Undifferentiated CL/S/ML
PZ03 ^c	12	Fall 2012	HSA	1645502.88	2499288.54	6676.86	6679.44	1645502.60	2499288.48	6677.91	6680.45	49.3	ND	1	PVC	20.0	29.3 – 49.3	6,648.61 – 6,628.61	Active	Alluvium	Undifferentiated CL/S/ML
PZ04 ^c	12	Fall 2012	HSA	1645288.26	2498592.56	6674.17	6676.68	1645288.57	2498592.28	6675.26	6677.80	49.3	ND	1	PVC	20.0	29.3 – 49.3	6,645.96 – 6,625.96	Active	Alluvium	Undifferentiated CL/S/ML
PZ05 ^c	12	Fall 2012	HSA	1646574.66	2498263.13	6671.53	6674.15	1646574.61	2498262.94	6672.50	6675.17	48.7	ND	1	PVC	20.0	28.7 – 48.7	6,643.80 – 6,623.80	Active	Alluvium	Undifferentiated CL/S/ML
PZ06 ^c	12	Fall 2012	HSA	1646327.75	2498718.95	6673.29	6676.04	1646328.10	2498719.31	6674.47	6677.19	49.2	ND	1	PVC	20.0	29.2 – 49.2	6,645.27 – 6,625.27	Active	Alluvium	Undifferentiated CL/S/ML
PZ07 ^c	12	Fall 2012	HSA	1645600.75	2500958.18	6682.38	6684.53	1645600.90	2500958.04	6683.24	6685.70	32.8	ND	1	PVC	20.0	12.8 – 32.8	6,670.44 – 6,650.44	Active	Alluvium	Undifferentiated CL/S/ML
PZ08 ^c	12	Fall 2012	HSA	1645511.30	2500744.34	6684.11	6686.81	1645511.40	2500744.21	6685.03	6687.93	49	ND	1	PVC	20.0	29 – 49	6,656.03 – 6,636.03	Active	Alluvium	Undifferentiated CL/S/ML
PZ09 ^c	12	Fall 2012	HSA	1648138.17	2495520.51	6651.12	6653.61	1648137.97	2495520.26	6652.37	6654.66	35.6	ND	1	PVC	15.0	20.6 – 35.6	6,631.77 – 6,616.77	Active	Alluvium	Undifferentiated CL/S/ML
PZ10 ^c	12	Fall 2012	HSA	1648008.28	2495406.66	6654.83	6657.27	1648008.64	2495406.20	6655.92	6658.31	48.5	ND	1	PVC	15.0	33.5 – 48.5	6,622.42 – 6,607.42	Active	Alluvium	Undifferentiated CL/S/ML
Wingate 89	10B	01/01/1963	–	1647927.73	2496972.14	6663.20	6663.70	–	–	–	–	ND	ND	8	PVC	ND	ND	ND	Abandoned	Alluvium	–
Wingate 90	10B	01/02/1963	–	1648335.14	2495646.34	6655.30	6656.50	–	–	–	–	102	ND	8	PVC	ND	ND	ND	Abandoned	Alluvium	–
Wingate 91	10B	01/03/1963	–	1648705.22	2494863.70	6658.80	6659.70	–	–	–	–	ND	ND	8	PVC	ND	ND	ND	Abandoned	Alluvium	–

NOTES:

^a Horizontal Coordinate System: NM NAD83 State Plane Central

^b Vertical Coordinate System: NAVD88

^c Indicates the well is used for water level measurements only and is not sampled.

ABBREVIATIONS and ACRONYMS:

amsl	= above mean sea level	in	= inches
AR	= air rotary drilling method	ML	= silt
bgs	= below ground surface	NA	= not available
CL	= lean clay	NAD83	= North American Datum of 1983
ft	= feet	NAVD88	= North American Vertical Datum of 1988
FWDA	= Fort Wingate Depot Activity	NM	= New Mexico
HSA	= hollow stem auger drilling method	PVC	= polyvinyl chloride

TABLE 2-2: NORTHERN AREA CONTAMINANTS OF POTENTIAL CONCERN BY SITE AND POINT OF RELEASE
2024 INTERIM NORTHERN AREA GROUNDWATER MONITORING PLAN
Fort Wingate Depot Activity, New Mexico

Parcel	SWMU or AOC Site	Soil Investigation Results Soil COPCs	Release to Soil Exceeding SSL	GW Release ^{1,2}	Proposed Interim GW Monitoring Retain as GW COPC	Area and Aquifer Zone
4A	AOC 29 (Igloo Block C)	Explosives, metals, perchlorate, WP	Removed	No	No per Interim Measures Report	None
4B	None pending transfer to U.S. Department of Interior	–	–	–	–	–
5A	AOC 78 (Feature 18 on 1973 aerial photo)	Explosives, metals, PCB	RA to determine	No	No, pending RA ¹	None
5B	None, pending transfer to U.S. Department of Interior	–	–	–	–	–
6	SWMU 4 (Building 600, Ammunition Workshop)	Explosives, metals, VOC, SVOC	No, per Parcel 6 RFI	No	No, NFA proposed under RFI	None
	SWMU 8 (Building 537, removed)	PCB, PAH	PAH and PCB in soil to greater than 5 foot depth	No	SVOC pending ICM ¹	Bedrock groundwater north of SWMU
	SWMU 11 (Buildings 541 and 542)	Explosives, metals, VOC, SVOC	No, per Parcel 6 RFI	No	No, NFA proposed under RFI	None
	SWMU 20 (Feature 4, locomotive near Building 542)	Metals, SVOC, PCB, oils, grease	No, per Parcel 6 RFI	No	No, pending ICM ¹	None
	AOC 28 (Igloo Block B)	Explosives, metals	Sampling to determine	No	No, pending metals sampling in ICM ¹	None
	AOC 42 (Building 516)	None	No, per Parcel 6 RFI	No	No, NFA proposed under RFI	None
	AOC 61 (Building 507)	None	No, per Parcel 6 RFI	No	No, NFA proposed under RFI	None
	AOC 75 (Electrical Transformers, removed)	None	No, per Parcel 6 RFI	No	No, NFA proposed under RFI	None
	AOC 80 (Feature 9 on 1962 aerial photo)	None	No, per Parcel 6 RFI	No	No, NFA proposed under RFI	None
	AOC 81 (Feature 11 on 1962 aerial photo)	None	No, per Parcel 6 RFI	No	No, NFA proposed under RFI	None
	AOC 83 (Feature 22 on 1973 aerial photo)	None	No, per Parcel 6 RFI	No	No, NFA proposed under RFI	None
	AOC 84 (Feature 12 on 1962 aerial photo)	None	No, per Parcel 6 RFI	No	No, NFA proposed under RFI	None
7	SWMU 9 (POL Waste Discharge Area)	TPH, VOC, SVOC, PCB, metals	Lead in soil to 1 foot, per Parcel 7 RFI	No	No, pending ICM ¹	None
	SWMU 25 (Trash Burning Ground Property Disposal	Pesticides, VOC, SVOC, PCB, metals	No, per Parcel 7 RFI	No	None	None
	AOC 43 (Railroad Classification Yard)	Dioxins/Furans	Yes, one surface sample	No	None	None
	AOC 75 (Electrical Transformers, removed)	None	No, per Parcel 7 RFI	No	None	None
8	None, pending transfer to U.S. Department of Interior	–	–	–	–	–
9	AOC 18 (Igloo Block A)	Explosives, metals	RFI to determine	No	No, pending Parcel 9 RFI ¹	None
	AOC 85 (Feature 11 1 on 1962 aerial photo and Feature 1 on 1973 aerial photo)	Explosives, metals	RFI to determine	No	No, pending Parcel 9 RFI ¹	None
10A	SWMU 26 (Suspected POL Area)	TPH, VOC, SVOC, PCB, metals	No, per Parcel 10 RFI	No	None	None
	AOC 44 (Former Administration and Utilities Area)	Pesticides, VOC, SVOC, metals	No, per Parcel 10 RFI	No	None	None
10B	None, pending transfer to U.S. Department of Interior	–	–	–	–	–
11	SWMU 3 (Fenced Storage Yard)	DRO, PAH, metals	PAH and DRO in soil to 1 foot depth	No	No, pending Parcel 11 Phase 2 RFI ¹	None
	SWMU 5 (Building 5, Regimental Garage)	None	No, per Parcel 11 RFI	No	None	None
	SWMU 6 (Building 11, Former Locomotive Shop)	DRO, SVOC, PCB	Yes, DRO in soil. Depth not defined.	No	DRO, SVOC	Alluvial groundwater west of SWMU
	SWMU 10 (Sewage Treatment Plan, Bldgs. 22, T 37, 63, 69 through 74d, 82, 83, document incinerator)	MEC, explosives, VOC, SVOC, nitrate, pesticides	No per Phase 1 RFI, Phase 2 RFI planned	No	No, pending Parcel 11 Phase 2 RFI ¹	None
	SWMU 23 (Buildings 7 and 9, Paint and Carpenter Shops)	DRO, SVOC, metals	PAH and metals in soil to 1 foot depth	No	No, pending Parcel 11 Phase 2 RFI ¹	None
	SWMU 24 (Buildings 15 Garage and Storage Shop)	VOC, SVOC, DRO, PCB, pesticides, metals	PAH, pesticides and metals in soil to 2 foot depth	No	No, pending Parcel 11 Phase 2 RFI ¹	None
	SWMU 37 (Buildings 9 Machine and Signal Shop)	VOC, SVOC, PCB, metals	PAH and metals in drain sediments	No	No	None
	SWMU 40 (South Administration Area, Coal Tar Storage Tanks 58 60)	VOC, SVOC, PCB, DRO, GRO, pesticides, herbicides, metals	DRO, PAH, metals, and PCB in soil to 1 foot depth	No	No, pending Parcel 11 Phase 2 RFI ¹	None
	SWMU 45 (Building 6 Gas Station)	DRO, GRO, VOC, metals	DRO, GRO, VOC	Yes	DRO GRO, VOC, SVOC, metals	Alluvial groundwater west of SWMU
	SWMU 48 (Buildings 10)	Metals	No, per Parcel 11 RFI	No	No	None

TABLE 2-2: NORTHERN AREA CONTAMINANTS OF POTENTIAL CONCERN BY SITE AND POINT OF RELEASE
2024 INTERIM NORTHERN AREA GROUNDWATER MONITORING PLAN
Fort Wingate Depot Activity, New Mexico

Parcel	SWMU or AOC Site	Soil Investigation Results Soil COPCs	Release to Soil Exceeding SSL	GW Release ^{1,2}	Proposed Interim GW Monitoring Retain as GW COPC	Area and Aquifer Zone
11	SWMU 49 (Buildings 12)	SVOC, PCB, metals	PAH and metals in soil to 1 foot depth	No	No	None
11	SWMU 50 (Structure 35, UST 7)	GRO, DRO, VOC, metals	VOC to undetermined depth	Yes	VOC, metals	Alluvial groundwater west of SWMU
	SWMU 51 (Buildings 29)	SVOC, PCB, metals	Metals in soil to 1 foot depth	No	No	None
	SWMU 52 (Buildings T 33)	SVOC, PCB, metals	PAH and metals in soil to 1 foot depth	No	No	None
	SWMU 53 (Buildings 36)	SVOC, PCB, metals	PAH and metals in soil to 1 foot depth	No	No	None
	SWMU 54 (UST 5)	DRO, heating oil	No	No	No	No
	AOC 46 (AST near Bog. 11)	DRO	No, per Parcel 11 RFI	No	No	None
	AOC 47 (spill of photoflash powder west of Bldg.11)	Nitrate, perchlorate	No, per Parcel 11 RFI	No	No	None
	AOC 48 (Building 34, Fire Station)	VOC, SVOC, PCB, DRO, metals	No, per Parcel 11 RFI.	No	No	None
	AOC 49 (Structures 38, 39, Loading Docks)	VOC, SVOC, PCB, metals	No	No	No	No
	AOC 51 (Structure 64, UST)	GRO, DRO, VOC, metals	No, per Parcel 11 RFI. ICM planned	No	No, pending ICM ¹	None
	AOC 52 (Buildings 79, 80, Storage Vaults)	VOC, SVOC, PCB, pesticides, Herbicides, metals	No, per Parcel 11 RFI. ICM planned	No	No, pending ICM ¹	None
	AOC 55 (Structure T 49)	SVOC, PCB, metals	PAH and metals in soil to 1 foot depth	No	No	None
	AOC 56 (Structure T 50)	SVOC, PCB, metals	No	No	No	No
	AOC 57 (Building 14)	VOC, SVOC, PCB, pesticides, herbicides, metals	SVOC and metals in soil to 1 foot depth	No	No, pending ICM ¹	None
	AOC 75 (Electrical Transformers)	PCBs	No, per Parcel 11 RFI.	No	No, NFA proposed under RFI	No
	AOC 83 (Structure 63)	GRO, DRO, VOC, metals	DRO and metals in soil to 1 foot depth	No	No, pending ICM ¹	None
	AOC 87 (Structure 57)	DRO, SVOC, metals	DRO in soil to 1 foot depth	No	No	None
12	None, pending transfer to U.S. Department of Interior	–	–	–	–	–
13	AOC 53 (Lake Knudson)	Explosives, VOC, SVOC, pesticides, perchlorate, metals	No, per Parcel 13 RFI	No	No	None
	AOC 54 and AOC 57 (Buildings 306 to 311, Standard Magazines)	Explosives, perchlorate, VOC, SVOC, PCB, pesticides, metals	PAHs and metals in soil to 1 foot depth	No	No	None
	AOC 55 (Structure 506, TNT Storage Barricade)	Explosives, metals	No, per Parcel 13 RFI	No	No	None
	AOC 56 (Structure 533, explosives exceeding Barricade)	Explosives, metals	No, per Parcel 13 RFI	No	No	None
14	None, pending transfer to U.S. Department of Interior	–	–	–	–	–
15	None, transferred to U.S. Department of Interior	–	–	–	–	–
16	SWMU 16 (Functional Test Range 2/3)	Explosives, metals, asbestos, perchlorate, SVOC	Explosives and asbestos in soil to 1 foot depth	No	No, pending ICM ¹	None
	AOC 41 (Igloo Block K)	Explosives, metals	Metals in soil to 1 foot depth	No	No, pending ICM ¹	None
	AOC 57 (Buildings 306 310, Standard Magazines)	Explosives, metals	No	No	No	None
17	None, transferred to U.S. Department of Interior	–	–	–	–	–
18	SWMU 13 (Eastern Landfill, Removed)	None	Removed	No	No	None
19	SWMU 39 (Pistol Range)	Lead	RFI to determine	No	No, pending Parcel 19 RFI ¹	None
	AOC 30 (Igloo Block D)	Explosives, metals	RFI to determine	No	No, pending Parcel 19 RFI ¹	None
	AOC 31 (Igloo Block E)	Explosives, metals	RFI to determine	No	No, pending Parcel 19 RFI ¹	None
	AOC 32 (Igloo Block F)	Explosives, metals	RFI to determine	No	No, pending Parcel 19 RFI ¹	None
	AOC 34 (Igloo Block G)	Explosives, metals	RFI to determine	No	No, pending Parcel 19 RFI ¹	None
	AOC 58 (Buildings 303, 304, Standard Magazines; Building 320, Field Dunnage)	Explosives, asbestos, VOC, SVOC, PCB, metals	RFI to determine	No	No, pending Parcel 19 RFI ¹	None
	AOC 59 (Building T 422, Normal Maintenance, Bomb and Shell Paint)	Explosives, VOC, SVOC, PCB, metals	RFI to determine	No	No, pending Parcel 19 RFI ¹	None

TABLE 2-2: NORTHERN AREA CONTAMINANTS OF POTENTIAL CONCERN BY SITE AND POINT OF RELEASE
2024 INTERIM NORTHERN AREA GROUNDWATER MONITORING PLAN
Fort Wingate Depot Activity, New Mexico

Parcel	SWMU or AOC Site	Soil Investigation Results Soil COPCs	Release to Soil Exceeding SSL	GW Release ^{1,2}	Proposed Interim GW Monitoring Retain as GW COPC	Area and Aquifer Zone
21	SWMU 1 (TNT Leaching Beds and Building 503)	Explosives, VOC, SVOC, pesticides, herbicides, PCB, perchlorate, metals	Explosives and metals to depth of water table	Yes	Explosives, nitrate, metals	Alluvial groundwater north and west of SWMU. Suspected bedrock to southwest.
21	SWMU 2 (Building 515, Painting and Acid Washout and Acid Holding Pond)	VOC, SVOC, PCB, pesticides, metals	Metals in soil to 1 foot depth	No	No, pending ICM ¹	None
	SWMU 7 (Fire Training Ground)	VOC, SVOC, metals	DRO in soil to undefined depth	No	DRO, pending ICM1	Alluvial groundwater north and west of Building 31
	SWMU 19 (Building 501, Former Boiler House and Heating Plant 7)	VOC, SVOC, DRO, PCB, pesticides, metals	No, per Parcel 21 RFI	No	No, NFA proposed under RFI	None
	SWMU 72 (Deactivation Furnace and Acid Pits)	MEC, VOC, SVOC, DRO, metals	No, per Parcel 21 RFI	No	No, NFA proposed under RFI	None
	AOC 60 (Building 522 Ammunition Receiving)	MEC, VOC, SVOC, DRO, metals	No, per Parcel 21 RFI	No	No	None
	AOC 61 (Building 507, Smokeless Powder Magazine)	Explosives, metals	No, per Parcel 21 RFI	No	No	None
	AOC 62 (Building 508, Smokeless Powder Magazine)	Explosives, SVOC, nitrate, perchlorate, metals	No, per Parcel 21 RFI	No	No, NFA proposed under RFI	None
	AOC 63 (Building 509, Primary Collector Barricade or Propellant Baghouse)	Explosives, SVOC, nitrate, PCB, metals	Explosives in soil to 1 foot depth	No	No, pending ICM ¹	None
	AOC 64 (Building 510, Vacuum Producer Building)	Explosives, SVOC, nitrate, PCB, metals	Explosives, PCB in soil to 1 foot depth	No	No, pending ICM ¹	None
	AOC 65 (Building 511, Service Magazine)	Explosives, SVOC, PCB, metals	No, per Parcel 21 RFI	No	No, NFA proposed under RFI	None
	AOC 66 (Building 512, Service Magazine)	Explosives, SVOC, PCB, metals	No, per Parcel 21 RFI	No	No, NFA proposed under RFI	None
	AOC 67 (Building 513, Service Magazine)	Explosives, SVOC, PCB, metals	No, per Parcel 21 RFI	No	No, NFA proposed under RFI	None
	AOC 68 (Structures 514 and 545, Deboosting Barricade,	Explosives, SVOC, nitrate, PCB, metals	Explosives in soil to 1 foot depth		No, pending ICM1	None
	AOC 75 (Electrical Transformers)	PCB	No, per Parcel 21 RFI	No	No, NFA proposed under RFI	None
	AOC 86 (Feature 15 on 1973 aerial photo)	None	No	No	No, NFA proposed under RFI	None
	AOC 87 (Feature 18 on 1962 aerial photo, and Feature 23	None	No	No	No, NFA proposed under RFI	None
22	SWMU 12 (Building 536, Inspectors Workshop, Ammunition Renovation Depot, one PCB transformer)	Explosives, VOC, SVOC, pesticides, PCB, metals	Explosives, PAH, PCB, metals in manhole sediment	No	No, pending munitions response team1	None
	SWMU 27 (Building 528 Complex)	Explosives, perchlorate, VOC, SVOC, PCB, metals	PAH in soil to 1 foot depth	Yes	Perchlorate, explosives, nitrate, metals	Alluvial and bedrock groundwater north and west of SWMU
	SWMU 70 (Buildings 517 520, Disassembly Plant and Test	Explosives, SVOC, PCB, metals	No, per Parcel 22 RFI	No	No, NFA proposed under RFI	None
	AOC 30 (Igloo Block D)	Explosives, SVOC, metals	Explosives, metals in soil to 1 foot depth	No	No, pending ICM ¹	None
	AOC 69 (Buildings 301, 302, 312, Standard Magazines; Building 316, Field Lunch Room)	Explosives, VOC, SVOC, DRO, nitrate, PCB, metals	DRO, PAH, and metals in soil to 3 foot depth	No	No, pending ICM ¹	None
	AOC 71 (Former rectangular structure near TMW 5 and north of Bldg. 528)	Explosives, VOC, SVOC, nitrate, PCB, metals	No, per Parcel 22 RFI	No	No	None
	AOC 75 (Electrical Transformers)	PCB	No, per Parcel 22 RFI	No	No, NFA proposed under RFI	None
	AOC 88 (Former buildings south of Bldg. 528)	Explosives, VOC, SVOC pesticides, PCB, metals	No, per Parcel 22 RFI	No	No, NFA proposed under RFI	None
	AOC 121 (Building 528B, temporary storage igloo)	Explosives, perchlorate, VOC, SVOC, PCB, metals	No, per Parcel 22 RFI	No	No	None
	AOC 122 (Building 529)	Explosives, perchlorate, VOC, SVOC, PCB, metals	No, per Parcel 22 RFI	No	No	None
	AOC 125 (Building 550, vacuum collector barricade)	Explosives, perchlorate, VOC, SVOC, PCB, metals	No, per Parcel 22 RFI	No	No	None

TABLE 2-2: NORTHERN AREA CONTAMINANTS OF POTENTIAL CONCERN BY SITE AND POINT OF RELEASE
2024 INTERIM NORTHERN AREA GROUNDWATER MONITORING PLAN
Fort Wingate Depot Activity, New Mexico

Parcel	SWMU or AOC Site	Soil Investigation Results Soil COPCs	Release to Soil Exceeding SSL	GW Release ^{1,2}	Proposed Interim GW Monitoring Retain as GW COPC	Area and Aquifer Zone
23	SWMU 21 (Central Landfill, Removed)	Explosives, pesticides, herbicide, VOC, SVOC, PCB, metals	Removed. Residual PAH, metals to 18 foot depth	No	No, pending additional ICM ¹	None
	AOC 73 (Former structures along Road C 3)	Explosives, SVOC, metals	No, per Parcel 23 RFI	No	No	None
24	AOC 18 (Igloo Block A)	Explosives, SVOC, metals	Metals in soil to 1 foot depth	No	No, pending ICM ¹	None
25	None, pending transfer to U.S. Department of Interior	—	—	—	—	—

NOTES:
¹ For the purposes of interim measures planning, there is no release to groundwater considered without investigation data documenting impacts in the groundwater media.
² A pathway for transport of contaminants to groundwater is known when the contaminants are detected in groundwater in excess of screening levels. A pathway is suspected when releases of soluble contaminants exceeding soil screening levels are not vertically delineated in subsurface soils.

Blue highlight = point of groundwater release.

- ABBREVIATIONS and ACRONYMS:
- AOC = area of concern
 - Bldg. = building
 - COPC = contaminant of potential concern
 - DRO = diesel range organics
 - GRO = gasoline range organics
 - GW = groundwater
 - ICM = interim corrective measures
 - NFA = no further action
 - PAH = polyaromatic hydrocarbon
 - PCB = polychlorinated biphenol
 - POL = petroleum, oil, and lubricants
 - RA = release assessment
 - RFI = Resource Conservation and Recovery Act Facility Investigation
 - SSL = soil screening levels
 - SVOC = semivolatile organic compound
 - SWMU = solid waste management unit
 - VOC = volatile organic compound

TABLE 2-3: NORTHERN AREA GROUNDWATER SAMPLING ANALYTE GROUPS WITH SCREENING LEVEL EXCEEDANCES
2024 INTERIM NORTHERN AREA GROUNDWATER MONITORING PLAN
Fort Wingate Depot Activity, New Mexico

Associated Wells	Zone	Constituents of Potential Concern Analyzed	Contaminants Detected	Groups with Cleanup Level/ Screening Level Exceedances	Analyte Groups Retained for Monitoring
Parcel 7 SWMU 8					
BGMW07	Bedrock	Not available	Not available	Not available	Explosives, Metals, Anions, Perchlorate, SVOCs, VOCs
BGMW08	Bedrock	Not available	Not available	Not available	
BGMW09	Bedrock	Not available	Not available	Not available	
BGMW10	Bedrock	Not available	Not available	Not available	
TMW14A	Bedrock	Explosives, Metals, Anions, Perchlorate, SVOC, VOC, Dioxins/Furans	Explosives, Metals, Anions, SVOC, VOC	Metals, Anions, SVOC, VOC	
TMW16	Bedrock	Explosives, Metals, Anions, Perchlorate, SVOC, VOC, Dioxins/Furans	Explosives, Metals, Perchlorate, SVOC, VOC	Metals	
TMW17	Bedrock	Explosives, Metals, Anions, Perchlorate, SVOC, VOC, Dioxins/Furans	Metals, Anions, Perchlorate, VOC	Metals	
TMW18	Bedrock	Explosives, Metals, Anions, Perchlorate, SVOC, VOC, Dioxins/Furans	Explosives, Metals, Anions, Perchlorate, SVOC, VOC	Metals, SVOC, VOC	
TMW36	Bedrock	Explosives, Metals, Anions, Perchlorate, Phosphorus, SVOC, VOC, Cyanide, Dioxins/Furans, Herbicides, Pesticides, TPH	Explosives, Metals, Anions, Perchlorate, SVOC, Tph, VOC, Pesticides	Metals, SVOC, VOC	
TMW37	Bedrock	Explosives, Metals, Anions, Perchlorate, Phosphorus, SVOC, VOC, Cyanide, Dioxins/Furans, Herbicides, Pesticides, TPH	Explosives, Metals, Anions, Perchlorate, SVOC, Tph, VOC, Pesticides	Metals, Perchlorate, VOC	
TMW38	Bedrock	Explosives, Metals, Anions, Perchlorate, SVOC, VOC, Pesticides	Explosives, Metals, Anions, Perchlorate, SVOC, VOC, Pesticides	Explosives, Metals, SVOC	
TWM19	Not available	Not available	Not available	Not available	
Parcel 11 SWMU 6					
BGMW01	Alluvium	Explosives, Metals, Anions, Perchlorate, SVOC, VOC, Pesticides	Metals, Anions, SVOC, VOC	Metals	Metals, Anions, SVOCs, VOCs, TPH
BGMW03	Alluvium	Explosives, Metals, Anions, Perchlorate, SVOC, VOC, Pesticides	Metals, Anions, Perchlorate, SVOC, VOC	Metals	
MW23	Alluvium	Explosives, Metals, Anions, Perchlorate, SVOC, VOC, Pesticides	Explosives, Metals, Anions, Perchlorate, SVOC, VOC, Pesticides	Metals, SVOC, VOC	
MW24	Alluvium	Explosives, Metals, Anions, Perchlorate, SVOC, VOC, Pesticides	Metals, SVOC, VOC	Metals	
TMW24	Alluvium	Explosives, Metals, Anions, Perchlorate, SVOC, VOC, Dioxins/Furans, Pesticides	Metals, Anions, VOC, Pesticides	Metals	
TMW25	Alluvium	Explosives, Metals, Anions, Perchlorate, SVOC, VOC, Dioxins/Furans, Pesticides	Metals, Anions, VOC	Metals	

TABLE 2-3: NORTHERN AREA GROUNDWATER SAMPLING ANALYTE GROUPS WITH SCREENING LEVEL EXCEEDANCES
2024 INTERIM NORTHERN AREA GROUNDWATER MONITORING PLAN
Fort Wingate Depot Activity, New Mexico

Associated Wells	Zone	Constituents of Potential Concern Analyzed	Contaminants Detected	Groups with Cleanup Level/ Screening Level Exceedances	Analyte Groups Retained for Monitoring
TMW26	Alluvium	Explosives, Metals, Anions, Perchlorate, SVOC, VOC, Dioxins/Furans, Pesticides	Explosives, Metals, Anions, Perchlorate, VOC, Pesticides	Metals, VOC	Metals, Anions, SVOCs, VOCs, TPH
TMW28	Alluvium	Explosives, Metals, Anions, Perchlorate, SVOC, VOC, Dioxins/Furans, Pesticides	Metals, Anions, VOC	Metals, VOC	
TMW34	Alluvium	Metals, Anions, Perchlorate, VOC, TPH	Metals, Anions, Perchlorate, Tph, VOC	Metals, Anions	
TMW46	Alluvium	Explosives, Metals, Anions, Perchlorate, SVOC, VOC, Pesticides	Metals, Anions, Perchlorate, SVOC	Metals, Anions	
Parcel 11 SWMU 45					
BGMW01	Alluvium	Explosives, Metals, Anions, Perchlorate, SVOC, VOC, Pesticides	Metals, Anions, SVOC, VOC	Metals	Explosives, Metals, Anions, SVOCs, VOCs, TPH
BGMW03	Alluvium	Explosives, Metals, Anions, Perchlorate, SVOC, VOC, Pesticides	Metals, Anions, Perchlorate, SVOC, VOC	Metals	
MW18D	Alluvium	Explosives, Metals, Anions, Perchlorate, SVOC, VOC, Dioxins/Furans, Pesticides, PCB, TPH	Explosives, Metals, Anions, Perchlorate, SVOC, Tph, VOC, Pesticides	Explosives, Metals, Anions, VOC	
MW18S	Alluvium	Not available	Not available	Not available	
MW20	Alluvium	Explosives, Metals, Anions, Perchlorate, SVOC, VOC, Dioxins/Furans, Pesticides, PCB, TPH	Metals, Anions, Perchlorate, SVOC, TPH, VOC, Pesticides	Metals, Anions, SVOC, VOC	
MW22D	Alluvium	Explosives, Metals, Anions, Perchlorate, SVOC, VOC, Dioxins/Furans, Pesticides, PCB, TPH	Metals, Anions, Perchlorate, SVOC, TPH, VOC, Pesticides	Metals, Anions, SVOC, VOC	
MW22S	Alluvium	Explosives, Metals, Anions, Perchlorate, SVOC, VOC, Dioxins/Furans, Pesticides, PCB, TPH	Explosives, Metals, Anions, Perchlorate, SVOC, Tph, VOC, Pesticides	Metals, Anions, VOC	
MW23	Alluvium	Explosives, Metals, Anions, Perchlorate, SVOC, VOC, Pesticides	Explosives, Metals, Anions, Perchlorate, SVOC, VOC, Pesticides	Metals, SVOC, VOC	
MW24	Alluvium	Explosives, Metals, Anions, Perchlorate, SVOC, VOC, Pesticides	Metals, SVOC, VOC	Metals	
TMW23	Alluvium	Explosives, Metals, Anions, Perchlorate, SVOC, VOC, Dioxins/Furans, Pesticides	Explosives, Metals, Anions, Perchlorate, SVOC, VOC, Pesticides	Explosives, Metals, Anions	
TMW24	Alluvium	Explosives, Metals, Anions, Perchlorate, SVOC, VOC, Dioxins/Furans, Pesticides	Metals, Anions, VOC, Pesticides	Metals	

TABLE 2-3: NORTHERN AREA GROUNDWATER SAMPLING ANALYTE GROUPS WITH SCREENING LEVEL EXCEEDANCES
2024 INTERIM NORTHERN AREA GROUNDWATER MONITORING PLAN
Fort Wingate Depot Activity, New Mexico

Associated Wells	Zone	Constituents of Potential Concern Analyzed	Contaminants Detected	Groups with Cleanup Level/ Screening Level Exceedances	Analyte Groups Retained for Monitoring
Parcel 11 SWMU 50					
BGMW01	Alluvium	Explosives, Metals, Anions, Perchlorate, SVOC, VOC, Pesticides	Metals, Anions, SVOC, VOC	Metals	Metals, Anions, SVOCs, VOCs, TPH
BGMW03	Alluvium	Explosives, Metals, Anions, Perchlorate, SVOC, VOC, Pesticides	Metals, Anions, Perchlorate, SVOC, VOC	Metals	
MW01	Alluvium	Explosives, Metals, Anions, Perchlorate, SVOC, VOC, Dioxins/Furans, Pesticides, TPH	Explosives, Metals, Anions, Perchlorate, SVOC, TPH, VOC, Pesticides	Metals, Anions, VOC	
MW02	Alluvium	Explosives, Metals, Anions, Perchlorate, SVOC, VOC, Dioxins/Furans, Pesticides, TPH	Explosives, Metals, Anions, Perchlorate, SVOC, TPH, VOC	Metals, VOC	
MW03	Alluvium	Explosives, Metals, Anions, Perchlorate, SVOC, VOC, Dioxins/Furans, Pesticides, TPH	Explosives, Metals, Anions, Perchlorate, TPH, VOC	Metals, Anions, VOC	
MW23	Alluvium	Explosives, Metals, Anions, Perchlorate, SVOC, VOC, Pesticides	Explosives, Metals, Anions, Perchlorate, SVOC, VOC, Pesticides	Metals, SVOC, VOC	
MW24	Alluvium	Explosives, Metals, Anions, Perchlorate, SVOC, VOC, Pesticides	Metals, SVOC, VOC	Metals	
TMW08	Alluvium	Explosives, Metals, Anions, Perchlorate, SVOC, VOC, Dioxins/Furans, Pesticides, PCB, TPH	Metals, Anions, SVOC, TPH, VOC, Pesticides	Metals, Anions, VOC	
TMW24	Alluvium	Explosives, Metals, Anions, Perchlorate, SVOC, VOC, Dioxins/Furans, Pesticides	Metals, Anions, VOC, Pesticides	Metals	
TMW45	Alluvium	Explosives, Metals, Anions, Perchlorate, SVOC, VOC, Pesticides	Metals, Anions, Perchlorate, SVOC, VOC	Metals	
Parcel 21 SWMU 1					
BGMW01	Alluvium	Explosives, Metals, Anions, Perchlorate, SVOC, VOC, Pesticides	Metals, Anions, SVOC, VOC	Metals	Explosives, Metals, Anions, Perchlorate, SVOCs, VOCs, TPH
BGMW02	Alluvium	Explosives, Metals, Anions, Perchlorate, SVOC, VOC, Pesticides	Metals, Anions, Perchlorate, SVOC, VOC	Metals, Anions	
BGMW03	Alluvium	Explosives, Metals, Anions, Perchlorate, SVOC, VOC, Pesticides	Metals, Anions, Perchlorate, SVOC, VOC	Metals	
BGMW07	Bedrock	Not available	Not available	Not available	

TABLE 2-3: NORTHERN AREA GROUNDWATER SAMPLING ANALYTE GROUPS WITH SCREENING LEVEL EXCEEDANCES
2024 INTERIM NORTHERN AREA GROUNDWATER MONITORING PLAN
Fort Wingate Depot Activity, New Mexico

Associated Wells	Zone	Constituents of Potential Concern Analyzed	Contaminants Detected	Groups with Cleanup Level/ Screening Level Exceedances	Analyte Groups Retained for Monitoring
BGMW08	Bedrock	Not available	Not available	Not available	Explosives, Metals, Anions, Perchlorate, SVOCs, VOCs, TPH
BGMW09	Bedrock	Not available	Not available	Not available	
BGMW10	Bedrock	Not available	Not available	Not available	
MW03	Alluvium	Explosives, Metals, Anions, Perchlorate, SVOC, VOC, Dioxins/Furans, Pesticides, TPH	Explosives, Metals, Anions, Perchlorate, Tph, VOC	Metals, Anions, VOC	
MW22D	Alluvium	Explosives, Metals, Anions, Perchlorate, SVOC, VOC, Dioxins/Furans, Pesticides, PCB, TPH	Metals, Anions, Perchlorate, SVOC, Tph, VOC, Pesticides	Metals, Anions, SVOC, VOC	
MW23	Alluvium	Explosives, Metals, Anions, Perchlorate, SVOC, VOC, Pesticides	Explosives, Metals, Anions, Perchlorate, SVOC, VOC, Pesticides	Metals, SVOC, VOC	
MW24	Alluvium	Explosives, Metals, Anions, Perchlorate, SVOC, VOC, Pesticides	Metals, SVOC, VOC	Metals	
SMW01	Alluvium	Explosives, Metals, Anions, Perchlorate, SVOC, VOC, Dioxins/Furans, Pesticides	Explosives, Metals, Anions, Perchlorate, SVOC, VOC	Metals, Anions, SVOC	
TMW02	Bedrock	Explosives, Metals, Anions, Perchlorate, SVOC, VOC, Dioxins/Furans	Explosives, Metals, Anions, Perchlorate, VOC	Explosives, Metals, Anions, Perchlorate	
TMW03	Alluvium	Explosives, Metals, Anions, Perchlorate, SVOC, VOC, Dioxins/Furans	Explosives, Metals, Anions, Perchlorate, SVOC, VOC	Explosives, Metals, Anions, SVOC	
TMW04	Alluvium	Explosives, Metals, Anions, Perchlorate, SVOC, VOC, Dioxins/Furans	Explosives, Metals, Anions, Perchlorate, SVOC, VOC	Explosives, Metals, Anions	
TMW06	Alluvium	Explosives, Metals, Anions, Perchlorate, SVOC, VOC, Dioxins/Furans	Explosives, Metals, Anions, SVOC, VOC	Metals, Anions	

TABLE 2-3: NORTHERN AREA GROUNDWATER SAMPLING ANALYTE GROUPS WITH SCREENING LEVEL EXCEEDANCES
2024 INTERIM NORTHERN AREA GROUNDWATER MONITORING PLAN
Fort Wingate Depot Activity, New Mexico

Associated Wells	Zone	Constituents of Potential Concern Analyzed	Contaminants Detected	Groups with Cleanup Level/ Screening Level Exceedances	Analyte Groups Retained for Monitoring
TMW07	Alluvium	Explosives, Metals, Anions, Perchlorate, SVOC, VOC, Dioxins/Furans	Explosives, Metals, Anions, SVOC, VOC	Metals, Anions, SVOC	Explosives, Metals, Anions, Perchlorate, SVOCs, VOCs, TPH
TMW08	Alluvium	Explosives, Metals, Anions, Perchlorate, SVOC, VOC, Dioxins/Furans, Pesticides, PCB, TPH	Metals, Anions, SVOC, TPH, VOC, Pesticides	Metals, Anions, VOC	
TMW10	Alluvium	Explosives, Metals, Anions, Perchlorate, SVOC, VOC, Dioxins/Furans, Pesticides, PCB, TPH	Metals, Anions, Perchlorate, SVOC, VOC, Pesticides	Metals, Anions	
TMW11	Alluvium	Explosives, Metals, Anions, Perchlorate, SVOC, VOC, Dioxins/Furans	Explosives, Metals, Anions, Perchlorate, VOC	Metals, Anions, VOC	
TMW13	Alluvium	Explosives, Metals, Anions, Perchlorate, SVOC, VOC, Dioxins/Furans, PCB	Metals, Anions, Perchlorate, VOC	Metals, Anions, VOC	
TMW14A	Bedrock	Explosives, Metals, Anions, Perchlorate, SVOC, VOC, Dioxins/Furans	Explosives, Metals, Anions, SVOC, VOC	Metals, Anions, SVOC, VOC	
TMW15	Alluvium	Explosives, Metals, Anions, Perchlorate, SVOC, VOC, Dioxins/Furans, Pesticides	Explosives, Metals, Anions, Perchlorate, SVOC, VOC	Metals, VOC	
TMW16	Bedrock	Explosives, Metals, Anions, Perchlorate, SVOC, VOC, Dioxins/Furans	Explosives, Metals, Perchlorate, SVOC, VOC	Metals	
TMW17	Bedrock	Explosives, Metals, Anions, Perchlorate, SVOC, VOC, Dioxins/Furans	Metals, Anions, Perchlorate, VOC	Metals	
TMW18	Bedrock	Explosives, Metals, Anions, Perchlorate, SVOC, VOC, Dioxins/Furans	Explosives, Metals, Anions, Perchlorate, SVOC, VOC	Metals, SVOC, VOC	
TMW19	Bedrock	Explosives, Metals, Anions, Perchlorate, SVOC, VOC, Dioxins/Furans	Explosives, Metals, Perchlorate, SVOC, VOC	Metals, SVOC	
TMW21	Alluvium	Explosives, Metals, Anions, Perchlorate, SVOC, VOC, Dioxins/Furans	Explosives, Metals, Anions, Perchlorate, VOC	Metals, Anions	
TMW22	Alluvium	Explosives, Metals, Anions, Perchlorate, SVOC, VOC, Dioxins/Furans, Pesticides, TPH	Explosives, Metals, Anions, Perchlorate, SVOC, VOC	Metals, Anions	
TMW23	Alluvium	Explosives, Metals, Anions, Perchlorate, SVOC, VOC, Dioxins/Furans, Pesticides	Explosives, Metals, Anions, Perchlorate, SVOC, VOC, Pesticides	Explosives, Metals, Anions	
TMW24	Alluvium	Explosives, Metals, Anions, Perchlorate, SVOC, VOC, Dioxins/Furans, Pesticides	Metals, Anions, VOC, Pesticides	Metals	

TABLE 2-3: NORTHERN AREA GROUNDWATER SAMPLING ANALYTE GROUPS WITH SCREENING LEVEL EXCEEDANCES
2024 INTERIM NORTHERN AREA GROUNDWATER MONITORING PLAN
Fort Wingate Depot Activity, New Mexico

Associated Wells	Zone	Constituents of Potential Concern Analyzed	Contaminants Detected	Groups with Cleanup Level/ Screening Level Exceedances	Analyte Groups Retained for Monitoring
TMW25	Alluvium	Explosives, Metals, Anions, Perchlorate, SVOC, VOC, Dioxins/Furans, Pesticides	Metals, Anions, VOC	Metals	Explosives, Metals, Anions, Perchlorate, SVOCs, VOCs, TPH
TMW26	Alluvium	Explosives, Metals, Anions, Perchlorate, SVOC, VOC, Dioxins/Furans, Pesticides	Explosives, Metals, Anions, Perchlorate, VOC, Pesticides	Metals, VOC	
TMW27	Alluvium	Explosives, Metals, Anions, Perchlorate, SVOC, VOC, Dioxins/Furans, Pesticides	Metals, Perchlorate, VOC	Metals	
TMW28	Alluvium	Explosives, Metals, Anions, Perchlorate, SVOC, VOC, Dioxins/Furans, Pesticides	Metals, Anions, VOC	Metals, VOC	
TMW29	Alluvium	Explosives, Metals, Anions, Perchlorate, SVOC, VOC, Dioxins/Furans	Metals, Anions, Perchlorate, VOC	Metals, Anions, VOC	
TMW31S	Alluvium	Explosives, Metals, Anions, Perchlorate, Phosphorus, SVOC, VOC, Cyanide, Dioxins/Furans, Herbicides, Pesticides, TPH	Explosives, Metals, Anions, Perchlorate, SVOC, TPH, VOC	Metals, Anions, Perchlorate, SVOC	
TMW34	Alluvium	Metals, Anions, Perchlorate, VOC, TPH	Metals, Anions, Perchlorate, TPH, VOC	Metals, Anions	
TMW36	Bedrock	Explosives, Metals, Anions, Perchlorate, Phosphorus, SVOC, VOC, Cyanide, Dioxins/Furans, Herbicides, Pesticides, TPH	Explosives, Metals, Anions, Perchlorate, SVOC, TPH, VOC, Pesticides	Metals, SVOC, VOC	
TMW37	Bedrock	Explosives, Metals, Anions, Perchlorate, Phosphorus, SVOC, VOC, Cyanide, Dioxins/Furans, Herbicides, Pesticides, TPH	Explosives, Metals, Anions, Perchlorate, SVOC, TPH, VOC, Pesticides	Metals, Perchlorate, VOC	
TMW38	Bedrock	Explosives, Metals, Anions, Perchlorate, SVOC, VOC, Pesticides	Explosives, Metals, Anions, Perchlorate, SVOC, VOC, Pesticides	Explosives, Metals, SVOC	
TMW40	Not available	Not available	Not available	Not available	
TMW40S	Alluvium	Explosives, Metals, Anions, Perchlorate, SVOC, VOC, Pesticides	Explosives, Metals, Anions, Perchlorate, SVOC, VOC, Pesticides	Explosives, Metals, Anions, Perchlorate	

TABLE 2-3: NORTHERN AREA GROUNDWATER SAMPLING ANALYTE GROUPS WITH SCREENING LEVEL EXCEEDANCES
2024 INTERIM NORTHERN AREA GROUNDWATER MONITORING PLAN
Fort Wingate Depot Activity, New Mexico

Associated Wells	Zone	Constituents of Potential Concern Analyzed	Contaminants Detected	Groups with Cleanup Level/ Screening Level Exceedances	Analyte Groups Retained for Monitoring
TMW41	Alluvium	Explosives, Metals, Anions, Perchlorate, SVOC, VOC, Pesticides	Explosives, Metals, Anions, Perchlorate, SVOC, VOC, Pesticides	Metals	Explosives, Metals, Anions, Perchlorate, SVOCs, VOCs, TPH
TMW43	Alluvium	Explosives, Metals, Anions, Perchlorate, SVOC, VOC, Pesticides	Explosives, Metals, Anions, SVOC, VOC	Metals	
TMW44	Alluvium	Explosives, Metals, Anions, Perchlorate, SVOC, VOC, Pesticides	Explosives, Metals, Anions, Perchlorate, SVOC	Explosives, Metals, Anions	
TMW45	Alluvium	Explosives, Metals, Anions, Perchlorate, SVOC, VOC, Pesticides	Metals, Anions, Perchlorate, SVOC, VOC	Metals	
TMW46	Alluvium	Explosives, Metals, Anions, Perchlorate, SVOC, VOC, Pesticides	Metals, Anions, Perchlorate, SVOC	Metals, Anions	
TMW47	Alluvium	Explosives, Metals, Anions, Perchlorate, SVOC, VOC, Pesticides	Explosives, Metals, Anions, Perchlorate, VOC, Pesticides	Anions	
TMW49	Alluvium	Explosives, Metals, Anions, Perchlorate, SVOC, VOC, Pesticides	Metals, Anions, Perchlorate, SVOC, VOC, Pesticides	Metals, Perchlorate	
Parcel 21 SWMU 7					
BGMW01	Alluvium	Explosives, Metals, Anions, Perchlorate, SVOC, VOC, Pesticides	Metals, Anions, SVOC, VOC	Metals	Metals, Anions, SVOCs, VOCs
BGMW03	Alluvium	Explosives, Metals, Anions, Perchlorate, SVOC, VOC, Pesticides	Metals, Anions, Perchlorate, SVOC, VOC	Metals	
MW23	Alluvium	Explosives, Metals, Anions, Perchlorate, SVOC, VOC, Pesticides	Explosives, Metals, Anions, Perchlorate, SVOC, VOC, Pesticides	Metals, SVOC, VOC	
MW24	Alluvium	Explosives, Metals, Anions, Perchlorate, SVOC, VOC, Pesticides	Metals, SVOC, VOC	Metals	
TMW21	Alluvium	Explosives, Metals, Anions, Perchlorate, SVOC, VOC, Dioxins/Furans	Explosives, Metals, Anions, Perchlorate, VOC	Metals, Anions	
TMW25	Alluvium	Explosives, Metals, Anions, Perchlorate, SVOC, VOC, Dioxins/Furans, Pesticides	Metals, Anions, VOC	Metals	
TMW45	Alluvium	Explosives, Metals, Anions, Perchlorate, SVOC, VOC, Pesticides	Metals, Anions, Perchlorate, SVOC, VOC	Metals	

TABLE 2-3: NORTHERN AREA GROUNDWATER SAMPLING ANALYTE GROUPS WITH SCREENING LEVEL EXCEEDANCES
2024 INTERIM NORTHERN AREA GROUNDWATER MONITORING PLAN
Fort Wingate Depot Activity, New Mexico

Associated Wells	Zone	Constituents of Potential Concern Analyzed	Contaminants Detected	Groups with Cleanup Level/ Screening Level Exceedances	Analyte Groups Retained for Monitoring
Parcel 22 SWMU 27					
BGMW01	Alluvium	Explosives, Metals, Anions, Perchlorate, SVOC, VOC, Pesticides	Metals, Anions, SVOC, VOC	Metals	Explosives, Metals, Anions, Perchlorate, SVOCs, VOCs
BGMW03	Alluvium	Explosives, Metals, Anions, Perchlorate, SVOC, VOC, Pesticides	Metals, Anions, Perchlorate, SVOC, VOC	Metals	
BGMW07	Bedrock	Not available	Not available	Not available	Explosives, Metals, Anions, Perchlorate, SVOCs, VOCs
BGMW08	Bedrock	Not available	Not available	Not available	
BGMW09	Bedrock	Not available	Not available	Not available	
BGMW10	Bedrock	Not available	Not available	Not available	
MW23	Alluvium	Explosives, Metals, Anions, Perchlorate, SVOC, VOC, Pesticides	Explosives, Metals, Anions, Perchlorate, SVOC, VOC, Pesticides	Metals, SVOC, VOC	
MW24	Alluvium	Explosives, Metals, Anions, Perchlorate, SVOC, VOC, Pesticides	Metals, SVOC, VOC	Metals	
TMW01	Alluvium	Explosives, Metals, Anions, Perchlorate, SVOC, VOC, Dioxins/Furans	Explosives, Metals, Anions, Perchlorate, VOC	Metals, Anions, Perchlorate, VOC	
TMW02	Alluvium	Explosives, Metals, Anions, Perchlorate, SVOC, VOC, Dioxins/Furans	Explosives, Metals, Anions, Perchlorate, VOC	Explosives, Metals, Anions, Perchlorate	
TMW03	Alluvium	Explosives, Metals, Anions, Perchlorate, SVOC, VOC, Dioxins/Furans	Explosives, Metals, Anions, Perchlorate, SVOC, VOC	Explosives, Metals, Anions, SVOC	
TMW11	Alluvium	Explosives, Metals, Anions, Perchlorate, SVOC, VOC, Dioxins/Furans	Explosives, Metals, Anions, Perchlorate, VOC	Metals, Anions, VOC	
TMW13	Alluvium	Explosives, Metals, Anions, Perchlorate, SVOC, VOC, Dioxins/Furans, PCB	Metals, Anions, Perchlorate, VOC	Metals, Anions, VOC	
TMW14A	Bedrock	Explosives, Metals, Anions, Perchlorate, SVOC, VOC, Dioxins/Furans	Explosives, Metals, Anions, SVOC, VOC	Metals, Anions, SVOC, VOC	

TABLE 2-3: NORTHERN AREA GROUNDWATER SAMPLING ANALYTE GROUPS WITH SCREENING LEVEL EXCEEDANCES
2024 INTERIM NORTHERN AREA GROUNDWATER MONITORING PLAN
Fort Wingate Depot Activity, New Mexico

Associated Wells	Zone	Constituents of Potential Concern Analyzed	Contaminants Detected	Groups with Cleanup Level/ Screening Level Exceedances	Analyte Groups Retained for Monitoring
TMW15	Alluvium	Explosives, Metals, Anions, Perchlorate, SVOC, VOC, Dioxins/Furans, Pesticides	Explosives, Metals, Anions, Perchlorate, SVOC, VOC	Metals, VOC	Explosives, Metals, Anions, Perchlorate, SVOCs, VOCs
TMW30	Bedrock	Explosives, Metals, Anions, Perchlorate, Phosphorus, SVOC, VOC, Cyanide, Dioxins/Furans, Herbicides, Pesticides, TPH	Explosives, Metals, Anions, Perchlorate, SVOC, TPH, VOC, Pesticides	Metals, Anions, Perchlorate	
TMW31D	Bedrock	Explosives, Metals, Anions, Perchlorate, Phosphorus, SVOC, VOC, Cyanide, Dioxins/Furans, Herbicides, Pesticides, TPH	Explosives, Metals, Anions, Perchlorate, SVOC, VOC	Anions, Perchlorate	
TMW31S	Alluvium	Explosives, Metals, Anions, Perchlorate, Phosphorus, SVOC, VOC, Cyanide, Dioxins/Furans, Herbicides, Pesticides, TPH	Explosives, Metals, Anions, Perchlorate, SVOC, TPH, VOC	Metals, Anions, Perchlorate, SVOC	
TMW32	Bedrock	Explosives, Metals, Anions, Perchlorate, Phosphorus, SVOC, VOC, Cyanide, Dioxins/Furans, Herbicides, Pesticides, TPH	Explosives, Metals, Anions, Perchlorate, SVOC, TPH, VOC	Metals, Anions, Perchlorate	
TMW36	Bedrock	Explosives, Metals, Anions, Perchlorate, Phosphorus, SVOC, VOC, Cyanide, Dioxins/Furans, Herbicides, Pesticides, TPH	Explosives, Metals, Anions, Perchlorate, SVOC, TPH, VOC, Pesticides	Metals, SVOC, VOC	
TMW38	Bedrock	Explosives, Metals, Anions, Perchlorate, SVOC, VOC, Pesticides	Explosives, Metals, Anions, Perchlorate, SVOC, VOC, Pesticides	Explosives, Metals, SVOC	
TMW39D	Bedrock	Explosives, Metals, Anions, Perchlorate, SVOC, VOC, Pesticides	Explosives, Metals, Anions, Perchlorate, SVOC	Metals, Perchlorate	
TMW39S	Alluvium	Explosives, Metals, Anions, Perchlorate, SVOC, VOC, Pesticides	Explosives, Metals, Anions, Perchlorate, SVOC, VOC, Pesticides	Metals, Perchlorate, SVOC, VOC	
TMW40D	Bedrock	Explosives, Metals, Anions, Perchlorate, SVOC, VOC, Pesticides	Metals, Anions, Perchlorate	Metals, Anions, Perchlorate	
TMW40S	Alluvium	Explosives, Metals, Anions, Perchlorate, SVOC, VOC, Pesticides	Explosives, Metals, Anions, Perchlorate, SVOC, VOC, Pesticides	Explosives, Metals, Anions, Perchlorate	
TMW41	Alluvium	Explosives, Metals, Anions, Perchlorate, SVOC, VOC, Pesticides	Explosives, Metals, Anions, Perchlorate, SVOC, VOC, Pesticides	Metals	
TMW47	Alluvium	Explosives, Metals, Anions, Perchlorate, SVOC, VOC, Pesticides	Explosives, Metals, Anions, Perchlorate, VOC, Pesticides	Anions	

TABLE 2-3: NORTHERN AREA GROUNDWATER SAMPLING ANALYTE GROUPS WITH SCREENING LEVEL EXCEEDANCES
2024 INTERIM NORTHERN AREA GROUNDWATER MONITORING PLAN
Fort Wingate Depot Activity, New Mexico

Associated Wells	Zone	Constituents of Potential Concern Analyzed	Contaminants Detected	Groups with Cleanup Level/ Screening Level Exceedances	Analyte Groups Retained for Monitoring
TMW48	Alluvium	Explosives, Metals, Anions, Perchlorate, SVOC, VOC, Pesticides	Explosives, Metals, Anions, Perchlorate, SVOC	Metals, Anions, Perchlorate	Explosives, Metals, Anions, Perchlorate, SVOCs, VOCs
TMW49	Alluvium	Explosives, Metals, Anions, Perchlorate, SVOC, VOC, Pesticides	Metals, Anions, Perchlorate, SVOC, VOC, Pesticides	Metals, Perchlorate	

ABBREVIATIONS and ACRONYMS:

AOC = area of concern
PCB = polychlorinated biphenyl
SVOC = semivolatile organic compound
TPH = total petroleum hydrocarbons
VOC = volatile organic compound

TABLE 2-4: NORTHERN AREA MONITORING NETWORK BY SITE AND POINT OF RELEASE
2024 INTERIM NORTHERN AREA GROUNDWATER MONITORING PLAN
Fort Wingate Depot Activity, New Mexico

COPC	Point of Release/Parcel Number	Release Type	Primary Downgradient Well	Upgradient Well	Background Well	Sentinel Well
Nitrates	SWMU 1/Parcel 21	Alluvial = Large	MW03	BGMW02	BGMW01	MW23
			MW22D	TMW24	BGMW03	MW24
			SMW01	TMW47		
			TMW03			
			TMW10			
			TMW21			
			TMW22			
			TMW23			
			TMW25			
			TMW34			
			TMW40S			
			TMW43			
			TMW45			
			TMW46			
		Bedrock = Suspected	TMW02	None, dry	BGMW07	None
			TMW36		BGMW08	
			TMW38		BGMW09	
			TMW40D		BGMW10	
					TMW18	
					TMW19	
	SWMU 27/Parcel 22	Bedrock = Large	TMW02	None, dry	BGMW07	None
			TMW30		BGMW08	
			TMW31D		BGMW09	
			TMW32		BGMW10	
			TMW39D		TMW18	
			TMW48		TMW19	
		Alluvial = Suspected	TMW01	None, dry	BGMW01	MW23
			TMW13		BGMW03	MW24
			TMW31S			
			TMW41			

TABLE 2-4: NORTHERN AREA MONITORING NETWORK BY SITE AND POINT OF RELEASE
2024 INTERIM NORTHERN AREA GROUNDWATER MONITORING PLAN
Fort Wingate Depot Activity, New Mexico

COPC	Point of Release/Parcel Number	Release Type	Primary Downgradient Well	Upgradient Well	Background Well	Sentinel Well
Explosives	SWMU 1/Parcel 21	Alluvial = Large	MW03	BGMW02	BGMW01	MW23
			TMW03	TMW47	BGMW03	MW24
			TMW06			
			TMW22			
			TMW23			
			TMW40S			
			TMW43			
			TMW45			
		Bedrock = Suspected	TMW02	None, dry	TMW18	None
			TMW36		TMW19	
			TMW38			
			TMW40D			
	SWMU 27/Parcel 22	Bedrock = Large	TMW02	None, dry	BGMW07	None
			TMW30		BGMW08	
			TMW31D		BGMW09	
			TMW32		BGMW10	
			TMW39D		TMW18	
			TMW48		TMW19	
		Alluvial = Suspected	TMW01	None, dry	BGMW01	MW23
			TMW13		BGMW03	MW24
			TMW31S			
			TMW41			
			TMW02	None, dry	BGMW07	None
Perchlorate	SWMU 27/Parcel 22	Bedrock = Large	TMW30		BGMW08	
			TMW31D		BGMW09	
			TMW32		BGMW10	
			TMW36		TMW18	
			TMW38		TMW19	
			TMW39D			
			TMW40D			
			TMW48			
		Alluvial = Large	TMW01	None, dry	BGMW01	MW23
			TMW03		BGMW03	MW24
			TMW13			
			TMW31S			
			TMW39S			
			TMW41			

TABLE 2-4: NORTHERN AREA MONITORING NETWORK BY SITE AND POINT OF RELEASE
2024 INTERIM NORTHERN AREA GROUNDWATER MONITORING PLAN
Fort Wingate Depot Activity, New Mexico

COPC	Point of Release/Parcel Number	Release Type	Primary Downgradient Well	Upgradient Well	Background Well	Sentinel Well
Metals	SWMU 45/Parcel 11	Suspected	MW18D	TMW24	BGMW01	MW23
			TMW33		BGMW03	MW24
			TMW34			
	SWMU 50/Parcel 11	Suspected	MW01	TMW24	BGMW01	MW23
			MW18D		BGMW03	MW24
	SWMU 1/Parcel 21	Alluvial = Large	TMW10	BGMW02	BGMW01	MW23
			TMW21	TMW24	BGMW03	MW24
			TMW23	TMW47		
			TMW25			
			TMW27			
			TMW34			
			TMW40S			
			TMW44			
			TMW46			
		Bedrock = Suspected	TMW02	None, dry	BGMW07	None
			TMW36		BGMW08	
			TMW38		BGMW09	
			TMW40D		BGMW10	
					TMW18	
					TMW19	
	SWMU 27/Parcel 22	Bedrock = Large	TMW02	None, dry	BGMW07	None
			TMW30		BGMW08	
			TMW31D		BGMW09	
			TMW32		BGMW10	
			TMW36		TMW18	
			TMW39D		TMW19	
			TMW48			
		Alluvial = Suspected	TMW01	None, dry	BGMW01	MW23
			TMW13		BGMW03	MW24
			TMW31S			
			TMW41			

TABLE 2-4: NORTHERN AREA MONITORING NETWORK BY SITE AND POINT OF RELEASE
2024 INTERIM NORTHERN AREA GROUNDWATER MONITORING PLAN
Fort Wingate Depot Activity, New Mexico

COPC	Point of Release/Parcel Number	Release Type	Primary Downgradient Well	Upgradient Well	Background Well	Sentinel Well
VOC	SWMU 45/Parcel 11	Small	MW18D	TMW24	BGMW01	MW23
			MW20	TMW45	BGMW03	MW24
			MW22D			
			TMW33			
			TMW46			
	SWMU 50/Parcel 11	Small	MW01	TMW24	BGMW01	MW23
			MW02	TMW45	BGMW03	MW24
SVOC			MW03			
	SWMU 8/Parcel 6	Suspected	TMW14A	None, dry	BGMW07	None
			TMW16		BGMW08	
			TMW17		BGMW09	
					BGMW10	
					TMW18	
					TMW19	
	SWMU 6/Parcel 11	Suspected	TMW34	TMW24	BGMW01	MW23
			TMW46		BGMW03	MW24
	SWMU 45/Parcel 11	Small	MW18D	TMW24	BGMW01	MW23
			MW20		BGMW03	MW24
DRO			TMW34			
			TMW46			
	SWMU 6/Parcel 11	Suspected	MW18D	TMW24	BGMW01	MW23
			TMW25		BGMW03	MW24
			TMW34			
			TMW46			
	SWMU 7/Parcel 21	Suspected	TMW21	TMW45	BGMW01	MW23
			TMW25		BGMW03	MW24
	SWMU 45/Parcel 11	Small	MW18D	TMW24	BGMW01	MW23
			MW20		BGMW03	MW24
			MW22D			
			TMW33			

TABLE 2-4: NORTHERN AREA MONITORING NETWORK BY SITE AND POINT OF RELEASE
2024 INTERIM NORTHERN AREA GROUNDWATER MONITORING PLAN
Fort Wingate Depot Activity, New Mexico

COPC	Point of Release/Parcel Number	Release Type	Primary Downgradient Well	Upgradient Well	Background Well	Sentinel Well
GRO	SWMU 45/Parcel 11	Small	MW18D	TMW24	BGMW01	MW23
			MW20		BGMW03	MW24
			MW22D			
			TMW33			
	SWMU 50/Parcel 11	Small	MW01	TMW24	BGMW01	MW23
			MW02	TMW45	BGMW03	MW24
			MW03			
			TMW46			

NOTES:

Large = contaminant plume greater than 500 feet in any direction

Small = contaminant plume less than 500 feet in longest dimension

Suspected = contaminant plume not delineated historically

ABBREVIATIONS and ACRONYMS:

COPC = contaminant of potential concern

DRO = diesel range organics

GRO = gasoline range organics

SVOC = semivolatile organic compound

SWMU = solid waste management unit

VOC = volatile organic compound

TABLE 3-1: NORTHERN AREA WATER-LEVEL MEASUREMENTS BY GROUNDWATER ZONE
2024 INTERIM NORTHERN AREA GROUNDWATER MONITORING PLAN
Fort Wingate Depot Activity, New Mexico

Well ID	GW Zone	Casing Stick Up Length (feet)	Screened Interval (feet bgs)	Total Well Depth (feet bgs)	Well Ground Elevation (NAVD 88)	Well TOC Elevation (NAVD 88)	Water Level Measurement Date	Depth to Water (feet bgs)	Depth to Water (feet btoc)	Groundwater Elevation (NAVD 88)
Alluvial Wells										
BGMW01	Alluvial	2.40	12.5-32.5	33.0	6,690.28	6,692.68	Jul-14	16.82	19.22	6,673.46
							Oct-14	16.87	19.27	6,673.41
							Jan-15	16.62	19.02	6,673.66
							Mar-15	16.55	18.95	6,673.73
							Jul-15	17.02	19.42	6,673.26
							Oct-15	17.24	19.64	6,673.04
							Jan-16	16.91	19.31	6,673.37
							Apr-16	16.95	19.35	6,673.33
							Jul-16	17.47	19.87	6,672.81
							Oct-16	17.59	19.99	6,672.69
							Jan-17	17.22	19.62	6,673.06
							Apr-17	17.08	19.48	6,673.20
							Jul-17	17.68	20.08	6,672.60
							Oct-17	17.82	20.22	6,672.46
							Jan-18	17.60	20.00	6,672.68
		Apr-18			17.38	19.78	6,672.90			
		Jul-18			18.04	20.44	6,672.24			
		Oct-18			18.15	20.55	6,672.13			
		Jan-19			17.89	20.29	6,672.39			
		Apr-19			17.47	19.87	6,672.81			
		Jul-19			17.95	20.36	6,672.87			
		Sep-19			18.21	20.62	6,672.61			
		Jan-20			17.67	20.08	6,673.15			
		Apr-20			17.54	19.95	6,673.28			
		Jul-20			18.44	20.85	6,672.38			
		Oct-20			18.06	20.47	6,672.76			
		Jan-21			17.85	20.26	6,672.97			
		Apr-21			18.04	20.45	6,672.78			
		Jul-21			18.79	21.20	6,672.03			
		Oct-21			18.66	21.07	6,672.16			
		Jan-22			18.60	21.01	6,672.22			
		Apr-22			18.43	20.84	6,672.39			
BGMW02	Alluvial	2.79	13.5-33.5	34.0	6,689.20	6,691.99	Jul-14	18.38	21.17	6,670.82
							Oct-14	18.62	21.41	6,670.58
							Jan-15	18.34	21.13	6,670.86
							Mar-15	18.17	20.96	6,671.03
							Jul-15	18.57	21.36	6,670.63
							Oct-15	19.02	21.81	6,670.18
							Jan-16	18.68	21.47	6,670.52
							Apr-16	18.56	21.35	6,670.64
							Jul-16	18.98	21.77	6,670.22
							Oct-16	19.37	22.16	6,669.83
							Jan-17	18.98	21.77	6,670.22
							Apr-17	18.63	21.42	6,670.57
							Jul-17	19.03	21.82	6,670.17
							Oct-17	19.52	22.31	6,669.68
							Jan-18	19.24	22.03	6,669.96
		Apr-18			18.83	21.62	6,670.37			
		Jul-18			19.61	22.40	6,669.59			
		Oct-18			19.92	22.71	6,669.28			
		Jan-19			19.17	21.96	6,670.03			
		Apr-19			19.04	21.83	6,670.16			
		Jul-19			19.08	21.92	6,670.65			
		Sep-19			18.89	21.73	6,670.84			
		Jan-20			19.26	22.10	6,670.47			
		Apr-20			19.19	22.03	6,670.54			
		Jul-20			20.06	22.90	6,669.67			
		Oct-20			20.35	23.19	6,669.38			
		Jan-21			20.00	22.84	6,669.73			
		Apr-21			19.67	22.51	6,670.06			
		Jul-21			20.60	23.44	6,669.13			
		Oct-21			20.79	23.63	6,668.94			
		Jan-22			20.27	23.11	6,669.46			
		Apr-22			19.98	22.82	6,669.75			

TABLE 3-1: NORTHERN AREA WATER-LEVEL MEASUREMENTS BY GROUNDWATER ZONE
2024 INTERIM NORTHERN AREA GROUNDWATER MONITORING PLAN
Fort Wingate Depot Activity, New Mexico

Well ID	GW Zone	Casing Stick Up Length (feet)	Screened Interval (feet bgs)	Total Well Depth (feet bgs)	Well Ground Elevation (NAVD 88)	Well TOC Elevation (NAVD 88)	Water Level Measurement Date	Depth to Water (feet bgs)	Depth to Water (feet btoc)	Groundwater Elevation (NAVD 88)
BGMW03	Alluvial	2.76	8.5-28.5	29.0	6,677.79	6,680.57	Jul-14	14.29	17.05	6,663.52
							Oct-14	14.39	17.15	6,663.42
							Jan-15	13.61	16.37	6,664.20
							Mar-15	13.33	16.09	6,664.48
							Jul-15	14.21	16.97	6,663.60
							Oct-15	14.33	17.09	6,663.48
							Jan-16	13.95	16.71	6,663.86
							Apr-16	13.73	16.49	6,664.08
							Jul-16	14.77	17.53	6,663.04
							Oct-16	15.12	17.88	6,662.69
							Jan-17	14.37	17.13	6,663.44
							Apr-17	13.97	16.73	6,663.84
							Jul-17	16.11	18.87	6,661.70
							Oct-17	15.21	17.97	6,662.60
							Jan-18	14.32	17.08	6,663.49
							Apr-18	13.87	16.63	6,663.94
							Jul-18	15.24	18.00	6,662.57
							Oct-18	15.59	18.35	6,662.22
							Jan-19	14.83	17.59	6,662.98
							Apr-19	14.55	17.31	6,663.26
		2.77			6,676.63	6,679.39	Jul-19	15.61	18.38	6,661.01
							Sep-19	16.14	18.91	6,660.48
							Jan-20	15.16	17.93	6,661.46
							Apr-20	14.63	17.40	6,661.99
							Jul-20	16.01	18.78	6,660.61
							Oct-20	16.49	19.26	6,660.13
							Jan-21	15.67	18.44	6,660.95
							Apr-21	15.26	18.03	6,661.36
							Jul-21	16.42	19.19	6,660.20
							Oct-21	16.48	19.25	6,660.14
							Jan-22	15.37	18.14	6,661.25
							Apr-22	14.93	17.70	6,661.69
BGMW11	Alluvial	2.29	20-40	40.0	6,653.27	6,655.56	Nov-19	17.19	19.48	6,636.08
							Apr-20	15.86	18.15	6,637.41
							Jul-20	17.27	19.56	6,636.00
							Oct-20	17.90	20.19	6,635.37
							Jan-21	17.26	19.55	6,636.01
							Apr-21	16.73	19.02	6,636.54
							Jul-21	17.85	20.14	6,635.42
							Oct-21	18.11	20.40	6,635.16
BGMW12	Alluvial	2.81	12-32	32.0	6,692.40	6,695.21	Jan-22	17.47	19.76	6,635.80
							Apr-22	17.00	19.29	6,636.27
							Nov-19	17.58	20.39	6,674.82
							Apr-20	17.14	19.95	6,675.26
							Jul-20	18.94	21.75	6,673.46
							Oct-20	18.18	20.99	6,674.22
							Jan-21	17.83	20.64	6,674.57
							Apr-21	17.62	20.43	6,674.78
BGMW13S	Alluvial	2.92	49-69	69.0	6,659.05	6,661.97	Jul-21	18.51	21.32	6,673.89
							Oct-21	18.48	21.29	6,673.92
							Jan-22	18.15	20.96	6,674.25
							Apr-22	18.08	20.89	6,674.32
							Nov-19	18.88	21.80	6,640.17
							Apr-20	18.39	21.31	6,640.66
							Jul-20	18.97	21.89	6,640.08
							Oct-20	19.43	22.35	6,639.62
							Jan-21	19.36	22.28	6,639.69
							Apr-21	19.08	22.00	6,639.97
							Jul-21	19.53	22.45	6,639.52
							Oct-21	19.55	22.47	6,639.50
							Jan-22	19.32	22.24	6,639.73
							Apr-22	19.11	22.03	6,639.94

TABLE 3-1: NORTHERN AREA WATER-LEVEL MEASUREMENTS BY GROUNDWATER ZONE
2024 INTERIM NORTHERN AREA GROUNDWATER MONITORING PLAN
Fort Wingate Depot Activity, New Mexico

Well ID	GW Zone	Casing Stick Up Length (feet)	Screened Interval (feet bgs)	Total Well Depth (feet bgs)	Well Ground Elevation (NAVD 88)	Well TOC Elevation (NAVD 88)	Water Level Measurement Date	Depth to Water (feet bgs)	Depth to Water (feet btoc)	Groundwater Elevation (NAVD 88)	
BGMW13D	Alluvial	2.75	84-104	104.0	6,659.08	6,661.83	Nov-19	18.05	20.80	6,641.03	
							Apr-20	17.67	20.42	6,641.41	
							Jul-20	18.14	20.89	6,640.94	
							Oct-20	18.53	21.28	6,640.55	
							Jan-21	18.58	21.33	6,640.50	
							Apr-21	18.34	21.09	6,640.74	
							Jul-21	18.68	21.43	6,640.40	
							Oct-21	18.80	21.55	6,640.28	
							Jan-22	18.50	21.25	6,640.58	
FW31	Alluvial	1.74	10.0-50.0	50.0	6,830.72	6,832.49	Apr-22	18.33	21.08	6,640.75	
							Jul-14	40.66	42.40	6,790.09	
							Oct-14	40.75	42.49	6,790.00	
							Jan-15	40.67	42.41	6,790.08	
							Mar-15	40.65	42.39	6,790.10	
							Jul-15	40.81	42.55	6,789.94	
							Oct-15	40.92	42.66	6,789.83	
							Jan-16	40.85	42.59	6,789.90	
							Apr-16	40.91	42.65	6,789.84	
							Jul-16	41.09	42.83	6,789.66	
							Oct-16	41.18	42.92	6,789.57	
							Jan-17	NM	NM	NM	
							Apr-17	41.09	42.83	6,789.66	
							Jul-17	41.26	43.00	6,789.49	
							Oct-17	41.30	43.04	6,789.45	
							Jan-18	41.36	43.10	6,789.39	
							Apr-18	41.27	43.01	6,789.48	
							Jul-18	41.35	43.09	6,789.40	
							Oct-18	41.40	43.14	6,789.35	
							Jan-19	41.39	43.13	6,789.36	
							Apr-19	41.26	43.00	6,789.49	
			1.74			6,830.96	6,832.70	Jul-19	41.52	43.26	6,789.44
								Sep-19	41.58	43.32	6,789.38
								Jan-20	41.64	43.38	6,789.32
								Apr-20	41.59	43.33	6,789.37
								Jul-20	41.80	43.54	6,789.16
								Oct-20	41.89	43.63	6,789.07
								Jan-21	45.97	47.71	6,784.99
								Apr-21	41.86	43.60	6,789.10
								Jul-21	42.02	43.76	6,788.94
								Oct-21	41.88	43.62	6,789.08
								Jan-22	41.94	43.68	6,789.02
								Apr-22	41.92	43.66	6,789.04

TABLE 3-1: NORTHERN AREA WATER-LEVEL MEASUREMENTS BY GROUNDWATER ZONE
2024 INTERIM NORTHERN AREA GROUNDWATER MONITORING PLAN
Fort Wingate Depot Activity, New Mexico

Well ID	GW Zone	Casing Stick Up Length (feet)	Screened Interval (feet bgs)	Total Well Depth (feet bgs)	Well Ground Elevation (NAVD 88)	Well TOC Elevation (NAVD 88)	Water Level Measurement Date	Depth to Water (feet bgs)	Depth to Water (feet btoc)	Groundwater Elevation (NAVD 88)			
FW35	Alluvial	2.18	10.0-30.0	30.0	6,709.17	6,711.11	Jul-14	26.77	28.95	6,682.16			
							Oct-14	28.11	30.29	6,680.82			
							Jan-15	27.67	29.85	6,681.26			
							Mar-15	27.33	29.51	6,681.60			
							Jul-15	28.81	30.99	6,680.12			
							Oct-15	Dry	Dry	Dry			
							Jan-16	Dry	Dry	Dry			
							Apr-16	Dry	Dry	Dry			
							Jul-16	Dry	Dry	Dry			
							Oct-16	Dry	Dry	Dry			
							Jan-17	Dry	Dry	Dry			
							Apr-17	Dry	Dry	Dry			
							Jul-17	Dry	Dry	Dry			
							Oct-17	Dry	Dry	Dry			
							Jan-18	Dry	Dry	Dry			
							Apr-18	Dry	Dry	Dry			
							Jul-18	Dry	Dry	Dry			
							Oct-18	Dry	Dry	Dry			
							Jan-19	Dry	Dry	Dry			
							Apr-19	Dry	Dry	Dry			
		2.18			6,709.13	6,711.31	Jul-19	Dry	Dry	Dry			
							Sep-19	Dry	Dry	Dry			
							Jan-20	Dry	Dry	Dry			
							Apr-20	Dry	Dry	Dry			
							Jul-20	Dry	Dry	Dry			
							Oct-20	Dry	Dry	Dry			
							Jan-21	Dry	Dry	Dry			
							Apr-21	Dry	Dry	Dry			
							Jul-21	Dry	Dry	Dry			
							Oct-21	Dry	Dry	Dry			
	MW01	Alluvial			-0.09	33.6-53.6	55.0	6,686.03	6,685.94	Jul-14	42.65	42.56	6,643.38
										Oct-14	42.72	42.63	6,643.31
Jan-15	42.63		42.54	6,643.40									
Mar-15	42.78		42.69	6,643.25									
Jul-15	42.72		42.63	6,643.31									
Oct-15	42.92		42.83	6,643.11									
Jan-16	42.86		42.77	6,643.17									
Apr-16	43.04		42.95	6,642.99									
Jul-16	43.08		42.99	6,642.95									
Oct-16	43.11		43.02	6,642.92									
Jan-17	43.28		43.19	6,642.75									
Apr-17	43.24		43.15	6,642.79									
Jul-17	43.37		43.28	6,642.66									
Oct-17	43.48		43.39	6,642.55									
Jan-18	43.53		43.44	6,642.50									
Apr-18	43.49		43.40	6,642.54									
Jul-18	43.46		43.37	6,642.57									
Oct-18	43.51		43.42	6,642.52									
Jan-19	43.70		43.61	6,642.33									
Apr-19	43.76		43.67	6,642.27									
-0.19	6,686.98	6,686.79	Jul-19	43.89	43.70			6,643.09					
			Sep-19	43.84	43.65			6,643.14					
			Jan-20	44.00	43.81			6,642.98					
			Apr-20	43.96	43.77			6,643.02					
			Jul-20	43.99	43.80			6,642.99					
			Oct-20	44.07	43.88			6,642.91					
			Jan-21	44.32	44.13			6,642.66					
			Apr-21	44.17	43.98			6,642.81					
			Jul-21	44.31	44.12			6,642.67					
			Sep-21	42.80	42.61			6,644.18					
			Jan-22	44.42	44.23			6,642.56					
			Apr-22	44.55	44.36			6,642.43					

TABLE 3-1: NORTHERN AREA WATER-LEVEL MEASUREMENTS BY GROUNDWATER ZONE
2024 INTERIM NORTHERN AREA GROUNDWATER MONITORING PLAN
Fort Wingate Depot Activity, New Mexico

Well ID	GW Zone	Casing Stick Up Length (feet)	Screened Interval (feet bgs)	Total Well Depth (feet bgs)	Well Ground Elevation (NAVD 88)	Well TOC Elevation (NAVD 88)	Water Level Measurement Date	Depth to Water (feet bgs)	Depth to Water (feet btoc)	Groundwater Elevation (NAVD 88)
MW02	Alluvial	-0.56	37.0-47.0	48.0	6,685.78	6,685.22	Jul-14	40.89	40.33	6,644.89
							Oct-14	41.07	40.51	6,644.71
							Jan-15	41.27	40.71	6,644.51
							Mar-15	41.32	40.76	6,644.46
							Jul-15	41.37	40.81	6,644.41
							Oct-15	41.51	40.95	6,644.27
							Jan-16	41.53	40.97	6,644.25
							Apr-16	41.71	41.15	6,644.07
							Jul-16	41.71	41.15	6,644.07
							Oct-16	41.83	41.27	6,643.95
							Jan-17	41.98	41.42	6,643.80
							Apr-17	42.00	41.44	6,643.78
							Jul-17	42.12	41.56	6,643.66
							Oct-17	42.25	41.69	6,643.53
							Jan-18	42.29	41.73	6,643.49
							Apr-18	42.32	41.76	6,643.46
							Jul-18	42.39	41.83	6,643.39
							Oct-18	42.35	41.79	6,643.43
							Jan-19	42.60	42.04	6,643.18
							Apr-19	42.62	42.06	6,643.16
		-0.46			6,685.60	6,685.13	Jul-19	42.54	42.08	6,643.05
							Sep-19	42.49	42.03	6,643.10
							Jan-20	42.65	42.19	6,642.94
							Apr-20	44.30	43.84	6,641.29
							Jul-20	42.73	42.27	6,642.86
							Oct-20	42.79	42.33	6,642.80
							Jan-21	42.99	42.53	6,642.60
							Apr-21	42.89	42.43	6,642.70
							Jul-21	43.02	42.56	6,642.57
							Sep-21	44.69	44.23	6,640.90
							Jan-22	43.16	42.70	6,642.43
							Apr-22	43.27	42.81	6,642.32
MW03	Alluvial	2.03	43.0-53.0	53.0	6,687.50	6,689.53	Jul-14	44.33	46.36	6,643.17
							Oct-14	44.32	46.35	6,643.18
							Jan-15	44.27	46.30	6,643.23
							Mar-15	44.39	46.42	6,643.11
							Jul-15	44.40	46.43	6,643.10
							Oct-15	44.48	46.51	6,643.02
							Jan-16	44.39	46.42	6,643.11
							Apr-16	44.62	46.65	6,642.88
							Jul-16	44.60	46.63	6,642.90
							Oct-16	44.84	46.87	6,642.66
							Jan-17	44.64	46.67	6,642.86
							Apr-17	44.70	46.73	6,642.80
							Jul-17	44.89	46.92	6,642.61
							Oct-17	45.07	47.10	6,642.43
							Jan-18	44.93	46.96	6,642.57
							Apr-18	44.96	46.99	6,642.54
							Jul-18	44.95	46.98	6,642.55
							Oct-18	44.81	46.84	6,642.69
							Jan-19	45.04	47.07	6,642.46
							Apr-19	45.22	47.25	6,642.28
		2.45			6,687.81	6,690.26	Jul-19	44.76	47.21	6,643.05
							Sep-19	44.57	47.02	6,643.24
							Jan-20	44.81	47.26	6,643.00
							Apr-20	44.84	47.29	6,642.97
							Jul-20	44.80	47.25	6,643.01
							Oct-20	44.95	47.40	6,642.86
							Jan-21	45.11	47.56	6,642.70
							Apr-21	44.99	47.44	6,642.82
							Jul-21	45.17	47.62	6,642.64
							Sep-21	45.19	47.64	6,642.62
							Jan-22	45.38	47.83	6,642.43
							Apr-22	45.49	47.94	6,642.32

TABLE 3-1: NORTHERN AREA WATER-LEVEL MEASUREMENTS BY GROUNDWATER ZONE
2024 INTERIM NORTHERN AREA GROUNDWATER MONITORING PLAN
Fort Wingate Depot Activity, New Mexico

Well ID	GW Zone	Casing Stick Up Length (feet)	Screened Interval (feet bgs)	Total Well Depth (feet bgs)	Well Ground Elevation (NAVD 88)	Well TOC Elevation (NAVD 88)	Water Level Measurement Date	Depth to Water (feet bgs)	Depth to Water (feet btoc)	Groundwater Elevation (NAVD 88)
MW18D	Alluvial	1.81	47.0-57.0	59.9	6,684.94	6,686.32	Jul-14	41.67	43.48	6,642.84
							Oct-14	41.74	43.55	6,642.77
							Jan-15	41.60	43.41	6,642.91
							Mar-15	41.80	43.61	6,642.71
							Jul-15	41.69	43.50	6,642.82
							Oct-15	41.90	43.71	6,642.61
							Jan-16	41.84	43.65	6,642.67
							Apr-16	42.07	43.88	6,642.44
							Jul-16	42.08	43.89	6,642.43
							Oct-16	42.23	44.04	6,642.28
							Jan-17	42.21	44.02	6,642.30
							Apr-17	42.26	44.07	6,642.25
							Jul-17	42.39	44.20	6,642.12
							Oct-17	42.62	44.43	6,641.89
							Jan-18	42.51	44.32	6,642.00
							Apr-18	42.58	44.39	6,641.93
							Jul-18	42.63	44.44	6,641.88
							Oct-18	42.47	44.28	6,642.04
							Jan-19	42.67	44.48	6,641.84
							Apr-19	42.89	44.70	6,641.62
		1.81			6,685.30	6,687.11	Jul-19	42.94	44.75	6,642.36
							Sep-19	42.80	44.61	6,642.50
							Jan-20	43.00	44.81	6,642.30
							Apr-20	44.12	45.93	6,641.18
							Jul-20	43.10	44.91	6,642.20
							Oct-20	43.19	45.00	6,642.11
							Jan-21	43.46	45.27	6,641.84
							Apr-21	43.24	45.05	6,642.06
							Jul-21	43.47	45.28	6,641.83
							Sep-21	43.60	45.41	6,641.70
							Jan-22	43.58	45.39	6,641.72
							Apr-22	43.82	45.63	6,641.48
MW18S	Alluvial	2.05	27.0-37.0	39.0	6,684.67	6,686.61	Jul-14	Dry	Dry	Dry
							Oct-14	Dry	Dry	Dry
							Jan-15	Dry	Dry	Dry
							Mar-15	Dry	Dry	Dry
							Jul-15	Dry	Dry	Dry
							Oct-15	Dry	Dry	Dry
							Jan-16	Dry	Dry	Dry
							Apr-16	Dry	Dry	Dry
							Jul-16	Dry	Dry	Dry
							Oct-16	Dry	Dry	Dry
							Jan-17	Dry	Dry	Dry
							Apr-17	Dry	Dry	Dry
							Jul-17	Dry	Dry	Dry
							Oct-17	Dry	Dry	Dry
							Jan-18	Dry	Dry	Dry
							Apr-18	Dry	Dry	Dry
							Jul-18	Dry	Dry	Dry
							Oct-18	Dry	Dry	Dry
							Jan-19	Dry	Dry	Dry
							Apr-19	Dry	Dry	Dry
		1.96			6,685.30	6,687.26	Jul-19	Dry	Dry	Dry
							Sep-19	Dry	Dry	Dry
							Jan-20	Dry	Dry	Dry
							Apr-20	Dry	Dry	Dry
							Jul-20	Dry	Dry	Dry
							Oct-20	Dry	Dry	Dry
							Jan-21	Dry	Dry	Dry
							Apr-21	Dry	Dry	Dry
							Jul-21	Dry	Dry	Dry
							Sep-21	Dry	Dry	Dry
							Jan-22	36.88	38.84	6,648.42
							Apr-22	Dry	Dry	Dry

TABLE 3-1: NORTHERN AREA WATER-LEVEL MEASUREMENTS BY GROUNDWATER ZONE
2024 INTERIM NORTHERN AREA GROUNDWATER MONITORING PLAN
Fort Wingate Depot Activity, New Mexico

Well ID	GW Zone	Casing Stick Up Length (feet)	Screened Interval (feet bgs)	Total Well Depth (feet bgs)	Well Ground Elevation (NAVD 88)	Well TOC Elevation (NAVD 88)	Water Level Measurement Date	Depth to Water (feet bgs)	Depth to Water (feet btoc)	Groundwater Elevation (NAVD 88)
MW20	Alluvial	2.33	47.0-57.0	59.4	6,685.34	6,687.67	Jul-14	43.00	45.33	6,642.34
							Oct-14	43.12	45.45	6,642.22
							Jan-15	42.99	45.32	6,642.35
							Mar-15	43.09	45.42	6,642.25
							Jul-15	43.05	45.38	6,642.29
							Oct-15	43.23	45.56	6,642.11
							Jan-16	43.19	45.52	6,642.15
							Apr-16	43.28	45.61	6,642.06
							Jul-16	43.36	45.69	6,641.98
							Oct-16	43.49	45.82	6,641.85
							Jan-17	43.60	45.93	6,641.74
							Apr-17	43.49	45.82	6,641.85
							Jul-17	43.62	45.95	6,641.72
							Oct-17	43.83	46.16	6,641.51
							Jan-18	43.82	46.15	6,641.52
							Apr-18	43.77	46.10	6,641.57
							Jul-18	43.93	46.26	6,641.41
							Oct-18	43.92	46.25	6,641.42
							Jan-19	43.95	46.28	6,641.39
							Apr-19	44.05	46.38	6,641.29
		2.51			6,685.84	6,688.35	Jul-19	43.96	46.47	6,641.88
							Sep-19	43.99	46.50	6,641.85
							Jan-20	44.07	46.58	6,641.77
							Apr-20	43.83	46.34	6,642.01
							Jul-20	44.23	46.74	6,641.61
							Oct-20	44.27	46.78	6,641.57
							Jan-21	44.53	47.04	6,641.31
							Apr-21	44.28	46.79	6,641.56
							Jul-21	44.54	47.05	6,641.30
							Sep-21	44.69	47.20	6,641.15
							Jan-22	44.68	47.19	6,641.16
							Apr-22	44.72	47.23	6,641.12
MW22D	Alluvial	1.86	47.0-57.0	58.6	6,682.69	6,684.55	Jul-14	40.41	42.27	6,642.28
							Oct-14	40.55	42.41	6,642.14
							Jan-15	40.39	42.25	6,642.30
							Mar-15	40.45	42.31	6,642.24
							Jul-15	40.47	42.33	6,642.22
							Oct-15	40.71	42.57	6,641.98
							Jan-16	40.66	42.52	6,642.03
							Apr-16	40.81	42.67	6,641.88
							Jul-16	40.88	42.74	6,641.81
							Oct-16	41.06	42.92	6,641.63
							Jan-17	41.07	42.93	6,641.62
							Apr-17	41.06	42.92	6,641.63
							Jul-17	41.20	43.06	6,641.49
							Oct-17	41.45	43.31	6,641.24
							Jan-18	41.54	43.40	6,641.15
							Apr-18	41.33	43.19	6,641.36
							Jul-18	41.55	43.41	6,641.14
							Oct-18	41.69	43.55	6,641.00
							Jan-19	41.55	43.41	6,641.14
							Apr-19	41.61	43.47	6,641.08
		2.06			6,683.28	6,685.34	Jul-19	41.58	43.64	6,641.70
							Sep-19	41.58	43.64	6,641.70
							Jan-20	41.71	43.77	6,641.57
							Apr-20	41.67	43.73	6,641.61
							Jul-20	41.80	43.86	6,641.48
							Oct-20	41.91	43.97	6,641.37
							Jan-21	42.17	44.23	6,641.11
							Apr-21	41.91	43.97	6,641.37
							Jul-21	42.20	44.26	6,641.08
							Sep-21	43.65	45.71	6,639.63
							Jan-22	42.37	44.43	6,640.91
							Apr-22	42.36	44.42	6,640.92

TABLE 3-1: NORTHERN AREA WATER-LEVEL MEASUREMENTS BY GROUNDWATER ZONE
2024 INTERIM NORTHERN AREA GROUNDWATER MONITORING PLAN
Fort Wingate Depot Activity, New Mexico

Well ID	GW Zone	Casing Stick Up Length (feet)	Screened Interval (feet bgs)	Total Well Depth (feet bgs)	Well Ground Elevation (NAVD 88)	Well TOC Elevation (NAVD 88)	Water Level Measurement Date	Depth to Water (feet bgs)	Depth to Water (feet btoc)	Groundwater Elevation (NAVD 88)
MW22S	Alluvial	2.00	31.0-41.0	43.5	6,682.69	6,684.69	Jul-14	40.17	42.17	6,642.52
							Oct-14	40.27	42.27	6,642.42
							Jan-15	40.18	42.18	6,642.51
							Mar-15	40.37	42.37	6,642.32
							Jul-15	40.29	42.29	6,642.40
							Oct-15	40.53	42.53	6,642.16
							Jan-16	40.47	42.47	6,642.22
							Apr-16	40.61	42.61	6,642.08
							Jul-16	40.70	42.70	6,641.99
							Oct-16	Dry	Dry	Dry
							Jan-17	Dry	Dry	Dry
							Apr-17	Dry	Dry	Dry
							Jul-17	Dry	Dry	Dry
							Oct-17	Dry	Dry	Dry
							Jan-18	Dry	Dry	Dry
							Apr-18	Dry	Dry	Dry
							Jul-18	Dry	Dry	Dry
							Oct-18	Dry	Dry	Dry
							Jan-19	Dry	Dry	Dry
							Apr-19	Dry	Dry	Dry
		2.05			6,683.28	6,685.33	Jul-19	Dry	Dry	Dry
							Sep-19	Dry	Dry	Dry
							Jan-20	Dry	Dry	Dry
							Apr-20	Dry	Dry	Dry
							Jul-20	Dry	Dry	Dry
							Oct-20	Dry	Dry	Dry
							Jan-21	Dry	Dry	Dry
							Apr-21	Dry	Dry	Dry
							Jul-21	Dry	Dry	Dry
							Sep-21	Dry	Dry	Dry
MW23	Alluvial	2.04	63.5-133.5	134.0	6,652.46	6,654.50	Jul-14	13.16	15.20	6,639.30
							Oct-14	13.49	15.53	6,638.97
							Jan-15	13.22	15.26	6,639.24
							Mar-15	12.71	14.75	6,639.75
							Jul-15	12.64	14.68	6,639.82
							Oct-15	13.08	15.12	6,639.38
							Jan-16	12.94	14.98	6,639.52
							Apr-16	13.32	15.36	6,639.14
							Jul-16	13.00	15.04	6,639.46
							Oct-16	13.59	15.63	6,638.87
							Jan-17	13.33	15.37	6,639.13
							Apr-17	12.72	14.76	6,639.74
							Jul-17	12.96	15.00	6,639.50
							Oct-17	13.36	15.40	6,639.10
							Jan-18	13.35	15.39	6,639.11
							Apr-18	13.47	15.51	6,638.99
							Jul-18	13.90	15.94	6,638.56
							Oct-18	13.98	16.02	6,638.48
							Jan-19	13.99	16.03	6,638.47
							Apr-19	13.10	15.14	6,639.36
		2.10			6,652.99	6,655.09	Jul-19	13.65	15.75	6,639.34
							Sep-19	13.93	16.03	6,639.06
							Jan-20	14.05	16.15	6,638.94
							Apr-20	16.02	18.12	6,636.97
							Jul-20	14.41	16.51	6,638.58
							Oct-20	14.90	17.00	6,638.09
							Jan-21	15.16	17.26	6,637.83
							Apr-21	15.06	17.16	6,637.93
							Jul-21	15.48	17.58	6,637.51
							Oct-21	15.10	17.20	6,637.89
14.68	16.78	6,638.31								
			Apr-22	14.35	16.45	6,638.64				

TABLE 3-1: NORTHERN AREA WATER-LEVEL MEASUREMENTS BY GROUNDWATER ZONE
2024 INTERIM NORTHERN AREA GROUNDWATER MONITORING PLAN
Fort Wingate Depot Activity, New Mexico

Well ID	GW Zone	Casing Stick Up Length (feet)	Screened Interval (feet bgs)	Total Well Depth (feet bgs)	Well Ground Elevation (NAVD 88)	Well TOC Elevation (NAVD 88)	Water Level Measurement Date	Depth to Water (feet bgs)	Depth to Water (feet btoc)	Groundwater Elevation (NAVD 88)
MW24	Alluvial	1.99	16.0-66.0	66.5	6,655.09	6,657.08	Jul-14	17.87	19.86	6,637.22
							Oct-14	18.32	20.31	6,636.77
							Jan-15	17.72	19.71	6,637.37
							Mar-15	17.31	19.30	6,637.78
							Jul-15	17.50	19.49	6,637.59
							Oct-15	19.54	21.53	6,635.55
							Jan-16	17.63	19.62	6,637.46
							Apr-16	17.95	19.94	6,637.14
							Jul-16	17.79	19.78	6,637.30
							Oct-16	18.64	20.63	6,636.45
							Jan-17	17.85	19.84	6,637.24
							Apr-17	17.30	19.29	6,637.79
							Jul-17	17.82	19.81	6,637.27
							Oct-17	18.76	20.75	6,636.33
							Jan-18	16.57	18.56	6,638.52
							Apr-18	17.98	19.97	6,637.11
							Jul-18	18.61	20.60	6,636.48
							Oct-18	18.93	20.92	6,636.16
							Jan-19	18.66	20.65	6,636.43
							Apr-19	18.06	20.05	6,637.03
		1.85	16.0-66.0	66.5	6,655.72	6,657.57	Jul-19	18.57	20.42	6,637.15
							Sep-19	17.31	19.16	6,638.41
							Jan-20	18.10	19.95	6,637.62
							Apr-20	18.14	19.99	6,637.58
							Jul-20	19.49	21.34	6,636.23
							Oct-20	19.30	21.15	6,636.42
							Jan-21	19.75	21.60	6,635.97
							Apr-21	19.35	21.20	6,636.37
							Jul-21	20.06	21.91	6,635.66
							Oct-21	20.14	21.99	6,635.58
MW25	Alluvial	2.87	45.5-65.5	65.5	6,676.18	6,679.05	Nov-19	38.90	41.77	6,637.28
							Apr-20	38.45	41.32	6,637.73
							Jul-20	38.81	41.68	6,637.37
							Oct-20	39.05	41.92	6,637.13
							Jan-21	38.99	41.86	6,637.19
							Apr-21	38.65	41.52	6,637.53
							Jul-21	39.14	42.01	6,637.04
							Oct-21	39.32	42.19	6,636.86
MW26	Alluvial	2.97	40-60	60.0	6,670.96	6,673.93	Jan-22	39.16	42.03	6,637.02
							Apr-22	39.09	41.96	6,637.09
							Nov-19	35.73	38.70	6,635.23
							Apr-20	27.36	30.33	6,643.60
							Jul-20	35.55	38.52	6,635.41
							Oct-20	35.76	38.73	6,635.20
							Jan-21	35.87	38.84	6,635.09
							Apr-21	35.59	38.56	6,635.37
MW27	Alluvial	2.46	43-63	63.0	6,690.94	6,693.40	Jul-21	35.87	38.84	6,635.09
							Oct-21	35.95	38.92	6,635.01
							Jan-22	36.04	39.01	6,634.92
							Apr-22	35.64	38.61	6,635.32
							Nov-19	42.68	45.14	6,648.26
							Apr-20	47.94	50.40	6,643.00
							Jul-20	48.02	50.48	6,642.92
							Oct-20	48.07	50.53	6,642.87
							Jan-21	55.04	57.50	6,635.90
							Apr-21	48.17	50.63	6,642.77
							Jul-21	48.34	50.80	6,642.60
							Sep-21	48.40	50.86	6,642.54
							Jan-22	48.46	50.92	6,642.48
							Apr-22	48.50	50.96	6,642.44

TABLE 3-1: NORTHERN AREA WATER-LEVEL MEASUREMENTS BY GROUNDWATER ZONE
2024 INTERIM NORTHERN AREA GROUNDWATER MONITORING PLAN
Fort Wingate Depot Activity, New Mexico

Well ID	GW Zone	Casing Stick Up Length (feet)	Screened Interval (feet bgs)	Total Well Depth (feet bgs)	Well Ground Elevation (NAVD 88)	Well TOC Elevation (NAVD 88)	Water Level Measurement Date	Depth to Water (feet bgs)	Depth to Water (feet btoc)	Groundwater Elevation (NAVD 88)
MW28	Alluvial	2.66	40-60	60.0	6,689.51	6,692.17	Nov-19	46.11	48.77	6,643.40
							Apr-20	46.28	48.94	6,643.23
							Jul-20	46.32	48.98	6,643.19
							Oct-20	46.37	49.03	6,643.14
							Jan-21	46.57	49.23	6,642.94
							Apr-21	46.45	49.11	6,643.06
							Jul-21	46.57	49.23	6,642.94
							Sep-21	46.66	49.32	6,642.85
							Jan-22	46.70	49.36	6,642.81
MW29	Alluvial	2.65	37-57	57.0	6,684.49	6,687.14	Apr-22	46.83	49.49	6,642.68
							Nov-19	41.47	44.12	6,643.02
							Apr-20	41.58	44.23	6,642.91
							Jul-20	41.70	44.35	6,642.79
							Oct-20	41.77	44.42	6,642.72
							Jan-21	41.94	44.59	6,642.55
							Apr-21	41.91	44.56	6,642.58
							Jul-21	42.24	44.89	6,642.25
							Sep-21	44.91	47.56	6,639.58
MW30	Alluvial	2.75	40-60	60.0	6,686.83	6,689.57	Jan-22	42.21	44.86	6,642.28
							Apr-22	42.24	44.89	6,642.25
							Nov-19	43.67	46.42	6,643.15
							Apr-20	43.82	46.57	6,643.00
							Jul-20	44.16	46.91	6,642.66
							Oct-20	43.96	46.71	6,642.86
							Jan-21	44.26	47.01	6,642.56
							Apr-21	43.99	46.74	6,642.83
							Jul-21	44.29	47.04	6,642.53
MW31	Alluvial	2.68	36-56	56.0	6,681.76	6,684.45	Sep-21	44.27	47.02	6,642.55
							Jan-22	44.57	47.32	6,642.25
							Apr-22	44.57	47.32	6,642.25
							Nov-19	40.50	43.18	6,641.27
							Apr-20	40.39	43.07	6,641.38
							Jul-20	40.64	43.32	6,641.13
							Oct-20	40.76	43.44	6,641.01
							Jan-21	40.98	43.66	6,640.79
							Apr-21	40.69	43.37	6,641.08
MW32	Alluvial	2.54	40-60	60.0	6,684.84	6,687.37	Jul-21	41.00	43.68	6,640.77
							Sep-21	41.16	43.84	6,640.61
							Jan-22	41.15	43.83	6,640.62
							Apr-22	41.19	43.87	6,640.58
							Nov-19	44.03	46.57	6,640.80
							Apr-20	43.73	46.27	6,641.10
							Jul-20	44.99	47.53	6,639.84
							Oct-20	44.13	46.67	6,640.70
							Jan-21	44.30	46.84	6,640.53
MW33	Alluvial	3.01	37-57	57.0	6,675.98	6,679.00	Apr-21	44.02	46.56	6,640.81
							Jul-21	44.34	46.88	6,640.49
							Sep-21	44.51	47.05	6,640.32
							Jan-22	44.42	46.96	6,640.41
							Apr-22	44.41	46.95	6,640.42
							Nov-19	42.16	45.17	6,633.83
							Apr-20	41.64	44.65	6,634.35
							Jul-20	41.78	44.79	6,634.21
							Oct-20	42.01	45.02	6,633.98
							Jan-21	42.21	45.22	6,633.78
							Apr-21	41.96	44.97	6,634.03
							Jul-21	42.26	45.27	6,633.73
							Oct-21	42.34	45.35	6,633.65
							Jan-22	42.57	45.58	6,633.42
							Apr-22	42.46	45.47	6,633.53

TABLE 3-1: NORTHERN AREA WATER-LEVEL MEASUREMENTS BY GROUNDWATER ZONE
2024 INTERIM NORTHERN AREA GROUNDWATER MONITORING PLAN
Fort Wingate Depot Activity, New Mexico

Well ID	GW Zone	Casing Stick Up Length (feet)	Screened Interval (feet bgs)	Total Well Depth (feet bgs)	Well Ground Elevation (NAVD 88)	Well TOC Elevation (NAVD 88)	Water Level Measurement Date	Depth to Water (feet bgs)	Depth to Water (feet btoc)	Groundwater Elevation (NAVD 88)
MW34	Alluvial	2.88	40-60	60.0	6,672.91	6,675.80	Nov-19	40.83	43.71	6,632.09
							Apr-20	40.33	43.21	6,632.59
							Jul-20	40.35	43.23	6,632.57
							Oct-20	40.73	43.61	6,632.19
							Jan-21	40.72	43.60	6,632.20
							Apr-21	40.72	43.60	6,632.20
							Jul-21	40.81	43.69	6,632.11
							Oct-21	40.67	43.55	6,632.25
							Jan-22	40.99	43.87	6,631.93
MW35	Alluvial	2.42	41-61	61.0	6,708.96	6,711.38	Apr-22	40.94	43.82	6,631.98
							Nov-19	20.87	23.29	6,688.09
							Apr-20	30.67	33.09	6,678.29
							Jul-20	31.17	33.59	6,677.79
							Oct-20	31.57	33.99	6,677.39
							Jan-21	31.83	34.25	6,677.13
							Apr-21	31.79	34.21	6,677.17
							Jul-21	32.38	34.80	6,676.58
							Sep-21	32.63	35.05	6,676.33
MW36S	Alluvial	2.77	30-50	50.0	6,653.54	6,656.31	Jan-22	32.69	35.11	6,676.27
							Apr-22	32.58	35.00	6,676.38
							Nov-19	19.18	21.95	6,634.36
							Apr-20	18.97	21.74	6,634.57
							Jul-20	19.33	22.10	6,634.21
							Oct-20	19.87	22.64	6,633.67
							Jan-21	20.09	22.86	6,633.45
							Apr-21	19.69	22.46	6,633.85
							Jul-21	20.01	22.78	6,633.53
MW36D	Alluvial	2.75	55-75	75.0	6,653.48	6,656.23	Oct-21	20.19	22.96	6,633.35
							Jan-22	20.41	23.18	6,633.13
							Apr-22	19.89	22.66	6,633.65
							Nov-19	14.40	17.15	6,639.08
							Apr-20	14.14	16.89	6,639.34
							Jul-20	14.70	17.45	6,638.78
							Oct-20	15.16	17.91	6,638.32
							Jan-21	15.16	17.91	6,638.32
							Apr-21	15.03	17.78	6,638.45
MW37	Alluvial	2.68	25-45	45.0	6,663.34	6,666.02	Jul-21	15.73	18.48	6,637.75
							Oct-21	15.50	18.25	6,637.98
							Jan-22	14.99	17.74	6,638.49
							Apr-22	14.62	17.37	6,638.86
							Jan-21	27.71	30.39	6,635.63
							Apr-21	27.41	30.09	6,635.93
MW38	Alluvial	2.43	30-50	50.0	6,665.48	6,667.91	Jul-21	27.81	30.49	6,635.53
							Oct-21	27.96	30.64	6,635.38
							Jan-22	28.00	30.68	6,635.34
							Apr-22	27.76	30.44	6,635.58
							Jan-21	32.09	34.52	6,633.39
							Apr-21	31.80	34.23	6,633.68
MW39	Alluvial	2.60	30-50	50.0	6,670.64	6,673.24	Jul-21	32.28	34.71	6,633.20
							Oct-21	32.44	34.87	6,633.04
							Jan-22	32.33	34.76	6,633.15
							Apr-22	32.05	34.48	6,633.43
							Jan-21	35.46	38.06	6,635.18
							Apr-21	35.25	37.85	6,635.39
							Jul-21	35.67	38.27	6,634.97
							Oct-21	35.85	38.45	6,634.79
							Jan-22	35.75	38.35	6,634.89
							Apr-22	35.54	38.14	6,635.10

TABLE 3-1: NORTHERN AREA WATER-LEVEL MEASUREMENTS BY GROUNDWATER ZONE
2024 INTERIM NORTHERN AREA GROUNDWATER MONITORING PLAN
Fort Wingate Depot Activity, New Mexico

Well ID	GW Zone	Casing Stick Up Length (feet)	Screened Interval (feet bgs)	Total Well Depth (feet bgs)	Well Ground Elevation (NAVD 88)	Well TOC Elevation (NAVD 88)	Water Level Measurement Date	Depth to Water (feet bgs)	Depth to Water (feet btoc)	Groundwater Elevation (NAVD 88)
SMW01	Alluvial	1.53	29.9-49.9	50.2	6,668.41	6,669.94	Jul-14	29.32	30.85	6,639.09
							Oct-14	29.56	31.09	6,638.85
							Jan-15	29.19	30.72	6,639.22
							Mar-15	29.27	30.80	6,639.14
							Jul-15	29.66	31.19	6,638.75
							Oct-15	29.92	31.45	6,638.49
							Jan-16	29.67	31.20	6,638.74
							Apr-16	29.88	31.41	6,638.53
							Jul-16	30.30	31.83	6,638.11
							Oct-16	30.58	32.11	6,637.83
							Jan-17	30.34	31.87	6,638.07
							Apr-17	31.27	32.80	6,637.14
							Jul-17	30.77	32.30	6,637.64
							Oct-17	31.17	32.70	6,637.24
							Jan-18	30.84	32.37	6,637.57
							Apr-18	30.66	32.19	6,637.75
							Jul-18	31.25	32.78	6,637.16
							Oct-18	31.29	32.82	6,637.12
							Jan-19	31.32	32.85	6,637.09
							Apr-19	31.26	32.79	6,637.15
		1.37			6,668.68	6,670.05	Jul-19	31.52	32.89	6,637.16
							Sep-19	31.13	32.50	6,637.55
							Jan-20	31.66	33.03	6,637.02
							Apr-20	31.38	32.75	6,637.30
							Jul-20	31.49	32.86	6,637.19
							Oct-20	31.94	33.31	6,636.74
							Jan-21	32.35	33.72	6,636.33
							Apr-21	31.58	32.95	6,637.10
							Jul-21	32.75	34.12	6,635.93
							Oct-21	32.90	34.27	6,635.78
							Jan-22	32.75	34.12	6,635.93
							Apr-22	32.71	34.08	6,635.97
TMW01	Alluvial	2.05	44.0-59.0	60.0	6,709.79	6,711.84	Jul-14	36.66	38.71	6,673.13
							Oct-14	36.96	39.01	6,672.83
							Jan-15	36.96	39.01	6,672.83
							Mar-15	37.18	39.23	6,672.61
							Jul-15	37.32	39.37	6,672.47
							Oct-15	37.57	39.62	6,672.22
							Jan-16	37.58	39.63	6,672.21
							Apr-16	37.89	39.94	6,671.90
							Jul-16	38.11	40.16	6,671.68
							Oct-16	38.36	40.41	6,671.43
							Jan-17	38.29	40.34	6,671.50
							Apr-17	38.61	40.66	6,671.18
							Jul-17	38.80	40.85	6,670.99
							Oct-17	39.15	41.20	6,670.64
							Jan-18	39.25	41.30	6,670.54
							Apr-18	39.36	41.41	6,670.43
							Jul-18	39.63	41.68	6,670.16
							Oct-18	39.73	41.78	6,670.06
							Jan-19	40.10	42.15	6,669.69
							Apr-19	40.07	42.12	6,669.72
		1.72			6,710.79	6,712.50	Jul-19	40.78	42.50	6,670.00
							Sep-19	40.79	42.51	6,669.99
							Jan-20	41.10	42.82	6,669.68
							Apr-20	41.26	42.98	6,669.52
							Jul-20	41.48	43.20	6,669.30
							Oct-20	41.69	43.41	6,669.09
							Jan-21	41.85	43.57	6,668.93
							Apr-21	41.96	43.68	6,668.82
							Jul-21	42.25	43.97	6,668.53
							Oct-21	42.44	44.16	6,668.34
							Jan-22	42.68	44.40	6,668.10
							Apr-22	42.74	44.46	6,668.04

TABLE 3-1: NORTHERN AREA WATER-LEVEL MEASUREMENTS BY GROUNDWATER ZONE
2024 INTERIM NORTHERN AREA GROUNDWATER MONITORING PLAN
Fort Wingate Depot Activity, New Mexico

Well ID	GW Zone	Casing Stick Up Length (feet)	Screened Interval (feet bgs)	Total Well Depth (feet bgs)	Well Ground Elevation (NAVD 88)	Well TOC Elevation (NAVD 88)	Water Level Measurement Date	Depth to Water (feet bgs)	Depth to Water (feet btoc)	Groundwater Elevation (NAVD 88)
TMW02	Alluvial	2.01	67.9-81.9	85.0	6,703.34	6,705.35	Jul-14	53.67	55.68	6,649.67
							Oct-14	53.75	55.76	6,649.59
							Jan-15	53.68	55.69	6,649.66
							Mar-15	53.81	55.82	6,649.53
							Jul-15	53.84	55.85	6,649.50
							Oct-15	53.89	55.90	6,649.45
							Jan-16	53.81	55.82	6,649.53
							Apr-16	54.03	56.04	6,649.31
							Jul-16	54.75	56.76	6,648.59
							Oct-16	54.17	56.18	6,649.17
							Jan-17	53.93	55.94	6,649.41
							Apr-17	54.15	56.16	6,649.19
							Jul-17	55.27	57.28	6,648.07
							Oct-17	54.38	56.39	6,648.96
							Jan-18	54.35	56.36	6,648.99
							Apr-18	54.42	56.43	6,648.92
		1.53			6,704.51	6,706.03	Jul-18	54.27	56.28	6,649.07
							Oct-18	54.47	56.48	6,648.87
							Jan-19	54.47	56.48	6,648.87
							Apr-19	54.49	56.50	6,648.85
							Jul-19	55.19	56.72	6,649.31
							Sep-19	54.95	56.48	6,649.55
							Jan-20	55.10	56.63	6,649.40
							Apr-20	55.15	56.68	6,649.35
							Jul-20	55.15	56.68	6,649.35
							Oct-20	55.26	56.79	6,649.24
							Jan-21	55.33	56.86	6,649.17
							Apr-21	55.28	56.81	6,649.22
							Jul-21	55.39	56.92	6,649.11
							Sep-21	55.42	56.95	6,649.08
							Jan-22	55.55	57.08	6,648.95
							Apr-22	55.56	57.09	6,648.94
TMW03	Alluvial	2.06	49.8-69.8	70.1	6,700.37	6,702.43	Jul-14	55.09	57.15	6,645.28
							Oct-14	55.18	57.24	6,645.19
							Jan-15	55.12	57.18	6,645.25
							Mar-15	55.26	57.32	6,645.11
							Jul-15	55.26	57.32	6,645.11
							Oct-15	55.33	57.39	6,645.04
							Jan-16	55.26	57.32	6,645.11
							Apr-16	55.34	57.40	6,645.03
							Jul-16	55.39	57.45	6,644.98
							Oct-16	55.44	57.50	6,644.93
							Jan-17	55.33	57.39	6,645.04
							Apr-17	55.50	57.56	6,644.87
							Jul-17	55.55	57.61	6,644.82
							Oct-17	55.63	57.69	6,644.74
							Jan-18	55.69	57.75	6,644.68
							Apr-18	55.67	57.73	6,644.70
							Jul-18	55.76	57.82	6,644.61
							Oct-18	55.73	57.79	6,644.64
							Jan-19	55.88	57.94	6,644.49
							Apr-19	55.83	57.89	6,644.54
		1.87			6,701.35	6,703.22	Jul-19	56.14	58.01	6,645.21
							Sep-19	56.02	57.89	6,645.33
							Jan-20	56.21	58.08	6,645.14
							Apr-20	56.23	58.10	6,645.12
							Jul-20	56.22	58.09	6,645.13
							Oct-20	56.38	58.25	6,644.97
							Jan-21	56.39	58.26	6,644.96
							Apr-21	56.43	58.30	6,644.92
							Jul-21	56.43	58.30	6,644.92
							Sep-21	56.53	58.40	6,644.82
							Jan-22	56.63	58.50	6,644.72
							Apr-22	56.64	58.51	6,644.71

TABLE 3-1: NORTHERN AREA WATER-LEVEL MEASUREMENTS BY GROUNDWATER ZONE
2024 INTERIM NORTHERN AREA GROUNDWATER MONITORING PLAN
Fort Wingate Depot Activity, New Mexico

Well ID	GW Zone	Casing Stick Up Length (feet)	Screened Interval (feet bgs)	Total Well Depth (feet bgs)	Well Ground Elevation (NAVD 88)	Well TOC Elevation (NAVD 88)	Water Level Measurement Date	Depth to Water (feet bgs)	Depth to Water (feet btoc)	Groundwater Elevation (NAVD 88)
TMW04	Alluvial	1.86	50.0-70.0	70.5	6,699.00	6,700.86	Jul-14	54.59	56.45	6,644.41
							Oct-14	54.65	56.51	6,644.35
							Jan-15	54.56	56.42	6,644.44
							Mar-15	54.66	56.52	6,644.34
							Jul-15	54.64	56.50	6,644.36
							Oct-15	54.68	56.54	6,644.32
							Jan-16	54.64	56.50	6,644.36
							Apr-16	54.83	56.69	6,644.17
							Jul-16	54.80	56.66	6,644.20
							Oct-16	54.85	56.71	6,644.15
							Jan-17	55.63	57.49	6,643.37
							Apr-17	54.87	56.73	6,644.13
							Jul-17	54.94	56.80	6,644.06
							Oct-17	55.02	56.88	6,643.98
							Jan-18	55.03	56.89	6,643.97
							Apr-18	55.03	56.89	6,643.97
							Jul-18	55.12	56.98	6,643.88
							Oct-18	54.92	56.78	6,644.08
							Jan-19	55.18	57.04	6,643.82
							Apr-19	55.17	57.03	6,643.83
		1.80			6,699.85	6,701.65	Jul-19	55.32	57.12	6,644.53
							Sep-19	55.07	56.87	6,644.78
							Jan-20	55.31	57.11	6,644.54
							Apr-20	55.40	57.20	6,644.45
							Jul-20	55.29	57.09	6,644.56
							Oct-20	55.40	57.20	6,644.45
							Jan-21	55.51	57.31	6,644.34
							Apr-21	55.44	57.24	6,644.41
							Jul-21	55.51	57.31	6,644.34
							Sep-21	55.54	57.34	6,644.31
							Jan-22	55.28	57.08	6,644.57
							Apr-22	55.71	57.51	6,644.14
TMW06	Alluvial	1.55	45.0-55.0	57.0	6,689.08	6,690.63	Jul-14	45.64	47.19	6,643.44
							Oct-14	45.72	47.27	6,643.36
							Jan-15	45.55	47.10	6,643.53
							Mar-15	45.76	47.31	6,643.32
							Jul-15	45.67	47.22	6,643.41
							Oct-15	45.78	47.33	6,643.30
							Jan-16	45.59	47.14	6,643.49
							Apr-16	45.97	47.52	6,643.11
							Jul-16	46.01	47.56	6,643.07
							Oct-16	45.96	47.51	6,643.12
							Jan-17	45.62	47.17	6,643.46
							Apr-17	46.03	47.58	6,643.05
							Jul-17	46.12	47.67	6,642.96
							Oct-17	46.23	47.78	6,642.85
							Jan-18	46.16	47.71	6,642.92
							Apr-18	46.14	47.69	6,642.94
							Jul-18	46.21	47.76	6,642.87
							Oct-18	46.08	47.63	6,643.00
							Jan-19	46.24	47.79	6,642.84
							Apr-19	46.41	47.96	6,642.67
		1.47			6,689.87	6,691.34	Jul-19	46.56	48.03	6,643.31
							Sep-19	46.35	47.82	6,643.52
							Jan-20	46.45	47.92	6,643.42
							Apr-20	46.64	48.11	6,643.23
							Jul-20	46.55	48.02	6,643.32
							Oct-20	46.62	48.09	6,643.25
							Jan-21	46.89	48.36	6,642.98
							Apr-21	46.61	48.08	6,643.26
							Jul-21	46.87	48.34	6,643.00
							Sep-21	46.88	48.35	6,642.99
							Jan-22	47.08	48.55	6,642.79
							Apr-22	47.28	48.75	6,642.59

TABLE 3-1: NORTHERN AREA WATER-LEVEL MEASUREMENTS BY GROUNDWATER ZONE
2024 INTERIM NORTHERN AREA GROUNDWATER MONITORING PLAN
Fort Wingate Depot Activity, New Mexico

Well ID	GW Zone	Casing Stick Up Length (feet)	Screened Interval (feet bgs)	Total Well Depth (feet bgs)	Well Ground Elevation (NAVD 88)	Well TOC Elevation (NAVD 88)	Water Level Measurement Date	Depth to Water (feet bgs)	Depth to Water (feet btoc)	Groundwater Elevation (NAVD 88)			
TMW07	Alluvial	1.39	65.0-75.0	76.0	6,689.08	6,690.47	Jul-14	46.02	47.41	6,643.06			
							Oct-14	45.67	47.06	6,643.41			
							Jan-15	45.86	47.25	6,643.22			
							Mar-15	45.71	47.10	6,643.37			
							Jul-15	45.93	47.32	6,643.15			
							Oct-15	45.65	47.04	6,643.43			
							Jan-16	45.49	46.88	6,643.59			
							Apr-16	45.56	46.95	6,643.52			
							Jul-16	45.76	47.15	6,643.32			
							Oct-16	45.61	47.00	6,643.47			
							Jan-17	45.80	47.19	6,643.28			
							Apr-17	45.59	46.98	6,643.49			
							Jul-17	46.47	47.86	6,642.61			
							Oct-17	46.39	47.78	6,642.69			
							Jan-18	46.29	47.68	6,642.79			
							Apr-18	45.75	47.14	6,643.33			
		Jul-18			46.38	47.77	6,642.70						
		Oct-18			45.71	47.10	6,643.37						
		Jan-19			46.19	47.58	6,642.89						
		Apr-19			45.95	47.34	6,643.13						
		1.38			6,689.84	6,691.23	Jul-19	46.51	47.89	6,643.34			
							Sep-19	45.96	47.34	6,643.89			
							Jan-20	46.47	47.85	6,643.38			
							Apr-20	45.91	47.29	6,643.94			
							Jul-20	46.39	47.77	6,643.46			
							Oct-20	46.17	47.55	6,643.68			
							Jan-21	46.73	48.11	6,643.12			
							Apr-21	46.01	47.39	6,643.84			
							Jul-21	46.62	48.00	6,643.23			
							Sep-21	46.20	47.58	6,643.65			
							Jan-22	47.08	48.46	6,642.77			
							Apr-22	46.45	47.83	6,643.40			
TMW08	Alluvial		1.76	30.0-60.0			62.0	6,678.55	6,680.31	Jul-14	35.17	36.93	6,643.38
										Oct-14	35.31	37.07	6,643.24
										Jan-15	35.18	36.94	6,643.37
										Mar-15	35.41	37.17	6,643.14
		Jul-15			35.32	37.08				6,643.23			
		Oct-15			35.44	37.20				6,643.11			
		Jan-16			35.28	37.04				6,643.27			
		Apr-16			35.62	37.38				6,642.93			
		Jul-16			35.60	37.36				6,642.95			
		Oct-16			35.81	37.57				6,642.74			
		Jan-17			35.57	37.33				6,642.98			
		Apr-17			35.82	37.58				6,642.73			
		Jul-17			35.94	37.70				6,642.61			
		Oct-17			36.21	37.97				6,642.34			
		Jan-18			35.98	37.74				6,642.57			
		Apr-18			35.91	37.67				6,642.64			
		Jul-18	36.13		37.89	6,642.42							
		Oct-18	35.88		37.64	6,642.67							
		Jan-19	35.31		37.07	6,643.24							
		Apr-19	36.38		38.14	6,642.17							
		1.49	6,679.56		6,681.05	Jul-19		36.67	38.16	6,642.89			
						Sep-19		36.24	37.73	6,643.32			
						Jan-20		36.60	38.09	6,642.96			
						Apr-20		36.81	38.30	6,642.75			
						Jul-20		36.72	38.21	6,642.84			
						Oct-20		36.90	38.39	6,642.66			
						Jan-21		37.20	38.69	6,642.36			
						Apr-21		36.93	38.42	6,642.63			
						Jul-21		37.28	38.77	6,642.28			
						Oct-21		37.20	38.69	6,642.36			
						Jan-22		37.46	38.95	6,642.10			
						Apr-22		37.46	38.95	6,642.10			

TABLE 3-1: NORTHERN AREA WATER-LEVEL MEASUREMENTS BY GROUNDWATER ZONE
2024 INTERIM NORTHERN AREA GROUNDWATER MONITORING PLAN
Fort Wingate Depot Activity, New Mexico

Well ID	GW Zone	Casing Stick Up Length (feet)	Screened Interval (feet bgs)	Total Well Depth (feet bgs)	Well Ground Elevation (NAVD 88)	Well TOC Elevation (NAVD 88)	Water Level Measurement Date	Depth to Water (feet bgs)	Depth to Water (feet btoc)	Groundwater Elevation (NAVD 88)
TMW10	Alluvial	2.30	28.0-58.0	65.0	6,677.74	6,680.04	Jul-14	35.48	37.78	6,642.26
							Oct-14	35.60	37.90	6,642.14
							Jan-15	35.45	37.75	6,642.29
							Mar-15	35.64	37.94	6,642.10
							Jul-15	35.62	37.92	6,642.12
							Oct-15	35.77	38.07	6,641.97
							Jan-16	35.61	37.91	6,642.13
							Apr-16	35.86	38.16	6,641.88
							Jul-16	35.98	38.28	6,641.76
							Oct-16	36.20	38.50	6,641.54
							Jan-17	36.07	38.37	6,641.67
							Apr-17	36.07	38.37	6,641.67
							Jul-17	36.26	38.56	6,641.48
							Oct-17	36.60	38.90	6,641.14
							Jan-18	36.47	38.77	6,641.27
							Apr-18	36.38	38.68	6,641.36
							Jul-18	36.64	38.94	6,641.10
							Oct-18	36.62	38.92	6,641.12
							Jan-19	36.82	39.12	6,640.92
							Apr-19	36.82	39.12	6,640.92
		1.91			6,678.85	6,680.76	Jul-19	37.35	39.26	6,641.50
							Sep-19	37.23	39.14	6,641.62
							Jan-20	37.48	39.39	6,641.37
							Apr-20	37.49	39.40	6,641.36
							Jul-20	37.54	39.45	6,641.31
							Oct-20	37.78	39.69	6,641.07
							Jan-21	38.00	39.91	6,640.85
							Apr-21	39.61	41.52	6,639.24
							Jul-21	38.04	39.95	6,640.81
							Sep-21	38.12	40.03	6,640.73
							Jan-22	38.18	40.09	6,640.67
							Apr-22	38.24	40.15	6,640.61
TMW11	Alluvial	2.12	55.0-80.0	82.0	6,716.16	6,718.28	Jul-14	65.46	67.58	6,650.70
							Oct-14	65.61	67.73	6,650.55
							Jan-15	65.68	67.80	6,650.48
							Mar-15	65.69	67.81	6,650.47
							Jul-15	65.81	67.93	6,650.35
							Oct-15	65.98	68.10	6,650.18
							Jan-16	66.07	68.19	6,650.09
							Apr-16	66.10	68.22	6,650.06
							Jul-16	66.28	68.40	6,649.88
							Oct-16	66.27	68.39	6,649.89
							Jan-17	66.47	68.59	6,649.69
							Apr-17	66.84	68.96	6,649.32
							Jul-17	66.62	68.74	6,649.54
							Oct-17	66.85	68.97	6,649.31
							Jan-18	66.93	69.05	6,649.23
							Apr-18	67.00	69.12	6,649.16
							Jul-18	67.14	69.26	6,649.02
							Oct-18	67.31	69.43	6,648.85
							Jan-19	72.90	75.02	6,643.26
							Apr-19	72.09	74.21	6,644.07
		1.80			6,717.32	6,719.13	Jul-19	77.45	79.25	6,639.88
							Sep-19	76.68	78.48	6,640.65
							Jan-20	77.88	79.68	6,639.45
							Apr-20	77.13	78.93	6,640.20
							Jul-20	80.01	81.81	6,637.32
							Oct-20	80.16	81.96	6,637.17
							Jan-21	79.82	81.62	6,637.51
							Apr-21	Dry	Dry	Dry
							Jul-21	Dry	Dry	Dry
							Oct-21	80.17	81.97	6,637.16
							Jan-22	79.82	81.62	6,637.51
							Apr-22	79.29	81.09	6,638.04

TABLE 3-1: NORTHERN AREA WATER-LEVEL MEASUREMENTS BY GROUNDWATER ZONE
2024 INTERIM NORTHERN AREA GROUNDWATER MONITORING PLAN
Fort Wingate Depot Activity, New Mexico

Well ID	GW Zone	Casing Stick Up Length (feet)	Screened Interval (feet bgs)	Total Well Depth (feet bgs)	Well Ground Elevation (NAVD 88)	Well TOC Elevation (NAVD 88)	Water Level Measurement Date	Depth to Water (feet bgs)	Depth to Water (feet btoc)	Groundwater Elevation (NAVD 88)
TMW13	Alluvial	2.07	60.7-70.7	72.5	6,705.42	6,707.49	Jul-14	58.30	60.37	6,647.12
							Oct-14	58.40	60.47	6,647.02
							Jan-15	58.39	60.46	6,647.03
							Mar-15	58.43	60.50	6,646.99
							Jul-15	58.49	60.56	6,646.93
							Oct-15	58.59	60.66	6,646.83
							Jan-16	58.62	60.69	6,646.80
							Apr-16	58.68	60.75	6,646.74
							Jul-16	58.75	60.82	6,646.67
							Oct-16	58.89	60.96	6,646.53
							Jan-17	58.82	60.89	6,646.60
							Apr-17	58.93	61.00	6,646.49
							Jul-17	58.95	61.02	6,646.47
							Oct-17	59.13	61.20	6,646.29
							Jan-18	59.16	61.23	6,646.26
							Apr-18	59.18	61.25	6,646.24
							Jul-18	59.27	61.34	6,646.15
							Oct-18	59.34	61.41	6,646.08
							Jan-19	59.36	61.43	6,646.06
							Apr-19	59.40	61.47	6,646.02
		1.46			6,706.75	6,708.21	Jul-19	60.14	61.60	6,646.61
							Sep-19	60.14	61.60	6,646.61
							Jan-20	60.30	61.76	6,646.45
							Apr-20	60.36	61.82	6,646.39
							Jul-20	60.42	61.88	6,646.33
							Oct-20	60.54	62.00	6,646.21
							Jan-21	60.58	62.04	6,646.17
							Apr-21	60.67	62.13	6,646.08
							Jul-21	60.73	62.19	6,646.02
							Oct-21	60.86	62.32	6,645.89
								60.92	62.38	6,645.83
								60.97	62.43	6,645.78
TMW15	Alluvial	3.09	56.0-71.0	82.0	6,710.80	6,713.89	Jul-14	61.85	64.94	6,648.95
							Oct-14	61.96	65.05	6,648.84
							Jan-15	61.99	65.08	6,648.81
							Mar-15	62.02	65.11	6,648.78
							Jul-15	62.13	65.22	6,648.67
							Oct-15	62.26	65.35	6,648.54
							Jan-16	62.29	65.38	6,648.51
							Apr-16	62.33	65.42	6,648.47
							Jul-16	62.44	65.53	6,648.36
							Oct-16	62.61	65.70	6,648.19
							Jan-17	62.61	65.70	6,648.19
							Apr-17	62.65	65.74	6,648.15
							Jul-17	62.74	65.83	6,648.06
							Oct-17	63.06	66.15	6,647.74
							Jan-18	62.98	66.07	6,647.82
							Apr-18	63.00	66.09	6,647.80
							Jul-18	63.17	66.26	6,647.63
							Oct-18	63.25	66.34	6,647.55
							Jan-19	63.31	66.40	6,647.49
							Apr-19	63.39	66.48	6,647.41
		2.97			6,711.71	6,714.68	Jul-19	63.63	66.60	6,648.08
							Sep-19	63.71	66.68	6,648.00
							Jan-20	63.82	66.79	6,647.89
							Apr-20	63.76	66.73	6,647.95
							Jul-20	64.11	67.08	6,647.60
							Oct-20	64.14	67.11	6,647.57
							Jan-21	64.24	67.21	6,647.47
							Apr-21	64.33	67.30	6,647.38
							Jul-21	64.48	67.45	6,647.23
							Oct-21	64.58	67.55	6,647.13
							Jan-22	64.88	67.85	6,646.83
							Apr-22	64.78	67.75	6,646.93

TABLE 3-1: NORTHERN AREA WATER-LEVEL MEASUREMENTS BY GROUNDWATER ZONE
2024 INTERIM NORTHERN AREA GROUNDWATER MONITORING PLAN
Fort Wingate Depot Activity, New Mexico

Well ID	GW Zone	Casing Stick Up Length (feet)	Screened Interval (feet bgs)	Total Well Depth (feet bgs)	Well Ground Elevation (NAVD 88)	Well TOC Elevation (NAVD 88)	Water Level Measurement Date	Depth to Water (feet bgs)	Depth to Water (feet btoc)	Groundwater Elevation (NAVD 88)
TMW21	Alluvial	2.39	48.0-58.0	72.0	6,692.75	6,695.14	Jul-14	48.46	50.85	6,644.29
							Oct-14	48.51	50.90	6,644.24
							Jan-15	48.43	50.82	6,644.32
							Mar-15	48.52	50.91	6,644.23
							Jul-15	48.51	50.90	6,644.24
							Oct-15	48.49	50.88	6,644.26
							Jan-16	48.49	50.88	6,644.26
							Apr-16	48.66	51.05	6,644.09
							Jul-16	48.65	51.04	6,644.10
							Oct-16	48.69	51.08	6,644.06
							Jan-17	48.80	51.19	6,643.95
							Apr-17	48.73	51.12	6,644.02
							Jul-17	48.79	51.18	6,643.96
							Oct-17	48.94	51.33	6,643.81
							Jan-18	48.97	51.36	6,643.78
							Apr-18	48.94	51.33	6,643.81
							Jul-18	49.07	51.46	6,643.68
							Oct-18	49.04	51.43	6,643.71
							Jan-19	49.15	51.54	6,643.60
							Apr-19	49.13	51.52	6,643.62
		2.11			6,693.75	6,695.86	Jul-19	49.06	51.17	6,644.69
							Sep-19	49.52	51.63	6,644.23
							Jan-20	49.59	51.70	6,644.16
							Apr-20	49.90	52.01	6,643.85
							Jul-20	49.72	51.83	6,644.03
							Oct-20	49.79	51.90	6,643.96
							Jan-21	49.99	52.10	6,643.76
							Apr-21	49.83	51.94	6,643.92
							Jul-21	49.99	52.10	6,643.76
							Sep-21	50.10	52.21	6,643.65
							Jan-22	50.14	52.25	6,643.61
							Apr-22	50.20	52.31	6,643.55
TMW22	Alluvial	1.94	52.0-62.0	77.0	6,689.80	6,691.74	Jul-14	46.78	48.72	6,643.02
							Oct-14	46.74	48.68	6,643.06
							Jan-15	46.58	48.52	6,643.22
							Mar-15	46.77	48.71	6,643.03
							Jul-15	46.73	48.67	6,643.07
							Oct-15	46.77	48.71	6,643.03
							Jan-16	46.52	48.46	6,643.28
							Apr-16	46.89	48.83	6,642.91
							Jul-16	46.80	48.74	6,643.00
							Oct-16	46.55	48.49	6,643.25
							Jan-17	46.45	48.39	6,643.35
							Apr-17	46.82	48.76	6,642.98
							Jul-17	46.96	48.90	6,642.84
							Oct-17	47.11	49.05	6,642.69
							Jan-18	46.87	48.81	6,642.93
							Apr-18	46.91	48.85	6,642.89
							Jul-18	46.99	48.93	6,642.81
							Oct-18	46.62	48.56	6,643.18
							Jan-19	46.95	48.89	6,642.85
							Apr-19	47.09	49.03	6,642.71
		1.61			6,690.90	6,692.51	Jul-19	47.48	49.09	6,643.42
							Sep-19	47.14	48.75	6,643.76
							Jan-20	47.35	48.96	6,643.55
							Apr-20	47.41	49.02	6,643.49
							Jul-20	47.37	48.98	6,643.53
							Oct-20	47.45	49.06	6,643.45
							Jan-21	47.70	49.31	6,643.20
							Apr-21	47.43	49.04	6,643.47
							Jul-21	47.67	49.28	6,643.23
							Sep-21	47.60	49.21	6,643.30
							Jan-22	47.93	49.54	6,642.97
							Apr-22	47.83	49.44	6,643.07

TABLE 3-1: NORTHERN AREA WATER-LEVEL MEASUREMENTS BY GROUNDWATER ZONE
2024 INTERIM NORTHERN AREA GROUNDWATER MONITORING PLAN
Fort Wingate Depot Activity, New Mexico

Well ID	GW Zone	Casing Stick Up Length (feet)	Screened Interval (feet bgs)	Total Well Depth (feet bgs)	Well Ground Elevation (NAVD 88)	Well TOC Elevation (NAVD 88)	Water Level Measurement Date	Depth to Water (feet bgs)	Depth to Water (feet btoc)	Groundwater Elevation (NAVD 88)
TMW23	Alluvial	2.29	46.0-56.0	72.0	6,685.37	6,687.66	Jul-14	43.15	45.44	6,642.22
							Oct-14	43.20	45.49	6,642.17
							Jan-15	43.03	45.32	6,642.34
							Mar-15	43.19	45.48	6,642.18
							Jul-15	43.03	45.32	6,642.34
							Oct-15	43.14	45.43	6,642.23
							Jan-16	42.91	45.20	6,642.46
							Apr-16	43.26	45.55	6,642.11
							Jul-16	43.21	45.50	6,642.16
							Oct-16	43.28	45.57	6,642.09
							Jan-17	42.81	45.10	6,642.56
							Apr-17	43.20	45.49	6,642.17
							Jul-17	43.35	45.64	6,642.02
							Oct-17	43.51	45.80	6,641.86
							Jan-18	43.32	45.61	6,642.05
							Apr-18	44.26	46.55	6,641.11
							Jul-18	43.37	45.66	6,642.00
							Oct-18	43.11	45.40	6,642.26
							Jan-19	42.90	45.19	6,642.47
							Apr-19	43.49	45.78	6,641.88
		2.11			6,686.50	6,688.61	Jul-19	43.72	45.83	6,642.78
							Sep-19	43.51	45.62	6,642.99
							Jan-20	43.61	45.72	6,642.89
							Apr-20	43.64	45.75	6,642.86
							Jul-20	43.69	45.80	6,642.81
							Oct-20	43.88	45.99	6,642.62
							Jan-21	44.05	46.16	6,642.45
							Apr-21	43.76	45.87	6,642.74
							Jul-21	44.01	46.12	6,642.49
							Oct-21	43.99	46.10	6,642.51
TMW24	Alluvial	1.90	44.0-54.0	75.0	6,678.52	6,680.42	Jul-14	36.37	38.27	6,642.15
							Oct-14	36.41	38.31	6,642.11
							Jan-15	36.22	38.12	6,642.30
							Mar-15	36.30	38.20	6,642.22
							Jul-15	36.13	38.03	6,642.39
							Oct-15	36.25	38.15	6,642.27
							Jan-16	35.92	37.82	6,642.60
							Apr-16	36.15	38.05	6,642.37
							Jul-16	36.16	38.06	6,642.36
							Oct-16	36.32	38.22	6,642.20
							Jan-17	35.75	37.65	6,642.77
							Apr-17	36.09	37.99	6,642.43
							Jul-17	36.22	38.12	6,642.30
							Oct-17	36.44	38.34	6,642.08
							Jan-18	36.19	38.09	6,642.33
							Apr-18	36.06	37.96	6,642.46
							Jul-18	36.29	38.19	6,642.23
							Oct-18	36.00	37.90	6,642.52
							Jan-19	35.85	37.75	6,642.67
							Apr-19	36.26	38.16	6,642.26
		1.74			6,679.40	6,681.14	Jul-19	36.43	38.17	6,642.97
							Sep-19	36.21	37.95	6,643.19
							Jan-20	36.32	38.06	6,643.08
							Apr-20	36.79	38.53	6,642.61
							Jul-20	36.35	38.09	6,643.05
							Oct-20	36.60	38.34	6,642.80
							Jan-21	36.75	38.49	6,642.65
							Apr-21	36.38	38.12	6,643.02
							Jul-21	36.62	38.36	6,642.78
							Oct-21	36.67	38.41	6,642.73
Jan-22	36.94	38.68	6,642.46							
				Apr-22	36.78	38.52	6,642.62			

TABLE 3-1: NORTHERN AREA WATER-LEVEL MEASUREMENTS BY GROUNDWATER ZONE
2024 INTERIM NORTHERN AREA GROUNDWATER MONITORING PLAN
Fort Wingate Depot Activity, New Mexico

Well ID	GW Zone	Casing Stick Up Length (feet)	Screened Interval (feet bgs)	Total Well Depth (feet bgs)	Well Ground Elevation (NAVD 88)	Well TOC Elevation (NAVD 88)	Water Level Measurement Date	Depth to Water (feet bgs)	Depth to Water (feet btoc)	Groundwater Elevation (NAVD 88)
TMW25	Alluvial	1.79	42.5-52.5	74.0	6,671.09	6,672.88	Jul-14	37.13	38.92	6,633.96
							Oct-14	37.26	39.05	6,633.83
							Jan-15	37.07	38.86	6,634.02
							Mar-15	37.14	38.93	6,633.95
							Jul-15	37.03	38.82	6,634.06
							Oct-15	37.21	39.00	6,633.88
							Jan-16	37.20	38.99	6,633.89
							Apr-16	37.31	39.10	6,633.78
							Jul-16	37.26	39.05	6,633.83
							Oct-16	37.46	39.25	6,633.63
							Jan-17	37.25	39.04	6,633.84
							Apr-17	37.29	39.08	6,633.80
							Jul-17	37.42	39.21	6,633.67
							Oct-17	37.79	39.58	6,633.30
							Jan-18	37.58	39.37	6,633.51
							Apr-18	37.47	39.26	6,633.62
							Jul-18	37.67	39.46	6,633.42
							Oct-18	37.53	39.32	6,633.56
							Jan-19	37.86	39.65	6,633.23
							Apr-19	37.77	39.56	6,633.32
		1.56			6,671.61	6,673.17	Jul-19	38.06	39.62	6,633.55
							Sep-19	38.11	39.67	6,633.50
							Jan-20	38.23	39.79	6,633.38
							Apr-20	38.37	39.93	6,633.24
							Jul-20	38.37	39.93	6,633.24
							Oct-20	40.27	41.83	6,631.34
							Jan-21	38.69	40.25	6,632.92
							Apr-21	38.45	40.01	6,633.16
							Jul-21	38.69	40.25	6,632.92
							Oct-21	38.76	40.32	6,632.85
							Jan-22	38.88	40.44	6,632.73
							Apr-22	38.78	40.34	6,632.83
TMW26	Alluvial	2.83	45.0-55.0	64.8	6,674.88	6,677.71	Jul-14	23.72	26.55	6,651.16
							Oct-14	24.23	27.06	6,650.65
							Jan-15	24.30	27.13	6,650.58
							Mar-15	24.32	27.15	6,650.56
							Jul-15	24.22	27.05	6,650.66
							Oct-15	24.65	27.48	6,650.23
							Jan-16	24.75	27.58	6,650.13
							Apr-16	24.47	27.30	6,650.41
							Jul-16	24.77	27.60	6,650.11
							Oct-16	25.28	28.11	6,649.60
							Jan-17	NM	NM	NM
							Apr-17	24.90	27.73	6,649.98
							Jul-17	25.06	27.89	6,649.82
							Oct-17	25.35	28.18	6,649.53
							Jan-18	25.24	28.07	6,649.64
							Apr-18	25.20	28.03	6,649.68
							Jul-18	25.16	27.99	6,649.72
							Oct-18	25.27	28.10	6,649.61
							Jan-19	25.29	28.12	6,649.59
							Apr-19	25.33	28.16	6,649.55
		2.64			6,675.79	6,678.43	Jul-19	25.38	28.21	6,650.22
							Sep-19	25.77	28.60	6,649.83
							Jan-20	25.98	28.81	6,649.62
							Apr-20	29.22	32.05	6,646.38
							Jul-20	26.13	28.96	6,649.47
							Oct-20	26.43	29.26	6,649.17
							Jan-21	26.67	29.50	6,648.93
							Apr-21	26.16	28.99	6,649.44
							Jul-21	26.75	29.58	6,648.85
							Oct-21	26.76	29.59	6,648.84
							Jan-22	26.91	29.74	6,648.69
							Apr-22	26.52	29.35	6,649.08

TABLE 3-1: NORTHERN AREA WATER-LEVEL MEASUREMENTS BY GROUNDWATER ZONE
2024 INTERIM NORTHERN AREA GROUNDWATER MONITORING PLAN
Fort Wingate Depot Activity, New Mexico

Well ID	GW Zone	Casing Stick Up Length (feet)	Screened Interval (feet bgs)	Total Well Depth (feet bgs)	Well Ground Elevation (NAVD 88)	Well TOC Elevation (NAVD 88)	Water Level Measurement Date	Depth to Water (feet bgs)	Depth to Water (feet btoc)	Groundwater Elevation (NAVD 88)
TMW27	Alluvial	2.68	60.0-70.0	102.2	6,665.45	6,668.13	Jul-14	25.36	28.04	6,640.09
							Oct-14	25.63	28.31	6,639.82
							Jan-15	25.52	28.20	6,639.93
							Mar-15	25.39	28.07	6,640.06
							Jul-15	25.38	28.06	6,640.07
							Oct-15	25.76	28.44	6,639.69
							Jan-16	25.64	28.32	6,639.81
							Apr-16	25.57	28.25	6,639.88
							Jul-16	25.95	28.63	6,639.50
							Oct-16	26.06	28.74	6,639.39
							Jan-17	25.81	28.49	6,639.64
							Apr-17	25.71	28.39	6,639.74
							Jul-17	25.85	28.53	6,639.60
							Oct-17	26.31	28.99	6,639.14
							Jan-18	26.11	28.79	6,639.34
							Apr-18	25.96	28.64	6,639.49
							Jul-18	26.21	28.89	6,639.24
							Oct-18	26.40	29.08	6,639.05
							Jan-19	26.38	29.06	6,639.07
							Apr-19	26.24	28.92	6,639.21
		2.11			6,666.40	6,668.51	Jul-19	26.24	28.92	6,639.59
							Sep-19	26.47	29.15	6,639.36
							Jan-20	26.59	29.27	6,639.24
							Apr-20	26.44	29.12	6,639.39
							Jul-20	26.74	29.42	6,639.09
							Oct-20	27.05	29.73	6,638.78
							Jan-21	27.13	29.81	6,638.70
							Apr-21	26.93	29.61	6,638.90
							Jul-21	27.16	29.84	6,638.67
							Oct-21	27.23	29.91	6,638.60
							Jan-22	27.31	29.99	6,638.52
							Apr-22	27.17	29.85	6,638.66
TMW28	Alluvial	2.40	37.0-47.0	72.5	6,686.77	6,689.17	Jul-14	16.28	18.96	6,670.21
							Oct-14	16.68	19.36	6,669.81
							Jan-15	16.34	19.02	6,670.15
							Mar-15	16.01	18.69	6,670.48
							Jul-15	16.67	19.35	6,669.82
							Oct-15	17.15	19.83	6,669.34
							Jan-16	16.75	19.43	6,669.74
							Apr-16	16.67	19.35	6,669.82
							Jul-16	17.09	19.77	6,669.40
							Oct-16	17.63	20.31	6,668.86
							Jan-17	17.21	19.89	6,669.28
							Apr-17	15.96	18.64	6,670.53
							Jul-17	16.94	19.62	6,669.55
							Oct-17	17.72	20.40	6,668.77
							Jan-18	17.51	20.19	6,668.98
							Apr-18	17.26	19.94	6,669.23
							Jul-18	17.97	20.65	6,668.52
							Oct-18	18.21	20.89	6,668.28
							Jan-19	17.88	20.56	6,668.61
							Apr-19	15.70	18.38	6,670.79
		2.27			6,688.08	6,690.35	Jul-19	17.33	19.60	6,670.75
							Sep-19	18.32	20.59	6,669.76
							Jan-20	18.04	20.31	6,670.04
							Apr-20	17.84	20.11	6,670.24
							Jul-20	18.93	21.20	6,669.15
							Oct-20	18.30	20.57	6,669.78
							Jan-21	18.87	21.14	6,669.21
							Apr-21	18.59	20.86	6,669.49
							Jul-21	19.62	21.89	6,668.46
							Oct-21	19.77	22.04	6,668.31
							Jan-22	19.13	21.40	6,668.95
							Apr-22	18.82	21.09	6,669.26

TABLE 3-1: NORTHERN AREA WATER-LEVEL MEASUREMENTS BY GROUNDWATER ZONE
2024 INTERIM NORTHERN AREA GROUNDWATER MONITORING PLAN
Fort Wingate Depot Activity, New Mexico

Well ID	GW Zone	Casing Stick Up Length (feet)	Screened Interval (feet bgs)	Total Well Depth (feet bgs)	Well Ground Elevation (NAVD 88)	Well TOC Elevation (NAVD 88)	Water Level Measurement Date	Depth to Water (feet bgs)	Depth to Water (feet btoc)	Groundwater Elevation (NAVD 88)
TMW29	Alluvial	2.57	49.0-59.0	69.0	6,700.31	6,702.88	Jul-14	54.88	57.45	6,645.43
							Oct-14	54.99	57.56	6,645.32
							Jan-15	54.94	57.51	6,645.37
							Mar-15	55.00	57.57	6,645.31
							Jul-15	55.01	57.58	6,645.30
							Oct-15	55.05	57.62	6,645.26
							Jan-16	55.09	57.66	6,645.22
							Apr-16	55.20	57.77	6,645.11
							Jul-16	55.21	57.78	6,645.10
							Oct-16	55.28	57.85	6,645.03
							Jan-17	55.19	57.76	6,645.12
							Apr-17	55.32	57.89	6,644.99
							Jul-17	55.39	57.96	6,644.92
							Oct-17	55.50	58.07	6,644.81
							Jan-18	55.52	58.09	6,644.79
							Apr-18	55.56	58.13	6,644.75
							Jul-18	55.62	58.19	6,644.69
							Oct-18	55.63	58.20	6,644.68
							Jan-19	55.74	58.31	6,644.57
							Apr-19	55.69	58.26	6,644.62
		2.48			6,701.36	6,703.84	Jul-19	55.90	58.38	6,645.46
							Sep-19	55.87	58.35	6,645.49
							Jan-20	56.02	58.50	6,645.34
							Apr-20	56.04	58.52	6,645.32
							Jul-20	56.08	58.56	6,645.28
							Oct-20	56.21	58.69	6,645.15
							Jan-21	56.23	58.71	6,645.13
							Apr-21	56.28	58.76	6,645.08
							Jul-21	55.31	57.79	6,646.05
							Sep-21	56.41	58.89	6,644.95
							Jan-22	56.48	58.96	6,644.88
							Apr-22	56.49	58.97	6,644.87
TMW31S	Alluvial	0.01	50.0-60.0	61.0	6,710.19	6,710.20	Jul-14	37.85	37.86	6,672.34
							Oct-14	38.12	38.13	6,672.07
							Jan-15	38.10	38.11	6,672.09
							Mar-15	38.34	38.35	6,671.85
							Jul-15	38.49	38.50	6,671.70
							Oct-15	38.75	38.76	6,671.44
							Jan-16	38.69	38.70	6,671.50
							Apr-16	39.10	39.11	6,671.09
							Jul-16	39.23	39.24	6,670.96
							Oct-16	39.59	39.60	6,670.60
							Jan-17	39.39	39.40	6,670.80
							Apr-17	39.81	39.82	6,670.38
							Jul-17	40.02	40.03	6,670.17
							Oct-17	40.38	40.39	6,669.81
							Jan-18	40.39	40.40	6,669.80
							Apr-18	40.50	40.51	6,669.69
							Jul-18	40.75	40.76	6,669.44
							Oct-18	40.79	40.80	6,669.40
							Jan-19	41.20	41.21	6,668.99
							Apr-19	41.19	41.20	6,669.00
		1.26			6,710.19	6,711.45	Jul-19	40.31	41.57	6,669.88
							Sep-19	40.24	41.50	6,669.95
							Jan-20	40.60	41.86	6,669.59
							Apr-20	39.72	40.98	6,670.47
							Jul-20	40.96	42.22	6,669.23
							Oct-20	41.19	42.45	6,669.00
							Jan-21	41.42	42.68	6,668.77
							Apr-21	41.44	42.70	6,668.75
							Jul-21	41.74	43.00	6,668.45
							Oct-21	41.93	43.19	6,668.26
							Jan-22	42.21	43.47	6,667.98
							Apr-22	42.34	43.60	6,667.85

TABLE 3-1: NORTHERN AREA WATER-LEVEL MEASUREMENTS BY GROUNDWATER ZONE
2024 INTERIM NORTHERN AREA GROUNDWATER MONITORING PLAN
Fort Wingate Depot Activity, New Mexico

Well ID	GW Zone	Casing Stick Up Length (feet)	Screened Interval (feet bgs)	Total Well Depth (feet bgs)	Well Ground Elevation (NAVD 88)	Well TOC Elevation (NAVD 88)	Water Level Measurement Date	Depth to Water (feet bgs)	Depth to Water (feet btoc)	Groundwater Elevation (NAVD 88)
TMW33	Alluvial	2.51	37.0-57.0	60.4	6,684.09	6,686.60	Jul-14	41.47	43.98	6,642.62
							Oct-14	41.56	44.07	6,642.53
							Jan-15	41.44	43.95	6,642.65
							Mar-15	41.59	44.10	6,642.50
							Jul-15	41.54	44.05	6,642.55
							Oct-15	41.75	44.26	6,642.34
							Jan-16	41.70	44.21	6,642.39
							Apr-16	41.92	44.43	6,642.17
							Jul-16	41.94	44.45	6,642.15
							Oct-16	42.12	44.63	6,641.97
							Jan-17	42.06	44.57	6,642.03
							Apr-17	42.12	44.63	6,641.97
							Jul-17	42.28	44.79	6,641.81
							Oct-17	42.54	45.05	6,641.55
							Jan-18	42.42	44.93	6,641.67
							Apr-18	42.46	44.97	6,641.63
							Jul-18	42.54	45.05	6,641.55
							Oct-18	42.41	44.92	6,641.68
							Jan-19	42.70	45.21	6,641.39
							Apr-19	42.77	45.28	6,641.32
		2.37			6,685.07	6,687.45	Jul-19	42.95	45.32	6,642.13
							Sep-19	42.88	45.25	6,642.20
							Jan-20	43.10	45.47	6,641.98
							Apr-20	42.99	45.36	6,642.09
							Jul-20	43.17	45.54	6,641.91
							Oct-20	44.30	46.67	6,640.78
							Jan-21	43.57	45.94	6,641.51
							Apr-21	43.34	45.71	6,641.74
							Jul-21	43.56	45.93	6,641.52
							Sep-21	43.65	46.02	6,641.43
TMW34	Alluvial	2.97	37.0-57.0	57.3	6,684.32	6,687.29	Jul-14	42.95	45.92	6,641.37
							Oct-14	43.07	46.04	6,641.25
							Jan-15	42.95	45.92	6,641.37
							Mar-15	43.02	45.99	6,641.30
							Jul-15	42.98	45.95	6,641.34
							Oct-15	43.17	46.14	6,641.15
							Jan-16	43.13	46.10	6,641.19
							Apr-16	43.17	46.14	6,641.15
							Jul-16	43.26	46.23	6,641.06
							Oct-16	43.40	46.37	6,640.92
							Jan-17	43.51	46.48	6,640.81
							Apr-17	43.41	46.38	6,640.91
							Jul-17	43.47	46.44	6,640.85
							Oct-17	43.39	46.36	6,640.93
							Jan-18	43.37	46.34	6,640.95
							Apr-18	43.32	46.29	6,641.00
							Jul-18	43.49	46.46	6,640.83
							Oct-18	43.52	46.49	6,640.80
							Jan-19	43.53	46.50	6,640.79
							Apr-19	43.60	46.57	6,640.72
		2.61			6,685.75	6,688.36	Jul-19	44.05	46.66	6,641.70
							Sep-19	44.09	46.70	6,641.66
							Jan-20	44.30	46.91	6,641.45
							Apr-20	44.30	46.91	6,641.45
							Jul-20	44.29	46.90	6,641.46
							Oct-20	44.37	46.98	6,641.38
							Jan-21	44.61	47.22	6,641.14
							Apr-21	44.33	46.94	6,641.42
							Jul-21	44.63	47.24	6,641.12
							Sep-21	44.76	47.37	6,640.99
Jan-22	44.71	47.32	6,641.04							
				Apr-22	44.74	47.35	6,641.01			

TABLE 3-1: NORTHERN AREA WATER-LEVEL MEASUREMENTS BY GROUNDWATER ZONE
2024 INTERIM NORTHERN AREA GROUNDWATER MONITORING PLAN
Fort Wingate Depot Activity, New Mexico

Well ID	GW Zone	Casing Stick Up Length (feet)	Screened Interval (feet bgs)	Total Well Depth (feet bgs)	Well Ground Elevation (NAVD 88)	Well TOC Elevation (NAVD 88)	Water Level Measurement Date	Depth to Water (feet bgs)	Depth to Water (feet btoc)	Groundwater Elevation (NAVD 88)
TMW35	Alluvial	2.38	35.0-55.0	55.0	6,684.14	6,686.52	Jul-14	41.70	44.08	6,642.44
							Oct-14	41.81	44.19	6,642.33
							Jan-15	41.75	44.13	6,642.39
							Mar-15	41.87	44.25	6,642.27
							Jul-15	41.82	44.20	6,642.32
							Oct-15	42.01	44.39	6,642.13
							Jan-16	41.98	44.36	6,642.16
							Apr-16	42.14	44.52	6,642.00
							Jul-16	42.19	44.57	6,641.95
							Oct-16	42.35	44.73	6,641.79
							Jan-17	42.42	44.80	6,641.72
							Apr-17	42.38	44.76	6,641.76
							Jul-17	42.48	44.86	6,641.66
							Oct-17	42.64	45.02	6,641.50
							Jan-18	42.65	45.03	6,641.49
							Apr-18	42.63	45.01	6,641.51
							Jul-18	42.64	45.02	6,641.50
							Oct-18	42.74	45.12	6,641.40
							Jan-19	42.87	45.25	6,641.27
							Apr-19	42.91	45.29	6,641.23
		2.30			6,685.52	6,687.82	Jul-19	43.05	45.35	6,642.47
							Sep-19	43.09	45.39	6,642.43
							Jan-20	43.21	45.51	6,642.31
							Apr-20	43.38	45.68	6,642.14
							Jul-20	43.28	45.58	6,642.24
							Oct-20	43.42	45.72	6,642.10
							Jan-21	43.71	46.01	6,641.81
							Apr-21	43.50	45.80	6,642.02
							Jul-21	43.71	46.01	6,641.81
							Sep-21	43.82	46.12	6,641.70
							Jan-22	43.85	46.15	6,641.67
							Apr-22	43.90	46.20	6,641.62
TMW39S	Alluvial	2.08	32.5-52.5	53.0	6,706.53	6,708.61	Jul-14	33.62	35.70	6,672.91
							Oct-14	33.80	35.88	6,672.73
							Jan-15	33.87	35.95	6,672.66
							Mar-15	33.99	36.07	6,672.54
							Jul-15	34.15	36.23	6,672.38
							Oct-15	34.29	36.37	6,672.24
							Jan-16	34.32	36.40	6,672.21
							Apr-16	34.43	36.51	6,672.10
							Jul-16	34.62	36.70	6,671.91
							Oct-16	34.83	36.91	6,671.70
							Jan-17	34.81	36.89	6,671.72
							Apr-17	35.00	37.08	6,671.53
							Jul-17	35.17	37.25	6,671.36
							Oct-17	35.39	37.47	6,671.14
							Jan-18	35.46	37.54	6,671.07
							Apr-18	35.44	37.52	6,671.09
							Jul-18	35.88	37.96	6,670.65
							Oct-18	35.95	38.03	6,670.58
							Jan-19	36.23	38.31	6,670.30
							Apr-19	36.14	38.22	6,670.39
		1.56			6,706.69	6,708.25	Jul-19	37.11	38.67	6,669.58
							Sep-19	37.23	38.79	6,669.46
							Jan-20	37.26	38.82	6,669.43
							Apr-20	37.46	39.02	6,669.23
							Jul-20	37.83	39.39	6,668.86
							Oct-20	38.05	39.61	6,668.64
							Jan-21	37.28	38.84	6,669.41
							Apr-21	38.07	39.63	6,668.62
							Jul-21	38.59	40.15	6,668.10
							Sep-21	38.59	40.15	6,668.10
							Jan-22	38.96	40.52	6,667.73
							Apr-22	39.00	40.56	6,667.69

TABLE 3-1: NORTHERN AREA WATER-LEVEL MEASUREMENTS BY GROUNDWATER ZONE
2024 INTERIM NORTHERN AREA GROUNDWATER MONITORING PLAN
Fort Wingate Depot Activity, New Mexico

Well ID	GW Zone	Casing Stick Up Length (feet)	Screened Interval (feet bgs)	Total Well Depth (feet bgs)	Well Ground Elevation (NAVD 88)	Well TOC Elevation (NAVD 88)	Water Level Measurement Date	Depth to Water (feet bgs)	Depth to Water (feet btoc)	Groundwater Elevation (NAVD 88)
TMW40S	Alluvial	2.59	50.0-60.0	60.5	6,703.81	6,706.40	Jul-14	57.74	60.33	6,646.07
							Oct-14	57.81	60.40	6,646.00
							Jan-15	57.79	60.38	6,646.02
							Mar-15	57.83	60.42	6,645.98
							Jul-15	57.85	60.44	6,645.96
							Oct-15	57.91	60.50	6,645.90
							Jan-16	57.90	60.49	6,645.91
							Apr-16	57.99	60.58	6,645.82
							Jul-16	57.98	60.57	6,645.83
							Oct-16	Dry	Dry	Dry
							Jan-17	Dry	Dry	Dry
							Apr-17	58.09	60.68	6,645.72
							Jul-17	58.11	60.70	6,645.70
							Oct-17	58.21	60.80	6,645.60
							Jan-18	58.21	60.80	6,645.60
							Apr-18	58.24	60.83	6,645.57
							Jul-18	58.26	60.85	6,645.55
							Oct-18	58.27	60.86	6,645.54
							Jan-19	58.38	60.97	6,645.43
							Apr-19	58.40	60.99	6,645.41
		2.61			6,704.37	6,706.98	Jul-19	58.47	61.08	6,645.90
							Sep-19	58.44	61.05	6,645.93
							Jan-20	58.53	61.14	6,645.84
							Apr-20	58.57	61.18	6,645.80
							Jul-20	58.59	61.20	6,645.78
							Oct-20	58.69	61.30	6,645.68
							Jan-21	58.74	61.35	6,645.63
							Apr-21	Dry	Dry	Dry
							Jul-21	Dry	Dry	Dry
							Sep-21	Dry	Dry	Dry
							Jan-22	58.96	61.57	6,645.41
							Apr-22	60.30	62.91	6,644.07
TMW41	Alluvial	1.73	55.5-65.5	66.0	6,703.48	6,705.21	Jul-14	39.26	40.99	6,664.22
							Oct-14	39.37	41.10	6,664.11
							Jan-15	39.27	41.00	6,664.21
							Mar-15	39.55	41.28	6,663.93
							Jul-15	39.62	41.35	6,663.86
							Oct-15	39.75	41.48	6,663.73
							Jan-16	39.53	41.26	6,663.95
							Apr-16	40.01	41.74	6,663.47
							Jul-16	40.03	41.76	6,663.45
							Oct-16	40.27	42.00	6,663.21
							Jan-17	39.82	41.55	6,663.66
							Apr-17	40.29	42.02	6,663.19
							Jul-17	40.55	42.28	6,662.93
							Oct-17	40.74	42.47	6,662.74
							Jan-18	40.70	42.43	6,662.78
							Apr-18	40.87	42.60	6,662.61
							Jul-18	41.08	42.81	6,662.40
							Oct-18	40.80	42.53	6,662.68
							Jan-19	41.10	42.83	6,662.38
							Apr-19	41.07	42.80	6,662.41
		1.59			6,704.15	6,705.74	Jul-19	41.55	43.14	6,662.60
							Sep-19	41.28	42.87	6,662.87
							Jan-20	41.63	43.22	6,662.52
							Apr-20	40.78	42.37	6,663.37
							Jul-20	41.86	43.45	6,662.29
							Oct-20	42.09	43.68	6,662.06
							Jan-21	42.30	43.89	6,661.85
							Apr-21	42.18	43.77	6,661.97
							Jul-21	42.47	44.06	6,661.68
							Sep-21	42.49	44.08	6,661.66
							Jan-22	42.88	44.47	6,661.27
							Apr-22	42.85	44.44	6,661.30

TABLE 3-1: NORTHERN AREA WATER-LEVEL MEASUREMENTS BY GROUNDWATER ZONE
2024 INTERIM NORTHERN AREA GROUNDWATER MONITORING PLAN
Fort Wingate Depot Activity, New Mexico

Well ID	GW Zone	Casing Stick Up Length (feet)	Screened Interval (feet bgs)	Total Well Depth (feet bgs)	Well Ground Elevation (NAVD 88)	Well TOC Elevation (NAVD 88)	Water Level Measurement Date	Depth to Water (feet bgs)	Depth to Water (feet btoc)	Groundwater Elevation (NAVD 88)
TMW43	Alluvial	3.00	58.0-78.0	78.5	6,695.63	6,698.63	Jul-14	50.51	53.51	6,645.12
							Oct-14	50.59	53.59	6,645.04
							Jan-15	50.50	53.50	6,645.13
							Mar-15	50.59	53.59	6,645.04
							Jul-15	50.58	53.58	6,645.05
							Oct-15	50.63	53.63	6,645.00
							Jan-16	50.59	53.59	6,645.04
							Apr-16	50.79	53.79	6,644.84
							Jul-16	50.79	53.79	6,644.84
							Oct-16	50.84	53.84	6,644.79
							Jan-17	50.67	53.67	6,644.96
							Apr-17	50.86	53.86	6,644.77
							Jul-17	50.92	53.92	6,644.71
							Oct-17	51.00	54.00	6,644.63
							Jan-18	51.06	54.06	6,644.57
							Apr-18	51.05	54.05	6,644.58
							Jul-18	51.14	54.14	6,644.49
							Oct-18	51.11	54.11	6,644.52
							Jan-19	51.17	54.17	6,644.46
							Apr-19	51.12	54.12	6,644.51
		3.11			6,696.21	6,699.32	Jul-19	51.75	54.86	6,644.46
							Sep-19	51.09	54.20	6,645.12
							Jan-20	51.26	54.37	6,644.95
							Apr-20	51.24	54.35	6,644.97
							Jul-20	51.30	54.41	6,644.91
							Oct-20	51.45	54.56	6,644.76
							Jan-21	51.45	54.56	6,644.76
							Apr-21	47.47	50.58	6,648.74
							Jul-21	51.57	54.68	6,644.64
							Sep-21	51.58	54.69	6,644.63
							Jan-22	51.65	54.76	6,644.56
							Apr-22	51.61	54.72	6,644.60
TMW44	Alluvial	2.50	43.5-63.5	64.0	6,694.81	6,697.31	Jul-14	50.22	52.72	6,644.59
							Oct-14	50.26	52.76	6,644.55
							Jan-15	50.12	52.62	6,644.69
							Mar-15	50.32	52.82	6,644.49
							Jul-15	50.28	52.78	6,644.53
							Oct-15	50.36	52.86	6,644.45
							Jan-16	50.16	52.66	6,644.65
							Apr-16	50.53	53.03	6,644.28
							Jul-16	50.46	52.96	6,644.35
							Oct-16	50.52	53.02	6,644.29
							Jan-17	50.18	52.68	6,644.63
							Apr-17	50.54	53.04	6,644.27
							Jul-17	50.62	53.12	6,644.19
							Oct-17	50.77	53.27	6,644.04
							Jan-18	50.67	53.17	6,644.14
							Apr-18	50.70	53.20	6,644.11
							Jul-18	50.78	53.28	6,644.03
							Oct-18	50.50	53.00	6,644.31
							Jan-19	50.88	53.38	6,643.93
							Apr-19	50.89	53.39	6,643.92
		2.50			6,695.49	6,697.99	Jul-19	50.97	53.47	6,644.52
							Sep-19	50.73	53.23	6,644.76
							Jan-20	50.94	53.44	6,644.55
							Apr-20	50.60	53.10	6,644.89
							Jul-20	50.93	53.43	6,644.56
							Oct-20	50.97	53.47	6,644.52
							Jan-21	51.24	53.74	6,644.25
							Apr-21	51.04	53.54	6,644.45
							Jul-21	51.22	53.72	6,644.27
							Sep-21	51.39	53.89	6,644.10
							Jan-22	51.48	53.98	6,644.01
							Apr-22	51.45	53.95	6,644.04

TABLE 3-1: NORTHERN AREA WATER-LEVEL MEASUREMENTS BY GROUNDWATER ZONE
2024 INTERIM NORTHERN AREA GROUNDWATER MONITORING PLAN
Fort Wingate Depot Activity, New Mexico

Well ID	GW Zone	Casing Stick Up Length (feet)	Screened Interval (feet bgs)	Total Well Depth (feet bgs)	Well Ground Elevation (NAVD 88)	Well TOC Elevation (NAVD 88)	Water Level Measurement Date	Depth to Water (feet bgs)	Depth to Water (feet btoc)	Groundwater Elevation (NAVD 88)
TMW45	Alluvial	2.50	38.5-58.5	59.0	6,686.50	6,689.00	Jul-14	44.93	47.43	6,641.57
							Oct-14	44.99	47.49	6,641.51
							Jan-15	44.81	47.31	6,641.69
							Mar-15	44.89	47.39	6,641.61
							Jul-15	44.73	47.23	6,641.77
							Oct-15	44.80	47.30	6,641.70
							Jan-16	44.55	47.05	6,641.95
							Apr-16	44.80	47.30	6,641.70
							Jul-16	44.85	47.35	6,641.65
							Oct-16	44.79	47.29	6,641.71
							Jan-17	44.38	46.88	6,642.12
							Apr-17	44.68	47.18	6,641.82
							Jul-17	44.71	47.21	6,641.79
							Oct-17	44.83	47.33	6,641.67
							Jan-18	44.77	47.27	6,641.73
							Apr-18	44.66	47.16	6,641.84
							Jul-18	44.68	47.18	6,641.82
							Oct-18	44.58	47.08	6,641.92
							Jan-19	44.91	47.41	6,641.59
							Apr-19	44.70	47.20	6,641.80
		2.46			6,687.14	6,689.60	Jul-19	44.79	47.25	6,642.35
							Sep-19	44.68	47.14	6,642.46
							Jan-20	44.70	47.16	6,642.44
							Apr-20	44.64	47.10	6,642.50
							Jul-20	44.77	47.23	6,642.37
							Oct-20	44.92	47.38	6,642.22
							Jan-21	45.00	47.46	6,642.14
							Apr-21	44.75	47.21	6,642.39
							Jul-21	44.95	47.41	6,642.19
							Oct-21	44.99	47.45	6,642.15
							Jan-22	45.06	47.52	6,642.08
							Apr-22	45.06	47.52	6,642.08
TMW46	Alluvial	2.29	38.5-58.5	59.0	6,678.69	6,680.98	Jul-14	41.88	44.17	6,636.81
							Oct-14	42.12	44.41	6,636.57
							Jan-15	41.81	44.10	6,636.88
							Mar-15	41.76	44.05	6,636.93
							Jul-15	41.81	44.10	6,636.88
							Oct-15	42.10	44.39	6,636.59
							Jan-16	41.89	44.18	6,636.80
							Apr-16	41.95	44.24	6,636.74
							Jul-16	42.30	44.59	6,636.39
							Oct-16	42.28	44.57	6,636.41
							Jan-17	42.27	44.56	6,636.42
							Apr-17	42.05	44.34	6,636.64
							Jul-17	42.19	44.48	6,636.50
							Oct-17	42.68	44.97	6,636.01
							Jan-18	42.57	44.86	6,636.12
							Apr-18	42.27	44.56	6,636.42
							Jul-18	42.70	44.99	6,635.99
							Oct-18	42.96	45.25	6,635.73
							Jan-19	43.02	45.31	6,635.67
							Apr-19	42.81	45.10	6,635.88
		1.94			6,679.41	6,681.34	Jul-19	43.22	45.16	6,636.18
							Sep-19	43.41	45.35	6,635.99
							Jan-20	43.23	45.17	6,636.17
							Apr-20	43.16	45.10	6,636.24
							Jul-20	43.66	45.60	6,635.74
							Oct-20	43.88	45.82	6,635.52
							Jan-21	48.00	49.94	6,631.40
							Apr-21	43.61	45.55	6,635.79
							Jul-21	44.10	46.04	6,635.30
							Sep-21	44.31	46.25	6,635.09
							Jan-22	44.10	46.04	6,635.30
							Apr-22	43.97	45.91	6,635.43

TABLE 3-1: NORTHERN AREA WATER-LEVEL MEASUREMENTS BY GROUNDWATER ZONE
2024 INTERIM NORTHERN AREA GROUNDWATER MONITORING PLAN
Fort Wingate Depot Activity, New Mexico

Well ID	GW Zone	Casing Stick Up Length (feet)	Screened Interval (feet bgs)	Total Well Depth (feet bgs)	Well Ground Elevation (NAVD 88)	Well TOC Elevation (NAVD 88)	Water Level Measurement Date	Depth to Water (feet bgs)	Depth to Water (feet btoc)	Groundwater Elevation (NAVD 88)
TMW47	Alluvial	2.56	82.5-102.5	103.0	6,699.32	6,701.88	Jul-14	43.84	46.40	6,655.48
							Oct-14	43.85	46.41	6,655.47
							Jan-15	43.77	46.33	6,655.55
							Mar-15	43.76	46.32	6,655.56
							Jul-15	44.03	46.59	6,655.29
							Oct-15	44.05	46.61	6,655.27
							Jan-16	44.01	46.57	6,655.31
							Apr-16	44.13	46.69	6,655.19
							Jul-16	44.28	46.84	6,655.04
							Oct-16	44.32	46.88	6,655.00
							Jan-17	44.23	46.79	6,655.09
							Apr-17	44.31	46.87	6,655.01
							Jul-17	44.52	47.08	6,654.80
							Oct-17	44.54	47.10	6,654.78
							Jan-18	44.64	47.20	6,654.68
							Apr-18	44.76	47.32	6,654.56
							Jul-18	44.79	47.35	6,654.53
							Oct-18	44.74	47.30	6,654.58
							Jan-19	44.78	47.34	6,654.54
							Apr-19	44.69	47.25	6,654.63
		2.60			6,699.87	6,702.47	Jul-19	44.89	47.49	6,654.98
							Sep-19	44.92	47.52	6,654.95
							Jan-20	44.95	47.55	6,654.92
							Apr-20	44.97	47.57	6,654.90
							Jul-20	45.17	47.77	6,654.70
							Oct-20	45.20	47.80	6,654.67
							Jan-21	45.32	47.92	6,654.55
							Apr-21	45.29	47.89	6,654.58
							Jul-21	45.46	48.06	6,654.41
							Sep-21	45.37	47.97	6,654.50
							Jan-22	45.37	47.97	6,654.50
							Apr-22	45.43	48.03	6,654.44
TMW54	Alluvial	2.46	21.4-41.4	41.4	6,708.77	6,711.23	Nov-19	Dry	Dry	Dry
							Apr-20	41.34	43.80	6,667.43
							Jul-20	Dry	Dry	Dry
							Oct-20	Dry	Dry	Dry
							Jan-21	Dry	Dry	Dry
							Apr-21	Dry	Dry	Dry
							Jul-21	Dry	Dry	Dry
							Oct-21	Dry	Dry	Dry
TMW56	Alluvial	2.88	30-50	50.0	6,705.44	6,708.32	Jan-22	Dry	Dry	Dry
							Apr-22	Dry	Dry	Dry
							Nov-19	49.42	52.30	6,656.02
							Apr-20	48.16	51.04	6,657.28
							Jul-20	48.55	51.43	6,656.89
							Oct-20	48.13	51.01	6,657.31
							Jan-21	47.63	50.51	6,657.81
							Apr-21	Dry	Dry	Dry
TMW57	Alluvial	2.43	60-70	70.0	6,710.76	6,713.19	Jul-21	47.03	49.91	6,658.41
							Sep-21	46.87	49.75	6,658.57
							Jan-22	46.67	49.55	6,658.77
							Apr-22	46.49	49.37	6,658.95
							Nov-19	63.60	66.03	6,647.16
							Apr-20	63.67	66.10	6,647.09
							Jul-20	63.80	66.23	6,646.96
							Oct-20	63.89	66.32	6,646.87
							Jan-21	63.98	66.41	6,646.78
							Apr-21	64.04	66.47	6,646.72
							Jul-21	64.37	66.80	6,646.39
							Oct-21	64.26	66.69	6,646.50
							Jan-22	64.32	66.75	6,646.44
							Apr-22	64.40	66.83	6,646.36

TABLE 3-1: NORTHERN AREA WATER-LEVEL MEASUREMENTS BY GROUNDWATER ZONE
2024 INTERIM NORTHERN AREA GROUNDWATER MONITORING PLAN
Fort Wingate Depot Activity, New Mexico

Well ID	GW Zone	Casing Stick Up Length (feet)	Screened Interval (feet bgs)	Total Well Depth (feet bgs)	Well Ground Elevation (NAVD 88)	Well TOC Elevation (NAVD 88)	Water Level Measurement Date	Depth to Water (feet bgs)	Depth to Water (feet btoc)	Groundwater Elevation (NAVD 88)
TMW59	Alluvial	2.53	42-62	62.0	6,690.38	6,692.90	Nov-19	46.65	49.18	6,643.72
							Apr-20	46.57	49.10	6,643.80
							Jul-20	46.69	49.22	6,643.68
							Oct-20	46.80	49.33	6,643.57
							Jan-21	46.91	49.44	6,643.46
							Apr-21	46.75	49.28	6,643.62
							Jul-21	46.96	49.49	6,643.41
							Sep-21	46.94	49.47	6,643.43
							Jan-22	47.10	49.63	6,643.27
TMW60	Alluvial	2.50	46-66	66.0	6,694.17	6,696.66	Apr-22	47.03	49.56	6,643.34
							Nov-19	65.85	68.35	6,628.31
							Apr-20	65.78	68.28	6,628.38
							Jul-20	65.75	68.25	6,628.41
							Oct-20	65.78	68.28	6,628.38
							Jan-21	Dry	Dry	Dry
							Apr-21	Dry	Dry	Dry
							Jul-21	Dry	Dry	Dry
							Sep-21	Dry	Dry	Dry
TMW61	Alluvial	2.55	41-61	61.0	6,684.51	6,687.07	Jan-22	65.27	67.77	6,628.89
							Apr-22	Dry	Dry	Dry
							Nov-19	42.08	44.63	6,642.44
							Apr-20	41.86	44.41	6,642.66
							Jul-20	41.95	44.50	6,642.57
							Oct-20	42.15	44.70	6,642.37
							Jan-21	42.28	44.83	6,642.24
							Apr-21	41.96	44.51	6,642.56
							Jul-21	42.23	44.78	6,642.29
TMW62	Alluvial	2.56	40-60	60.0	6,691.39	6,693.95	Oct-21	42.23	44.78	6,642.29
							Jan-22	42.41	44.96	6,642.11
							Apr-22	42.34	44.89	6,642.18
							Nov-19	47.70	50.26	6,643.69
							Apr-20	47.74	50.30	6,643.65
							Jul-20	47.74	50.30	6,643.65
							Oct-20	47.83	50.39	6,643.56
							Jan-21	47.94	50.50	6,643.45
							Apr-21	47.87	50.43	6,643.52
							Jul-21	47.99	50.55	6,643.40
							Sep-21	48.05	50.61	6,643.34
							Jan-22	48.13	50.69	6,643.26
							Apr-22	48.13	50.69	6,643.26

TABLE 3-1: NORTHERN AREA WATER-LEVEL MEASUREMENTS BY GROUNDWATER ZONE
2024 INTERIM NORTHERN AREA GROUNDWATER MONITORING PLAN
Fort Wingate Depot Activity, New Mexico

Well ID	GW Zone	Casing Stick Up Length (feet)	Screened Interval (feet bgs)	Total Well Depth (feet bgs)	Well Ground Elevation (NAVD 88)	Well TOC Elevation (NAVD 88)	Water Level Measurement Date	Depth to Water (feet bgs)	Depth to Water (feet btoc)	Groundwater Elevation (NAVD 88)
PZ01	Alluvial	2.58	23.1-43.1	43.1	6,674.71	6,677.29	Jul-14	24.54	27.12	6,650.17
							Oct-14	24.32	26.90	6,650.39
							Jan-15	24.06	26.64	6,650.65
							Mar-15	24.22	26.80	6,650.49
							Jul-15	24.22	26.80	6,650.49
							Oct-15	24.34	26.92	6,650.37
							Jan-16	24.32	26.90	6,650.39
							Apr-16	24.66	27.24	6,650.05
							Jul-16	24.71	27.29	6,650.00
							Oct-16	25.02	27.60	6,649.69
							Jan-17	24.79	27.37	6,649.92
							Apr-17	25.03	27.61	6,649.68
							Jul-17	25.22	27.80	6,649.49
							Oct-17	25.45	28.03	6,649.26
							Jan-18	25.44	28.02	6,649.27
							Apr-18	25.50	28.08	6,649.21
							Jul-18	25.59	28.17	6,649.12
							Oct-18	25.53	28.11	6,649.18
							Jan-19	25.90	28.48	6,648.81
							Apr-19	25.97	28.55	6,648.74
		2.57			6,675.61	6,678.18	Jul-19	26.11	28.68	6,649.50
							Sep-19	25.86	28.43	6,649.75
							Jan-20	26.11	28.68	6,649.50
							Apr-20	26.13	28.70	6,649.48
							Jul-20	26.15	28.72	6,649.46
							Oct-20	26.39	28.96	6,649.22
							Jan-21	26.49	29.06	6,649.12
							Apr-21	26.44	29.01	6,649.17
							Jul-21	26.59	29.16	6,649.02
							Oct-21	27.04	29.61	6,648.57
							Jan-22	27.04	29.61	6,648.57
							Apr-22	27.05	29.62	6,648.56
PZ02	Alluvial	2.45	30.3-50.3	50.7	6,672.50	6,674.95	Jul-14	20.77	23.22	6,651.73
							Oct-14	20.81	23.26	6,651.69
							Jan-15	20.86	23.31	6,651.64
							Mar-15	20.80	23.25	6,651.70
							Jul-15	20.83	23.28	6,651.67
							Oct-15	21.21	23.66	6,651.29
							Jan-16	21.12	23.57	6,651.38
							Apr-16	21.25	23.70	6,651.25
							Jul-16	21.25	23.70	6,651.25
							Oct-16	21.82	24.27	6,650.68
							Jan-17	21.39	23.84	6,651.11
							Apr-17	21.57	24.02	6,650.93
							Jul-17	21.76	24.21	6,650.74
							Oct-17	22.15	24.60	6,650.35
							Jan-18	21.96	24.41	6,650.54
							Apr-18	21.98	24.43	6,650.52
							Jul-18	22.24	24.69	6,650.26
							Oct-18	22.21	24.66	6,650.29
							Jan-19	22.53	24.98	6,649.97
							Apr-19	22.51	24.96	6,649.99
		2.41			6,673.57	6,675.99	Jul-19	22.40	24.81	6,651.18
							Sep-19	22.44	24.85	6,651.14
							Jan-20	22.64	25.05	6,650.94
							Apr-20	22.54	24.95	6,651.04
							Jul-20	22.87	25.28	6,650.71
							Oct-20	23.20	25.61	6,650.38
							Jan-21	23.38	25.79	6,650.20
							Apr-21	23.07	25.48	6,650.51
							Jul-21	23.45	25.86	6,650.13
							Oct-21	23.42	25.83	6,650.16
							Jan-22	23.80	26.21	6,649.78
							Apr-22	23.70	26.11	6,649.88

TABLE 3-1: NORTHERN AREA WATER-LEVEL MEASUREMENTS BY GROUNDWATER ZONE
2024 INTERIM NORTHERN AREA GROUNDWATER MONITORING PLAN
Fort Wingate Depot Activity, New Mexico

Well ID	GW Zone	Casing Stick Up Length (feet)	Screened Interval (feet bgs)	Total Well Depth (feet bgs)	Well Ground Elevation (NAVD 88)	Well TOC Elevation (NAVD 88)	Water Level Measurement Date	Depth to Water (feet bgs)	Depth to Water (feet btoc)	Groundwater Elevation (NAVD 88)
PZ03	Alluvial	2.58	26.7-46.7	46.9	6,676.86	6,679.44	Jul-14	23.84	26.42	6,653.02
							Oct-14	23.70	26.28	6,653.16
							Jan-15	23.62	26.20	6,653.24
							Mar-15	23.62	26.20	6,653.24
							Jul-15	23.55	26.13	6,653.31
							Oct-15	23.90	26.48	6,652.96
							Jan-16	24.03	26.61	6,652.83
							Apr-16	23.86	26.44	6,653.00
							Jul-16	24.00	26.58	6,652.86
							Oct-16	24.44	27.02	6,652.42
							Jan-17	24.07	26.65	6,652.79
							Apr-17	24.05	26.63	6,652.81
							Jul-17	24.28	26.86	6,652.58
							Oct-17	24.02	26.60	6,652.84
							Jan-18	24.17	26.75	6,652.69
							Apr-18	25.03	27.61	6,651.83
							Jul-18	24.16	26.74	6,652.70
							Oct-18	24.17	26.75	6,652.69
							Jan-19	24.49	27.07	6,652.37
							Apr-19	24.30	26.88	6,652.56
		2.54			6,677.91	6,680.45	Jul-19	26.62	29.16	6,651.29
							Sep-19	26.28	28.82	6,651.63
							Jan-20	24.51	27.05	6,653.40
							Apr-20	24.40	26.94	6,653.51
							Jul-20	26.27	28.81	6,651.64
							Oct-20	25.04	27.58	6,652.87
							Jan-21	25.22	27.76	6,652.69
							Apr-21	24.86	27.40	6,653.05
							Jul-21	25.30	27.84	6,652.61
							Oct-21	25.54	28.08	6,652.37
							Jan-22	25.53	28.07	6,652.38
							Apr-22	25.37	27.91	6,652.54
PZ04	Alluvial	2.51	26.8-46.8	47.0	6,674.17	6,676.68	Jul-14	25.89	28.40	6,648.28
							Oct-14	25.51	28.02	6,648.66
							Jan-15	25.64	28.15	6,648.53
							Mar-15	25.73	28.24	6,648.44
							Jul-15	25.75	28.26	6,648.42
							Oct-15	25.94	28.45	6,648.23
							Jan-16	25.89	28.40	6,648.28
							Apr-16	26.19	28.70	6,647.98
							Jul-16	26.19	28.70	6,647.98
							Oct-16	26.56	29.07	6,647.61
							Jan-17	NM	NM	NM
							Apr-17	26.52	29.03	6,647.65
							Jul-17	26.74	29.25	6,647.43
							Oct-17	27.19	29.70	6,646.98
							Jan-18	26.87	29.38	6,647.30
							Apr-18	28.53	31.04	6,645.64
							Jul-18	29.52	32.03	6,644.65
							Oct-18	30.29	32.80	6,643.88
							Jan-19	27.92	30.43	6,646.25
							Apr-19	29.80	32.31	6,644.37
		2.54			6,675.26	6,677.80	Jul-19	31.91	34.45	6,643.35
							Sep-19	30.64	33.18	6,644.62
							Jan-20	27.57	30.11	6,647.69
							Apr-20	29.51	32.05	6,645.75
							Jul-20	28.09	30.63	6,647.17
							Oct-20	27.88	30.42	6,647.38
							Jan-21	28.20	30.74	6,647.06
							Apr-21	27.86	30.40	6,647.40
							Jul-21	28.28	30.82	6,646.98
							Oct-21	28.10	30.64	6,647.16
							Jan-22	28.50	31.04	6,646.76
							Apr-22	28.33	30.87	6,646.93

TABLE 3-1: NORTHERN AREA WATER-LEVEL MEASUREMENTS BY GROUNDWATER ZONE
2024 INTERIM NORTHERN AREA GROUNDWATER MONITORING PLAN
Fort Wingate Depot Activity, New Mexico

Well ID	GW Zone	Casing Stick Up Length (feet)	Screened Interval (feet bgs)	Total Well Depth (feet bgs)	Well Ground Elevation (NAVD 88)	Well TOC Elevation (NAVD 88)	Water Level Measurement Date	Depth to Water (feet bgs)	Depth to Water (feet btoc)	Groundwater Elevation (NAVD 88)
PZ05	Alluvial	2.62	26.0-46.0	46.3	6,671.53	6,674.15	Jul-14	18.43	21.05	6,653.10
							Oct-14	17.99	20.61	6,653.54
							Jan-15	17.80	20.42	6,653.73
							Mar-15	17.65	20.27	6,653.88
							Jul-15	18.14	20.76	6,653.39
							Oct-15	18.79	21.41	6,652.74
							Jan-16	18.09	20.71	6,653.44
							Apr-16	18.08	20.70	6,653.45
							Jul-16	18.91	21.53	6,652.62
							Oct-16	19.44	22.06	6,652.09
							Jan-17	18.38	21.00	6,653.15
							Apr-17	18.35	20.97	6,653.18
							Jul-17	19.07	21.69	6,652.46
							Oct-17	19.87	22.49	6,651.66
							Jan-18	18.92	21.54	6,652.61
							Apr-18	18.56	21.18	6,652.97
							Jul-18	19.61	22.23	6,651.92
							Oct-18	19.82	22.44	6,651.71
							Jan-19	19.13	21.75	6,652.40
							Apr-19	19.12	21.74	6,652.41
		2.67			6,672.50	6,675.17	Jul-19	19.38	22.05	6,653.12
							Sep-19	19.91	22.58	6,652.59
							Jan-20	19.34	22.01	6,653.16
							Apr-20	18.91	21.58	6,653.59
							Jul-20	20.13	22.80	6,652.37
							Oct-20	20.73	23.40	6,651.77
							Jan-21	20.22	22.89	6,652.28
							Apr-21	19.72	22.39	6,652.78
							Jul-21	20.76	23.43	6,651.74
							Oct-21	24.68	27.35	6,647.82
							Jan-22	20.43	23.10	6,652.07
							Apr-22	20.05	22.72	6,652.45
PZ06	Alluvial	2.75	26.5-46.5	46.7	6,673.29	6,676.04	Jul-14	17.95	20.70	6,655.34
							Oct-14	16.41	19.16	6,656.88
							Jan-15	16.01	18.76	6,657.28
							Mar-15	15.71	18.46	6,657.58
							Jul-15	17.27	20.02	6,656.02
							Oct-15	17.65	20.40	6,655.64
							Jan-16	16.41	19.16	6,656.88
							Apr-16	16.20	18.95	6,657.09
							Jul-16	18.00	20.75	6,655.29
							Oct-16	18.38	21.13	6,654.91
							Jan-17	16.68	19.43	6,656.61
							Apr-17	16.23	18.98	6,657.06
							Jul-17	18.39	21.14	6,654.90
							Oct-17	18.65	21.40	6,654.64
							Jan-18	17.08	19.83	6,656.21
							Apr-18	16.54	19.29	6,656.75
							Jul-18	19.03	21.78	6,654.26
							Oct-18	18.96	21.71	6,654.33
							Jan-19	17.31	20.06	6,655.98
							Apr-19	16.89	19.64	6,656.40
		2.73			6,674.47	6,677.19	Jul-19	19.08	21.81	6,655.38
							Sep-19	19.65	22.38	6,654.81
							Jan-20	17.70	20.43	6,656.76
							Apr-20	17.02	19.75	6,657.44
							Jul-20	19.92	22.65	6,654.54
							Oct-20	20.45	23.18	6,654.01
							Jan-21	18.48	21.21	6,655.98
							Apr-21	17.76	20.49	6,656.70
							Jul-21	20.39	23.12	6,654.07
							Oct-21	20.58	23.31	6,653.88
							Jan-22	18.59	21.32	6,655.87
							Apr-22	18.02	20.75	6,656.44

TABLE 3-1: NORTHERN AREA WATER-LEVEL MEASUREMENTS BY GROUNDWATER ZONE
2024 INTERIM NORTHERN AREA GROUNDWATER MONITORING PLAN
Fort Wingate Depot Activity, New Mexico

Well ID	GW Zone	Casing Stick Up Length (feet)	Screened Interval (feet bgs)	Total Well Depth (feet bgs)	Well Ground Elevation (NAVD 88)	Well TOC Elevation (NAVD 88)	Water Level Measurement Date	Depth to Water (feet bgs)	Depth to Water (feet btoc)	Groundwater Elevation (NAVD 88)
PZ07	Alluvial	2.15	10.6-30.6	30.5	6,682.38	6,684.53	Jul-14	14.01	16.16	6,668.37
							Oct-14	9.87	12.02	6,672.51
							Jan-15	12.85	15.00	6,669.53
							Mar-15	11.99	14.14	6,670.39
							Jul-15	13.30	15.45	6,669.08
							Oct-15	14.15	16.30	6,668.23
							Jan-16	13.68	15.83	6,668.70
							Apr-16	13.56	15.71	6,668.82
							Jul-16	13.42	15.57	6,668.96
							Oct-16	13.84	15.99	6,668.54
							Jan-17	8.19	10.34	6,674.19
							Apr-17	9.68	11.83	6,672.70
							Jul-17	12.31	14.46	6,670.07
							Oct-17	14.06	16.21	6,668.32
							Jan-18	14.72	16.87	6,667.66
							Apr-18	14.66	16.81	6,667.72
							Jul-18	15.46	17.61	6,666.92
							Oct-18	15.54	17.69	6,666.84
							Jan-19	15.23	17.38	6,667.15
							Apr-19	7.04	9.19	6,675.34
		2.46			6,683.24	6,685.70	Jul-19	11.26	13.72	6,671.98
							Sep-19	14.28	16.74	6,668.96
							Jan-20	14.70	17.16	6,668.54
							Apr-20	14.55	17.01	6,668.69
							Jul-20	15.66	18.12	6,667.58
							Oct-20	16.30	18.76	6,666.94
							Jan-21	16.01	18.47	6,667.23
							Apr-21	15.72	18.18	6,667.52
							Jul-21	16.75	19.21	6,666.49
							Oct-21	16.85	19.31	6,666.39
							Jan-22	15.99	18.45	6,667.25
							Apr-22	15.51	17.97	6,667.73
PZ08	Alluvial	2.70	26.3-46.3	46.6	6,684.11	6,686.81	Jul-14	17.16	19.86	6,666.95
							Oct-14	12.40	15.10	6,671.71
							Jan-15	15.55	18.25	6,668.56
							Mar-15	14.44	17.14	6,669.67
							Jul-15	16.18	18.88	6,667.93
							Oct-15	16.92	19.62	6,667.19
							Jan-16	16.39	19.09	6,667.72
							Apr-16	16.36	19.06	6,667.75
							Jul-16	16.33	19.03	6,667.78
							Oct-16	16.79	19.49	6,667.32
							Jan-17	17.08	19.78	6,667.03
							Apr-17	11.79	14.49	6,672.32
							Jul-17	15.31	18.01	6,668.80
							Oct-17	17.10	19.80	6,667.01
							Jan-18	17.62	20.32	6,666.49
							Apr-18	17.47	20.17	6,666.64
							Jul-18	18.56	21.26	6,665.55
							Oct-18	18.58	21.28	6,665.53
							Jan-19	18.12	20.82	6,665.99
							Apr-19	9.74	12.44	6,674.37
		2.91			6,685.03	6,687.93	Jul-19	14.67	17.58	6,670.35
							Sep-19	17.77	20.68	6,667.25
							Jan-20	17.64	20.55	6,667.38
							Apr-20	17.39	20.30	6,667.63
							Jul-20	18.90	21.81	6,666.12
							Oct-20	19.48	22.39	6,665.54
							Jan-21	19.04	21.95	6,665.98
							Apr-21	18.60	21.51	6,666.42
							Jul-21	19.94	22.85	6,665.08
							Oct-21	19.88	22.79	6,665.14
							Jan-22	18.92	21.83	6,666.10
							Apr-22	18.40	21.31	6,666.62

TABLE 3-1: NORTHERN AREA WATER-LEVEL MEASUREMENTS BY GROUNDWATER ZONE
2024 INTERIM NORTHERN AREA GROUNDWATER MONITORING PLAN
Fort Wingate Depot Activity, New Mexico

Well ID	GW Zone	Casing Stick Up Length (feet)	Screened Interval (feet bgs)	Total Well Depth (feet bgs)	Well Ground Elevation (NAVD 88)	Well TOC Elevation (NAVD 88)	Water Level Measurement Date	Depth to Water (feet bgs)	Depth to Water (feet btoc)	Groundwater Elevation (NAVD 88)
PZ09	Alluvial	2.49	18.1-33.1	33.5	6,651.12	6,653.61	Jul-14	13.88	16.37	6,637.24
							Oct-14	12.85	15.34	6,638.27
							Jan-15	12.90	15.39	6,638.22
							Mar-15	12.43	14.92	6,638.69
							Jul-15	13.13	15.62	6,637.99
							Oct-15	13.73	16.22	6,637.39
							Jan-16	12.90	15.39	6,638.22
							Apr-16	12.86	15.35	6,638.26
							Jul-16	13.74	16.23	6,637.38
							Oct-16	14.33	16.82	6,636.79
							Jan-17	13.38	15.87	6,637.74
							Apr-17	12.77	15.26	6,638.35
							Jul-17	13.97	16.46	6,637.15
							Oct-17	14.72	17.21	6,636.40
							Jan-18	13.95	16.44	6,637.17
							Apr-18	13.37	15.86	6,637.75
							Jul-18	14.69	17.18	6,636.43
							Oct-18	15.03	17.52	6,636.09
							Jan-19	14.46	16.95	6,636.66
							Apr-19	13.64	16.13	6,637.48
		2.30			6,652.37	6,654.66	Jul-19	13.79	16.09	6,638.57
							Sep-19	15.30	17.60	6,637.06
							Jan-20	14.79	17.09	6,637.57
							Apr-20	14.22	16.52	6,638.14
							Jul-20	15.58	17.88	6,636.78
							Oct-20	16.13	18.43	6,636.23
							Jan-21	15.55	17.85	6,636.81
							Apr-21	15.02	17.32	6,637.34
							Jul-21	16.19	18.49	6,636.17
							Oct-21	16.39	18.69	6,635.97
							Jan-22	15.80	18.10	6,636.56
							Apr-22	15.31	17.61	6,637.05
PZ10	Alluvial	2.44	31.0-46.0	46.3	6,654.83	6,657.27	Jul-14	17.79	20.23	6,637.04
							Oct-14	16.75	19.19	6,638.08
							Jan-15	16.77	19.21	6,638.06
							Mar-15	16.32	18.76	6,638.51
							Jul-15	17.05	19.49	6,637.78
							Oct-15	17.59	20.03	6,637.24
							Jan-16	16.74	19.18	6,638.09
							Apr-16	16.70	19.14	6,638.13
							Jul-16	17.66	20.10	6,637.17
							Oct-16	18.20	20.64	6,636.63
							Jan-17	17.23	19.67	6,637.60
							Apr-17	16.62	19.06	6,638.21
							Jul-17	17.90	20.34	6,636.93
							Oct-17	18.59	21.03	6,636.24
							Jan-18	17.76	20.20	6,637.07
							Apr-18	17.22	19.66	6,637.61
							Jul-18	18.59	21.03	6,636.24
							Oct-18	18.91	21.35	6,635.92
							Jan-19	18.28	20.72	6,636.55
							Apr-19	17.51	19.95	6,637.32
		2.39			6,655.92	6,658.31	Jul-19	18.39	20.78	6,637.53
							Sep-19	19.04	21.43	6,636.88
							Jan-20	18.49	20.88	6,637.43
							Apr-20	17.91	20.30	6,638.01
							Jul-20	19.34	21.73	6,636.58
							Oct-20	19.84	22.23	6,636.08
							Jan-21	19.29	21.68	6,636.63
							Apr-21	18.74	21.13	6,637.18
							Jul-21	19.90	22.29	6,636.02
							Oct-21	20.98	23.37	6,634.94
							Jan-22	19.43	21.82	6,636.49
							Apr-22	18.97	21.36	6,636.95

TABLE 3-1: NORTHERN AREA WATER-LEVEL MEASUREMENTS BY GROUNDWATER ZONE
2024 INTERIM NORTHERN AREA GROUNDWATER MONITORING PLAN
Fort Wingate Depot Activity, New Mexico

Well ID	GW Zone	Casing Stick Up Length (feet)	Screened Interval (feet bgs)	Total Well Depth (feet bgs)	Well Ground Elevation (NAVD 88)	Well TOC Elevation (NAVD 88)	Water Level Measurement Date	Depth to Water (feet bgs)	Depth to Water (feet btoc)	Groundwater Elevation (NAVD 88)							
Bedrock Wells																	
BGMW07	Bedrock	0.00	215.0-255.0	256.0	6,691.63	6,691.63	Apr-18	36.01	36.01	6,655.62							
							Jul-18	18.02	18.02	6,673.61							
							Oct-18	17.57	17.57	6,674.06							
							Jan-19	17.77	17.77	6,673.86							
					6,689.77	6,692.03	Apr-19	17.48	17.48	6,674.15							
							Jul-19	18.06	18.06	6,673.97							
							Sep-19	17.98	17.98	6,674.05							
							Jan-20	17.72	17.72	6,674.31							
							Apr-20	17.49	17.49	6,674.54							
							Jul-20	17.90	17.90	6,674.13							
							Oct-20	17.77	17.77	6,674.26							
							Jan-21	18.15	18.15	6,673.88							
							Apr-21	17.83	17.83	6,674.20							
							Jul-21	18.15	18.15	6,673.88							
							Oct-21	17.82	17.82	6,674.21							
							Jan-22	18.83	18.83	6,673.20							
							Apr-22	17.72	17.72	6,674.31							
BGMW08	Bedrock	0.00	165.0-185.0	186.0	6,685.02	6,685.02	Apr-18	179.36	179.36	6,505.66							
							Jul-18	170.16	170.16	6,514.86							
							Oct-18	168.64	168.64	6,516.38							
							Jan-19	23.46	23.46	6,661.56							
		1.71			6,681.72	6,683.42	Apr-19	145.77	145.77	6,539.25							
							Jul-19	165.84	167.55	6,515.87							
							Sep-19	144.31	146.02	6,537.40							
							Jan-20	157.74	159.45	6,523.97							
							Apr-20	124.39	126.10	6,557.32							
							Jul-20	161.49	163.20	6,520.22							
							Oct-20	137.70	139.41	6,544.01							
							Jan-21	164.84	166.55	6,516.87							
							Apr-21	133.91	135.62	6,547.80							
							Jul-21	164.08	165.79	6,517.63							
							Oct-21	137.75	139.46	6,543.96							
							Jan-22	165.24	166.95	6,516.47							
							Apr-22	135.95	137.66	6,545.76							
							BGMW09	Bedrock	0.00	106.0-136.0	173.0	6,692.27	6,692.27	Apr-18	115.19	115.19	6,577.08
														Jul-18	53.84	53.84	6,638.43
														Jul-18	47.24	47.24	6,645.03
Jan-19	49.37	49.37	6,642.90														
2.18	6,689.83	6,692.01	Apr-19	46.88	46.88	6,645.39											
			Jul-19	46.39	48.57	6,643.44											
			Sep-19	44.92	47.10	6,644.91											
			Jan-20	45.64	47.82	6,644.19											

TABLE 3-1: NORTHERN AREA WATER-LEVEL MEASUREMENTS BY GROUNDWATER ZONE
2024 INTERIM NORTHERN AREA GROUNDWATER MONITORING PLAN
Fort Wingate Depot Activity, New Mexico

Well ID	GW Zone	Casing Stick Up Length (feet)	Screened Interval (feet bgs)	Total Well Depth (feet bgs)	Well Ground Elevation (NAVD 88)	Well TOC Elevation (NAVD 88)	Water Level Measurement Date	Depth to Water (feet bgs)	Depth to Water (feet btoc)	Groundwater Elevation (NAVD 88)
BGMW10	Bedrock	0.00	106.0-136.0	147.0	6,701.49	6,701.49	Apr-18	30.49	30.49	6,671.00
							Jul-18	30.69	30.69	6,670.80
							Oct-18	30.79	30.79	6,670.70
							Jan-19	31.07	31.07	6,670.42
							Apr-19	31.15	31.15	6,670.34
		2.33			6,699.50	6,701.83	Jul-19	29.09	31.42	6,670.41
							Sep-19	29.25	31.58	6,670.25
							Jan-20	29.46	31.79	6,670.04
							Apr-20	29.62	31.95	6,669.88
							Jul-20	29.87	32.20	6,669.63
							Oct-20	30.03	32.36	6,669.47
							Jan-21	30.32	32.65	6,669.18
							Apr-21	30.34	32.67	6,669.16
							Jul-21	30.67	33.00	6,668.83
							Sep-21	30.73	33.06	6,668.77
							Jan-22	30.93	33.26	6,668.57
							Apr-22	31.05	33.38	6,668.45
TMW14A	Bedrock	2.46	94.3-109.3	110.0	6,721.08	6,723.54	Jul-14	62.41	64.87	6,658.67
							Oct-14	62.48	64.94	6,658.60
							Jan-15	62.61	65.07	6,658.47
							Mar-15	62.54	65.00	6,658.54
							Jul-15	62.68	65.14	6,658.40
							Oct-15	62.71	65.17	6,658.37
							Jan-16	62.73	65.19	6,658.35
							Apr-16	62.74	65.20	6,658.34
							Jul-16	63.05	65.51	6,658.03
							Oct-16	63.04	65.50	6,658.04
							Jan-17	63.22	65.68	6,657.86
							Apr-17	63.53	65.99	6,657.55
							Jul-17	63.31	65.77	6,657.77
							Oct-17	63.49	65.95	6,657.59
							Jan-18	63.85	66.31	6,657.23
							Apr-18	64.01	66.47	6,657.07
							Jul-18	64.22	66.68	6,656.86
							Oct-18	63.96	66.42	6,657.12
							Jan-19	64.32	66.78	6,656.76
		Apr-19			64.32	66.78	6,656.76			
		2.20			6,722.53	6,724.73	Jul-19	65.78	67.98	6,656.75
							Sep-19	64.65	66.85	6,657.88
							Jan-20	64.89	67.09	6,657.64
							Apr-20	65.11	67.31	6,657.42
							Jul-20	65.15	67.35	6,657.38
							Oct-20	65.24	67.44	6,657.29
							Jan-21	65.26	67.46	6,657.27
							Apr-21	65.29	67.49	6,657.24
							Jul-21	65.36	67.56	6,657.17
							Oct-21	65.37	67.57	6,657.16
							Jan-22	65.39	67.59	6,657.14
							Apr-22	65.39	67.59	6,657.14

TABLE 3-1: NORTHERN AREA WATER-LEVEL MEASUREMENTS BY GROUNDWATER ZONE
2024 INTERIM NORTHERN AREA GROUNDWATER MONITORING PLAN
Fort Wingate Depot Activity, New Mexico

Well ID	GW Zone	Casing Stick Up Length (feet)	Screened Interval (feet bgs)	Total Well Depth (feet bgs)	Well Ground Elevation (NAVD 88)	Well TOC Elevation (NAVD 88)	Water Level Measurement Date	Depth to Water (feet bgs)	Depth to Water (feet btoc)	Groundwater Elevation (NAVD 88)			
TMW16	Bedrock	2.50	123.0-138.0	142.0	6,711.65	6,714.15	Jul-14	54.08	56.58	6,657.57			
							Oct-14	54.16	56.66	6,657.49			
							Jan-15	54.18	56.68	6,657.47			
							Mar-15	54.24	56.74	6,657.41			
							Jul-15	54.27	56.77	6,657.38			
							Oct-15	54.53	57.03	6,657.12			
							Jan-16	54.54	57.04	6,657.11			
							Apr-16	54.71	57.21	6,656.94			
							Jul-16	54.89	57.39	6,656.76			
							Oct-16	55.06	57.56	6,656.59			
							Jan-17	54.92	57.42	6,656.73			
							Apr-17	55.05	57.55	6,656.60			
							Jul-17	55.25	57.75	6,656.40			
							Oct-17	55.60	58.10	6,656.05			
							Jan-18	55.70	58.20	6,655.95			
							Apr-18	55.75	58.25	6,655.90			
							Jul-18	56.32	58.82	6,655.33			
							Oct-18	55.85	58.35	6,655.80			
							Jan-19	55.42	57.92	6,656.23			
							Apr-19	56.11	58.61	6,655.54			
		2.48			6,712.72	6,715.21	Jul-19	55.98	58.46	6,656.75			
							Sep-19	53.27	55.75	6,659.46			
							Jan-20	56.28	58.76	6,656.45			
							Apr-20	56.30	58.78	6,656.43			
							Jul-20	56.70	59.18	6,656.03			
							Oct-20	56.57	59.05	6,656.16			
							Jan-21	57.06	59.54	6,655.67			
							Apr-21	56.93	59.41	6,655.80			
							Jul-21	57.10	59.58	6,655.63			
							Oct-21	57.02	59.50	6,655.71			
2.49	6,717.40	6,719.89	Jan-22	57.06	59.54	6,655.71							
			Apr-22	57.19	59.67	6,655.54							
			Jul-14	60.73	63.22	6,656.67							
			Oct-14	60.84	63.33	6,656.56							
			Jan-15	60.83	63.32	6,656.57							
			Mar-15	60.94	63.43	6,656.46							
			Jul-15	61.16	63.65	6,656.24							
			Oct-15	61.21	63.70	6,656.19							
			Jan-16	61.20	63.69	6,656.20							
			Apr-16	61.41	63.90	6,655.99							
TMW17	Bedrock	2.49	112.0-127.0	152.0	6,717.40	6,719.89	Jul-16	61.54	64.03	6,655.86			
							Oct-16	61.65	64.14	6,655.75			
							Jan-17	61.72	64.21	6,655.68			
							Apr-17	61.70	64.19	6,655.70			
							Jul-17	62.50	64.99	6,654.90			
							Oct-17	62.51	65.00	6,654.89			
							Jan-18	62.64	65.13	6,654.76			
							Apr-18	62.62	65.11	6,654.78			
							Jul-18	62.63	65.12	6,654.77			
							Oct-18	62.61	65.10	6,654.79			
							Jan-19	62.61	65.10	6,654.79			
							Apr-19	62.63	65.12	6,654.77			
							2.55	6,718.53	6,721.07	Jul-19	62.64	65.19	6,655.88
										Sep-19	62.62	65.17	6,655.90
										Jan-20	62.66	65.21	6,655.86
										Apr-20	62.70	65.25	6,655.82
										Jul-20	62.73	65.28	6,655.79
										Oct-20	62.73	65.28	6,655.79
										Jan-21	62.80	65.35	6,655.72
										Apr-21	62.83	65.38	6,655.69
		Jul-21			63.06	65.61				6,655.46			
		Oct-21			63.05	65.60				6,655.47			
		2.55			6,718.53	6,721.07	Jan-22	63.14	65.69	6,655.38			
							Apr-22	63.17	65.72	6,655.35			

TABLE 3-1: NORTHERN AREA WATER-LEVEL MEASUREMENTS BY GROUNDWATER ZONE
2024 INTERIM NORTHERN AREA GROUNDWATER MONITORING PLAN
Fort Wingate Depot Activity, New Mexico

Well ID	GW Zone	Casing Stick Up Length (feet)	Screened Interval (feet bgs)	Total Well Depth (feet bgs)	Well Ground Elevation (NAVD 88)	Well TOC Elevation (NAVD 88)	Water Level Measurement Date	Depth to Water (feet bgs)	Depth to Water (feet btoc)	Groundwater Elevation (NAVD 88)
TMW18	Bedrock	3.35	150.0-160.0	220.0	6,710.14	6,713.49	Jul-14	52.09	55.44	6,658.05
							Oct-14	52.18	55.53	6,657.96
							Jan-15	52.21	55.56	6,657.93
							Mar-15	52.20	55.55	6,657.94
							Jul-15	52.45	55.80	6,657.69
							Oct-15	52.50	55.85	6,657.64
							Jan-16	52.52	55.87	6,657.62
							Apr-16	52.67	56.02	6,657.47
							Jul-16	52.85	56.20	6,657.29
							Oct-16	52.95	56.30	6,657.19
							Jan-17	52.94	56.29	6,657.20
							Apr-17	52.99	56.34	6,657.15
							Jul-17	53.03	56.38	6,657.11
							Oct-17	53.35	56.70	6,656.79
							Jan-18	53.60	56.95	6,656.54
							Apr-18	53.80	57.15	6,656.34
							Jul-18	53.93	57.28	6,656.21
							Oct-18	53.76	57.11	6,656.38
							Jan-19	54.15	57.50	6,655.99
							Apr-19	54.23	57.58	6,655.91
		3.08			6,711.48	6,714.56	Jul-19	54.25	57.33	6,657.23
							Sep-19	54.60	57.68	6,656.88
							Jan-20	54.00	57.08	6,657.48
							Apr-20	54.53	57.61	6,656.95
							Jul-20	51.16	54.24	6,660.32
							Oct-20	54.87	57.95	6,656.61
							Jan-21	55.20	58.28	6,656.28
							Apr-21	55.17	58.25	6,656.31
							Jul-21	55.30	58.38	6,656.18
							Oct-21	55.50	58.58	6,655.98
							Jan-22	55.58	58.66	6,655.90
							Apr-22	55.48	58.56	6,656.00
TMW19	Bedrock	2.95	169.0-184.0	187.0	6,697.57	6,700.52	Jul-14	40.21	43.16	6,657.36
							Oct-14	40.25	43.20	6,657.32
							Jan-15	40.19	43.14	6,657.38
							Mar-15	40.25	43.20	6,657.32
							Jul-15	40.30	43.25	6,657.27
							Oct-15	40.59	43.54	6,656.98
							Jan-16	40.51	43.46	6,657.06
							Apr-16	40.78	43.73	6,656.79
							Jul-16	40.98	43.93	6,656.59
							Oct-16	41.08	44.03	6,656.49
							Jan-17	40.94	43.89	6,656.63
							Apr-17	40.95	43.90	6,656.62
							Jul-17	41.42	44.37	6,656.15
							Oct-17	41.53	44.48	6,656.04
							Jan-18	41.60	44.55	6,655.97
							Apr-18	41.92	44.87	6,655.65
							Jul-18	42.27	45.22	6,655.30
							Oct-18	41.90	44.85	6,655.67
							Jan-19	43.40	46.35	6,654.17
							Apr-19	42.06	45.01	6,655.51
		2.74			6,698.93	6,701.67	Jul-19	42.52	45.26	6,656.41
							Sep-19	44.48	47.22	6,654.45
							Jan-20	42.93	45.67	6,656.00
							Apr-20	43.64	46.38	6,655.29
							Jul-20	43.84	46.58	6,655.09
							Oct-20	43.32	46.06	6,655.61
							Jan-21	44.14	46.88	6,654.79
							Apr-21	45.11	47.85	6,653.82
							Jul-21	44.05	46.79	6,654.88
							Oct-21	56.15	58.89	6,642.78
							Jan-22	44.01	46.75	6,654.92
							Apr-22	44.21	46.95	6,654.72

TABLE 3-1: NORTHERN AREA WATER-LEVEL MEASUREMENTS BY GROUNDWATER ZONE
2024 INTERIM NORTHERN AREA GROUNDWATER MONITORING PLAN
Fort Wingate Depot Activity, New Mexico

Well ID	GW Zone	Casing Stick Up Length (feet)	Screened Interval (feet bgs)	Total Well Depth (feet bgs)	Well Ground Elevation (NAVD 88)	Well TOC Elevation (NAVD 88)	Water Level Measurement Date	Depth to Water (feet bgs)	Depth to Water (feet btoc)	Groundwater Elevation (NAVD 88)
TMW30	Bedrock	2.24	35.0-45.0	51.5	6,712.35	6,714.59	Jul-14	38.36	40.60	6,673.99
							Oct-14	38.31	40.55	6,674.04
							Jan-15	38.32	40.56	6,674.03
							Mar-15	37.71	39.95	6,674.64
							Jul-15	38.14	40.38	6,674.21
							Oct-15	38.14	40.38	6,674.21
							Jan-16	38.19	40.43	6,674.16
							Apr-16	38.34	40.58	6,674.01
							Jul-16	38.30	40.54	6,674.05
							Oct-16	38.34	40.58	6,674.01
							Jan-17	38.32	40.56	6,674.03
							Apr-17	38.35	40.59	6,674.00
							Jul-17	38.28	40.52	6,674.07
							Oct-17	38.36	40.60	6,673.99
							Jan-18	38.34	40.58	6,674.01
							Apr-18	38.38	40.62	6,673.97
							Jul-18	38.53	40.77	6,673.82
							Oct-18	38.47	40.71	6,673.88
							Jan-19	38.42	40.66	6,673.93
							Apr-19	38.51	40.75	6,673.84
		2.24			6,713.42	6,715.66	Jul-19	38.38	40.62	6,675.04
							Sep-19	38.28	40.52	6,675.14
							Jan-20	38.36	40.60	6,675.06
							Apr-20	38.42	40.66	6,675.00
							Jul-20	38.55	40.79	6,674.87
							Oct-20	38.49	40.73	6,674.93
							Jan-21	38.40	40.64	6,675.02
							Apr-21	38.48	40.72	6,674.94
							Jul-21	38.62	40.86	6,674.80
							Oct-21	38.58	40.82	6,674.84
							Jan-22	38.46	40.70	6,674.96
							Apr-22	38.51	40.75	6,674.91
TMW31D	Bedrock	1.91	77.0-107.0	111.5	6,708.53	6,710.44	Jul-14	36.23	38.14	6,672.30
							Oct-14	36.50	38.41	6,672.03
							Jan-15	36.54	38.45	6,671.99
							Mar-15	36.74	38.65	6,671.79
							Jul-15	36.90	38.81	6,671.63
							Oct-15	37.14	39.05	6,671.39
							Jan-16	37.15	39.06	6,671.38
							Apr-16	37.46	39.37	6,671.07
							Jul-16	37.66	39.57	6,670.87
							Oct-16	37.95	39.86	6,670.58
							Jan-17	38.43	40.34	6,670.10
							Apr-17	38.18	40.09	6,670.35
							Jul-17	38.29	40.20	6,670.24
							Oct-17	38.74	40.65	6,669.79
							Jan-18	38.77	40.68	6,669.76
							Apr-18	38.87	40.78	6,669.66
							Jul-18	39.15	41.06	6,669.38
							Oct-18	39.24	41.15	6,669.29
							Jan-19	39.58	41.49	6,668.95
							Apr-19	39.59	41.50	6,668.94
		1.80			6,710.19	6,711.99	Jul-19	40.03	41.83	6,670.16
							Sep-19	40.12	41.92	6,670.07
							Jan-20	40.37	42.17	6,669.82
							Apr-20	40.21	42.01	6,669.98
							Jul-20	40.76	42.56	6,669.43
							Oct-20	40.75	42.55	6,669.44
							Jan-21	41.25	43.05	6,668.94
							Apr-21	41.25	43.05	6,668.94
							Jul-21	41.54	43.34	6,668.65
							Oct-21	41.73	43.53	6,668.46
							Jan-22	41.94	43.74	6,668.25
							Apr-22	42.02	43.82	6,668.17

TABLE 3-1: NORTHERN AREA WATER-LEVEL MEASUREMENTS BY GROUNDWATER ZONE
2024 INTERIM NORTHERN AREA GROUNDWATER MONITORING PLAN
Fort Wingate Depot Activity, New Mexico

Well ID	GW Zone	Casing Stick Up Length (feet)	Screened Interval (feet bgs)	Total Well Depth (feet bgs)	Well Ground Elevation (NAVD 88)	Well TOC Elevation (NAVD 88)	Water Level Measurement Date	Depth to Water (feet bgs)	Depth to Water (feet btoc)	Groundwater Elevation (NAVD 88)
TMW32	Bedrock	2.22	117.0-137.0	139.1	6,707.09	6,709.31	Jul-14	38.07	40.29	6,669.02
							Oct-14	38.27	40.49	6,668.82
							Jan-15	38.31	40.53	6,668.78
							Mar-15	38.47	40.69	6,668.62
							Jul-15	38.70	40.92	6,668.39
							Oct-15	38.86	41.08	6,668.23
							Jan-16	38.91	41.13	6,668.18
							Apr-16	39.13	41.35	6,667.96
							Jul-16	39.35	41.57	6,667.74
							Oct-16	39.57	41.79	6,667.52
							Jan-17	39.54	41.76	6,667.55
							Apr-17	39.79	42.01	6,667.30
							Jul-17	39.93	42.15	6,667.16
							Oct-17	39.92	42.14	6,667.17
							Jan-18	40.28	42.50	6,666.81
							Apr-18	40.43	42.65	6,666.66
							Jul-18	40.77	42.99	6,666.32
							Oct-18	40.84	43.06	6,666.25
							Jan-19	40.68	42.90	6,666.41
							Apr-19	40.31	42.53	6,666.78
		1.85			6,709.03	6,710.88	Jul-19	41.47	43.32	6,667.56
							Sep-19	40.50	42.35	6,668.53
							Jan-20	41.83	43.68	6,667.20
							Apr-20	42.17	44.02	6,666.86
							Jul-20	42.19	44.04	6,666.84
							Oct-20	41.45	43.30	6,667.58
							Jan-21	42.32	44.17	6,666.71
							Apr-21	42.67	44.52	6,666.36
							Jul-21	42.67	44.52	6,666.36
							Oct-21	43.10	44.95	6,665.93
							Jan-22	43.17	45.02	6,665.86
							Apr-22	43.28	45.13	6,665.75
TMW36	Bedrock	1.71	132.0-152.0	157.0	6,697.33	6,699.04	Jul-14	26.47	28.18	6,670.86
							Oct-14	26.55	28.26	6,670.78
							Jan-15	26.69	28.40	6,670.64
							Mar-15	26.78	28.49	6,670.55
							Jul-15	26.99	28.70	6,670.34
							Oct-15	27.27	28.98	6,670.06
							Jan-16	27.33	29.04	6,670.00
							Apr-16	27.55	29.26	6,669.78
							Jul-16	27.88	29.59	6,669.45
							Oct-16	28.07	29.78	6,669.26
							Jan-17	28.06	29.77	6,669.27
							Apr-17	28.30	30.01	6,669.03
							Jul-17	28.52	30.23	6,668.81
							Oct-17	28.96	30.67	6,668.37
							Jan-18	28.88	30.59	6,668.45
							Apr-18	29.21	30.92	6,668.12
							Jul-18	29.37	31.08	6,667.96
							Oct-18	29.72	31.43	6,667.61
							Jan-19	29.67	31.38	6,667.66
							Apr-19	29.92	31.63	6,667.41
		1.66			6,700.57	6,702.23	Jul-19	30.20	31.86	6,670.37
							Sep-19	30.28	31.94	6,670.29
							Jan-20	30.41	32.07	6,670.16
							Apr-20	33.85	35.51	6,666.72
							Jul-20	30.90	32.56	6,669.67
							Oct-20	31.31	32.97	6,669.26
							Jan-21	31.75	33.41	6,668.82
							Apr-21	31.29	32.95	6,669.28
							Jul-21	31.44	33.10	6,669.13
							Sep-21	31.86	33.52	6,668.71
							Jan-22	31.88	33.54	6,668.69
							Apr-22	32.20	33.86	6,668.37

TABLE 3-1: NORTHERN AREA WATER-LEVEL MEASUREMENTS BY GROUNDWATER ZONE
2024 INTERIM NORTHERN AREA GROUNDWATER MONITORING PLAN
Fort Wingate Depot Activity, New Mexico

Well ID	GW Zone	Casing Stick Up Length (feet)	Screened Interval (feet bgs)	Total Well Depth (feet bgs)	Well Ground Elevation (NAVD 88)	Well TOC Elevation (NAVD 88)	Water Level Measurement Date	Depth to Water (feet bgs)	Depth to Water (feet btoc)	Groundwater Elevation (NAVD 88)
TMW37	Bedrock	2.58	88.0-108.0	111.0	6,710.51	6,713.09	Jul-14	43.83	46.41	6,666.68
							Oct-14	43.93	46.51	6,666.58
							Jan-15	44.03	46.61	6,666.48
							Mar-15	44.17	46.75	6,666.34
							Jul-15	44.07	46.65	6,666.44
							Oct-15	44.24	46.82	6,666.27
							Jan-16	44.22	46.80	6,666.29
							Apr-16	44.54	47.12	6,665.97
							Jul-16	44.67	47.25	6,665.84
							Oct-16	44.93	47.51	6,665.58
							Jan-17	46.87	49.45	6,663.64
							Apr-17	45.11	47.69	6,665.40
							Jul-17	45.26	47.84	6,665.25
							Oct-17	45.67	48.25	6,664.84
							Jan-18	45.78	48.36	6,664.73
							Apr-18	45.77	48.35	6,664.74
		2.09			6,712.15	6,714.25	Jul-18	46.28	48.86	6,664.23
							Oct-18	46.39	48.97	6,664.12
							Jan-19	46.28	48.86	6,664.23
							Apr-19	46.09	48.67	6,664.42
							Jul-19	47.01	49.10	6,665.15
							Sep-19	47.00	49.09	6,665.16
							Jan-20	47.12	49.21	6,665.04
							Apr-20	47.25	49.34	6,664.91
							Jul-20	47.53	49.62	6,664.63
							Oct-20	47.74	49.83	6,664.42
							Jan-21	47.95	50.04	6,664.21
							Apr-21	48.04	50.13	6,664.12
							Jul-21	48.22	50.31	6,663.94
							Oct-21	48.15	50.24	6,664.01
							Jan-22	48.39	50.48	6,663.77
							Apr-22	48.58	50.67	6,663.58
TMW38	Bedrock	2.38	118.9-158.9	159.5	6,704.41	6,706.79	Jul-14	45.06	47.44	6,659.35
							Oct-14	45.13	47.51	6,659.28
							Jan-15	45.08	47.46	6,659.33
							Mar-15	45.17	47.55	6,659.24
							Jul-15	45.48	47.86	6,658.93
							Oct-15	45.53	47.91	6,658.88
							Jan-16	45.52	47.90	6,658.89
							Apr-16	45.74	48.12	6,658.67
							Jul-16	45.90	48.28	6,658.51
							Oct-16	46.02	48.40	6,658.39
							Jan-17	45.86	48.24	6,658.55
							Apr-17	46.04	48.42	6,658.37
							Jul-17	46.25	48.63	6,658.16
							Oct-17	46.33	48.71	6,658.08
							Jan-18	46.38	48.76	6,658.03
							Apr-18	46.41	48.79	6,658.00
		2.59			6,705.03	6,707.62	Jul-18	46.16	48.54	6,658.25
							Oct-18	47.31	49.69	6,657.10
							Jan-19	47.30	49.68	6,657.11
							Apr-19	47.10	49.48	6,657.31
							Jul-19	46.91	49.50	6,658.12
							Sep-19	46.75	49.34	6,658.28
							Jan-20	46.95	49.54	6,658.08
							Apr-20	47.02	49.61	6,658.01
							Jul-20	47.28	49.87	6,657.75
							Oct-20	47.43	50.02	6,657.60
							Jan-21	47.54	50.13	6,657.49
							Apr-21	47.51	50.10	6,657.52
							Jul-21	47.74	50.33	6,657.29
							Oct-21	47.96	50.55	6,657.07
							Jan-22	47.83	50.42	6,657.20
							Apr-22	47.93	50.52	6,657.10

TABLE 3-1: NORTHERN AREA WATER-LEVEL MEASUREMENTS BY GROUNDWATER ZONE
2024 INTERIM NORTHERN AREA GROUNDWATER MONITORING PLAN
Fort Wingate Depot Activity, New Mexico

Well ID	GW Zone	Casing Stick Up Length (feet)	Screened Interval (feet bgs)	Total Well Depth (feet bgs)	Well Ground Elevation (NAVD 88)	Well TOC Elevation (NAVD 88)	Water Level Measurement Date	Depth to Water (feet bgs)	Depth to Water (feet btoc)	Groundwater Elevation (NAVD 88)
TMW39D	Bedrock	2.08	70.0-100.0	100.5	6,706.53	6,708.61	Jul-14	33.32	35.40	6,673.21
							Oct-14	33.60	35.68	6,672.93
							Jan-15	33.64	35.72	6,672.89
							Mar-15	33.84	35.92	6,672.69
							Jul-15	33.98	36.06	6,672.55
							Oct-15	34.23	36.31	6,672.30
							Jan-16	34.23	36.31	6,672.30
							Apr-16	34.54	36.62	6,671.99
							Jul-16	34.75	36.83	6,671.78
							Oct-16	35.03	37.11	6,671.50
							Jan-17	34.94	37.02	6,671.59
							Apr-17	35.29	37.37	6,671.24
							Jul-17	35.42	37.50	6,671.11
							Oct-17	35.75	37.83	6,670.78
							Jan-18	35.82	37.90	6,670.71
							Apr-18	35.95	38.03	6,670.58
							Jul-18	36.22	38.30	6,670.31
							Oct-18	36.31	38.39	6,670.22
							Jan-19	36.63	38.71	6,669.90
							Apr-19	36.68	38.76	6,669.85
		2.06			6,707.08	6,709.14	Jul-19	37.02	39.08	6,670.06
							Sep-19	37.10	39.16	6,669.98
							Jan-20	37.36	39.42	6,669.72
							Apr-20	37.53	39.59	6,669.55
							Jul-20	37.72	39.78	6,669.36
							Oct-20	37.93	39.99	6,669.15
							Jan-21	38.22	40.28	6,668.86
							Apr-21	38.23	40.29	6,668.85
							Jul-21	38.74	40.80	6,668.34
							Sep-21	38.72	40.78	6,668.36
							Jan-22	38.94	41.00	6,668.14
							Apr-22	39.00	41.06	6,668.08
TMW40D	Bedrock	2.34	135.0-155.0	155.5	6,703.81	6,706.15	Jul-14	30.75	33.09	6,673.06
							Oct-14	31.01	33.35	6,672.80
							Jan-15	31.05	33.39	6,672.76
							Mar-15	31.24	33.58	6,672.57
							Jul-15	31.42	33.76	6,672.39
							Oct-15	31.67	34.01	6,672.14
							Jan-16	31.68	34.02	6,672.13
							Apr-16	31.97	34.31	6,671.84
							Jul-16	32.16	34.50	6,671.65
							Oct-16	32.47	34.81	6,671.34
							Jan-17	32.40	34.74	6,671.41
							Apr-17	32.70	35.04	6,671.11
							Jul-17	32.85	35.19	6,670.96
							Oct-17	33.15	35.49	6,670.66
							Jan-18	33.21	35.55	6,670.60
							Apr-18	33.41	35.75	6,670.40
							Jul-18	33.61	35.95	6,670.20
							Oct-18	33.76	36.10	6,670.05
							Jan-19	33.99	36.33	6,669.82
							Apr-19	33.88	36.22	6,669.93
		2.37			6,704.37	6,706.74	Jul-19	34.35	36.72	6,670.02
							Sep-19	35.38	37.75	6,668.99
							Jan-20	34.68	37.05	6,669.69
							Apr-20	34.93	37.30	6,669.44
							Jul-20	35.11	37.48	6,669.26
							Oct-20	35.34	37.71	6,669.03
							Jan-21	35.56	37.93	6,668.81
							Apr-21	35.58	37.95	6,668.79
							Jul-21	35.93	38.30	6,668.44
							Sep-21	36.02	38.39	6,668.35
							Jan-22	36.23	38.60	6,668.14
							Apr-22	36.33	38.70	6,668.04

TABLE 3-1: NORTHERN AREA WATER-LEVEL MEASUREMENTS BY GROUNDWATER ZONE
2024 INTERIM NORTHERN AREA GROUNDWATER MONITORING PLAN
Fort Wingate Depot Activity, New Mexico

Well ID	GW Zone	Casing Stick Up Length (feet)	Screened Interval (feet bgs)	Total Well Depth (feet bgs)	Well Ground Elevation (NAVD 88)	Well TOC Elevation (NAVD 88)	Water Level Measurement Date	Depth to Water (feet bgs)	Depth to Water (feet btoc)	Groundwater Elevation (NAVD 88)
TMW48	Bedrock	2.04	71.0-91.0	91.5	6,707.80	6,709.84	Jul-14	34.57	36.61	6,673.23
							Oct-14	34.85	36.89	6,672.95
							Jan-15	34.93	36.97	6,672.87
							Mar-15	35.06	37.10	6,672.74
							Jul-15	35.24	37.28	6,672.56
							Oct-15	35.49	37.53	6,672.31
							Jan-16	35.53	37.57	6,672.27
							Apr-16	35.77	37.81	6,672.03
							Jul-16	35.94	37.98	6,671.86
							Oct-16	36.27	38.31	6,671.53
							Jan-17	36.24	38.28	6,671.56
							Apr-17	36.54	38.58	6,671.26
							Jul-17	36.65	38.69	6,671.15
							Oct-17	36.93	38.97	6,670.87
							Jan-18	37.07	39.11	6,670.73
							Apr-18	37.20	39.24	6,670.60
							Jul-18	37.46	39.50	6,670.34
							Oct-18	37.61	39.65	6,670.19
							Jan-19	37.90	39.94	6,669.90
							Apr-19	37.93	39.97	6,669.87
		2.08			6,708.29	6,710.37	Jul-19	38.22	40.30	6,670.07
							Sep-19	38.28	40.36	6,670.01
							Jan-20	38.56	40.64	6,669.73
							Apr-20	38.72	40.80	6,669.57
							Jul-20	38.96	41.04	6,669.33
							Oct-20	39.27	41.35	6,669.02
							Jan-21	39.37	41.45	6,668.92
							Apr-21	39.44	41.52	6,668.85
							Jul-21	39.75	41.83	6,668.54
							Oct-21	39.92	42.00	6,668.37
							Jan-22	40.13	42.21	6,668.16
							Apr-22	40.18	42.26	6,668.11
TMW49	Bedrock	2.51	40.0-60.0	60.5	6,712.20	6,714.71	Jul-14	42.18	44.69	6,670.02
							Oct-14	42.46	44.97	6,669.74
							Jan-15	42.54	45.05	6,669.66
							Mar-15	42.71	45.22	6,669.49
							Jul-15	42.83	45.34	6,669.37
							Oct-15	43.07	45.58	6,669.13
							Jan-16	43.12	45.63	6,669.08
							Apr-16	43.42	45.93	6,668.78
							Jul-16	43.63	46.14	6,668.57
							Oct-16	43.84	46.35	6,668.36
							Jan-17	43.84	46.35	6,668.36
							Apr-17	44.17	46.68	6,668.03
							Jul-17	44.27	46.78	6,667.93
							Oct-17	44.58	47.09	6,667.62
							Jan-18	44.69	47.20	6,667.51
							Apr-18	44.82	47.33	6,667.38
							Jul-18	45.09	47.60	6,667.11
							Oct-18	45.09	47.60	6,667.11
							Jan-19	45.48	47.99	6,666.72
							Apr-19	45.57	48.08	6,666.63
		2.42			6,716.30	6,718.72	Jul-19	45.83	48.34	6,670.38
							Sep-19	45.77	48.28	6,670.44
							Jan-20	46.13	48.64	6,670.08
							Apr-20	46.49	49.00	6,669.72
							Jul-20	46.46	48.97	6,669.75
							Oct-20	46.66	49.17	6,669.55
							Jan-21	46.91	49.42	6,669.30
							Apr-21	46.98	49.49	6,669.23
							Jul-21	47.16	49.67	6,669.05
							Oct-21	47.24	49.75	6,668.97
							Jan-22	47.61	50.12	6,668.60
							Apr-22	47.64	50.15	6,668.57

TABLE 3-1: NORTHERN AREA WATER-LEVEL MEASUREMENTS BY GROUNDWATER ZONE
2024 INTERIM NORTHERN AREA GROUNDWATER MONITORING PLAN
Fort Wingate Depot Activity, New Mexico

Well ID	GW Zone	Casing Stick Up Length (feet)	Screened Interval (feet bgs)	Total Well Depth (feet bgs)	Well Ground Elevation (NAVD 88)	Well TOC Elevation (NAVD 88)	Water Level Measurement Date	Depth to Water (feet bgs)	Depth to Water (feet btoc)	Groundwater Elevation (NAVD 88)
TMW50	Bedrock	2.55	55-75	75.0	6,712.47	6,715.02	Nov-19	44.14	46.69	6,668.33
							Apr-20	43.59	46.14	6,668.88
							Jul-20	43.86	46.41	6,668.61
							Oct-20	44.03	46.58	6,668.44
							Jan-21	44.33	46.88	6,668.14
							Apr-21	44.34	46.89	6,668.13
							Jul-21	44.60	47.15	6,667.87
							Oct-21	44.67	47.22	6,667.80
							Jan-22	45.00	47.55	6,667.47
TMW51	Bedrock	2.59	105-125	125.0	6,704.11	6,706.70	Apr-22	45.02	47.57	6,667.45
							Nov-19	34.43	37.02	6,669.68
							Apr-20	34.66	37.25	6,669.45
							Jul-20	34.91	37.50	6,669.20
							Oct-20	35.14	37.73	6,668.97
							Jan-21	35.34	37.93	6,668.77
							Apr-21	35.38	37.97	6,668.73
							Jul-21	35.65	38.24	6,668.46
							Sep-21	35.83	38.42	6,668.28
TMW52	Bedrock	2.66	95-115	115.0	6,701.71	6,704.36	Jan-22	36.05	38.64	6,668.06
							Apr-22	36.13	38.72	6,667.98
							Nov-19	63.34	66.00	6,638.36
							Apr-20	55.81	58.47	6,645.89
							Jul-20	56.36	59.02	6,645.34
							Oct-20	55.75	58.41	6,645.95
							Jan-21	56.09	58.75	6,645.61
							Apr-21	55.84	58.50	6,645.86
							Jul-21	56.18	58.84	6,645.52
TMW53	Bedrock	2.57	107-117	117.0	6,699.77	6,702.34	Sep-21	55.98	58.64	6,645.72
							Jan-22	56.26	58.92	6,645.44
							Apr-22	56.00	58.66	6,645.70
							Nov-19	52.30	54.87	6,647.47
							Apr-20	52.09	54.66	6,647.68
							Jul-20	52.28	54.85	6,647.49
							Oct-20	52.31	54.88	6,647.46
							Jan-21	52.32	54.89	6,647.45
							Apr-21	52.29	54.86	6,647.48
TMW55	Bedrock	2.70	101-121	121.0	6,711.13	6,713.82	Jul-21	52.44	55.01	6,647.33
							Sep-21	52.35	54.92	6,647.42
							Jan-22	52.33	54.90	6,647.44
							Apr-22	52.42	54.99	6,647.35
							Nov-19	49.92	52.62	6,661.20
							Apr-20	50.01	52.71	6,661.11
							Jul-20	50.18	52.88	6,660.94
							Oct-20	50.35	53.05	6,660.77
							Jan-21	50.48	53.18	6,660.64
TMW58	Bedrock	2.75	145-185	185.0	6,700.79	6,703.54	Apr-21	50.52	53.22	6,660.60
							Jul-21	50.76	53.46	6,660.36
							Oct-21	50.72	53.42	6,660.40
							Jan-22	51.12	53.82	6,660.00
							Apr-22	51.04	53.74	6,660.08
							Nov-19	36.70	39.45	6,664.09
							Apr-20	35.59	38.34	6,665.20
							Jul-20	35.91	38.66	6,664.88
							Oct-20	36.04	38.79	6,664.75
							Jan-21	36.27	39.02	6,664.52
							Apr-21	36.33	39.08	6,664.46
							Jul-21	36.51	39.26	6,664.28
							Sep-21	36.56	39.31	6,664.23
							Jan-22	36.73	39.48	6,664.06
							Apr-22	37.11	39.86	6,663.68

TABLE 3-1: NORTHERN AREA WATER-LEVEL MEASUREMENTS BY GROUNDWATER ZONE
2024 INTERIM NORTHERN AREA GROUNDWATER MONITORING PLAN
Fort Wingate Depot Activity, New Mexico

Well ID	GW Zone	Casing Stick Up Length (feet)	Screened Interval (feet bgs)	Total Well Depth (feet bgs)	Well Ground Elevation (NAVD 88)	Well TOC Elevation (NAVD 88)	Water Level Measurement Date	Depth to Water (feet bgs)	Depth to Water (feet btoc)	Groundwater Elevation (NAVD 88)
TMW63	Bedrock	2.75	140-180	180.0	6,699.83	6,702.58	Nov-19	30.05	32.80	6,669.78
							Apr-20	30.16	32.91	6,669.67
							Jul-20	30.45	33.20	6,669.38
							Oct-20	30.66	33.41	6,669.17
							Jan-21	30.88	33.63	6,668.95
							Apr-21	30.89	33.64	6,668.94
							Jul-21	31.20	33.95	6,668.63
							Sep-21	31.30	34.05	6,668.53
							Jan-22	31.53	34.28	6,668.30
TMW64	Bedrock	2.70	80-100	100.0	6,705.50	6,708.20	Apr-22	31.64	34.39	6,668.19
							Nov-19	35.80	38.50	6,669.70
							Apr-20	35.97	38.67	6,669.53
							Jul-20	36.19	38.89	6,669.31
							Oct-20	36.42	39.12	6,669.08
							Jan-21	36.64	39.34	6,668.86
							Apr-21	36.65	39.35	6,668.85
							Jul-21	36.98	39.68	6,668.52
							Sep-21	37.13	39.83	6,668.37
							Jan-22	37.36	40.06	6,668.14
							Apr-22	37.41	40.11	6,668.09

NOTES: Elevations are recorded in U.S. feet above North America Vertical Datum of 1988 (NAVD88).

ABBREVIATIONS & ACRONYMS:

bgs = below ground surface
btoc = below top of casing
ID = identification

NAVD 88 = North American Vertical Datum of 1988

NM = no measurement

TOC = top of casing

TABLE 4-1: NORTHERN AREA GROUNDWATER PURGE METHOD
2024 INTERIM NORTHERN AREA GROUNDWATER MONITORING PLAN
Fort Wingate Depot Activity, New Mexico

Well ID	Casing Diameter (in)	Well Depth (ft bgs)	Screened Interval (ft bgs)	Screen Length (ft)	Dedicated Pump?	Low Flow?	Purge Method
BGMW01	2.5	33.0	12.5 – 32.5	20	Yes	Yes	Traditional Low Flow
BGMW02	2.5	34.0	13.5 – 33.5	20	Yes	Yes	Traditional Low Flow
BGMW03	2.5	29.0	8.5 – 28.5	20	No	No	Submersible Pump
BGMW07	2.0	300.0	215 – 255	40	No	No	Reclamation Pump
BGMW08	2.0	275.0	165 – 185	20	No	No	Submersible Pump
BGMW09	2.0	220.0	106 – 136	30	No	No	Submersible Pump
BGMW10	2.0	150.0	106 – 136	30	No	No	Submersible Pump
BGMW11	2.0	40.0	20 – 40	20	No	No	Submersible Pump
BGMW12	2.0	32.0	12 – 32	20	No	No	Submersible Pump
FW31	4.0	50.0	10 – 50	40	No	No	Hand Bail
FW35	4.0	30.0	10 – 30	20	Dry		Hand Bail
MW01	2.0	55.0	33.6 – 53.6	20	No	No	Hand Bail
MW02	2.0	48.0	37 – 47	10	No	No	Hand Bail
MW03	2.0	53.0	43 – 53	10	Yes	Yes	Traditional Low Flow
MW13S	2.0	69.0	49 – 69	20	No	No	Submersible Pump
MW13D	2.0	104.0	84 – 104	20	No	No	Submersible Pump
MW18D	2.0	59.9	47 – 57	10	No	No	Submersible Pump
MW18S	2.0	39.0	27 – 37	10	Dry		Submersible Pump
MW20	2.0	59.4	47 – 57	10	Yes	Yes	Traditional Low Flow
MW22D	2.0	58.6	47 – 57	10	Yes	Yes	Traditional Low Flow
MW22S	2.0	43.5	31 – 41	10	Dry		Traditional Low Flow
MW23	2.5	134.0	63.5 – 133.5	70	No	No	Bennett Pump
MW24	2.5	66.5	16 – 66	50	No	No	Bennett Pump
MW25	2.0	65.5	45.5 – 65.5	20	No	No	Submersible Pump
MW26	2.0	60.0	40 – 60	20	No	No	Submersible Pump
MW27	2.0	63.0	43 – 63	20	No	No	Submersible Pump
MW28	2.0	60.0	40 – 60	20	No	No	Submersible Pump
MW29	2.0	57.0	37 – 57	20	No	No	Submersible Pump
MW30	2.0	60.0	40 – 60	20	No	No	Submersible Pump
MW31	2.0	53.0	23 – 53	20	No	No	Submersible Pump
MW32	2.0	60.0	40 – 60	20	No	No	Submersible Pump
MW33	2.0	57.0	37 – 57	20	No	No	Hand Bail
MW34	2.0	60.0	40 – 60	20	No	No	Submersible Pump
MW35	2.0	61.0	41 – 61	20	No	No	Submersible Pump
MW36S	2.0	50.0	30 – 50	20	No	No	Submersible Pump
MW36D	2.0	75.0	55 – 75	20	No	No	Submersible Pump
MW37	2.0	45.0	25 – 45	20	No	No	Submersible Pump
MW38	2.0	50.0	30 – 50	20	No	No	Submersible Pump
MW39	2.0	50.0	30 – 50	20	No	No	Submersible Pump
SMW01	2.0	50.2	29.9 – 49.9	20	Yes	Yes	Traditional Low Flow
TMW01	2.0	60.0	44 – 59	15	Yes	Yes	Traditional Low Flow
TMW02	2.0	85.0	67.9 – 81.9	14	Yes	Yes	Traditional Low Flow

TABLE 4-1: NORTHERN AREA GROUNDWATER PURGE METHOD
2024 INTERIM NORTHERN AREA GROUNDWATER MONITORING PLAN
Fort Wingate Depot Activity, New Mexico

Well ID	Casing Diameter (in)	Well Depth (ft bgs)	Screened Interval (ft bgs)	Screen Length (ft)	Dedicated Pump?	Low Flow?	Purge Method
TMW03	2.0	70.1	49.8 – 69.8	20	Yes	Yes	Traditional Low Flow
TMW04	2.0	70.5	50 – 70	20	Yes	Yes	Traditional Low Flow
TMW06	2.0	57.0	45 – 55	10	Yes	Yes	Traditional Low Flow
TMW07	2.0	76.0	65 – 75	10	No	No	Submersible Pump
TMW08	2.0	62.0	30 – 60	30	Yes	Yes	Traditional Low Flow
TMW10	2.0	65.0	28 – 58	30	Yes	Yes	Traditional Low Flow
TMW11	2.0	82.0	55 – 80	25	No	No	Hand Bail
TMW13	2.0	72.5	60.7 – 70.7	10	Yes	Yes	Traditional Low Flow
TMW14A	2.0	110.0	94.25 – 109.25	15	Yes	Yes	ZIST Low Flow
TMW15	2.0	82.0	56 – 71	15	Yes	Yes	Traditional Low Flow
TMW16	2.0	142.0	123 – 138	15	No	No	Bennett Pump
TMW17	2.0	152.0	112 – 127	15	Yes	Yes	ZIST Low Flow
TMW18	2.0	220.0	150 – 160	10	No	No	Bennett Pump
TMW19	2.0	187.0	169 – 184	15	No	No	Bennett Pump
TMW21	2.0	72.0	48 – 58	10	No	No	Submersible Pump
TMW22	2.0	77.0	52 – 62	10	No	No	Submersible Pump
TMW23	2.0	72.0	46 – 56	10	No	No	Submersible Pump
TMW24	2.0	75.0	44 – 54	10	Yes	Yes	Traditional Low Flow
TMW25	2.0	74.0	42.5 – 52.5	10	No	No	Submersible Pump
TMW26	2.0	64.8	45 – 55	10	Yes	Yes	Traditional Low Flow
TMW27	2.0	102.2	60 – 70	10	Yes	Yes	Traditional Low Flow
TMW28	2.0	72.5	37 – 47	10	Yes	Yes	Traditional Low Flow
TMW29	2.0	69.0	49 – 59	10	No	No	Hand Bail
TMW30	2.0	51.5	35 – 45	10	No	No	Hand Bail
TMW31D	2.0	111.5	77 – 107	30	Yes	Yes	Traditional Low Flow
TMW31S	2.0	61.0	50 – 60	10	No	No	Submersible Pump
TMW32	2.0	139.1	117 – 137	20	Yes	Yes	Traditional Low Flow
TMW33	2.0	60.4	37 – 57	20	No	No	Submersible Pump
TMW34	2.0	57.3	37 – 57	20	Yes	Yes	Traditional Low Flow
TMW35	2.0	55.0	35 – 55	20	Yes	Yes	Traditional Low Flow
TMW36	2.0	157.0	132 – 152	20	No	No	Bennett Pump
TMW37	2.0	111.0	88 – 108	20	No	No	Bennett Pump
TMW38	2.5	159.5	118.9 – 158.9	40	Yes	Yes	Traditional Low Flow
TMW39S	2.5	53.0	32.5 – 52.5	20	No	No	Submersible Pump
TMW39D	2.5	100.5	70 – 100	30	Yes	Yes	Traditional Low Flow
TMW40D	2.5	155.5	135 – 155	20	Yes	Yes	Traditional Low Flow
TMW40S	2.5	60.5	50 – 60	10	No	No	Hand Bail
TMW41	2.5	66.0	55.5 – 65.5	10	No	No	Submersible Pump
TMW43	2.5	78.5	58 – 78	20	Yes	Yes	Traditional Low Flow
TMW44	2.5	64.0	43.5 – 63.5	20	No	No	Submersible Pump
TMW45	2.5	59.0	38.5 – 58.5	20	Yes	Yes	Traditional Low Flow
TMW46	2.5	59.0	38.5 – 58.5	20	No	No	Submersible Pump

TABLE 4-1: NORTHERN AREA GROUNDWATER PURGE METHOD
2024 INTERIM NORTHERN AREA GROUNDWATER MONITORING PLAN
Fort Wingate Depot Activity, New Mexico

Well ID	Casing Diameter (in)	Well Depth (ft bgs)	Screened Interval (ft bgs)	Screen Length (ft)	Dedicated Pump?	Low Flow?	Purge Method
TMW47	2.5	103.0	82.5 – 102.5	20	Yes	Yes	Traditional Low Flow
TMW48	2.5	91.5	71 – 91	20	Yes	Yes	Traditional Low Flow
TMW49	2.5	60.0	40 – 60	20	Yes	Yes	Traditional Low Flow
TMW50	2.0	75.0	55 – 75	20	No	No	Submersible Pump
TMW51	2.0	125.0	105 – 125	20	No	No	Submersible Pump
TMW52	2.0	115.0	95 – 115	20	No	No	Submersible Pump
TMW53	2.0	117.0	107 – 117	10	No	No	Submersible Pump
TMW54	2.0	41.4	21.4 – 41.4	20	Dry	No	Hand Bail
TMW55	2.0	121.0	101 – 121	20	No	No	Submersible Pump
TMW56	2.0	50.0	30 – 50	20	Dry	No	Hand Bail
TMW57	2.0	70.0	60 – 70	10	No	No	Submersible Pump
TMW58	2.0	185.0	145 – 185	40	No	No	Reclamation Pump
TMW59	2.0	62.0	42 – 62	20	No	No	Submersible Pump
TMW60	2.0	66.0	46 – 66	20	Dry	No	Submersible Pump
TMW61	2.0	61.0	41 – 61	20	No	No	Hand Bail
TMW62	2.0	60.0	40 – 60	20	No	No	Submersible Pump
TMW63	2.0	180.0	140 – 180	40	No	No	Reclamation Pump
TMW64	2.0	100.0	80 – 100	20	No	No	Submersible Pump

ABBREVIATIONS and ACRONYMS:

ft bgs = feet below ground surface
ID = identification
in = inches
ZIST = zone isolation sampling technology

TABLE 4-2: FIELD EQUIPMENT AND MATERIALS
2024 INTERIM NORTHERN AREA GROUNDWATER MONITORING PLAN
Fort Wingate Depot Activity, New Mexico

Equipment and Materials	Elevation Survey	Traditional Low-Flow	ZIST Low-Flow	Hand Bail	Submersible Pump	Bennett Pump
Electronic water level meter, capable of measuring to 0.01 feet accuracy	X	X	X	X	X	X
Power source (generator, portable rechargeable battery, and connectors) ^a		X	X		X	
Nitrogen Tanks with airline hoses and pressure regulator		X	X			X
Reusable submersible pump setup (control boxes, flow regulator, pump assembly, pump cable, power supply)					X	
Power Inverter		X	X			
Indicator field parameter monitoring instruments		X	X	X	X	X
Flow measurement supplies (graduated container and stopwatch)		X	X	X	X	X
Extra tubing		X	X		X	X
Bailers and bailing string				X	X	
Clamp or connector		X	X	X	X	X
Reusable buckets or storage containers for purge water		X	X	X	X	X
Reusable large portable water tanks (250 gallon or greater)					X	X
Decontamination supplies (including non phosphate detergent, distilled water, brushes, and dedicated decontamination buckets)	X	X	X	X	X	X
Plastic sheeting, absorbent pads, or shallow tubs to catch spills	X	X	X	X	X	X
Personal Protective Equipment	X	X	X	X	X	X
Trash bags	X	X	X	X	X	X
Sample bottles and sample labels		X	X	X	X	X
Shipping supplies (including coolers, resealable bags, tape, cushioning material , shipping forms)		X	X	X	X	X
Logbook and sampling forms	X	X	X	X	X	X
Well construction data, location map, field data from last sampling event.	X	X	X	X	X	X
Well keys	X	X	X	X	X	X

NOTES:

^a If a gasoline generator is used, it will be located downwind and at least 15 feet from the well so that the exhaust fumes do not contaminate the samples.

ZIST = zone isolation sampling technology

TABLE 4-3: SAMPLE CONTAINERS, PRESERVATION, AND HOLDING TIME BY ANALYTICAL METHOD
2024 INTERIM NORTHERN AREA GROUNDWATER MONITORING PLAN
Fort Wingate Depot Activity, New Mexico

Analytical Group	Analytical Method	Container (Number, Size, and Type)	MS/MSD Container (Number, Size, and Type)	Preservation	Holding Time
TCL VOCs	SW8260C	(3) 40 mL VOC glass vials	(9) 40 mL VOC glass vials	No headspace; Cool < 6°C, HCL to pH < 2	14 days preserved
TCL SVOCs	SW8270D	(2) 1 L amber bottle	(8) 1 L amber bottle	Cool < 6°C	7 days to extraction, 40 days to analysis
TPH GRO	SW8015D	(3) 40 mL VOC glass vials	(9) 40 mL VOC glass vials	No headspace; Cool < 6°C, HCL to pH < 2	14 days preserved
PCBs	SW8082A	(2) 1 L amber bottle	(6) 1 L amber bottle	Cool < 6°C	7 days to extraction, 40 days to analysis
TCL Pesticides	SW8081B	(2) 1 L amber bottle	(6) 1 L amber bottle	Cool < 6°C	7 days to extraction, 40 days to analysis
TPH DRO	SW8015D	(2) 1 L amber bottle	(6) 1 L amber bottle	Cool < 6°C	7 days to extraction, 40 days to analysis
Explosives	SW8330B/8332	(2) 250 mL amber bottles	(6) 250 mL amber bottles	Cool < 6°C	7 days to extraction, 40 days to analysis
Major Anions	SW9056A	(1) 250 mL poly	(3) 250 mL poly	Cool < 6°C	48 hours
Herbicides	SW8151A	(2) 1 L amber bottle	(6) 1 L amber bottle	Cool < 6°C	7 days to extraction, 40 days to analysis
Perchlorate (filtered)	SW6850	(1) 60 mL poly bottle, field filtered	(3) 60 mL poly bottle, field filtered	One third bottle headspace; Cool < 6°C	28 days
TAL Total Metals and Mercury (unfiltered)	SW6020A	(1) 250 mL poly bottle	(3) 250 mL poly bottle	Cool < 6°C, HNO3 to pH < 2	28 days
TAL Dissolved Metals and Mercury (filtered)	SW6020A	(1) 250 mL poly bottle, field filtered	(3) 250 mL poly bottle, field filtered	Cool < 6°C, HNO3 to pH < 2	28 days

ABBREVIATIONS AND ACRONYMS:

°C = degrees Celsius

DRO = diesel range organics

GRO = gasoline range organics

HCL = hydrochloric acid

HNO3 = nitric acid

L = liter

mL = milliliter

poly = polyethylene

SIM = Selected Ion Monitoring

SVOC = semivolatile organic compound

TAL = target analyte list

TCL = target compound list

TPH = total petroleum hydrocarbons

VOC = volatile organic compound

TABLE 5-1: GROUNDWATER SCREENING LEVELS, DETECTION LIMITS, AND CONTROL LIMITS
2024 INTERIM NORTHERN AREA GROUNDWATER MONITORING PLAN
Fort Wingate Depot Activity, New Mexico

METHOD	ANALYTE	CAS	UNITS	November 2023 EPA MCL ¹	Dec. 21, 2018 20.6.2 NMAC NM WQCC ²	November 2023 EPA RSL CANCER TAP WATER (target excess cancer risk level of 10 ⁻⁶)	November 2023 EPA RSL CANCER TAP WATER (target excess cancer risk level of 10 ⁻⁵)	November 2023 EPA RSL NONCANCER TAP WATER	FINAL SELECTED SL ^{3,4}	FINAL SELECTED SL REFERENCE	RISK ENDPOINT c/nc	NOTES
6020A	Aluminum	7429-90-5	µg/L		5,000			20,000	5,000	WQCC		
6020A	Calcium ⁶	7440-70-2	µg/L						NA			
6020A	Iron	7439-89-6	µg/L		1,000			14,000	1,000	WQCC		
6020A	Magnesium ⁶	7439-95-4	µg/L						NA			
6020A	Potassium ⁶	7440-09-7	µg/L						NA			
6020A	Sodium ⁶	7440-23-5	µg/L						NA			
6020A	Antimony	7440-36-0	µg/L	6	6			7.8	6	WQCC		
6020A	Arsenic	7440-38-2	µg/L	10	10	0.052	0.52	6	10	WQCC		
6020A	Barium	7440-39-3	µg/L	2,000	2,000			3,800	2,000	WQCC		
6020A	Beryllium	7440-41-7	µg/L	4	4			25	4	WQCC		
6020A	Cadmium	7440-43-9	µg/L	5	5			1.8	5	WQCC		
6020A	Chromium	7440-47-3	µg/L	100	50				50	WQCC		
6020A	Cobalt	7440-48-4	µg/L		50			6	50	WQCC		
6020A	Copper	7440-50-8	µg/L	1,300	1,000			800	1,000	WQCC		
6020A	Lead	7439-92-1	µg/L	15	15			15	15	WQCC		
6020A	Manganese	7439-96-5	µg/L		200			430	200	WQCC		
6020A	Nickel	7440-02-0	µg/L		200			390	200	WQCC		
6020A	Selenium	7782-49-2	µg/L	50	50			100	50	WQCC		
6020A	Silver	7440-22-4	µg/L		50			94	50	WQCC		
6020A	Thallium	7440-28-0	µg/L	2	2			0.2	2	WQCC		
6020A	Vanadium	7440-62-2	µg/L					86	86	RSL	nc	
6020A	Zinc	7440-66-6	µg/L		10,000			6,000	10,000	WQCC		
6850	Perchlorate	14797-73-0	µg/L					14	14	RSL		
7470A	Mercury	7439-97-6	µg/L	2	2			0.63	2	WQCC		
8015D	Diesel Range Organics (DRO) [C10 C28]	68334-30-5	µg/L						16.7	NMED RAG ⁵		
8015D	Gasoline Range Organics (GRO) [C6 C10]	8006-61-9	µg/L						10.1	NMED RAG ⁵		

TABLE 5-1: GROUNDWATER SCREENING LEVELS, DETECTION LIMITS, AND CONTROL LIMITS
2024 INTERIM NORTHERN AREA GROUNDWATER MONITORING PLAN
Fort Wingate Depot Activity, New Mexico

METHOD	ANALYTE	CAS	UNITS	November 2023 EPA MCL ¹	Dec. 21, 2018 20.6.2 NMAC NM WQCC ²	November 2023 EPA RSL CANCER TAP WATER (target excess cancer risk level of 10 ⁻⁶)	November 2023 EPA RSL CANCER TAP WATER (target excess cancer risk level of 10 ⁻⁵)	November 2023 EPA RSL NONCANCER TAP WATER	FINAL SELECTED SL ^{3,4}	FINAL SELECTED SL REFERENCE	RISK ENDPOINT c/nc	NOTES
8260C	1,1,1,2-Tetrachloroethane	630-20-6	µg/L			0.57	5.7	480	5.7	RSL	c	
8260C	1,1,1-Trichloroethane	71-55-6	µg/L	200	200			8,000	200	WQCC		
8260C	1,1,2,2-Tetrachloroethane	79-34-5	µg/L		10	0.076	0.76	360	10	WQCC		
8260C	1,1,2-Trichloro-1,2,2-trifluoroethane	76-13-1	µg/L					10,000	10,000	RSL	nc	
8260C	1,1,2-Trichloroethane	79-00-5	µg/L	5	5	0.28	2.8	0.41	5	WQCC		
8260C	1,1-Dichloroethane	75-34-3	µg/L		25	2.8	28	3,800	25	WQCC		
8260C	1,1-Dichloroethene	75-35-4	µg/L	7	7			280	7	WQCC		
8260C	1,1-Dichloropropene (Surrogate <i>dichloropropene, 1,3</i>)	563-58-6	µg/L			0.47	4.7	39	4.7	RSL	c	
8260C	1,2,3-Trichlorobenzene	87-61-6	µg/L					7	7	RSL	nc	
8260C	1,2,3-Trichloropropane	96-18-4	µg/L			0.00075	0.0075	0.62	0.0075	RSL	c	
8260C	1,2,4-Trichlorobenzene	120-82-1	µg/L	70	70	1.2	12	4	70	WQCC		
8260C	1,2,4-Trimethylbenzene	95-63-6	µg/L					56	56	RSL	nc	
8260C	1,2-Dibromo-3-Chloropropane	96-12-8	µg/L	0.2		0.00033	0.0033	0.37	0.2	MCL		
8260C	1,2-Dibromoethane	106-93-4	µg/L	0.05		0.0075	0.075	17	0.05	MCL		
8260C	1,2-Dichlorobenzene	95-50-1	µg/L	600	600			300	600	WQCC		
8260C	1,2-Dichloroethane	107-06-2	µg/L	5	5	0.17	1.7	13	5	WQCC		
8260C	1,3,5-Trimethylbenzene	108-67-8	µg/L					60	60	RSL	nc	
8260C	1,3-Dichlorobenzene (Surrogate <i>dichlorobenzene, 1,4</i>)	541-73-1	µg/L	75		0.48	4.8	570	75	MCL		
8260C	1,3-Dichloropropane	142-28-9	µg/L					370	370	RSL	nc	
8260C	1,4-Dichlorobenzene	106-46-7	µg/L	75	75	0.48	4.8	570	75	WQCC		
8260C	2,2-Dichloropropane (Surrogate <i>dichloropropane, 1,2</i>)	594-20-7	µg/L	5		0.85	8.5	8.2	5	MCL		
8260C	2-Butanone (MEK)	78-93-3	µg/L					5,600	5,600	RSL	nc	
8260C	2-Chlorotoluene	95-49-8	µg/L					240	240	RSL	nc	
8260C	2-Hexanone	591-78-6	µg/L					38	38	RSL	nc	
8260C	4-Chlorotoluene	106-43-4	µg/L					250	250	RSL	nc	
8260C	4-Methyl-2-pentanone (MIBK)	108-10-1	µg/L					6,300	6,300	RSL	nc	methyl isobutyl ketone
8260C	Acetone	67-64-1	µg/L					18,000	18,000	RSL	nc	

TABLE 5-1: GROUNDWATER SCREENING LEVELS, DETECTION LIMITS, AND CONTROL LIMITS
2024 INTERIM NORTHERN AREA GROUNDWATER MONITORING PLAN
Fort Wingate Depot Activity, New Mexico

METHOD	ANALYTE	CAS	UNITS	November 2023 EPA MCL ¹	Dec. 21, 2018 20.6.2 NMAC NM WQCC ²	November 2023 EPA RSL CANCER TAP WATER (target excess cancer risk level of 10 ⁻⁶)	November 2023 EPA RSL CANCER TAP WATER (target excess cancer risk level of 10 ⁻⁵)	November 2023 EPA RSL NONCANCER TAP WATER	FINAL SELECTED SL ^{3,4}	FINAL SELECTED SL REFERENCE	RISK ENDPOINT c/nc	NOTES
8260C	Benzene	71-43-2	µg/L	5	5	0.46	4.6	33	5	WQCC		
8260C	Bromobenzene	108-86-1	µg/L					62	62	RSL	nc	
8260C	Bromochloromethane	74-97-5	µg/L					83	83	RSL	nc	
8260C	Bromodichloromethane	75-27-4	µg/L	80		0.13	1.3	150	80	MCL		
8260C	Bromoform	75-25-2	µg/L	80		3.3	33	380	80	MCL		
8260C	Bromomethane	74-83-9	µg/L					7.5	7.5	RSL	nc	
8260C	Carbon disulfide	75-15-0	µg/L					810	810	RSL	nc	
8260C	Carbon tetrachloride	56-23-5	µg/L	5	5	0.46	4.6	49	5	WQCC		
8260C	Chlorobenzene	108-90-7	µg/L	100				78	100	MCL		
8260C	Chloroethane	75-00-3	µg/L					8,300	8,300	RSL	nc	
8260C	Chloroform	67-66-3	µg/L	80	100	0.22	2.2	97	80	MCL		
8260C	Chloromethane	74-87-3	µg/L					190	190	RSL	nc	
8260C	cis-1,2-Dichloroethene	156-59-2	µg/L	70	70			25	70	WQCC		
8260C	cis-1,3-Dichloropropene (<i>Surrogate dichloropropene, 1,3</i>)	10061-01-5	µg/L			0.47	4.7	39	4.7	RSL	c	
8260C	Dibromochloromethane	124-48-1	µg/L	80		0.87	8.7	380	80	MCL		
8260C	Dibromomethane	74-95-3	µg/L					8.3	8.3	RSL	nc	
8260C	Dichlorodifluoromethane	75-71-8	µg/L					200	200	RSL	nc	
8260C	Ethylbenzene	100-41-4	µg/L	700	700	1.5	15	500	700	WQCC		
8260C	Hexachlorobutadiene	87-68-3	µg/L			0.14	1.4	6.5	1.4	RSL	c	
8260C	Isopropylbenzene	98-82-8	µg/L					450	450	RSL	nc	
8260C	Methyl acetate	79-20-9	µg/L					20,000	20,000	RSL	nc	
8260C	Methyl tert butyl ether	1634-04-4	µg/L		100	14	140	6300	100	WQCC	c	
8260C	Methylene Chloride	75-09-2	µg/L	5	5	11	110	110	5	MCL		
8260C	m-Xylene & p Xylene	179601-23-1	µg/L					190	190	RSL	nc	
8260C	Naphthalene	91-20-3	µg/L		30	0.12	1.2	6.1	30	WQCC		
8260C	n-Butylbenzene	104-51-8	µg/L					1000	1000	RSL	nc	
8260C	N-Propylbenzene	103-65-1	µg/L					660	660	RSL	nc	
8260C	o-Xylene	95-47-6	µg/L					190	190	RSL	nc	
8260C	sec-Butylbenzene	135-98-8	µg/L					2,000	2,000	RSL	nc	

TABLE 5-1: GROUNDWATER SCREENING LEVELS, DETECTION LIMITS, AND CONTROL LIMITS
2024 INTERIM NORTHERN AREA GROUNDWATER MONITORING PLAN
Fort Wingate Depot Activity, New Mexico

METHOD	ANALYTE	CAS	UNITS	November 2023 EPA MCL ¹	Dec. 21, 2018 20.6.2 NMAC NM WQCC ²	November 2023 EPA RSL CANCER TAP WATER (target excess cancer risk level of 10 ⁻⁶)	November 2023 EPA RSL CANCER TAP WATER (target excess cancer risk level of 10 ⁻⁵)	November 2023 EPA RSL NONCANCER TAP WATER	FINAL SELECTED SL ^{3,4}	FINAL SELECTED SL REFERENCE	RISK ENDPOINT c/nc	NOTES
8260C	Styrene	100-42-5	µg/L	100	100			1,200	100	WQCC		
8260C	tert-Butylbenzene	98-06-6	µg/L					690	690	RSL	nc	
8260C	Toluene	108-88-3	µg/L	1,000	1,000			1,100	1,000	WQCC		
8260C	trans-1,2-Dichloroethene	156-60-5	µg/L	100	100			68	100	WQCC		
8260C	trans-1,3-Dichloropropene (<i>Surrogate dichloropropene, 1,3</i>)	10061-02-6	µg/L			0.47	4.7	39	4.7	RSL	c	
8260C	Trichloroethene	79-01-6	µg/L	5	5	0.49	4.9	2.8	5	WQCC		
8260C	Trichlorofluoromethane	75-69-4	µg/L					5,200	5,200	RSL	nc	
8260C	Vinyl chloride	75-01-4	µg/L	2	2	0.019	0.19	42	2	WQCC		
8270D	1,2,4,5-Tetrachlorobenzene	95-94-3	µg/L					0.17	0.17	RSL	nc	
8270D	1,2,4-Trichlorobenzene	120-82-1	µg/L	70	70	1.2	12	4	70	WQCC		
8270D	1,2-Dichlorobenzene	95-50-1	µg/L	600	600			300	600	WQCC		
8270D	1,2-Diphenylhydrazine	122-66-7	µg/L			0.078	0.78		0.78	RSL	c	
8270D	1,3-Dichlorobenzene (<i>Surrogate dichlorobenzene, 1,4</i>)	541-73-1	µg/L	75	75	0.48	4.8	570	75	WQCC		
8270D	1,4-Dichlorobenzene	106-46-7	µg/L	75	75	0.48	4.8	570	75	WQCC		
8270D	2,2-Oxybis(1-chloropropane)	108-60-1	µg/L					710	710	RSL	nc	bis-(2-chloroisopropyl) ether
8270D	2,3,4,6-Tetrachlorophenol	58-90-2	µg/L					240	240	RSL	nc	
8270D	2,4,5-Trichlorophenol	95-95-4	µg/L					1,200	1,200	RSL	nc	
8270D	2,4,6-Trichlorophenol	88-06-2	µg/L			4.1	41	12	12	RSL	nc	
8270D	2,4-Dichlorophenol	120-83-2	µg/L					46	46	RSL	nc	
8270D	2,4-Dimethylphenol	105-67-9	µg/L					360	360	RSL	nc	
8270D	2,4-Dinitrophenol	51-28-5	µg/L					39	39	RSL	nc	
8270D	2,4-Dinitrotoluene	121-14-2	µg/L			0.24	2.4	38	2.4	RSL	c	
8270D	2,6-Dichlorophenol (<i>Surrogate dichlorophenol, 2,4</i>)	87-65-0	µg/L					46	46	RSL	nc	
8270D	2,6-Dinitrotoluene	606-20-2	µg/L			0.049	0.49	5.7	0.49	RSL	c	
8270D	2-Chloronaphthalene	91-58-7	µg/L					750	750	RSL	nc	
8270D	2-Chlorophenol	95-57-8	µg/L					91	91	RSL	nc	
8270D	2-Methylnaphthalene	91-57-6	µg/L		30			36	30	WQCC		

TABLE 5-1: GROUNDWATER SCREENING LEVELS, DETECTION LIMITS, AND CONTROL LIMITS
2024 INTERIM NORTHERN AREA GROUNDWATER MONITORING PLAN
Fort Wingate Depot Activity, New Mexico

METHOD	ANALYTE	CAS	UNITS	November 2023 EPA MCL ¹	Dec. 21, 2018 20.6.2 NMAC NM WQCC ²	November 2023 EPA RSL CANCER TAP WATER (target excess cancer risk level of 10 ⁻⁶)	November 2023 EPA RSL CANCER TAP WATER (target excess cancer risk level of 10 ⁻⁵)	November 2023 EPA RSL NONCANCER TAP WATER	FINAL SELECTED SL ^{3,4}	FINAL SELECTED SL REFERENCE	RISK ENDPOINT c/nc	NOTES
8270D	2-Methylphenol	95-48-7	µg/L					930	930	RSL	nc	
8270D	2-Nitroaniline	88-74-4	µg/L					190	190	RSL	nc	
8270D	2-Nitrophenol	88-75-5	µg/L						NS			
8270D	3-Methylphenol	108-39-4	µg/L					970	970	RSL	nc	
8270D	4-Methylphenol	106-44-5	µg/L					370	370	RSL	nc	
8270D	3,3-Dichlorobenzidine	91-94-1	µg/L			0.13	1.3		1.3	RSL	c	
8270D	3-Nitroaniline (<i>Surrogate 4-nitroaniline</i>)	99-09-2	µg/L			3.8	38	78	38	RSL	c	
8270D	4,6-Dinitro-2-methylphenol	534-52-1	µg/L					1.5	1.5	RSL	nc	
8270D	4-Bromophenyl phenyl ether	101-55-3	µg/L						NS			
8270D	4-Chloro-3-methylphenol	59-50-7	µg/L					1,400	1,400	RSL	nc	
8270D	4-Chloroaniline	106-47-8	µg/L			0.37	3.7	9.5	3.7	RSL	c	
8270D	4-Chlorophenyl phenyl ether	7005-72-3	µg/L						NS			
8270D	4-Nitroaniline	100-01-6	µg/L			3.8	38	78	38	RSL	c	
8270D	4-Nitrophenol (<i>Surrogate 2-chlorophenol</i>)	100-02-7	µg/L						NS			
8270D	Acenaphthene	83-32-9	µg/L					530	530	RSL	nc	
8270D	Acenaphthylene	208-96-8	µg/L						NS			
8270D	Anthracene	120-12-7	µg/L					1,800	1,800	RSL	nc	
8270D	Benzaldehyde	100-52-7	µg/L			19	190	1,900	190	RSL	c	
8270D	Benzidine	92-87-5	µg/L			0.00011	0.0011	59	0.0011	RSL	c	
8270D	Benzo[a]anthracene	56-55-3	µg/L			0.03	0.3		0.3	RSL	c	
8270D	Benzo[a]pyrene	50-32-8	µg/L	0.2	0.2	0.025	0.25	6	0.2	WQCC		
8270D	Benzo[b]fluoranthene	205-99-2	µg/L			0.25	2.5		2.5	RSL	c	
8270D	Benzo[g,h,i]perylene	191-24-2	µg/L						NS			
8270D	Benzo[k]fluoranthene	207-08-9	µg/L			2.5	25		25	RSL	c	
8270D	Benzoic acid	65-85-0	µg/L					75,000	75,000	RSL	nc	
8270D	Benzyl alcohol	100-51-6	µg/L					2,000	2,000	RSL	nc	
8270D	bis-(2-Chloroethoxy)methane	111-91-1	µg/L					59	59	RSL	nc	
8270D	bis-(2-Chloroethyl)ether	111-44-4	µg/L			0.014	0.14		0.14	RSL	c	
8270D	bis-(2-Ethylhexyl)phthalate	117-81-7	µg/L	6		5.6	56	400	6	MCL		
8270D	Butyl benzyl phthalate	85-68-7	µg/L			16	160	1,700	160	RSL	c	

TABLE 5-1: GROUNDWATER SCREENING LEVELS, DETECTION LIMITS, AND CONTROL LIMITS
2024 INTERIM NORTHERN AREA GROUNDWATER MONITORING PLAN
Fort Wingate Depot Activity, New Mexico

METHOD	ANALYTE	CAS	UNITS	November 2023 EPA MCL ¹	Dec. 21, 2018 20.6.2 NMAC NM WQCC ²	November 2023 EPA RSL CANCER TAP WATER (target excess cancer risk level of 10 ⁻⁶)	November 2023 EPA RSL CANCER TAP WATER (target excess cancer risk level of 10 ⁻⁵)	November 2023 EPA RSL NONCANCER TAP WATER	FINAL SELECTED SL ^{3,4}	FINAL SELECTED SL REFERENCE	RISK ENDPOINT c/nc	NOTES
8270D	Caprolactam	105-60-2	µg/L					9,900	9,900	RSL	nc	
8270D	Carbazole (<i>Surrogate fluorene</i>)	86-74-8	µg/L					290	290	RSL	nc	
8270D	Chrysene	218-01-9	µg/L			25	250		250	RSL	c	
8270D	Dibenz(a,h)anthracene	53-70-3	µg/L			0.025	0.25		0.25	RSL	c	
8270D	Dibenzofuran	132-64-9	µg/L					7.9	7.9	RSL	nc	
8270D	Diethyl phthalate	84-66-2	µg/L					15,000	15,000	RSL	nc	
8270D	Dimethyl phthalate	131-11-3	µg/L						NS			
8270D	Di-n-butyl phthalate	84-74-2	µg/L					900	900	RSL	nc	
8270D	Di-n-octyl phthalate	117-84-0	µg/L					200	200	RSL	nc	
8270D	Fluoranthene	206-44-0	µg/L					800	800	RSL	nc	
8270D	Fluorene	86-73-7	µg/L					290	290	RSL	nc	
8270D	Hexachlorobenzene	118-74-1	µg/L	1		0.0098	0.098	0.2	1	MCL		
8270D	Hexachlorobutadiene	87-68-3	µg/L			0.14	1.4	6.5	1.4	RSL	c	
8270D	Hexachlorocyclopentadiene	77-47-4	µg/L	50				0.41	50	MCL		
8270D	Hexachloroethane	67-72-1	µg/L			0.33	3.3	6.2	3.3	RSL	c	
8270D	Indeno(1,2,3-cd)pyrene	193-39-5	µg/L			0.25	2.5		2.5	RSL	c	
8270D	Isophorone	78-59-1	µg/L			78	780	3,800	780	RSL	c	
8270D	Naphthalene	91-20-3	µg/L		30	0.17	1.7	6.1	30	WQCC		
8270D	Nitrobenzene	98-95-3	µg/L			0.14	1.4	13	1.4	RSL	c	
8270D	N-Nitrosodimethylamine	62-75-9	µg/L			0.00011	0.0011	0.055	0.0011	RSL	c	
8270D	N-Nitrosodi-n-propylamine	621-64-7	µg/L			0.011	0.11		0.11	RSL	c	
8270D	N-Nitrosodiphenylamine	86-30-6	µg/L			12	120		120	RSL	c	
8270D	Pentachlorophenol	87-86-5	µg/L	1	1	0.041	0.41	23	1	WQCC		
8270D	Phenanthrene	85-01-8	µg/L						NS			
8270D	Phenol	108-95-2	µg/L		5			5,800	5	WQCC		
8270D	Pyrene	129-00-0	µg/L					120	120	RSL	nc	
8270-SIM	1,4-Dioxane	123-91-1	µg/L			0.46	4.6	57	4.6	RSL	c	

TABLE 5-1: GROUNDWATER SCREENING LEVELS, DETECTION LIMITS, AND CONTROL LIMITS
2024 INTERIM NORTHERN AREA GROUNDWATER MONITORING PLAN
Fort Wingate Depot Activity, New Mexico

METHOD	ANALYTE	CAS	UNITS	November 2023 EPA MCL ¹	Dec. 21, 2018 20.6.2 NMAC NM WQCC ²	November 2023 EPA RSL CANCER TAP WATER (target excess cancer risk level of 10 ⁻⁶)	November 2023 EPA RSL CANCER TAP WATER (target excess cancer risk level of 10 ⁻⁵)	November 2023 EPA RSL NONCANCER TAP WATER	FINAL SELECTED SL ^{3,4}	FINAL SELECTED SL REFERENCE	RISK ENDPOINT c/nc	NOTES
8330B	1,3,5-Trinitrobenzene	99-35-4	µg/L					590	590	RSL	nc	1,3,5-TNB
8330B	1,3-Dinitrobenzene	99-65-0	µg/L					2	2	RSL	nc	1,3-DNB
8330B	2,4,6-Trinitrotoluene	118-96-7	µg/L			2.5	25	9.8	9.8	RSL	nc	2,4-DNT
8330B	2,4-Dinitrotoluene	121-14-2	µg/L			0.24	2.4	38	2.4	RSL	c	2,6-DNT
8330B	2,6-Dinitrotoluene	606-20-2	µg/L			0.049	0.49	5.7	0.49	RSL	c	
8330B	2-Amino-4,6-dinitrotoluene	35572-78-2	µg/L					1.9	1.9	RSL	nc	2-AM-4,6-DNT
8330B	3,5-Dinitroaniline (<i>Surrogate 4-nitroaniline</i>)	618-87-1	µg/L					7.7	7.7	RSL	nc	
8330B	4-Amino-2,6-dinitrotoluene	19406-51-0	µg/L					1.9	1.9	RSL	nc	4-AM-2,6-DNT
8330B	Octahydro-1,3,5,7-tetranitro-1,3,5,7-tetrazocine (HMX)	2691-41-0	µg/L					1,000	1,000	RSL	nc	
8330B	m-Nitrotoluene	99-08-01	µg/L					1.7	1.7	RSL	nc	3-nitrotoluene
8330B	Nitrobenzene	98-95-3	µg/L			0.14	1.4	13	1.4	RSL	c	Nitrobenzene
8330B	Nitroglycerin	55-63-0	µg/L			4.5	45	2	2	RSL	nc	
8330B	o-Nitrotoluene	88-72-2	µg/L			0.31	3.1	16	3.1	RSL	c	2-nitrotoluene
8330B	Pentaerythritol tetranitrate (PETN)	78-11-5	µg/L			17	170	170	170	RSL	nc	
8330B	p-Nitrotoluene	99-99-0	µg/L			4.3	43	71	43	RSL	c	4-nitrotoluene
8330B	Hexahydro-1,3,5-trinitro-1,3,5-triazine (RDX)	121-82-4	µg/L			0.97	9.7	80	9.7	RSL	c	
8330B	Trinitrophenylmethylnitramine (Tetryl)	479-45-8	µg/L					39	39	RSL	nc	
9056A	Nitrate as N	14797-55-8	mg/L	10	10			32	10	WQCC		
9056A	Nitrite as N	14797-65-0	mg/L	1	1			2	1	MCL		
9056A	Fluoride	16984-48-8	mg/L	4000	1.6			800	1.6	WQCC		
9056A	Chloride	16887-00-6	mg/L		250				250	WQCC		
9056A	Sulfate	14808-79-8	mg/L		600				600	WQCC		
9056A	Phosphate	14265-44-2	mg/L									
9056A	Bromide	24959-67-9	mg/L									
8081B	4,4-DDD	72-54-8	µg/L			0.032	0.32	1.1	0.32	RSL	c	
8081B	4,4-DDE	72-55-9	µg/L			0.046	0.46	10	0.46	RSL	c	
8081B	4,4-DDT	50-29-3	µg/L			0.23	2.3	10	2.3	RSL	c	

TABLE 5-1: GROUNDWATER SCREENING LEVELS, DETECTION LIMITS, AND CONTROL LIMITS
2024 INTERIM NORTHERN AREA GROUNDWATER MONITORING PLAN
Fort Wingate Depot Activity, New Mexico

METHOD	ANALYTE	CAS	UNITS	November 2023 EPA MCL ¹	Dec. 21, 2018 20.6.2 NMAC NM WQCC ²	November 2023 EPA RSL CANCER TAP WATER (target excess cancer risk level of 10 ⁻⁶)	November 2023 EPA RSL CANCER TAP WATER (target excess cancer risk level of 10 ⁻⁵)	November 2023 EPA RSL NONCANCER TAP WATER	FINAL SELECTED SL ^{3,4}	FINAL SELECTED SL REFERENCE	RISK ENDPOINT c/nc	NOTES
8081B	Aldrin	309-00-2	µg/L			0.00092	0.0092	0.6	0.0092	RSL	c	
8081B	alpha-BHC	319-84-6	µg/L			0.0072	0.072	97	0.072	RSL	c	
8081B	alpha-Chlordane	5103-71-9	µg/L	2				3.6	2	MCL		
8081B	beta-BHC	319-85-7	µg/L			0.025	0.25		0.25	RSL	c	
8081B	delta-BHC	319-86-8	µg/L			0.025	0.25		0.25	RSL	c	
8081B	Dieldrin	60-57-1	µg/L			0.0018	0.018	0.38	0.018	RSL	c	
8081B	Endosulfan I	959-98-8	µg/L					100	100	RSL	nc	
8081B	Endosulfan II	33213-65-9	µg/L					100	100	RSL	nc	
8081B	Endosulfan sulfate	1031-07-8	µg/L					110	110	RSL	nc	
8081B	Endrin	72-20-8	µg/L	2				2.3	2	MCL		
8081B	Endrin aldehyde (<i>Surrogate Endrin</i>)	7421-93-4	µg/L	2				2.3	2	MCL		
8081B	Endrin ketone (<i>Surrogate Endrin</i>)	53494-70-5	µg/L	2				2.3	2	MCL		
8081B	gamma-BHC (Lindane)	58-89-9	µg/L	0.2		0.042	0.42	0.12	0.2	MCL		
8081B	gamma-Chlordane	5103-74-2	µg/L	2				10	2	MCL		
8081B	Heptachlor	76-44-8	µg/L	0.4		0.0014	0.014	0.26	0.4	MCL		
8081B	Heptachlor epoxide	1024-57-3	µg/L	0.2		0.0014	0.014	0.12	0.2	MCL		
8081B	Methoxychlor	72-43-5	µg/L	40				37	40	MCL		
8081B	Toxaphene	8001-35-2	µg/L	3		0.071	0.71	1.8	3	MCL		
8082	PCBs, Total	1336-36-3	µg/L	0.5	0.5				0.5	WQCC		
8082	PCB-1016	12674-11-2	µg/L			0.22	2.2	1.4	1.4	RSL	nc	
8082	PCB-1221	11104-28-2	µg/L			0.0047	0.047		0.047	RSL	c	
8082	PCB-1232	11141-16-5	µg/L			0.0047	0.047		0.047	RSL	c	
8082	PCB-1242	53469-21-9	µg/L			0.0078	0.078		0.078	RSL	c	
8082	PCB-1248	12672-29-6	µg/L			0.0078	0.078		0.078	RSL	c	
8082	PCB-1254	11097-69-1	µg/L			0.0078	0.078	0.4	0.078	RSL	c	
8082	PCB-1260	11096-82-5	µg/L			0.0078	0.078		0.078	RSL	c	

TABLE 5-1: GROUNDWATER SCREENING LEVELS, DETECTION LIMITS, AND CONTROL LIMITS
2024 INTERIM NORTHERN AREA GROUNDWATER MONITORING PLAN
Fort Wingate Depot Activity, New Mexico

METHOD	ANALYTE	CAS	UNITS	November 2023 EPA MCL ¹	Dec. 21, 2018 20.6.2 NMAC NM WQCC ²	November 2023 EPA RSL CANCER TAP WATER (target excess cancer risk level of 10 ⁻⁶)	November 2023 EPA RSL CANCER TAP WATER (target excess cancer risk level of 10 ⁻⁵)	November 2023 EPA RSL NONCANCER TAP WATER	FINAL SELECTED SL ^{3,4}	FINAL SELECTED SL REFERENCE	RISK ENDPOINT c/nc	NOTES
8151A	2,4-D	94-75-7	µg/L	70				170	70	MCL		
8151A	2,4-DB	94-82-6	µg/L					450	450	RSL	nc	
8151A	2,4,5-T	93-76-5	µg/L					160	160	RSL	nc	
8151A	2,4,5-TP (Silvex)	93-72-1	µg/L	50				110	50	MCL		
8151A	Dalapon	75-99-0	µg/L	200				600	200	MCL		
8151A	Dicamba	1918-00-9	µg/L					570	570	RSL	nc	
8151A	Dichloroprop	120-36-5	µg/L						NS			
8151A	Dinoseb	88-85-7	µg/L	7				15	7	MCL		
8151A	MCPA	94-74-6	µg/L					7.5	7.5	RSL	nc	

NOTES:

- ¹ U.S. Environmental Protection Agency (EPA), Drinking Water Primary Maximum Contaminant Level (MCL) per 40 Code of Federal Regulations Sections 141 and 143.
- ² New Mexico Water Quality Control Commission (NM WQCC) standards per 20 New Mexico Administrative Code § 6.2.4103.
- ³ Final selected screening level was based on the lowest of the NM WQCC and the EPA R6 SSL MCL. If none, then EPA RSL Tap Water was selected. If the analyte does not have a published NM WQCC or MCL but has RSLs listed for both carcinogenic risks and non-carcinogenic hazards, the lower value between the adjusted carcinogenic RSL (target excess cancer risk level of 1 x 10⁻⁵) and the non-carcinogenic RSL (with a target hazard index of 1.0) is selected.
- ⁴ Target analytes amy exceed the screening level objective for one method but meet the screening level objective for another. For example, nitrobenzene by SW8270D exceeds but passes objectives by SW8330B. Both methods will be used, and both methods will report the target.
- ⁵ Screening level based on New Mexico Environment Department (NMED) Risk Assessment Guidance for Site Investigations and Remediation, Vol 1, Feb 2019 (Revision 2, 6-19-19).
- ⁶ Analyte is considered an essential nutrient and risk in groundwater is not evaluated.
- ⁷ Analyte is a laboratory surrogate used in analytical procedures and risk in groundwater is not evaluated.

ABBREVIATIONS and ACRONYMS:

- c = carcinogenic risk endpoint
- CAS = Chemical Abstract Service registry number
- µg/L = micrograms per liter
- MCL = U.S. Environmental Protection Agency
Maximum Contaminant Level (Primary or Secondary)
- mg/L = milligrams per liter
- nc = non-carcinogenic risk endpoint
- NA = not applicable (essential nutrients and laboratory surrogates)
- NMED RAG = New Mexico Environment Department Risk Assessment Guidance
- NS = no standard
- RSL = U.S. Environmental Protection Agency Regional Screening Level - Tap water screening level with cancer risk adjusted to 1x10⁻⁵
- SL = Screening Level
- WQCC = New Mexico Water Quality Control Commission Standard

TABLE 5-2 NORTHERN AREA GROUNDWATER SAMPLING MATRIX
2024 INTERIM NORTHERN AREA GROUNDWATER MONITORING PLAN
Fort Wingate Depot Activity, New Mexico

Well ID	PROPOSED REVISED ANALYTICAL PROGRAM											
	TCL VOC	Total Explosives	Major Anions	TAL Total Metals	TAL Dissolved Metals	Perchlorate	TCL SVOC *	TPH GRO	TPH DRO	PCB **	TCL Pesticides**	Herbicides**
	8260C	8330B/8332	9056A	6020A	6020A	6850	8270D	8015D	8015D	8082A	8081B	8151A
<i>Alluvial Monitoring Wells</i>												
BGMW01	x		x	x	x	x						
BGMW02	x		x	x	x	x						
BGMW03	x		x	x	x	x						
BGMW11	x	x	x	x	x	x	x	x	x			
BGMW12	x	x	x	x	x	x	x	x	x			
BGMW13D	x	x	x	x	x	x	x	x	x			
BGMW13S	x	x	x	x	x	x	x	x	x			
FW31	x		x	x	x							
FW35	x	x	x	x	x		x					
MW01	x		x	x	x			x	x			
MW02	x		x	x	x			x	x			
MW03	x		x	x	x			x	x			
MW18D	x		x	x	x			x	x			
MW18S	x			x	x							
MW20	x		x	x	x	x		x	x			
MW22S	x	x	x	x	x	x	x	x	x		x	
MW22D	x		x	x	x	x		x	x			
MW23	x			x	x	x						
MW24	x			x	x							
MW25	x	x	x	x	x	x	x	x	x			
MW26	x	x	x	x	x	x	x	x	x			
MW27	x	x	x	x	x	x	x	x	x			
MW28	x	x	x	x	x	x	x	x	x			
MW29	x	x	x	x	x	x	x	x	x			
MW30	x	x	x	x	x	x	x	x	x			
MW31	x	x	x	x	x	x	x	x	x			
MW32	x	x	x	x	x	x	x	x	x			
MW33	x	x	x	x	x	x	x	x	x			
MW34	x	x	x	x	x	x	x	x	x			

TABLE 5-2 NORTHERN AREA GROUNDWATER SAMPLING MATRIX
2024 INTERIM NORTHERN AREA GROUNDWATER MONITORING PLAN
Fort Wingate Depot Activity, New Mexico

Well ID	PROPOSED REVISED ANALYTICAL PROGRAM											
	TCL VOC	Total Explosives	Major Anions	TAL Total Metals	TAL Dissolved Metals	Perchlorate	TCL SVOC *	TPH GRO	TPH DRO	PCB **	TCL Pesticides**	Herbicides**
	8260C	8330B/8332	9056A	6020A	6020A	6850	8270D	8015D	8015D	8082A	8081B	8151A
MW35	x	x	x	x	x	x	x	x	x			
MW36D	x	x	x	x	x	x	x	x	x			
MW36S	x	x	x	x	x	x	x	x	x			
MW37	x	x	x	x	x	x	x	x	x			
MW38	x	x	x	x	x	x	x	x	x			
MW39	x	x	x	x	x	x	x	x	x			
SMW01	x			x	x							
TMW01	x		x	x	x	x						
TMW02	x	x	x	x	x	x						
TMW03	x	x	x	x	x	x	x					
TMW04	x	x	x	x	x	x	x					
TMW06	x	x	x	x	x		x	x	x			
TMW07	x		x	x	x		x	x	x			
TMW08	x		x	x	x			x	x			
TMW10	x		x	x	x			x	x			
TMW11	x	x	x	x	x	x	x					
TMW13	x		x	x	x	x						
TMW15	x		x	x	x							
TMW21	x		x	x	x	x		x	x			
TMW22	x		x	x	x							
TMW23	x	x	x	x	x		x					
TMW24	x		x	x	x							
TMW25	x		x	x	x							
TMW26	x		x	x	x							
TMW27	x			x	x							
TMW28	x		x	x	x							
TMW29	x		x	x	x	x						
TMW31S	x		x	x	x	x						
TMW33	x		x	x	x			x	x			
TMW34	x		x	x	x	x		x	x			

TABLE 5-2 NORTHERN AREA GROUNDWATER SAMPLING MATRIX
2024 INTERIM NORTHERN AREA GROUNDWATER MONITORING PLAN
Fort Wingate Depot Activity, New Mexico

Well ID	PROPOSED REVISED ANALYTICAL PROGRAM											
	TCL VOC	Total Explosives	Major Anions	TAL Total Metals	TAL Dissolved Metals	Perchlorate	TCL SVOC *	TPH GRO	TPH DRO	PCB **	TCL Pesticides**	Herbicides**
	8260C	8330B/8332	9056A	6020A	6020A	6850	8270D	8015D	8015D	8082A	8081B	8151A
TMW35	x		x	x	x	x		x	x			
TMW39S	x		x	x	x	x						
TMW40S	x	x	x	x	x	x	x					
TMW41	x	x	x	x	x	x	x					
TMW43	x	x	x	x	x	x	x					
TMW44	x		x	x	x	x						
TMW45	x		x	x	x							
TMW46	x		x	x	x	x		x	x			
TMW47	x	x	x	x	x		x					
TMW54	x	x	x	x	x	x	x	x	x	x	x	x
TMW56	x	x	x	x	x	x	x	x	x	x	x	x
TMW57	x	x	x	x	x	x	x	x	x			
TMW59	x	x	x	x	x	x	x	x	x			
TMW60	x	x	x	x	x	x	x	x	x	x	x	x
TMW61	x	x	x	x	x	x	x	x	x			
TMW62	x	x	x	x	x	x	x	x	x			
<i>Bedrock Monitoring Wells</i>												
BGMW07	x			x	x							
BGMW08	x		x	x	x							
BGMW09	x		x	x	x							
BGMW10	x		x	x	x							
TMW14A	x			x	x							
TMW16	x			x	x							
TMW17	x			x	x	x						
TMW18	x		x	x	x							
TMW19	x			x	x							
TMW30	x	x	x	x	x	x	x					
TMW31D	x		x	x	x	x						
TMW32	x		x	x	x	x						
TMW36	x		x	x	x	x						

TABLE 5-2 NORTHERN AREA GROUNDWATER SAMPLING MATRIX
2024 INTERIM NORTHERN AREA GROUNDWATER MONITORING PLAN
Fort Wingate Depot Activity, New Mexico

Well ID	PROPOSED REVISED ANALYTICAL PROGRAM											
	TCL VOC	Total Explosives	Major Anions	TAL Total Metals	TAL Dissolved Metals	Perchlorate	TCL SVOC *	TPH GRO	TPH DRO	PCB **	TCL Pesticides**	Herbicides**
	8260C	8330B/8332	9056A	6020A	6020A	6850	8270D	8015D	8015D	8082A	8081B	8151A
TMW37	x		x	x	x							
TMW38	x	x	x	x	x	x	x					
TMW39D	x		x	x	x	x						
TMW40D	x		x	x	x	x						
TMW48	x		x	x	x	x						
TMW49	x	x	x	x	x	x	x					
TMW50	x	x	x	x	x	x	x	x	x			
TMW51	x	x	x	x	x	x	x	x	x			
TMW52	x	x	x	x	x	x	x	x	x			
TMW53	x	x	x	x	x	x	x	x	x			
TMW55	x	x	x	x	x	x	x	x	x			
TMW58	x	x	x	x	x	x	x	x	x			
TMW63	x	x	x	x	x	x	x	x	x			
TMW64	x	x	x	x	x	x	x	x	x			

ABBREVIATIONS and ACRONYMS:

DRO = diesel range organics.

GRO = gasoline range organics.

ID = identification.

SVOC = semivolatile organic compound.

TAL = total analyte list.

TCL = target compound list.

TPH = total petroleum hydrocarbons.

VOC = volatile organic compound.

X = sample is analyzed for the specified method.

Major anions analysis includes nitrate, nitrite, chloride, fluoride, sulfate, phosphate, and bromide.

* Any well with a detection of a chlorinated solvent in 2021–2022 will be analyzed for 1,4-dioxane. Any well with a detection of an explosive or TPH-DRO will be analyzed for SVOCs in the subsequent sampling event.

** New wells will be analyzed for four consecutive events for PCBs, herbicides, and pesticides. Analysis for these analytical groups will cease if four consecutive events of non-detect or detections below screening levels.

APPENDIX A

Response to NMED Comments on the 2023 Groundwater Monitoring Plan



DEPARTMENT OF THE ARMY
OFFICE OF THE DEPUTY CHIEF OF STAFF, G-9
600 ARMY PENTAGON
WASHINGTON, DC 20310-0600

August 31, 2022

Base Realignment and Closure Operations Branch

Mr. Rick Shean
Chief, Hazardous Waste Bureau
New Mexico Environment Department
2905 Rodeo Park Drive East, Building 1
Santa Fe, New Mexico 87505-6303

RE: Response to Disapproval, 2023 Interim Northern Area Groundwater Monitoring Plan, Fort Wingate Depot Activity, McKinley County, New Mexico. EPA# NM6213820974, HWB-FWDA-22-001

Dear Mr. Shean:

This letter provides responses to the comments issued in the Disapproval, 2023 Interim Northern Area Groundwater Monitoring Plan, Fort Wingate Depot Activity, McKinley County, New Mexico, EPA ID# NM6213820974, HWB-FWDA-22-001, dated July 19, 2022. In addition to the comment responses provided in this letter, two (2) hard copies and one (1) electronic (CD) copy of the 2023 Interim Northern Area Groundwater Monitoring Plan Revision 1 are enclosed for your review and consideration. The electronic transmittal includes a redline-strikeout version of the above-mentioned report, showing where all revisions to the report were made.

Comments:

1. Objectives of the Plan

NMED Comment: Section 1.3 (Purpose), page 3 of 71, provides the objectives of the interim groundwater monitoring; however, it does not state the objectives of the plan itself, as described in Permit Section V.A.4. As a result, the Plan lacks the necessary details (e.g., proposed changes to the previous plans) required by the Permit; rather, it provides trivial details that appear to be irrelevant to the objectives of the Plan. For example, Section 2.2 (Previous Investigations) and its subsections (Section 2.2.1 through Section 2.2.27) provide approximately 20 pages of the description regarding previous investigations conducted at each SWMU and AOC. More than 30 percent of the text of the Plan discusses details regarding previous investigations. Such details are unnecessary for the purpose of the plan. Although Section 7.0 (Sampling Changes from Previous Plan) briefly discusses proposed changes to the previous monitoring and sampling plan, it lacks details, and the discussion is not sufficient. The Permittee must present all proposed changes to the previous plan and provide the basis for each proposed change requested by the Permittee or required by NMED. Relevant correspondence must be referenced for all proposed changes required by NMED. Comment 32 of the NMED's July 27, 2020, Disapproval also states, "Table 5-2, Northern Area Groundwater Sampling Matrix, and the text of the Plan lack an explanation for the changes made to the Plan (e.g., inclusion or exclusion of new or existing wells and analytical suite). The revised Plan must include a section that summarizes all changes made to the previous sampling matrix. If the change was directed by NMED, provide a reference to the direction. If the change is proposed by the Permittee, provide a basis or the proposed change." This

direction was not adequately followed. Revise the Plan to include more detail for the proposed changes from the previous plans and remove unnecessary information.

Permittee Response: Significant changes have been made per the comment, and are presented in the redline strike-out. Specifically, Section 2.2 (and its subsections) has been significantly reduced to remove unnecessary details and Section 7.0 was expanded to include text discussion of proposed changes to the plan for each well, including the basis for each proposed change.

2. Proposed Changes to the Plan

NMED Comment: The following issues regarding the proposed changes were identified in the Plan. Resolve the issues in the revised Plan.

- a) The nitrite concentrations in groundwater samples collected from wells MW27, MW35, and MW59 may have been reported inaccurately. Propose to split the nitrite samples collected from the wells and use two different analytical laboratories to conduct nitrite analysis in the revised Plan, as appropriate.

Permittee Response: Comment Noted: It is the Army's understanding that NMED is referencing to Northern Area Groundwater RFI Report comment # 22, dated July 25, 2022, in this comment. The Army has reviewed NMED's comment and notes that split data for the same compound using the same analytical method when submitted to two different labs often results in variations, mainly because of variations in instrumentation. To address the NMED comment, the Army will collect additional samples from these three wells (MW27, MW35, and TMW59) during the April 2023 sampling event, and submit the three sets of samples to two separate labs to verify the results. The Army will share the results with NMED. This change was noted in Section 7.0 and in Table 5-2.

- b) The Permittee recommended conducting additional groundwater sampling and analysis of herbicides for wells MW36S, BGMW13D, and BGMW07 in the May 6, 2022, letter. However, herbicide analysis was not proposed for wells MW36S and BGMW13D in the Plan. Propose to conduct herbicide analysis for these wells in the revised Plan.

Permittee Response: Comment Noted: The referenced wells were analyzed for herbicides in 2021 sampling events and will be analyzed during the 2022 sampling events. The results will be reported in upcoming PMRs. The wells have not had herbicide detections thus far, and the Army proposes removing herbicide analysis if non-detections continue through the 2022 sampling events. Section 7.0 and Table 5-2 were updated to reflect the proposed changes of removing them if they are non-detect, and if detected, continuing to sample for herbicides in 2023.

- c) Propose to conduct pesticides analysis for the groundwater samples collected from wells TMW40S and TMW52, as required by Comment 53 of the NMED's January 25, 2022, Disapproval.

Permittee Response: Comment Noted: The referenced wells were analyzed for pesticides in 2021 sampling events and will be analyzed during the 2022 sampling events. The results will be reported in upcoming PMRs. The wells have not had pesticide detections thus far, and the Army proposes removing pesticide analysis if non-detections continue through the 2022

sampling events. Section 7.0 and Table 5-2 were updated to reflect the proposed changes of removing them if they are non-detect, and if detected, continuing to sample for pesticides in 2023.

- d) Comment 38 of the NMED's January 25, 2022, Disapproval states, "propose to conduct TPH-DRO and TPH-GRO analyses for the groundwater samples collected from all new wells." Although it appears that this comment was addressed, the discussion was not included in the Plan. Indicate where this comment was addressed in the revised Plan.

Permittee Response: Concur: TPH analysis for the referenced "new" wells was discussed and addressed in the 2022 GWMP (Version 11). Any changes to TPH analyses are discussed on a well-specific basis in Section 7.0 of this GWMP.

- e) Comment 49 of the NMED's January 25, 2022, Disapproval states, "propose to conduct SVOC analysis for the groundwater samples collected from all wells where TPH-DRO was detected." Propose to conduct semi-volatile organic compounds (SVOCs) analysis for all applicable wells and indicate where this comment was or is addressed in the revised Plan.

Permittee Response: Concur: Section 7 and Table 5-2 of the GWMP were revised to propose SVOC analysis for wells where TPH-DRO is detected in the preceding sampling event.

- f) Comment 54 of the NMED's January 25, 2022, Disapproval states, "propose to conduct chloride/sulfate analysis for the groundwater samples collected from all pertinent wells where such evaluation is relevant and potentially feasible." Propose to conduct the analysis for all applicable wells and indicate where this comment was or is addressed in the revised Plan.

Permittee Response: Concur: The requested revision was made to the 2022 GWMP and was carried forward into the current workplan without change. Section 5.2.1 (in 2022 and 2023 GWMPs) states: "Starting in 2021, all wells sampled for nitrate and nitrite will also be sampled for additional major anions to include chloride, fluoride, sulfate, phosphate, and bromide." No change was made to the document as a result of this comment."

- g) Comment 17 of the NMED's July 1, 2020, Disapproval states, "propose to collect groundwater samples from wells TMW06, TMW07, TMW10, TMW21 and TMW46 for TPH-DRO analysis." Although it appears that this comment was addressed, the discussion was not included in the Plan. Indicate where this comment was or is addressed in the revised Plan.

Permittee Response: Any changes to TPH analyses are discussed on a well-specific basis in Section 7.0 of this GWMP. Wells TMW06, TMW07, TMW10, TMW21 and TMW46 were proposed for TPH-DRO analysis in the 2022 GWMP, and remain unchanged for this 2023 GWMP.

- h) Comment 27 of the NMED's July 1, 2020, Disapproval states, "propose to collect groundwater samples from wells TMW06, TMW07, and TMW21 for TPH-GRO analysis." Although it appears that this comment was addressed, the discussion was not included in the Plan. Indicate where this comment was or is addressed in the revised Plan.

Permittee Response: Any changes to TPH analyses are discussed on a well-specific basis in Section 7.0 of this GWMP. Wells TMW06, TMW07, and TMW21 were proposed for TPH-GRO analysis in the 2022 GWMP, and remain unchanged for this 2023 GWMP.

- i) Well MW27 appears to be the only well where 1,4-dioxane analysis was proposed in 2023. Provide a justification for the proposed change to the 1,4-dioxane analysis in the revised Plan.

Permittee Response: Comment Noted: Based on Comment No. 1 above, further explanation of changes in analytical protocol is provided in Section 7.0. Wells proposed for analysis for 1,4-dioxane were not changed from the 2022 GWMP.

- j) Comment 1 of the NMED's August 3, 2021, letter states, "[p]ropose to conduct PFAS analysis for the groundwater samples collected from the pertinent wells." Since this comment was not addressed, propose to conduct the analysis for all applicable wells and indicate where this comment was or is addressed in the revised Plan.

Permittee Response: Comment Noted: The Army is investigating the potential presence of PFAS at Fort Wingate Depot Activity under the Comprehensive Environmental Response, Compensation, and Liability Act (CERCLA). A Preliminary Assessment is currently being conducted and will be made available upon completion.

3. Section 1.5, Document Organization, lines 23-24, page 6 of 71

Permittee Statement: "Section 2 presents the available site history and general description of FWDA and summarizes previous groundwater investigations."

NMED Comment: Section 2.2 and its subsections present a summary of previous soil and groundwater investigations conducted in each SWMU and AOC in a chronological manner with the Permittee's recommendations made after the investigations and NMED's responses. Although Section 2.2 and its subsections were reviewed, the accuracy of the statements was not verified with actual references because the details were not relevant to the Plan. The pertinent sections must provide a general description of site history and previous groundwater investigations; however, the comprehensive description of site history and previous investigations discussed in the Plan is unnecessary. Remove irrelevant details from the revised Plan.

Permittee Response: Comment Noted: Section 2.2 was greatly reduced in response to Comment No. 1 above.

4. Section 2.1, General Facility Description, lines 35-37, page 7 of 71

Permittee Statements: "Figure 2-2 shows the locations of various buildings and SWMUs and AOCs throughout the Northern Area of the installation."

NMED Comment: Figure 2-2 was not included in the Plan. Include Figure 2-2 in the revised Plan.

Permittee Response: Concur: The GWMP was revised to correct the omission of Figure 2-2.

5. Section 2.3, Semiannual RCRA Groundwater Monitoring Reports and Updated Groundwater Monitoring Plans -Ongoing, lines 15-17, page 28 of 71

Permittee Statement: "Detected concentrations of other anions (fluoride, sulfate, chloride, and phosphate) are associated with hard water and brackish groundwater conditions observed at FWDA."

NMED Comment: Since the evaluation of background groundwater conditions has not been approved, it is not appropriate to conclude that the detection of anions is a result of natural conditions. Remove the unsupported statement from the revised Plan.

Permittee Response: Concur: The GWMP was revised to remove the referenced text from Section 2.3, lines 9-11, page 28 of 74.

6. Section 2.3, Semiannual RCRA Groundwater Monitoring Reports and Updated Groundwater Monitoring Plans – Ongoing, lines 29-31, page 28 of 71

Permittee Statement: "Toluene had two cleanup level exceedances and benzene has had one exceedance. Toluene and benzene may have been associated with previous fuel releases and are now detected at concentrations less than cleanup levels."

NMED Comment: 1,2-dichloroethane, carbon disulfide, 1,4-dioxane, toluene, and vinyl chloride are listed as volatile organic compounds (VOC) whose concentrations exceeded the applicable screening levels in the same section, lines 36-37, page 27 of 71. Since the statement indicates that benzene also exceeded the applicable screening level, resolve the discrepancy in the revised Plan.

Permittee Response: Concur: Benzene was added to the list of VOCs historically detected above cleanup levels in Section 2.3, line 31, page 27 of 74.

7. Section 3.4.4, Northern Area Alluvial Groundwater System, lines 28-31, page 35 of 71

Permittee Statement: "A video survey of Well 69 was performed in June 2019 to provide a visual observation of the interior of the well casing to assess possible deterioration and leaking. The video survey showed thick mineral deposits along the well casing, which made it difficult to assess the condition of the well casing."

NMED Comment: The Permittee submitted the June 15, 2022, Final Work Plan to Abandon and Plug Artesian Wells #68 and #69. The referenced work plan must be approved by the New Mexico Office of the State Engineer. The well abandonment plan must be approved by the New Mexico Office of the State Engineer. The well abandonment report must be submitted to NMED within ninety (90) calendar days of completion of the field activities. No revision is required to the Plan.

Permittee Response: Concur: No change to the document as a result of this comment.

8. Section 3.4.5, Northern Area Bedrock Groundwater System, lines 10-14, page 36 of 71

Permittee Statements: "The upper sandstone unit is evaluated by monitoring well TMW40D. The remaining bedrock monitoring wells are completed in the lower sandstone unit which is separated from the upper by a thick sequence of shale. A third water-bearing sandstone unit is assumed since groundwater from well BGMW08 was measured at 100 feet lower than those of other bedrock wells."

NMED Comment: The Permittee's May 6, 2022, Final Northern Area Groundwater RCRA Facility Investigation Report, Army's Response to the New Mexico Environment Department Letter of Disapproval dated January 25, 2022, states, "[f]or consistency, the terminology 'Bedrock 1/upper bedrock aquifer was changed to the Bedrock Aquifer 1 (BR1), thru-out [and] BR1 is defined by thickness and laterally discontinuous water bearing zone without sustainable water production." The designation of the sandstone units must be consistent. Well TMW40D was screened in the BR2 that are equivalent to the lower sandstone unit according to the referenced report. Revise the statement for consistency and accuracy.

Permittee Response: Concur: The 2nd sentence in the 2nd paragraph of Section 3.4.5 (lines 10-12, page 27) was revised to read as follows:

"The upper sandstone unit, designated as Bedrock Aquifer 1 (BR1), is evaluated by monitoring wells TMW38, TMW51, TMW52, TMW53, and TMW64."

9. Section 3.5, Nature and Extent of Groundwater Contamination, lines 1-2, page 37 of 71

Permittee Statements: "Figure 3-1 and Figure 3-2 present the alluvial and bedrock groundwater elevations generated from the October 2019 water level measurement event."

NMED Comment: Since the Plan proposes groundwater monitoring and sampling plans for year 2023, it is necessary to use the most recent data that were approved by NMED. The July through December 2020 groundwater monitoring report was approved by NMED on April 5, 2022; therefore, the data included in the 2020 report must be used. If the October 2019 data is sufficient for the purpose of this discussion, provide a justification for using the older data in the response letter.

Permittee Response: Concur: Figures 3-1 and 3-2 were updated to use data from the October 2020 sampling event.

10. Section 3.6, Fate & Transport of Contamination in Groundwater, lines 14-18, page 39 of 71

Permittee Statement: "Alluvial groundwater in the northern Administration Area and Workshop Area is present in a depression formed by the downward dip of largely impermeable claystone bedrock. Southeast of the Workshop Area, communication between the bedrock and alluvial aquifers create a direct pathway between both units. In the Northern Area, alluvium overlies claystone aquitards."

NMED Comment: Although NMED agrees with the presence of claystone between the alluvial and bedrock aquifers at the site, the claystone layer is not impermeable. The site contaminants (e.g., nitrate) have migrated vertically from the alluvial to the bedrock aquifer. Revise the

statement for accuracy.

Permittee Response: Comment Noted: The GWMP was revised to remove the referenced text from Section 3.6, lines 16-20, page 39 of 74.

11. Section 3.7, Exposure Pathways for Human and Ecological Receptor, lines 34 through 38, page 39 of 71 and lines 1 through 10, page 40 of 71

NMED Comment: Although the title of Section 3.7 indicates that discussion regarding exposure pathways for ecological receptor was provided, they were not provided in the text of Section 3.7. Include the discussion in the revised Plan or revise the title of Section 3.7.

Permittee Response: Concur: The GWMP was revised to remove "Ecological" from the heading for Section 3.7.

12. Section 4.2, Groundwater Sampling, lines 3-5, page 42 of 71

Permittee Statement: Low-flow purging and sampling is the preferred method at FWDA, in accordance with the NMED guidance document on low-flow sampling titled, "Use of Low-Flow and Other Non-Traditional Sampling Techniques for RCRA Compliant Groundwater Monitoring (NMED-HWB, 2001)."

NMED Comment: According to Table 4-1 (Northern Area Groundwater Purge Method), many wells are not purged using the low-flow method even though it is the preferred method. Presumably, the wells do not produce enough water to use the low-flow method; however, the wells that are purged with high-volume capacity pumps (MW23, MW24, TMW16, TMW18, TMW19, TMW36, and TMW37) may be appropriate for the low-flow purge method. (a) Evaluate the potential for use of the low-flow method for the wells where high-volume capacity pumps are currently used and (b) provide a discussion in the revised Plan.

Permittee Response: Comment Noted: Flow rates and drawdown from the referenced wells will be measured during the upcoming sampling events to evaluate whether the wells may be suitable for low-flow purging. The GWMP was revised to state in Section 4.2, page 33, lines 6-7 "Current wells not sampled via low-flow method will be evaluated to determine suitability for low-flow method and will be proposed for future sampling events as appropriate."

13. Section 4.2.2.1, Traditional Low-Flow and ZIST Low-Flow Dedicated Pumps, lines 28-29, page 46 of 71, and Section 4.2.4, Alternative Groundwater Purging and Sampling Procedures, line 40, page 47 of 71

Permittee Statement: "All measurements will be obtained using a field-parameter monitoring instrument with a transparent flow-through cell that prevents air bubble entrapment in the cell." and,
"Prior to purging, an additional DO measurement with a downhole probe will be collected on all wells without a dedicated pump."

NMED Comment: The data for water quality parameters other than dissolved oxygen (DO) appear to be collected by a flow-through cell rather than a downhole probe. Comment 2 of the NMED's July 6, 2021, letter states, "NMED agrees that in-situ DO measurement using downhole probes is more effective and accurate. Propose to use downhole probes for water quality

measurements, where applicable, in future groundwater monitoring plan update." Propose to use downhole probes for the measurement of all water quality parameters, where applicable, or explain why DO is the only water quality parameter measured using a downhole probe in the revised Plan.

Permittee Response: Concur: The following was added to Section 4.2.4, lines 1-4, pages 48 of 74:

"DO is the only parameter that shows a potential affect from pumping the water through a flow-through cell by possible introduction of air into the system. No other parameter has empirically been shown to be affected by pumping water through a flow-through cell."

14. Section 4.2.4.1, Disposable Bailers, lines 30-32, page 48 of 71

Permittee Statement: "To filter groundwater samples for dissolved metals and/or perchlorates analysis, use a hand pump filter or run water through a peristaltic pump with dedicated tubing and in-line filter or use a clean disposable syringe and filter."

NMED Comment: Three different filtering methods are proposed for collection of dissolved metals and/or perchlorate analysis. Explain the criteria/conditions dictating which particular filtering method is selected in the revised Plan. In addition, explain which method is used for each well in the revised Plan.

Permittee Response: Concur: The applicable paragraph was revised to read as follows:

"To filter groundwater samples for dissolved metals and/or perchlorates analysis, use a clean disposable syringe and filter. An intermediary container may be used to collect the groundwater sample prior to filtering. Sample filtering and preservation will be performed in accordance with laboratory and method requirements as listed in Table 4-3."

15. Section 5.1, Interim Groundwater Monitoring Analytical Program, lines 30-32, page 56 of 71

Permittee Statement: "USACE is currently evaluating options to achieve lower LOQs for the remaining few compounds using enhanced analytical procedures as documented in a NMED approval letter dated May 21, 2019 (NMED, 2019b)."

NMED Comment: The April 13, 2022, email from Mr. Ben Wear of NMED to Mr. George Cushman of FWDA states, "submit a formal report, which details the data you have collected and includes all information provided by the analytical laboratories, to NMED for review no later than July 29, 2022." Although this information is not required to be included in the Plan, the Permittee must submit the required document no later than July 29, 2022. This comment serves as a reminder.

Permittee Response: Comment Noted: No change to the document as a result of this comment.

16. Section 5.2, Monitoring Location and Frequency, lines 13-15, page 58 of 71

Permittee Statement: "Once additional bedrock aquifer background monitoring wells are installed; interim monitoring will be conducted to collect additional data to support background evaluations."

NMED Comment: It is not clear whether the Permittee will propose to install more bedrock background monitoring wells for the purpose of collecting additional data to support background evaluations. Provide a clarification in the response letter. If additional background monitoring wells are necessary to support background evaluations, propose to submit a work plan to install these wells in the revised Plan.

Permittee Response: Comment Noted: Regulatory approval of background conditions is pending, and potential further evaluation is yet to be determined. The Army does not currently propose to install more bedrock background monitoring wells for the purpose of collecting additional data to support background evaluations.

The last paragraph of Section 5.2 (page 58 of 74, lines 9-13) was revised to read as follows:

"An assessment of groundwater metals contamination cannot be completed without a statistically valid background evaluation and regulatory approval of groundwater background concentrations. Monitoring wells in the Northern Area alluvial aquifer can support a background evaluation; however, evaluation is pending whether additional monitoring wells in the Northern Area bedrock aquifer are needed to prepare a statistically valid background evaluation."

17. Section 5.2.1, Northern Area Alluvial Groundwater Monitoring Design, Explosives Plume, lines 35-36, page 58 of 71 and lines 1-2, page 59 of 71

Permittee Statements: "To monitor suspected [explosive compounds] releases from SWMU 27 (Building 528 Complex), wells TMW01, TMW31S, and TMW41 are designated for explosives analysis even though they are hydraulically upgradient of SWMU 1."

NMED Comment: According to Table 5-2 (Northern Area Groundwater Sampling Matrix), explosive compounds analysis was not proposed for wells TMW01, TMW31S, and TMW41. Revise Table 5-2 to propose explosive compounds analysis for the wells in the revised Plan.

Permittee Response: Comment Noted: Well TMW41 was retained for explosives analysis due to its proximity to the explosives plume. Table 5-2 was revised to reflect this change.

The Army proposes to remove explosives analysis from wells TMW01 and TMW31S due to no detections being reported in the last four sampling events. Section 7 and Table 5-2 were revised to reflect this change.

18. Section 5.2.1, Northern Area Alluvial Groundwater Monitoring Design, Metals Monitoring, lines 13-15, page 59 of 71

Permittee Statement: "Monitoring wells along the outside edges of the monitoring network are selected to provide data that could be used to monitor potential contaminant migration [for metals]."

NMED Comment: According to Table 5-2, metals analyses are proposed for groundwater samples collected from all monitoring wells. However, the statement indicates that metals analyses are only proposed for wells along the outside edges of the monitoring network. To clarify, metals analyses must be conducted for all wells unless the changes are proposed and approved by NMED. Remove the statement from the revised Plan.

Permittee Response: Concur: The statement was removed from Section 5.2.1, Metals Monitoring, lines 13-14, page 59 of 74.

19. Section 5.2.1, Northern Area Alluvial Groundwater Monitoring Design, Other Organics Monitoring, lines 21-25, page 59 of 71

Permittee Statement: "The points of release for the SVOCs in the Northern Area include SWMU 6 (Building 11, former Locomotive Shop) and SWMU 45 (Building 6 Gas Station). There are no groundwater SVOC plumes identified at FWDA; however, wells MW20, MW22D, TMW33, and TMW46 are designated to monitor suspected releases of petroleum fuels at SWMU 6 and known releases of fuels at SWMU 45 (Figure 3-8)."

NMED Comment: According to Table 5-2, SVOCs analysis was not proposed for wells MW20, MW22D, TMW33, and TMW46. Revise Table 5-2 to propose SVOCs analysis for the wells or explain the basis for excluding the analysis in the revised Plan. In addition, SVOCs may be detected as degradation products of explosive compounds. Propose to conduct SVOCs analysis for all wells designated for monitoring explosive compounds in the revised Plan.

Permittee Response: Comment Noted: The Army proposes to remove SVOCs analysis from the wells referenced in the comment due to no detections being reported in the last four sampling events. The referenced text (Section 5.2.1, Other Organics Monitoring, lines 23-25, page 59 of 74) was revised to remove the referenced wells from the list of wells monitored for SVOCs.

The GWMP was revised to propose SVOC analysis for wells where explosives were detected in the preceding sampling event.

20. Section 5.2.1, Northern Area Alluvial Groundwater Monitoring Design, Other Organics Monitoring, lines 29-30, page 59 of 71

Permittee Statement: "The GRO releases are monitored by wells MW01, MW02, MW03, MW18D, MW20, MW22D, and TMW33."

NMED Comment: According to Table 5-2, total petroleum hydrocarbon gasoline range organics (TPH GRO) analysis was not proposed for well MW03. Revise Table 5-2 to propose TPH GRO analysis for well MW03 in the revised Plan.

Permittee Response: Concur: Table 5-2 was revised to retain TPH GRO analysis for well MW03.

21. Section 5.2.2, Northern Area Bedrock Groundwater Monitoring Design, Perchlorate Plume, lines 13-14, page 60 of 71

Permittee Statement: "To monitor the [perchlorate] plume boundary wells TMW32, TMW36, TMW38, TMW39D, and TMW40D are designated as downgradient wells."

NMED Comment: According to Table 5-2, perchlorate analysis was not proposed for wells TMW36 and TMW38. Revise Table 5-2 to propose perchlorate analysis for the wells in the revised Plan.

Permittee Response: Concur: Wells TMW36 and TMW38 were retained for perchlorate analysis due to their proximity to the perchlorate plume. Table 5-2 was revised to reflect this change.

22. Section 5.2.2, Northern Area Bedrock Groundwater Monitoring Design, Other Organic COPCs Monitoring, lines 20-21, page 60 of 71

Permittee Statement: "Suspected [SVOCs] releases will be monitored by wells TMW14A and TMW16 located downgradient in the western portion of the Workshop Area (Figure 3- 13)."

NMED Comment: According to Table 5-2, SVOCs analysis was not proposed for wells TMW14A and TMW16. Revise Table 5-2 to propose SVOCs analysis for the wells in the revised Plan. In addition, SVOCs may be detected as degradation products of explosive compounds. Propose to conduct SVOCs analysis for all bedrock wells designated to monitor explosive compounds in the revised Plan.

Permittee Response: Comment Noted: The Army proposes to remove SVOCs analysis from wells TWM14A and TMW16 due to no detections being reported in the last four rounds of sampling events. The referenced text (Section 5.2.2, Other Organic COPCs Monitoring, lines 20-21, page 60 of 74) was revised to remove the referenced wells from the list of wells monitored for SVOCs.

The GWMP was revised to propose SVOC analysis for all bedrock wells designated to monitor explosive compounds.

23. Section 5.3.2, Analytical Data Quality Requirements, Sensitivity, DL [(Detection Limit)], lines 10-12, page 63 of 71

Permittee Statement: "A DL may be used as the lowest concentration for reliably reporting a detection of a specific analyte in a specific matrix with a specific method with 99% confidence."

NMED Comment: Neither the Instrument Detection Limit (IDL), nor the Method Detection Limit (MDL), can be used as the lowest concentration to report detection/non-detection of an analyte. However, the reporting limit (RL), limit of detection (LOD), practical quantitation limit (PQL), or limit of quantitation (LOQ) may be used as the lowest concentration to report a detection/non-detection. Revise the statement for clarity.

Permittee Response: Comment Noted: The referenced definitions stated in the Permittee statement above are directly cited from DOD QSM. Based on recent NMED comments, the LOD is used for all non-detects for reporting purposes. No change to the document as a result of this

comment.

24. Section 7.0, Sampling Changes from Previous Plan, lines 7-10, page 66 of 71

Permittee Statement: "Starting in 2023, these wells [installed in 2019 and 2020] will only be sampled for analytes based upon neighboring wells and proximity towards known contaminant plumes and if they had any detections of other analytes during the initial four sampling events. The revised analytical program is listed in Table 5-2 with highlights pertaining to the changes for 2023."

NMED Comment: Since the data that supports the absence of analytes in the wells where analyses are proposed to be removed is not provided or discussed, the appropriateness of the proposed removal has not been demonstrated. The Permittee must evaluate the analytical data for each well where removal of the analyses is proposed and discuss its basis in the revised Plan (see Comment 1). For example, herbicides, PCB, and pesticides analyses conducted in wells BGMW11 and BGMW12 in 2022 are proposed to be removed according to Table 5-2 of the Plan. However, the basis for the proposed changes is not discussed in the Plan. The discussion must include (1) the detection/non-detection of analytes, (2) the exceedance of the screening levels, if any, (3) the presence of data quality exceptions, if any, and (4) the number of the sampling events used for the evaluation of proposed changes. The basis for all proposed changes must clearly be stated in the revised Plan. Note that the proposed changes are subject to NMED's approval and must not be implemented without an approval of the Plan.

Permittee Response: Concur: Significant changes have been made per the comment and are presented in Section 7.0 on pages 57-59. Each well contains a summary of the decision based upon (1) detections and (4) the number of sampling events used for the decision. As for (2) and (3) in NMED's comment above, a note was added in Section 7.0 page 57, lines 13-16 stating "Although there are data quality exceptions for specific analytes for SVOCs, explosives, PCBs, pesticides, and herbicides, removal of these analytical groups for specific wells is proposed if no detections of any analytes for these analytical groups are reported."

25. Section 7.0, Sampling Changes from Previous Plan, lines 11-14, page 66 of 71

Permittee Statement: "Wells which have been non-detect for a given analyte group in four or more of the most recent sampling events (except for VOCs) are proposed for removal of that analytical group from the well, unless the well is in proximity to an existing plume for that analyte group. No changes are proposed for VOCs or metals analyses."

NMED Comment: The basis for the proposed changes in analytical suite in each well must be discussed in detail. For example, TPH diesel range organics (DRO) analysis was proposed to be removed from the analytical suite for well MW03 according to Table 5-2; however, all reported non-detect concentrations exceeded the applicable screening level in well MW03; therefore, the data is considered as a data quality exception and the absence of TPH DRO in the samples collected from well MW03 has not been demonstrated. As such, TPH DRO analysis for MW03 must be continued in 2023. The proposed changes for each well must be discussed for NMED's evaluation and approval in the revised Plan.

Permittee Response: Comment Noted. Significant changes have been made per the comment and are presented in Section 7.0 on pages 57-59. Each well contains a summary of the decision based upon detections and number of sampling events used for the decision. TPH DRO analysis

for MW03 will be retained, and a sentence was added for Section 7.0 page 57, line 19 stating that “No changes are proposed for VOCs, TPH-DRO, TPH-GRO, or metals analysis”.

26. Table 5-2, Northern Area Groundwater Sampling Matrix, pages TS-3; 1 through 7

NMED Comment: Some issues are identified in Table 5-2. Resolve the following issues in the revised Plan.

- a) Section 5.2.1 (Northern Area Alluvial Groundwater Monitoring Design, Nitrate and Nitrite Plume) states that all wells sampled for nitrate and nitrite will also be sampled for additional major anions to include chloride, fluoride, sulfate, phosphate, and bromide starting in 2021. Although Table 5-2 includes major anions as one of the analytical parameters, each analyte included in major anions is not identified in the table. Identify all analytes included in major anions (e.g., nitrate, nitrite, chloride, fluoride, sulfate, phosphate, and bromide) in the footnote of the revised Table 5-2.
- b) Although the revised 2022 Plan included pesticides analysis for multiple wells, Table 5-2 does not propose pesticides analysis for any well. Provide an explanation for the removal of pesticide analysis in 2023 in the revised Plan.

Permittee Response:

- a) Concur: Similar to VOCs, SVOCs, and other groups with multiple analytes, each specific analyte is not described or listed in this table. However, in response to this comment, a footnote was added listing specific analytes for major anions.
- b) Comment Noted. A selection of wells was analyzed for pesticides in the 2021 sampling events and will be analyzed during the 2022 sampling events as well. The results will be reported in upcoming PMRs. The wells have not had pesticide detections thus far, and the Army proposes removing pesticide analysis if non-detections continue through the 2022 sampling events. Section 7.0 and Table 5-2 were updated to reflect this proposal.

If you have questions or require further information, please contact me at George.h.cushman.civ@army.mil, 703-455-3234 (Temporary Home Office, preferred) or 703-608-2245 (Mobile).

Sincerely,

George H. Cushman IV

George H. Cushman IV
BRAC Environmental Coordinator
Fort Wingate Depot Activity
BRAC Operations Branch
Environmental Division

Enclosures

CF:

Dave Cobrain, NMED, HWB
Ben Wear NMED, HWB
Michiya Suzuki, NMED, HWB
Lucas McKinney, U.S. EPA Region 6
Ian Thomas, BRAC OPS
George H. Cushman, BRAC OPS
Alan Soicher, USACE
Saqib Khan, USACE
David Becker, USACE
Admin Record, NM
Admin Record, Ohio

APPENDIX B

Summary of Previous Investigation Analytical Results

(Tables B-1 through B-7)

Access Database is provided on CD.

TABLE B-1: SUMMARY OF INORGANIC ANIONS ANALYTICAL RESULTS
2024 INTERIM NORTHERN AREA GROUNDWATER MONITORING PLAN
Fort Wingate Depot Activity, New Mexico

Well ID	Sample ID	Date	Nitrate	Nitrite	Bromide	Chloride	Fluoride	Phosphate	Sulfate
			mg/L						
SL			10	1	-	250	1.6	-	600
Alluvial Wells									
BGMW01	BGMW01042022	04/13/2022	6.5	0.060 J	1.8	420	1.2	<0.25	1,200
	BGMW01102021	10/05/2021	3.2	<0.60	1.2	360	0.69	<0.25	1,100
	BGMW01042021	04/14/2021	3.7	<0.12	NA	NA	NA	NA	NA
	BGMW01102020	09/30/2020	2.79	<0.30	NA	NA	NA	NA	NA
BGMW02	BGMW02042022	04/13/2022	15	<0.06	1.8	380	0.35	<0.25	1,200
	BGMW02102021	10/05/2021	13	<0.30	<0.25	290	<0.05	<0.25	1,000
	BGMW02042021	04/14/2021	11	<0.12	NA	NA	NA	NA	NA
	BGMW02102020	09/30/2020	13.9	<0.30	NA	NA	NA	NA	NA
BGMW03	BGMW03042022	04/11/2022	0.38	<0.06	1.1	320	3.3	<0.25	510
	BGMW03102021	10/04/2021	1.3	<0.30	0.86	180	4.2	<0.25	510
	BGMW03042021	04/12/2021	0.22	<0.60	NA	NA	NA	NA	NA
	BGMW03102020	10/05/2020	1.56	<0.12	NA	NA	NA	NA	NA
BGMW11	BGMW11042022	04/15/2022	<0.06	<0.06	2.3	600	1.4	<0.25	2,000
	BGMW11102021	10/11/2021	<0.06	<6	<0.25	580	<0.05	<0.25	1,600
	BGMW11042021	04/20/2021	<0.06	<0.30	NA	NA	NA	NA	NA
BGMW12	BGMW12042022	04/11/2022	0.080 J	<0.06	0.52	96	1.9	<0.25	510
	BGMW12102021	10/07/2021	<0.06	<0.06	0.41 J	59	1.7	<0.25	400
	BGMW12042021	04/13/2021	<0.06	<0.12	NA	NA	NA	NA	NA
BGMW13D	BGMW13D042022	04/21/2022	<0.06	<0.06	0.46 J	98	1.2	0.47 J	62
	BGMW13D042022DUP	04/21/2022	<0.06	<0.06	0.45 J	91	1.2	0.53	67
	BGMW13D102021	10/14/2021	<0.06	<2.4	0.39 J	93	0.99	<0.25	84
	BGMW13D042021	04/23/2021	<0.06	<0.12	NA	NA	NA	NA	NA
	BGMW13D042021DUP	04/23/2021	<0.06	<0.12	NA	NA	NA	NA	NA
BGMW13S	BGMW13S042022	04/21/2022	<0.06	<0.06	0.53	130	1.1	0.61	51
	BGMW13S102021	10/11/2021	<0.06	<2.4	0.37 J	130	1.0	<0.25	41
	BGMW13S042021	04/23/2021	<0.06	<0.12	NA	NA	NA	NA	NA
FW31	FW31042022	04/18/2022	<0.06	<0.06	<0.25	7.4	3.6	<0.25	710
	FW31102021	10/12/2021	15	<0.06	<0.25	6.5	3.1	<0.25	590
	FW31042021	04/19/2021	0.055 J	<0.06	NA	NA	NA	NA	NA
	FW31102020	10/05/2020	0.068 J	<0.06	NA	NA	NA	NA	NA
	FW31102020DUP	10/05/2020	0.069 J	<0.06	NA	NA	NA	NA	NA
MW01	MW01042022	04/12/2022	3.8	<0.06	0.43 J	53	0.86	0.22 J	970
	MW01102021	10/05/2021	3.6	<0.30	0.34 J	38	0.61	<0.25	760
	MW01042021	04/13/2021	3.4	<0.12	NA	NA	NA	NA	NA
	MW01102020	09/29/2020	4.45	<0.06	NA	NA	NA	NA	NA
MW02	MW02042022	04/12/2022	1.3	<0.06	0.38 J	37	0.37	<0.25	770
	MW02102021	10/05/2021	1.0	<0.12	0.32 J	26	0.28	<0.25	630
	MW02042021	04/13/2021	1.1	<0.12	NA	NA	NA	NA	NA
	MW02102020	09/29/2020	1.95	<0.06	NA	NA	NA	NA	NA
MW03	MW03042022	04/14/2022	6.2	<0.06	0.64	370	0.48	<0.25	1,400
	MW03042022DUP	04/14/2022	6.2	<0.06	0.62	300	0.47	<0.25	1,300
	MW03102021	10/11/2021	5.2	<2.4	0.33 J	210	<0.05	<0.25	1,100
	MW03042021	04/15/2021	5.7	<0.30	NA	NA	NA	NA	NA
	MW03042021DUP	04/15/2021	5.7	<0.30	NA	NA	NA	NA	NA
	MW03102020	10/01/2020	6.29	<0.12	NA	NA	NA	NA	NA

TABLE B-1: SUMMARY OF INORGANIC ANIONS ANALYTICAL RESULTS
2024 INTERIM NORTHERN AREA GROUNDWATER MONITORING PLAN
Fort Wingate Depot Activity, New Mexico

Well ID	Sample ID	Date	Nitrate	Nitrite	Bromide	Chloride	Fluoride	Phosphate	Sulfate
			mg/L						
			10	1	-	250	1.6	-	600
SL			10	1	-	250	1.6	-	600
MW18D	MW18D042022	04/20/2022	<0.60	<0.60	3.5 J	860	0.58 J	2.4 J	2,400
	MW18D102021	10/13/2021	<0.60	<1.2	3.1 J	600	0.60 J	<0.25	2,000
	MW18D042021	04/21/2021	<0.30	<0.30	NA	NA	NA	NA	NA
	MW18D102020	10/06/2020	<0.12	<0.30	NA	NA	NA	NA	NA
MW20	MW20042022	04/20/2022	4.4	<1.2	7.6 J	3,200	<1	<5	2,700
	MW20102021	10/06/2021	17	<1.2	2.4	1,600	<0.05	<1.2	3,200
	MW20042021	04/21/2021	12	<1.2	NA	NA	NA	NA	NA
	MW20102020	10/05/2020	7.78	<1.2	NA	NA	NA	NA	NA
MW22D	MW22D042022	04/21/2022	18	<0.06	0.82	260	0.47	<0.25	1,300
	MW22D102021	10/14/2021	18	<1.2	0.50	250	<0.05	<0.25	850
	MW22D042021	04/26/2021	20	<0.06	NA	NA	NA	NA	NA
	MW22D102020	10/07/2020	19.2	<0.30	NA	NA	NA	NA	NA
MW23	MW23042022	04/11/2022	0.062 J	<0.06	0.75	100	0.92	0.66	3.9
	MW23102021	10/11/2021	<0.06	<2.4	0.54	97	0.78	<0.25	3.9
	MW23102021DUP	10/11/2021	<0.06	<2.4	0.57	86	0.76	<0.25	4.2
	MW23042021	04/13/2021	<0.12	<0.30	NA	NA	NA	NA	NA
	MW23102020	10/05/2020	<0.06	<0.06	NA	NA	NA	NA	NA
MW24	MW24042022	04/12/2022	0.048 J	<0.06	0.55	120	1.2	0.39 J	3.5
	MW24042022DUP	04/12/2022	0.046 J	<0.06	0.54	160	1.1	0.45 J	2.8
	MW24102021	10/11/2021	<0.06	<1.2	0.36 J	110	0.97	<0.25	2.5
	MW24102021DUP	10/11/2021	<0.06	<2.4	0.36 J	110	0.98	<0.25	1.6
	MW24042021	04/15/2021	<0.06	<0.12	NA	NA	NA	NA	NA
	MW24102020	09/29/2020	<0.06	<0.12	NA	NA	NA	NA	NA
	MW25042022	04/13/2022	51	<0.06	1.4	430	0.35	<0.25	2,000
MW25	MW25102021	10/12/2021	43	<2.4	0.59	380	<0.05	<10	1,700
	MW25042021	04/21/2021	45	<0.30	NA	NA	NA	NA	NA
	MW26042022	04/18/2022	1.8	<0.12	1.3	490	0.65	<0.25	1,500
MW26	MW26102021	10/11/2021	1.5	<2.4	0.84	370	<0.05	<0.25	1,100
	MW26042021	04/20/2021	1.6	<0.30	NA	NA	NA	NA	NA
	MW27042022	04/20/2022	35	<0.06	0.70	170	0.57	<0.25	1,100
MW27	MW27102021	10/08/2021	40	<1.2	0.50 J	120	<0.05	<5	920
	MW27042021	04/23/2021	33	<0.30	NA	NA	NA	NA	NA
	MW28042022	04/13/2022	9.7	<0.06	0.56	210	0.59	<0.25	1,400
MW28	MW28102021	10/05/2021	6.5	<0.30	0.38 J	120	<0.05	<0.25	1,200
	MW28042021	04/16/2021	5.4	<0.12	NA	NA	NA	NA	NA
	MW29042022	04/14/2022	6.3	<0.06	0.76	200	0.79	<0.25	760
MW29	MW29102021	10/05/2021	7.9	<0.30	0.48 J	170	0.59	<0.25	670
	MW29042021	04/16/2021	4.3	<0.12	NA	NA	NA	NA	NA
	MW30042022	04/20/2022	0.051 J	<0.12	1.3	280	0.98	<0.25	470
MW30	MW30102021	10/08/2021	<0.60	<0.60	<2.5	240	0.84 J	<2.5	410
	MW30042021	04/21/2021	0.13 J	<0.30	NA	NA	NA	NA	NA
	MW31042022	04/21/2022	13	<0.30	1.7	740	0.43	<0.25	2,500
MW31	MW31102021	10/13/2021	11	<1.2	3.3 J	760	0.49 J	<2.5	2,200
	MW31042021	04/21/2021	12	<0.30	NA	NA	NA	NA	NA

TABLE B-1: SUMMARY OF INORGANIC ANIONS ANALYTICAL RESULTS
2024 INTERIM NORTHERN AREA GROUNDWATER MONITORING PLAN
Fort Wingate Depot Activity, New Mexico

Well ID	Sample ID	Date	Nitrate	Nitrite	Bromide	Chloride	Fluoride	Phosphate	Sulfate
			mg/L						
SL			10	1	-	250	1.6	-	600
MW32	MW32042022	04/11/2022	67	<0.06	1.2	350	0.31	<0.25	2,000
	MW32102021	10/04/2021	59	<0.30	0.79	310	<0.05	<0.25	1,600
	MW32042021	04/13/2021	49	<0.60	NA	NA	NA	NA	NA
MW33	MW33042022	04/18/2022	<0.30	<0.30	2.1 J	250	1.2	<1.25	690
	MW33102021	10/11/2021	<0.12	<1.2	0.98 J	210	1.2	<0.50	570
	MW33042021	04/19/2021	<0.12	<0.30	NA	NA	NA	NA	NA
MW34	MW34042022	04/18/2022	9.6	<0.60	1.8	450	0.70	<0.25	2,300
	MW34102021	10/11/2021	9.8	<2.4	0.95	420	<0.05	<2.5	2,000
	MW34042021	04/19/2021	11	<0.30	NA	NA	NA	NA	NA
	MW34042021DUP	04/19/2021	11	<0.30	NA	NA	NA	NA	NA
MW35	MW35042022	04/20/2022	<0.06	<0.06	0.79	320	0.19	<0.25	1,100
	MW35042022DUP	04/20/2022	<0.06	<0.06	0.79	320	0.19	<0.25	1,000
	MW35102021	10/13/2021	<0.06	<2.4	0.56	330	0.16	<0.25	990
	MW35102021DUP	10/13/2021	<0.06	<1.2	0.56	260	0.15	<0.25	910
	MW35042021	04/21/2021	9	<0.12	NA	NA	NA	NA	NA
MW36D	MW36D042022	04/18/2022	0.074 J	<0.06	0.95	110	0.87	0.62	38
	MW36D042022DUP	04/18/2022	0.071 J	<0.06	0.93	110	0.86	0.68	39
	MW36D102021	10/11/2021	0.057 J	<2.4	0.68	96	0.73	<0.25	29
	MW36D042021	04/19/2021	<0.12	<0.12	NA	NA	NA	NA	NA
MW36S	MW36S042022	04/18/2022	0.081 J	<0.30	2.1	580	0.35	<0.25	4,800
	MW36S102021	10/11/2021	0.18	<6	1.4	540	<0.05	<0.25	4,100
	MW36S042021	04/19/2021	0.14 J	<0.30	NA	NA	NA	NA	NA
MW37	MW37042022	04/20/2022	0.046 J	<0.06	0.67	180	1.5	<0.25	460
	MW37102021	10/13/2021	<0.06	<2.4	0.55	190	1.3	<0.25	500
	MW37042021	04/21/2021	<0.06	<0.06	NA	NA	NA	NA	NA
MW38	MW38042022	04/22/2022	<0.06	<0.06	0.96	270	0.79	<0.25	650
	MW38102021	10/14/2021	<0.12	<1.2	0.92 J	220	0.61	<0.50	450
	MW38042021	04/23/2021	<0.12	<0.30	NA	NA	NA	NA	NA
MW39	MW39042022	04/22/2022	<0.60	<0.60	3.4 J	700	1.7	<0.25	1,900
	MW39102021	10/14/2021	<0.30	<1.2	1.8 J	520	1.4	<1.2	1,200
	MW39042021	04/23/2021	<0.12	<0.60	NA	NA	NA	NA	NA
SMW01	SMW01042022	04/12/2022	0.24 J	<0.30	1.3 J	730	1.3	<1.25	860
	SMW01102021	10/15/2021	<0.60	<0.60	<2.5	610	1.3	<2.5	560
	SMW01042021	04/13/2021	<0.12	<2.4	NA	NA	NA	NA	NA
	SMW01042021DUP	04/13/2021	<0.12	<2.4	NA	NA	NA	NA	NA
	SMW01102020	09/29/2020	<0.12	<0.60	NA	NA	NA	NA	NA
TMW01	TMW01042022	04/15/2022	9.7	<0.06	1.8	260	0.47	<0.25	1,000
	TMW01102021	10/15/2021	9.5	<0.06	1.0	190	0.43	<0.25	760
	TMW01102021	10/08/2021	9.2	<0.30	1.3	180	0.36	<2.5	770
	TMW01042021	04/15/2021	9.4	<0.30	NA	NA	NA	NA	NA
	TMW01102020	10/01/2020	9.4	<0.30	NA	NA	NA	NA	NA

TABLE B-1: SUMMARY OF INORGANIC ANIONS ANALYTICAL RESULTS
2024 INTERIM NORTHERN AREA GROUNDWATER MONITORING PLAN
Fort Wingate Depot Activity, New Mexico

Well ID	Sample ID	Date	Nitrate	Nitrite	Bromide	Chloride	Fluoride	Phosphate	Sulfate
			mg/L						
SL			10	1	-	250	1.6	-	600
TMW02	TMW02042022	04/15/2022	83	<0.30	1.6	300	0.30	<0.25	1,300
	TMW02042022DUP	04/15/2022	79	<0.30	1.6	310	0.30	<0.25	1,300
	TMW02102021	10/15/2021	81	<0.06	0.46 J	310	0.27	<0.25	1,300
	TMW02102021DUP	10/15/2021	79	<0.06	0.49 J	290	0.27	<0.25	1,200
	TMW02042021	04/16/2021	70	<0.12	NA	NA	NA	NA	NA
	TMW02042021DUP	04/16/2021	74	<0.12	NA	NA	NA	NA	NA
	TMW02102020	10/02/2020	82.3	<0.30	NA	NA	NA	NA	NA
	TMW02102020DUP	10/02/2020	81.1	<0.30	NA	NA	NA	NA	NA
TMW03	TMW03042022	04/19/2022	130	<0.06	0.81	190	1.1	<0.25	1,100
	TMW03102021	10/14/2021	110	<0.60	0.27 J	180	<0.05	<2.5	1,100
	TMW03042021	04/23/2021	110	<0.12	NA	NA	NA	NA	NA
	TMW03102020	10/07/2020	115	<0.30	NA	NA	NA	NA	NA
TMW04	TMW04042022	04/15/2022	43	<0.06	0.87	220	1.4	<0.25	1,200
	TMW04102021	10/11/2021	36	<1.2	<2.5	160	1.1	<1.2	940
	TMW04042021	04/16/2021	38	<0.12	NA	NA	NA	NA	NA
	TMW04102020	10/02/2020	39.8	<0.30	NA	NA	NA	NA	NA
TMW06	TMW06042022	04/20/2022	11	<0.06	0.65	130	1.0	<0.25	880
	TMW06102021	10/14/2021	10	<0.60	0.42 J	120	<0.05	<2.5	610
	TMW06102021DUP	10/14/2021	10	<0.60	0.42 J	59	<0.05	<2.5	610
	TMW06042021	04/21/2021	11	<0.12	NA	NA	NA	NA	NA
	TMW06102020	10/06/2020	11.8	<0.12	NA	NA	NA	NA	NA
TMW07	TMW07042022	04/15/2022	0.046 J	<0.06	0.63	200	0.65	<0.25	1,900
	TMW07102021	10/15/2021	0.11	<0.60	0.52	190	<0.05	<0.25	770
	TMW07042021	04/16/2021	0.097 J	<0.12	NA	NA	NA	NA	NA
	TMW07102020	10/01/2020	<0.06	<0.30	NA	NA	NA	NA	NA
	TMW07102020DUP	10/01/2020	<0.06	<0.30	NA	NA	NA	NA	NA
TMW08	TMW08042022	04/14/2022	4.6	0.58 J	5.9	1,700	0.51 J	<0.25	9,000
	TMW08102021	10/07/2021	4.9	<0.60	2.3	1,500	<0.05	<2.5	6,100
	TMW08042021	04/14/2021	3.1	<2.4	NA	NA	NA	NA	NA
	TMW08102020	09/30/2020	5.82	<1.2	NA	NA	NA	NA	NA
TMW10	TMW10042022	04/14/2022	<0.06	<0.30	1.3	710	0.92	0.29 J	1,700
	TMW10102021	10/07/2021	<0.06	<0.06	0.75	580	<0.05	<0.25	1,400
	TMW10042021	04/15/2021	<0.06	<0.60	NA	NA	NA	NA	NA
	TMW10102020	10/01/2020	<0.06	<0.60	NA	NA	NA	NA	NA
TMW13	TMW13042022	04/20/2022	4.0	<0.06	0.77	87	1.8	<0.25	350
	TMW13042022DUP	04/20/2022	4.0	<0.06	0.77	89	1.8	<0.25	360
	TMW13102021	10/13/2021	3.9	<0.30	0.47 J	74	0.89	<0.50	310
	TMW13042021	04/21/2021	4.2	<0.06	NA	NA	NA	NA	NA
	TMW13042021DUP	04/21/2021	4.2	<0.06	NA	NA	NA	NA	NA
	TMW13102020	10/06/2020	4.49	<0.12	NA	NA	NA	NA	NA
	TMW13102020DUP	10/06/2020	4.41	<0.12	NA	NA	NA	NA	NA
TMW15	TMW15042022	04/20/2022	1.7	<0.30	1.1	68	2.1	<0.25	240
	TMW15102021	10/15/2021	1.7	<0.60	0.68	120	1.6	<0.50	370
	TMW15042021	04/21/2021	2.0	<0.06	NA	NA	NA	NA	NA
	TMW15102020DUP	10/05/2020	2.34	<0.12	NA	NA	NA	NA	NA
	TMW15102020	10/05/2020	2.3	<0.12	NA	NA	NA	NA	NA

TABLE B-1: SUMMARY OF INORGANIC ANIONS ANALYTICAL RESULTS
2024 INTERIM NORTHERN AREA GROUNDWATER MONITORING PLAN
Fort Wingate Depot Activity, New Mexico

Well ID	Sample ID	Date	Nitrate	Nitrite	Bromide	Chloride	Fluoride	Phosphate	Sulfate
			mg/L						
SL			10	1	-	250	1.6	-	600
TMW21	TMW21042022	04/21/2022	10	<0.06	0.62	71	1.0	<0.25	610
	TMW21102021	10/13/2021	10	<0.30	0.58	75	1.6	<1.2	510
	TMW21042021	04/26/2021	11	<0.12	NA	NA	NA	NA	NA
	TMW21102020	10/07/2020	9.51	<0.30	NA	NA	NA	NA	NA
TMW22	TMW22042022	04/15/2022	13	<0.06	0.75	180	1.1	<0.25	910
	TMW22102021	10/15/2021	11	<0.60	0.46 J	140	<0.05	<2.5	920
	TMW22042021	04/21/2021	11	<0.30	NA	NA	NA	NA	NA
	TMW22102020	10/01/2020	12	<0.30	NA	NA	NA	NA	NA
TMW23	TMW23042022	04/15/2022	18	<0.06	0.63	99	0.81	<0.25	630
	TMW23102021	10/15/2021	17	<0.60	0.41 J	99	0.52	<2.5	470
	TMW23042021	04/16/2021	20	<0.12	NA	NA	NA	NA	NA
	TMW23102020	10/01/2020	20	<0.12	NA	NA	NA	NA	NA
TMW24	TMW24042022	04/19/2022	<0.06	<0.12	1.6	630	0.90	<0.25	680
	TMW24102021	10/14/2021	<0.06	<2.4	1.2	410	<0.05	<0.25	580
	TMW24042021	04/19/2021	<0.06	<0.30	NA	NA	NA	NA	NA
	TMW24102020	10/01/2020	0.17 J	<0.60	NA	NA	NA	NA	NA
TMW25	TMW25042022	04/21/2022	0.13	<0.06	1.0	190	0.68	0.21 J	940
	TMW25102021	10/13/2021	0.23	<2.4	0.75	200	0.55	<0.25	880
	TMW25042021	04/26/2021	0.31	<0.30	NA	NA	NA	NA	NA
	TMW25042021DUP	04/26/2021	0.31	<0.30	NA	NA	NA	NA	NA
	TMW25102020	10/07/2020	0.29	<0.12	NA	NA	NA	NA	NA
TMW26	TMW26042022	04/13/2022	0.055 J	<0.06	1.2	270	2.2	<0.25	750
	TMW26102021	10/04/2021	<0.12	<0.30	0.88 J	250	1.7	<0.50	780
	TMW26042021	04/13/2021	<0.12	<0.60	NA	NA	NA	NA	NA
	TMW26102020	09/30/2020	3.92	<0.30	NA	NA	NA	NA	NA
TMW28	TMW28042022	04/18/2022	<0.06	<0.06	0.57	90	0.64	0.32 J	550
	TMW28102021	10/12/2021	<0.06	<1.2	0.50 J	100	0.52	<0.25	430
	TMW28042021	04/16/2021	<0.06	<0.12	NA	NA	NA	NA	NA
	TMW28102020	10/02/2020	0.075 J	<0.12	NA	NA	NA	NA	NA
TMW29	TMW29042022	04/15/2022	4.0	<0.06	0.76	77	1.4	<0.25	400
	TMW29102021	10/08/2021	3.7	<0.30	0.49 J	68	1.1	<1.2	370
	TMW29042021	04/21/2021	3.3	<0.06	NA	NA	NA	NA	NA
	TMW29102020	10/01/2020	3.4	<0.12	NA	NA	NA	NA	NA
TMW31S	TMW31S042022	04/14/2022	6.4	<0.06	1.7	200	0.37	<0.25	950
	TMW31S102021	10/07/2021	6.7	<0.60	1.2	170	<0.05	<2.5	780
	TMW31S042021	04/26/2021	7.4	<0.30	NA	NA	NA	NA	NA
	TMW31S102020	10/01/2020	6.73	<0.12	NA	NA	NA	NA	NA
TMW33	TMW33042022	04/15/2022	0.076 J	<0.06	2.4	950	0.45	<0.25	3,300
	TMW33102021	10/15/2021	<0.06	<2.4	2.2	2,400	<0.05	<0.25	4,500
	TMW33042021	04/16/2021	<0.12	<0.30	NA	NA	NA	NA	NA
	TMW33102020	10/01/2020	<0.06	<0.60	NA	NA	NA	NA	NA
TMW34	TMW34042022	04/19/2022	68	<0.12	0.98	260	0.37	<0.25	1,800
	TMW34042022DUP	04/19/2022	66	<0.12	1.0	230	0.38	<0.25	1,700
	TMW34102021	10/13/2021	66	<2.4	0.78	260	<0.05	10	1,500
	TMW34102021DUP	10/13/2021	66	<2.4	0.78	250	<0.05	10	1,600
	TMW34042021	04/20/2021	59	<0.12	NA	NA	NA	NA	NA
	TMW34102020	10/05/2020	66.9	<0.30	NA	NA	NA	NA	NA

TABLE B-1: SUMMARY OF INORGANIC ANIONS ANALYTICAL RESULTS
2024 INTERIM NORTHERN AREA GROUNDWATER MONITORING PLAN
Fort Wingate Depot Activity, New Mexico

Well ID	Sample ID	Date	Nitrate	Nitrite	Bromide	Chloride	Fluoride	Phosphate	Sulfate
			mg/L						
SL			10	1	-	250	1.6	-	600
TMW35	TMW35042022	04/20/2022	6.4	<0.06	0.64	290	0.67	<0.25	1,300
	TMW35102021	10/06/2021	6.4	<0.60	0.47 J	260	<0.05	<0.25	1,100
	TMW35042021	04/21/2021	6.8	<0.30	NA	NA	NA	NA	NA
	TMW35102020	10/06/2020	7.38	<0.30	NA	NA	NA	NA	NA
TMW39S	TMW39S042022	04/13/2022	9.4	<0.06	2.1	440	0.56	<0.25	1,600
	TMW39S102021	10/15/2021	9.6	<0.30	0.99	210	0.37	<1.2	880
	TMW39S042021	04/26/2021	8.1	<0.06	NA	NA	NA	NA	NA
	TMW39S102020	10/01/2020	8.14	<0.30	NA	NA	NA	NA	NA
TMW41	TMW41042022	04/15/2022	4.9	<0.06	1.7	260	0.78	<0.25	950
	TMW41102021	10/15/2021	4.9	<0.30	0.95	240	<0.05	<1.2	740
	TMW41042021	04/16/2021	4.6	<0.12	NA	NA	NA	NA	NA
	TMW41102020	10/01/2020	4.8	<0.30	NA	NA	NA	NA	NA
TMW43	TMW43042022	04/19/2022	5.2	<0.06	0.68	71	1.4	<0.25	450
	TMW43102021	10/12/2021	6.5	<0.60	0.45 J	73	<0.05	<1.2	400
	TMW43042021	04/16/2021	6.0	<0.06	NA	NA	NA	NA	NA
	TMW43102020	10/02/2020	5.77	<0.12	NA	NA	NA	NA	NA
TMW44	TMW44042022	04/12/2022	53	<0.06	0.73	110	1.1	<0.25	780
	TMW44102021	10/05/2021	47	<0.30	0.47 J	120	0.85	<0.25	760
	TMW44042021	04/12/2021	42	<0.30	NA	NA	NA	NA	NA
	TMW44102020	09/29/2020	45.5	<0.12	NA	NA	NA	NA	NA
TMW45	TMW45042022	04/19/2022	1.6	<0.06	0.62	230	0.74	<0.25	630
	TMW45102021	10/12/2021	1.2	<2.4	0.45 J	200	0.60	<0.25	550
	TMW45102021DUP	10/12/2021	1.3	<2.4	0.45 J	220	0.60	<0.25	590
	TMW45042021	04/20/2021	1.2	<0.30	NA	NA	NA	NA	NA
	TMW45102020	10/05/2020	1.06	<0.30	NA	NA	NA	NA	NA
TMW46	TMW46042022	04/12/2022	77	<0.06	1.2	380	0.32	<0.25	1,900
	TMW46102021	10/05/2021	71	<0.30	<0.25	250	<0.05	<0.25	1,800
	TMW46042021	04/13/2021	66	<0.60	NA	NA	NA	NA	NA
	TMW46102020	09/29/2020	73.2	<0.30	NA	NA	NA	NA	NA
TMW47	TMW47042022	04/21/2022	<0.06	<0.06	0.45 J	92	2.2	<0.25	810
	TMW47102021	10/14/2021	<0.06	<1.2	0.38 J	73	1.8	<0.25	600
	TMW47042021	04/23/2021	<0.06	<0.06	NA	NA	NA	NA	NA
	TMW47102020	10/07/2020	<0.06	<0.06	NA	NA	NA	NA	NA
TMW57	TMW57042022	04/18/2022	1.3	<0.06	0.72	65	2.4	<0.25	230
	TMW57102021	10/11/2021	1.2	<2.4	0.47 J	80	2.1	<0.25	280
	TMW57042021	04/19/2021	1.4	<0.06	NA	NA	NA	NA	NA
TMW59	TMW59042022	04/18/2022	37	<0.06	0.69	97	1.1	<0.25	820
	TMW59102021	10/11/2021	35	<0.60	0.44 J	97	0.91	<2.5	760
	TMW59042021	04/23/2021	38	0.34 J	NA	NA	NA	NA	NA
TMW61	TMW61042022	04/18/2022	20	<0.30	1.4	620	0.74	<0.25	1,900
	TMW61102021	10/13/2021	19	<1.2	2.9 J	530	0.74 J	<2.5	1,600
	TMW61042021	04/26/2021	20	<0.12	NA	NA	NA	NA	NA
TMW62	TMW62042022	04/15/2022	23	<0.06	0.56	77	1.1	<0.25	1,300
	TMW62102021	10/08/2021	21	<0.60	0.36 J	65	<0.05	<2.5	640
	TMW62042021	04/21/2021	21	<0.06	NA	NA	NA	NA	NA

TABLE B-1: SUMMARY OF INORGANIC ANIONS ANALYTICAL RESULTS
2024 INTERIM NORTHERN AREA GROUNDWATER MONITORING PLAN
Fort Wingate Depot Activity, New Mexico

Well ID	Sample ID	Date	Nitrate	Nitrite	Bromide	Chloride	Fluoride	Phosphate	Sulfate
			mg/L						
SL			10	1	-	250	1.6	-	600
Bedrock Wells									
BGMW07	BGMW07042022	04/11/2022	0.94 J	<1.2	9.4 J	14,000	<1.0	<5	1,500
	BGMW07102021	10/04/2021	<1.2	<6	6.2 J	9,800	<1.0	<5	1,200
	BGMW07042021	04/12/2021	<0.30	<6.0	NA	NA	NA	NA	NA
	BGMW07102020	10/05/2020	<0.30	<2.5	NA	NA	NA	NA	NA
BGMW08	BGMW08042022	04/11/2022	1.2	<0.60	4.9 J	5,900	0.35 J	<2.5	2,700
	BGMW08102021	10/04/2021	0.24	<2.4	2.8	4,500	<0.10	<0.50	2,100
	BGMW08042021	04/13/2021	<0.30	<6.0	NA	NA	NA	NA	NA
	BGMW08102020	10/05/2020	0.35	<2.5	NA	NA	NA	NA	NA
BGMW09	BGMW09042022	04/12/2022	1.3	<0.06	0.41 J	500	0.95	<0.25	1,800
	BGMW09042022DUP	04/12/2022	1.2	<0.06	0.39 J	550	0.95	<0.25	1,900
	BGMW09102021	10/06/2021	0.87	<0.60	<0.25	480	<0.05	<0.25	1,700
	BGMW09042021	04/23/2021	0.51	<0.30	NA	NA	NA	NA	NA
	BGMW09102020	09/29/2020	0.35	<0.30	NA	NA	NA	NA	NA
BGMW10	BGMW10042022	04/12/2022	0.075 J	<0.06	0.49 J	94	0.66	<0.25	920
	BGMW10102021	10/07/2021	0.065 J	<0.06	0.36 J	70	0.56	<0.25	780
	BGMW10102021DUP	10/07/2021	0.072 J	<0.06	0.36 J	70	0.56	<0.25	800
	BGMW10042021	04/16/2021	0.075 J	<0.06	NA	NA	NA	NA	NA
	BGMW10102020	09/29/2020	<0.06	<0.06	NA	NA	NA	NA	NA
TMW14A	TMW14A042022	04/18/2022	<0.06	<0.06	0.81	160	0.54	<0.25	350
	TMW14A102021	10/12/2021	<0.06	<1.2	0.67	160	0.46	<0.25	350
	TMW14A102021DUP	10/12/2021	<0.06	<1.2	0.67	170	0.46	<0.25	350
	TMW14A042021	04/19/2021	<0.06	<0.06	NA	NA	NA	NA	NA
	TMW14A102020	10/02/2020	<0.06	<0.12	NA	NA	NA	NA	NA
TMW17	TMW17042022	04/18/2022	<0.06	<0.06	0.53	130	0.84	<0.25	480
	TMW17102021	10/13/2021	0.056 J	<1.2	0.45 J	140	0.81	<0.25	430
	TMW17042021	04/19/2021	<0.06	<0.06	NA	NA	NA	NA	NA
	TMW17042021DUP	04/19/2021	<0.06	<0.06	NA	NA	NA	NA	NA
	TMW17102020	10/02/2020	0.23	<0.12	NA	NA	NA	NA	NA
TMW18	TMW18042022	04/11/2022	0.054 J	<0.06	0.32 J	120	2.2	<0.25	1,000
	TMW18102021	10/05/2021	0.17	<0.30	<0.25	83	2.1	<0.25	940
	TMW18042021	04/12/2021	0.10	<0.30	NA	NA	NA	NA	NA
	TMW18102020	10/05/2020	0.094 J	<0.12	NA	NA	NA	NA	NA
TMW30	TMW30042022	04/13/2022	15	<0.06	0.88	120	0.44	<0.25	690
	TMW30102021	10/06/2021	13	<0.60	<0.25	84	0.35	<0.25	580
	TMW30042021	04/14/2021	12.0	<0.30	NA	NA	NA	NA	NA
	TMW30102020	09/30/2020	14.1	<0.12	NA	NA	NA	NA	NA
TMW31D	TMW31D042022	04/19/2022	9.2	<0.06	1.1	290	0.38	<0.25	1,200
	TMW31D102021	10/12/2021	9.6	<0.60	0.66	140	<0.05	<2.5	760
	TMW31D042021	04/20/2021	9.6	<0.06	NA	NA	NA	NA	NA
	TMW31D102020	10/02/2020	11.2	<0.30	NA	NA	NA	NA	NA
TMW32	TMW32042022	04/21/2022	2.1	<0.06	0.92	200	0.67	<0.25	1,300
	TMW32102021	10/14/2021	2.1	<1.2	<0.25	170	0.54	<0.25	740
	TMW32042021	04/26/2021	3.0	<0.12	NA	NA	NA	NA	NA
	TMW32102020	10/07/2020	2.28	<0.12	NA	NA	NA	NA	NA

TABLE B-1: SUMMARY OF INORGANIC ANIONS ANALYTICAL RESULTS
2024 INTERIM NORTHERN AREA GROUNDWATER MONITORING PLAN
Fort Wingate Depot Activity, New Mexico

Well ID	Sample ID	Date	Nitrate	Nitrite	Bromide	Chloride	Fluoride	Phosphate	Sulfate
			mg/L						
SL			10	1	–	250	1.6	–	600
TMW36	TMW36042022	04/11/2022	<0.06	<0.06	0.45 J	140	0.72	0.28 J	1,000
	TMW36102021	10/13/2021	<0.06	<2.4	0.36 J	130	0.61	<0.25	820
	TMW36042021	04/12/2021	<0.06	<0.30	NA	NA	NA	NA	NA
	TMW36102020	10/05/2020	0.11	<0.12	NA	NA	NA	NA	NA
TMW37	TMW37042022	04/12/2022	<0.06	<0.06	0.61	290	1.0	<0.25	720
	TMW37102021	10/06/2021	<0.06	<0.60	<0.25	210	0.88	<0.25	650
	TMW37042021	04/13/2021	<0.06	<0.60	NA	NA	NA	NA	NA
	TMW37102020	09/29/2020	0.048 J	<0.30	NA	NA	NA	NA	NA
TMW38	TMW38042022	04/21/2022	<0.06	<0.06	0.49 J	240	1.9	<0.25	1,000
	TMW38102021	10/13/2021	<0.06	<2.4	0.36 J	300	1.5	<0.25	790
	TMW38042021	04/26/2021	<0.06	<0.06	NA	NA	NA	NA	NA
	TMW38102020	10/06/2020	<0.06	<0.30	NA	NA	NA	NA	NA
TMW39D	TMW39D042022	04/22/2022	0.22	<0.06	0.74	350	0.81	<0.25	1,100
	TMW39D102021	10/13/2021	<0.06	<2.4	0.53	360	0.69	<0.25	940
	TMW39D042021	04/23/2021	0.30	<0.30	NA	NA	NA	NA	NA
	TMW39D102020	10/07/2020	0.055 J	<0.30	NA	NA	NA	NA	NA
TMW40D	TMW40D042022	04/22/2022	1.5	0.077 J	0.87	170	0.43	<0.25	1,100
	TMW40D102021	10/15/2021	1.4	<1.2	<0.25	130	0.36	<0.25	900
	TMW40D042021	04/23/2021	1.7	<0.30	NA	NA	NA	NA	NA
	TMW40D102020	10/07/2020	1.68	<0.30	NA	NA	NA	NA	NA
TMW48	TMW48042022	04/22/2022	9.7	<0.06	1.0	160	0.31	<0.25	1,000
	TMW48102021	10/15/2021	9.3	<0.60	0.90	140	<0.05	<2.5	860
	TMW48042021	04/23/2021	13.0	<0.30	NA	NA	NA	NA	NA
	TMW48102020	10/08/2020	11.2	<0.12	NA	NA	NA	NA	NA
TMW49	TMW49042022	04/22/2022	0.97	<0.06	0.84	390	0.58	<0.25	1,800
	TMW49102021	10/15/2021	1.9	<1.2	<0.25	330	0.44	<0.25	1,200
	TMW49042021	04/23/2021	3.3	<0.30	NA	NA	NA	NA	NA
	TMW49102020	10/08/2020	3.03	<0.30	NA	NA	NA	NA	NA
TMW50	TMW50042022	04/13/2022	0.078 J	<0.06	1.1	230	0.48	<0.25	620
	TMW50042022DUP	04/13/2022	0.070 J	<0.06	1.1	190	0.47	<0.25	570
	TMW50102021	10/06/2021	<0.06	<0.30	<0.25	180	0.40	<0.25	500
	TMW50042021	04/14/2021	<0.06	<0.60	NA	NA	NA	NA	NA
TMW51	TMW51042022	04/14/2022	7.0	<0.06	1.0	130	0.43	<0.25	950
	TMW51102021	10/04/2021	6.5	<0.06	0.73	110	0.36	<0.25	860
	TMW51042021	04/14/2021	5.2	<0.60	NA	NA	NA	NA	NA
TMW52	TMW52042022	04/18/2022	0.14	<0.06	0.43 J	70	2.0	<0.25	420
	TMW52102021	10/11/2021	0.16	<2.4	0.28 J	73	1.8	<0.25	400
	TMW52042021	04/19/2021	0.13	<0.06	NA	NA	NA	NA	NA
TMW53	TMW53042022	04/18/2022	<0.06	<0.06	0.39 J	89	3.1	<0.25	250
	TMW53102021	10/11/2021	0.058 J	<1.2	0.25 J	90	3.8	<0.25	250
	TMW53042021	04/19/2021	<0.06	<0.06	NA	NA	NA	NA	NA
TMW55	TMW55042022	04/15/2022	0.045 J	<0.06	0.63	150	0.77	<0.25	860
	TMW55102021	10/15/2021	0.042 J	<0.06	0.40 J	130	0.067 J	<0.25	610
	TMW55102021	10/08/2021	<0.06	<0.06	0.47 J	130	0.69	<0.25	730
	TMW55042021	04/16/2021	0.080 J	<0.12	NA	NA	NA	NA	NA

TABLE B-1: SUMMARY OF INORGANIC ANIONS ANALYTICAL RESULTS
2024 INTERIM NORTHERN AREA GROUNDWATER MONITORING PLAN
Fort Wingate Depot Activity, New Mexico

Well ID	Sample ID	Date	Nitrate	Nitrite	Bromide	Chloride	Fluoride	Phosphate	Sulfate
			mg/L						
SL			10	1	–	250	1.6	–	600
TMW58	TMW58042022	04/12/2022	0.070 J	<0.06	0.46 J	120	1.5	<0.25	980
	TMW58102021	10/05/2021	0.089 J	<0.12	<0.25	100	1.3	<0.25	730
	TMW58042021	04/13/2021	<0.12	<0.30	NA	NA	NA	NA	NA
TMW63	TMW63042022	04/13/2022	<0.06	<0.06	0.55	140	0.61	<0.25	1,100
	TMW63102021	10/06/2021	<0.06	<0.60	<0.25	120	0.52	<0.25	940
	TMW63042021	04/14/2021	<0.06	<0.60	NA	NA	NA	NA	NA
TMW64	TMW64042022	04/19/2022	0.45	<0.06	1.0	170	0.22	<0.25	1,000
	TMW64102021	10/12/2021	0.43	<2.4	<0.25	290	0.18	<0.25	750
	TMW64042021	04/20/2021	0.44	<0.06	NA	NA	NA	NA	NA

NOTES & ABBREVIATIONS:

mg/L = milligrams per liter
< = less than LOD
NA = not analyzed
J = estimated value
– = not established or not applicable
SL = Screening Level
Number = Result exceeds cited (lowest) SL.

TABLE B-2: SUMMARY OF EXPLOSIVES ANALYTICAL RESULTS
2024 INTERIM NORTHERN AREA GROUNDWATER MONITORING PLAN
Fort Wingate Depot Activity, New Mexico

[illegible]

TABLE B-2: SUMMARY OF EXPLOSIVES ANALYTICAL RESULTS
2024 INTERIM NORTHERN AREA GROUNDWATER MONITORING PLAN
Fort Wingate Depot Activity, New Mexico

[illegible]

TABLE B-2: SUMMARY OF EXPLOSIVES ANALYTICAL RESULTS
2024 INTERIM NORTHERN AREA GROUNDWATER MONITORING PLAN
Fort Wingate Depot Activity, New Mexico

Well ID	Sample ID	Date	1,3,5-Trinitrobenzene	1,3-Dinitrobenzene	2,4,6-Trinitrotoluene	2,4-Dinitrotoluene	2,6-Dinitrotoluene	2-Am-DNT	2-Nitrotoluene	3,5-Dinitroaniline	3-Nitrotoluene	4-Am-DNT	4-Nitrotoluene	HMX	Nitrobenzene	Nitroglycerin	PETN	RDX	Tetryl
			µg/L																
			590	2	9.8	2.4	0.49	1.9	3.1	7.7	1.7	1.9	43	1,000	1.4	2	170	9.7	39
MW34	MW34042022	04/18/2022	<0.32	<0.32	<0.32	<0.32	<0.32	<0.32	<0.32	<1.2	<0.32	<0.32	<0.60	<0.32	<0.32	<0.66	<0.40	<0.32	<0.32
	MW34102021	10/11/2021	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<62	<62	<0.20	<0.20
	MW34042021	04/19/2021	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<62	<62	<0.20	<0.20
	MW34042021DUP	04/19/2021	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<62	<62	<0.20	<0.20
MW35	MW35042022	04/20/2022	<0.32	<0.32	<0.32	<0.32	<0.32	<0.32	<0.32	<1.2	<0.32	<0.32	<0.60	<0.32	<0.32	<0.66	<0.40	<0.32	<0.32
	MW35042022DUP	04/20/2022	<0.32	<0.32	<0.32	<0.32	<0.32	<0.32	<0.32	<1.2	<0.32	<0.32	<0.60	<0.32	<0.32	<0.66	<0.40	<0.32	<0.32
	MW35102021	10/13/2021	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<62	<62	<0.20	<0.20
	MW35102021DUP	10/13/2021	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<62	<62	<0.20	<0.20
MW36D	MW35042021	04/21/2021	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<62	<62	<0.20	<0.20
	MW36D042022	04/18/2022	<0.32	<0.32	<0.32	<0.32	<0.32	<0.32	<0.32	<1.2	<0.32	<0.32	<0.60	<0.32	<0.32	<0.66	<0.40	<0.32	<0.32
	MW36D042022DUP	04/18/2022	<0.32	<0.32	<0.32	<0.32	<0.32	<0.32	<0.32	<1.2	<0.32	<0.32	<0.60	<0.32	<0.32	<0.66	<0.40	<0.32	<0.32
	MW36D102021	10/11/2021	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<62	<62	<0.20	<0.20
MW36S	MW36D042021	04/19/2021	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<62	<62	<0.20	<0.20
	MW36S042022	04/18/2022	<0.32	<0.32	<0.32	<0.32	<0.32	<0.32	<0.32	<1.2	<0.32	<0.32	<0.60	<0.32	<0.32	<0.66	<0.40	<0.32	<0.32
	MW36S102021	10/11/2021	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<62	<62	<0.20	<0.20
	MW36S042021	04/19/2021	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<62	<62	<0.20	<0.20
MW37	MW37042022	04/20/2022	<0.32	<0.32	<0.32	<0.32	<0.32	<0.32	<0.32	<1.2	<0.32	<0.32	<0.60	<0.32	<0.32	<0.66	<0.40	<0.32	<0.32
	MW37102021	10/13/2021	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<62	<62	<0.20	<0.20
	MW37042021	04/21/2021	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<62	<62	<0.20	<0.20
	MW38042022	04/22/2022	<0.32	<0.32	<0.32	<0.32	<0.32	<0.32	<0.32	<1.2	<0.32	<0.32	<0.60	<0.32	<0.32	<0.66	<0.40	<0.32	<0.32
MW38	MW38102021	10/14/2021	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<62	<62	<0.20	<0.20
	MW38042021	04/23/2021	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<62	<62	<0.20	<0.20
	MW39042022	04/22/2022	<0.32	<0.32	<0.32	<0.32	<0.32	<0.32	<0.32	<1.2	<0.32	<0.32	<0.60	<0.32	<0.32	<0.66	<0.40	<0.32	<0.32
	MW39102021	10/14/2021	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<62	<62	<0.20	<0.20
SMW01	MW39042021	04/23/2021	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<62	<62	<0.20	<0.20
	SMW01042022	04/12/2022	<0.32	<0.32	<0.32	<0.32	<0.32	<0.32	<0.32	<1.2	<0.32	<0.32	<0.60	<0.32	<0.32	<0.66	<0.40	<0.32	<0.32
	SMW01102021	10/08/2021	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<62	<62	<0.20	<0.20
	SMW01042021	04/13/2021	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<62	<62	<0.20	<0.20
TMW01	SMW01042021DUP	04/13/2021	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<62	<62	<0.20	<0.20
	SMW01102020	09/29/2020	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<62	<62	<0.20	<0.20
	TMW01042022	04/15/2022	<0.32	<0.32	<0.32	<0.32	<0.32	<0.32	<0.32	<1.2	<0.32	<0.32	<0.60	<0.32	<0.32	<0.66	<0.40	<0.32	<0.32
	TMW01102021	10/08/2021	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<62	<62	<0.20	<0.20
TMW02	TMW01042021	04/15/2021	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<62	<62	<0.20	<0.20
	TMW01102020	10/01/2020	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<62	<62	<0.20	<0.20
	TMW02042022	04/15/2022	<0.32	<0.32	<0.32	<0.32	<0.32	<0.32	<0.32	<1.2	<0.32	<0.32	<0.60	<0.32	<0.32	<0.66	<0.40	<0.32	<0.32
	TMW02042022DUP	04/15/2022	<0.32	<0.32	<0.32	<0.32	<0.32	<0.32	<0.32	<1.2	<0.32	<0.32	<0.60	<0.32	<0.32	<0.66	<0.40	<0.32	<0.32
TMW03	TMW02102021	10/08/2021	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	0.31 J	<0.20	<0.20	<0.20	<0.20	<0.20	<62	<62	<0.20	<0.20
	TMW02102021DUP	10/08/2021	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	0.20 J	<0.20	<0.20	<0.20	<0.20	<0.20	<62	<62	<0.20	<0.20
	TMW02042021	04/16/2021	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<62	<62	<0.20	<0.20
	TMW02042021DUP	04/16/2021	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<62	<62	<0.20	<0.20
TMW03	TMW02102020	10/02/2020	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<62	<62	<0.20	<0.20
	TMW03042022	04/19/2022	0.70	<0.32	<0.32	0.30 J	<0.32	0.46 J	<0.32	5.4	<0.32	0.55	<0.60	5.3	<0.32	<0.66	<0.40	304	<0.32
	TMW03102021	10/14/2021	0.74 J	<0.20	<0.20	0.79 J	<0.20	0.65 J	<0.20	7.0	<0.20	1.1	<0.20	6.2	<0.20	<62	<62	430	<0.20
	TMW03042021	04/23/2021	<0.20	<0.20	<0.20	<0.20	<0.20	0.65 J	<0.20	<0.20	<0.20	1.0	<0.20	6.1	<0.20	<62	<62	590	<0.20
TMW03	TMW03102020	10/07/2020	0.62 J	<0.20	<0.20	0.43 J	<0.20	0.53 J	<0.20	5.9	<0.20	1.1	<0.20	6.0	<0.20	<62	<62	390	<0.20

TABLE B-2: SUMMARY OF EXPLOSIVES ANALYTICAL RESULTS
2024 INTERIM NORTHERN AREA GROUNDWATER MONITORING PLAN
Fort Wingate Depot Activity, New Mexico

Well ID	Sample ID	Date	1,3,5-Trinitrobenzene	1,3-Dinitrobenzene	2,4,6-Trinitrotoluene	2,4-Dinitrotoluene	2,6-Dinitrotoluene	2-Am-DNT	2-Nitrotoluene	3,5-Dinitroaniline	3-Nitrotoluene	4-Am-DNT	4-Nitrotoluene	HMX	Nitrobenzene	Nitroglycerin	PETN	RDX	Tetryl
			µg/L																
			590	2	9.8	2.4	0.49	1.9	3.1	7.7	1.7	1.9	43	1,000	1.4	2	170	9.7	39
TMW04	TMW04042022	04/15/2022	2.1	<0.32	<0.32	<0.32	<0.32	0.80	0.18 J	0.85 J	<0.32	0.95	<0.60	<0.32	<0.32	<0.66	<0.40	1.7	<0.32
	TMW04102021	10/11/2021	1.0	<0.20	<0.20	<0.20	<0.20	0.93 J	1.0	0.82	<0.20	1.1	<0.20	<0.20	<0.20	<62	<62	1.2	<0.20
	TMW04042021	04/16/2021	<0.20	<0.20	<0.20	<0.20	<0.20	0.86 J	0.45 J	0.66	<0.20	0.96 J	<0.20	<0.20	<0.20	<62	<62	1.5	<0.20
	TMW04102020	10/02/2020	2.0	<0.20	<0.20	<0.20	<0.20	0.95 J	<0.20	0.96	<0.20	1.2	<0.20	<0.20	<0.20	<62	<62	2.1	<0.20
TMW06	TMW06042022	04/20/2022	<0.32	<0.32	<0.32	<0.32	<0.32	<0.32	<0.32	<1.2	<0.32	<0.32	<0.60	<0.32	<0.32	<0.66	<0.40	<0.32	<0.32
	TMW06102021	10/14/2021	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<62	<62	<0.20	<0.20
	TMW06102021DUP	10/14/2021	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<62	<62	<0.20	<0.20
	TMW06042021	04/21/2021	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<62	<62	<0.20	<0.20
TMW07	TMW06102020	10/06/2020	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<62	<62	<0.20	<0.20
	TMW07042022	04/15/2022	<0.32	<0.32	<0.32	<0.32	<0.32	<0.32	<0.32	<1.2	<0.32	<0.32	<0.60	<0.32	<0.32	<0.66	<0.40	<0.32	<0.32
	TMW07102021	10/08/2021	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<62	<62	<0.20	<0.20
	TMW07042021	04/16/2021	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<62	<62	<0.20	<0.20
TMW10	TMW07102020	10/01/2020	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<62	<62	<0.20	<0.20
	TMW07102020DUP	10/01/2020	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<62	<62	<0.20	<0.20
	TMW10042022	04/14/2022	<0.32	<0.32	<0.32	<0.32	<0.32	<0.32	<0.32	<1.2	<0.32	<0.32	<0.60	<0.32	<0.32	<0.66	<0.40	<0.32	<0.32
	TMW10102021	10/07/2021	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<62	<62	<0.20	<0.20
TMW15	TMW10042021	04/15/2021	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<62	<62	<0.20	<0.20
	TMW10102020	10/01/2020	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<62	<62	<0.20	<0.20
	TMW15042022	04/20/2022	<0.32	<0.32	<0.32	<0.32	<0.32	<0.32	<0.32	<1.2	<0.32	<0.32	<0.60	<0.32	<0.32	<0.66	<0.40	<0.32	<0.32
	TMW15102021	10/07/2021	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<62	<62	<0.20	<0.20
TMW21	TMW15042021	04/21/2021	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<62	<62	<0.20	<0.20
	TMW15102020	10/05/2020	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<62	<62	<0.20	<0.20
	TMW15102020DUP	10/05/2020	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<62	<62	<0.20	<0.20
	TMW21042022	04/21/2022	<0.32	<0.32	<0.32	<0.32	<0.32	<0.32	<0.32	<1.2	<0.32	<0.32	<0.60	<0.32	<0.32	<0.66	<0.40	<0.32	<0.32
TMW22	TMW21042021	10/13/2021	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	0.46 J	<62	<62	<0.20	<0.20
	TMW21042021	04/22/2021	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<62	<62	<0.20	<0.20
	TMW21102020	10/07/2020	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<62	<62	<0.20	<0.20
	TMW22042022	04/15/2022	<0.32	<0.32	<0.32	<0.32	<0.32	<0.32	<0.32	<1.2	<0.32	<0.32	<0.60	<0.32	<0.32	<0.66	<0.40	<0.32	<0.32
TMW23	TMW22042021	10/08/2021	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<62	<62	<0.20	<0.20
	TMW22042021	04/21/2021	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<62	<62	<0.20	<0.20
	TMW22102020	10/01/2020	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<62	<62	<0.20	<0.20
	TMW23042022	04/15/2022	<0.32	<0.32	<0.32	<0.32	<0.32	<0.32	<0.32	<1.2	<0.32	<0.32	<0.60	<0.32	<0.32	<0.66	<0.40	60	<0.32
TMW24	TMW23102021	10/08/2021	<0.10	<0.10	<0.10	<0.10	<0.10	<0.10	<0.10	<0.10	<0.10	<0.10	<0.10	<0.10	<0.10	<31	<31	53	<0.10
	TMW23042021	04/16/2021	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<62	<62	59	<0.20
	TMW23102020	10/01/2020	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<62	<62	62	<0.20
	TMW24042022	04/19/2022	<0.32	<0.32	<0.32	<0.32	<0.32	<0.32	<0.32	<1.2	<0.32	<0.32	<0.60	<0.32	<0.32	<0.66	<0.40	<0.32	<0.32
TMW25	TMW24102021	10/14/2021	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<62	<62	<0.20	<0.20
	TMW24042021	04/19/2021	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<62	<62	<0.20	<0.20
	TMW24102020	10/01/2020	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<62	<62	<0.20	<0.20
	TMW25042022	04/21/2022	<0.32	<0.32	<0.32	<0.32	<0.32	<0.32	<0.32	<1.2	<0.32	<0.32	<0.60	<0.32	<0.32	<0.66	<0.40	<0.32	<0.32
TMW26	TMW25042021	10/13/2021	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<62	<62	<0.20	<0.20
	TMW25042021	04/22/2021	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<62	<62	<0.20	<0.20
	TMW25042021DUP	04/22/2021	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<62	<62	<0.20	<0.20
	TMW25102020	10/07/2020	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<62	<62	<0.20	<0.20
TMW26	TMW26042022	04/13/2022	<0.32	<0.32	<0.32	<0.32	<0.32	<0.32	<0.32	<1.2	<0.32	<0.32	<0.60	<0.32	<0.32	<0.66	<0.40	<0.32	<0.32
	TMW26102021	10/04/2021	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<62	<62	<0.20	<0.20
	TMW26042021	04/13/2021	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<62	<62	<0.20	<0.20
	TMW26102020	09/30/2020	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<62	<62	<0.20	<0.20

TABLE B-2: SUMMARY OF EXPLOSIVES ANALYTICAL RESULTS
2024 INTERIM NORTHERN AREA GROUNDWATER MONITORING PLAN
Fort Wingate Depot Activity, New Mexico

Well ID	Sample ID	Date	1,3,5-Trinitrobenzene	1,3-Dinitrobenzene	2,4,6-Trinitrotoluene	2,4-Dinitrotoluene	2,6-Dinitrotoluene	2-Am-DNT	2-Nitrotoluene	3,5-Dinitroaniline	3-Nitrotoluene	4-Am-DNT	4-Nitrotoluene	HMX	Nitrobenzene	Nitroglycerin	PETN	RDX	Tetryl
			µg/L																
SL			590	2	9.8	2.4	0.49	1.9	3.1	7.7	1.7	1.9	43	1,000	1.4	2	170	9.7	39
TMW29	TMW29042022	04/15/2022	<0.32	<0.32	<0.32	<0.32	<0.32	<0.32	<0.32	<1.2	<0.32	<0.32	<0.60	<0.32	<0.32	<0.66	<0.40	<0.32	<0.32
	TMW29102021	10/08/2021	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<62	<62	<0.20	<0.20
	TMW29042021	04/21/2021	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<62	<62	<0.20	<0.20
	TMW29102020	10/01/2020	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<62	<62	<0.20	<0.20
TMW31S	TMW31S042022	04/14/2022	<0.32	<0.32	<0.32	<0.32	<0.32	<0.32	<0.32	<1.2	<0.32	<0.32	<0.60	<0.32	<0.32	<0.66	<0.40	<0.32	<0.32
	TMW31S102021	10/07/2021	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<62	<62	<0.20	<0.20
	TMW31S042021	04/26/2021	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<62	<62	<0.20	<0.20
	TMW31S102020	10/01/2020	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<62	<62	<0.20	<0.20
TMW39S	TMW39S042022	04/13/2022	<0.32	<0.32	<0.32	<0.32	<0.32	<0.32	<0.32	<1.2	<0.32	<0.32	<0.60	<0.32	<0.32	<0.66	<0.40	<0.32	<0.32
	TMW39S102021	10/08/2021	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<62	<62	<0.20	<0.20
	TMW39S042021	04/26/2021	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<62	<62	<0.20	<0.20
	TMW39S102020	10/01/2020	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<62	<62	<0.20	<0.20
TMW41	TMW41042022	04/15/2022	<0.32	<0.32	<0.32	<0.32	<0.32	<0.32	<0.32	<1.2	<0.32	<0.32	<0.60	<0.32	<0.32	<0.66	<0.40	<0.32	<0.32
	TMW41102021	10/08/2021	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<62	<62	<0.20	<0.20
	TMW41042021	04/16/2021	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<62	<62	<0.20	<0.20
	TMW41102020	10/01/2020	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<62	<62	<0.20	<0.20
TMW43	TMW43042022	04/19/2022	<0.32	<0.32	<0.32	<0.32	<0.32	<0.32	<0.32	<1.2	<0.32	<0.32	<0.60	<0.32	<0.32	<0.66	<0.40	2.0	<32
	TMW43102021	10/12/2021	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<62	<62	2.1	<20
	TMW43042021	04/16/2021	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<62	<62	2.2	<20
	TMW43102020	10/02/2020	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<62	<62	1.9	<20
TMW44	TMW44042022	04/12/2022	<0.32	<0.32	<0.32	<0.32	<0.32	<0.32	<0.32	<1.2	<0.32	<0.32	<0.60	<0.32	<0.32	<0.66	<0.40	<0.32	<0.32
	TMW44102021	10/05/2021	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<62	<62	<0.20	<0.20
	TMW44042021	04/12/2021	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<62	<62	<0.20	<0.20
	TMW44102020	09/29/2020	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<62	<62	<0.20	<0.20
TMW45	TMW45042022	04/19/2022	<0.32	<0.32	<0.32	<0.32	<0.32	<0.32	<0.32	<1.2	<0.32	<0.32	<0.60	<0.32	<0.32	<0.66	<0.40	<0.32	<0.32
	TMW45102021	10/12/2021	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<62	<62	<0.20	<0.20
	TMW45102021DUP	10/12/2021	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<62	<62	<0.20	<0.20
	TMW45042021	04/20/2021	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<62	<62	<0.20	<0.20
TMW46	TMW45102020	10/05/2020	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<62	<62	<0.20	<0.20
	TMW46042022	04/12/2022	<0.32	<0.32	<0.32	<0.32	<0.32	<0.32	<0.32	<1.2	<0.32	<0.32	<0.60	<0.32	<0.32	<0.66	<0.40	<0.32	<0.32
	TMW46102021	10/05/2021	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<62	<62	<0.20	<0.20
	TMW46042021	04/13/2021	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<62	<62	<0.20	<0.20
TMW47	TMW46102020	09/29/2020	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<62	<62	<0.20	<0.20
	TMW47042022	04/21/2022	<0.32	<0.32	<0.32	<0.32	<0.32	<0.32	<0.32	<1.2	<0.32	<0.32	<0.60	<0.32	<0.32	<0.66	<0.40	<0.32	<0.32
	TMW47102021	10/14/2021	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	0.52 J	<62	<62	<0.20	<0.20
	TMW47042021	04/23/2021	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	0.74 J	<62	<62	<0.20	<0.20
TMW57	TMW47102020	10/07/2020	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<62	<62	<0.20	<0.20
	TMW57042022	04/18/2022	<0.32	<0.32	<0.32	<0.32	<0.32	<0.32	<0.32	<1.2	<0.32	<0.32	<0.60	<0.32	<0.32	<0.66	<0.40	<0.32	<0.32
	TMW57102021	10/11/2021	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<62	<62	<0.20	<0.20
	TMW57042021	04/19/2021	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<62	<62	<0.20	<0.20
TMW59	TMW59042022	04/18/2022	<0.32	<0.32	<0.32	<0.32	<0.32	<0.32	<0.32	<1.2	<0.32	<0.32	<0.60	<0.32	<0.32	<0.66	<0.40	80	<32
	TMW59102021	10/11/2021	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<62	<62	76	<20
	TMW59042021	04/23/2021	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<62	<62	88	<20
	TMW61042022	04/18/2022	<0.32	<0.32	<0.32	<0.32	<0.32	<0.32	<0.32	<1.2	<0.32	<0.32	<0.60	<0.32	<0.32	<0.66	<0.40	<0.32	<0.32
TMW61	TMW61102021	10/13/2021	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<62	<62	<0.20	<0.20
	TMW61042021	04/26/2021	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<62	<62	<0.20	<0.20

TABLE B-2: SUMMARY OF EXPLOSIVES ANALYTICAL RESULTS
2024 INTERIM NORTHERN AREA GROUNDWATER MONITORING PLAN
Fort Wingate Depot Activity, New Mexico

Well ID	Sample ID	Date	1,3,5-Trinitrobenzene	1,3-Dinitrobenzene	2,4,6-Trinitrotoluene	2,4-Dinitrotoluene	2,6-Dinitrotoluene	2-Am-DNT	2-Nitrotoluene	3,5-Dinitroaniline	3-Nitrotoluene	4-Am-DNT	4-Nitrotoluene	HMX	Nitrobenzene	Nitroglycerin	PETN	RDX	Tetryl
			µg/L																
			590	2	9.8	2.4	0.49	1.9	3.1	7.7	1.7	1.9	43	1,000	1.4	2	170	9.7	39
TMW62	TMW62042022	04/15/2022	<0.32	<0.32	<0.32	<0.32	<0.32	<0.32	<0.32	<1.2	<0.32	<0.32	<0.60	<0.32	<0.32	<0.66	<0.40	<0.32	<0.32
	TMW62102021	10/08/2021	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<62	<62	16	<0.20
	TMW62042021	04/21/2021	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<62	<62	15	<0.20
Bedrock Wells																			
BGMW07	BGMW07042022	04/11/2022	<0.80	<0.80	<0.80	<0.80	<0.80	<0.80	<0.82	<3.0	<0.80	<0.80	<1.5	<0.80	<0.80	<1.66	<1.0	<0.80	<0.80
	BGMW07102021	10/04/2021	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<62	<62	<0.20	<0.20
	BGMW07042021	04/12/2021	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<62	<62	<0.20	<0.20
BGMW08	BGMW07102020	09/28/2020	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<62	<62	<0.20	<0.20
	BGMW08042022	04/11/2022	<0.80	<0.80	<0.80	<0.80	<0.80	<0.80	<0.82	<3.0	<0.80	<0.80	<1.5	<0.80	<0.80	<1.66	<1.0	<0.80	<0.80
	BGMW08102021	10/04/2021	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<62	<62	<0.20	<0.20
BGMW09	BGMW08042021	04/13/2021	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<62	<62	<0.20	<0.20
	BGMW08102020	09/28/2020	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<62	<62	<0.20	<0.20
	BGMW09042022	04/12/2022	<0.32	<0.32	<0.32	<0.32	<0.32	<0.32	<0.32	<1.2	<0.32	<0.32	<0.60	<0.32	<0.32	<0.66	<0.40	<0.32	<0.32
BGMW10	BGMW09042022DUP	04/12/2022	<0.32	<0.32	<0.32	<0.32	<0.32	<0.32	<0.32	<1.2	<0.32	<0.32	<0.60	<0.32	<0.32	<0.66	<0.40	<0.32	<0.32
	BGMW09102021	10/06/2021	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<62	<62	<0.20	<0.20
	BGMW09042021	04/23/2021	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<62	<62	<0.20	<0.20
BGMW10	BGMW09102020	09/29/2020	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<62	<62	<0.20	<0.20
	BGMW10042022	04/12/2022	<0.32	<0.32	<0.32	<0.32	<0.32	<0.32	<0.32	<1.2	<0.32	<0.32	<0.60	<0.32	<0.32	<0.66	<0.40	<0.32	<0.32
	BGMW10102021	10/07/2021	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<62	<62	<0.20	<0.20
BGMW10	BGMW10102021DUP	10/07/2021	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<62	<62	<0.20	<0.20
	BGMW10042021	04/16/2021	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<62	<62	<0.20	<0.20
	BGMW10102020	09/29/2020	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<62	<62	<0.20	<0.20
TMW14A	TMW14A042022	04/18/2022	<0.32	<0.32	<0.32	<0.32	<0.32	<0.32	<0.32	<1.2	<0.32	<0.32	<0.60	<0.32	<0.32	<0.66	<0.40	<0.32	<0.32
	TMW14A102021	10/12/2021	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<62	<62	<0.20	<0.20
	TMW14A102021DUP	10/12/2021	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<62	<62	<0.20	<0.20
TMW14A	TMW14A042021	04/19/2021	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<62	<62	<0.20	<0.20
	TMW14A102020	10/02/2020	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<62	<62	<0.20	<0.20
	TMW16042022	04/11/2022	<0.80	<0.80	<0.80	<0.80	<0.80	<0.80	<0.82	<3.0	<0.80	<0.80	<1.5	<0.80	<0.80	<1.66	<1.0	<0.80	<0.80
TMW16	TMW16102021	10/04/2021	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<62	<62	<0.20	<0.20
	TMW16102021DUP	10/04/2021	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<62	<62	<0.20	<0.20
	TMW16042021	04/12/2021	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<62	<62	<0.20	<0.20
TMW16	TMW16042021DUP	04/12/2021	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<62	<62	<0.20	<0.20
	TMW16102020	09/28/2020	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<62	<62	<0.20	<0.20
	TMW18042022	04/11/2022	<0.80	<0.80	<0.80	<0.80	<0.80	<0.80	<0.82	<3.0	<0.80	<0.80	<1.5	<0.80	<0.80	<1.66	<1.0	<0.80	<0.80
TMW18	TMW18102021	10/06/2021	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<62	<62	<0.20	<0.20
	TMW18042021	04/12/2021	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<62	<62	<0.20	<0.20
	TMW18102020	09/28/2020	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<62	<62	<0.20	<0.20
TMW19	TMW19042022	04/11/2022	<0.80	<0.80	<0.80	<0.80	<0.80	<0.80	<0.82	<3.0	<0.80	<0.80	<1.5	<0.80	<0.80	<1.66	<1.0	<0.80	<0.80
	TMW19102021	10/04/2021	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<62	<62	<0.20	<0.20
	TMW19042021	04/12/2021	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<62	<62	<0.20	<0.20
TMW19	TMW19102020	09/28/2020	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<62	<62	<0.20	<0.20
	TMW19102020DUP	09/28/2020	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<62	<62	<0.20	<0.20
	TMW30042022	04/13/2022	<0.32	<0.32	<0.32	<0.32	<0.32	<0.32	<0.32	<1.2	<0.32	<0.32	<0.60	<0.32	<0.32	<0.66	<0.40	<0.32	<0.32
TMW30	TMW30102021	10/06/2021	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<62	<62	<0.20	<0.20
	TMW30042021	04/14/2021	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<62	<62	<0.20	0.68 J
	TMW30102020	09/30/2020	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<62	<62	<0.20	<0.20

TABLE B-2: SUMMARY OF EXPLOSIVES ANALYTICAL RESULTS
2024 INTERIM NORTHERN AREA GROUNDWATER MONITORING PLAN
Fort Wingate Depot Activity, New Mexico

Well ID	Sample ID	Date	1,3,5-Trinitrobenzene	1,3-Dinitrobenzene	2,4,6-Trinitrotoluene	2,4-Dinitrotoluene	2,6-Dinitrotoluene	2-Am-DNT	2-Nitrotoluene	3,5-Dinitroaniline	3-Nitrotoluene	4-Am-DNT	4-Nitrotoluene	HMX	Nitrobenzene	Nitroglycerin	PETN	RDX	Tetryl
			µg/L																
SL			590	2	9.8	2.4	0.49	1.9	3.1	7.7	1.7	1.9	43	1,000	1.4	2	170	9.7	39
TMW31D	TMW31D042022	04/19/2022	<0.32	<0.32	<0.32	<0.32	<0.32	<0.32	<0.32	<1.2	<0.32	<0.32	<0.60	<0.32	<0.32	<0.66	<0.40	<0.32	<0.32
	TMW31D102021	10/12/2021	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<62	<62	<0.20	<0.20
	TMW31D042021	04/20/2021	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<62	<62	<0.20	<0.20
	TMW31D102020	10/02/2020	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<62	<62	<0.20	<0.20
TMW32	TMW32042022	04/21/2022	<0.32	<0.32	<0.32	<0.32	<0.32	<0.32	<0.32	<1.2	<0.32	<0.32	<0.60	<0.32	<0.32	<0.66	<0.40	<0.32	<0.32
	TMW32102021	10/14/2021	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<62	<62	<0.20	<0.20
	TMW32042021	04/22/2021	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<62	<62	<0.20	<0.20
	TMW32102020	10/07/2020	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<62	<62	<0.20	<0.20
TMW36	TMW36042022	04/11/2022	<0.80	<0.80	<0.80	<0.80	<0.80	<0.80	<0.82	<3.0	<0.80	<0.80	<1.5	<0.80	<0.80	<1.66	<1.0	<0.80	<0.80
	TMW36102021	10/13/2021	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<62	<62	<0.20	<0.20
	TMW36042021	04/12/2021	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<62	<62	<0.20	<0.20
	TMW36102020	09/28/2020	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<62	<62	<0.20	<0.20
TMW37	TMW37042022	04/12/2022	<0.32	<0.32	<0.32	<0.32	<0.32	<0.32	<0.32	<1.2	<0.32	<0.32	<0.60	<0.32	<0.32	<0.66	<0.40	<0.32	<0.32
	TMW37102021	10/06/2021	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<62	<62	<0.20	<0.20
	TMW37042021	04/13/2021	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<62	<62	<0.20	<0.20
	TMW37102020	09/29/2020	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<62	<62	<0.20	<0.20
TMW38	TMW38042022	04/21/2022	<0.32	<0.32	<0.32	<0.32	<0.32	<0.32	<0.32	<1.2	<0.32	<0.32	<0.60	<0.32	<0.32	<0.66	<0.40	<0.32	<0.32
	TMW38102021	10/13/2021	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	0.52 J	<62	<62	<0.20	<0.20
	TMW38042021	04/22/2021	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	1.4	<62	<62	<0.20	<0.20
	TMW38102020	10/06/2020	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	4.6	<62	<62	<0.20	<0.20
TMW39D	TMW39D042022	04/22/2022	<0.32	<0.32	<0.32	<0.32	<0.32	<0.32	<0.32	<1.2	<0.32	<0.32	<0.60	<0.32	<0.32	<0.66	<0.40	<0.32	<0.32
	TMW39D102021	10/13/2021	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<62	<62	<0.20	<0.20
	TMW39D042021	04/23/2021	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<62	<62	<0.20	<0.20
	TMW39D102020	10/07/2020	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<62	<62	<0.20	<0.20
TMW40D	TMW40D042022	04/22/2022	<0.32	<0.32	<0.32	<0.32	<0.32	<0.32	<0.32	<1.2	<0.32	<0.32	<0.60	<0.32	<0.32	<0.66	<0.40	<0.32	<0.32
	TMW40D102021	10/15/2021	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<62	<62	<0.20	<0.20
	TMW40D042021	04/23/2021	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<62	<62	<0.20	<0.20
	TMW40D102020	10/07/2020	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<62	<62	<0.20	<0.20
TMW48	TMW48042022	04/22/2022	<0.32	<0.32	<0.32	<0.32	<0.32	<0.32	<0.32	<1.2	<0.32	<0.32	<0.60	<0.32	<0.32	<0.66	<0.40	<0.32	<0.32
	TMW48102021	10/15/2021	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<62	<62	<0.20	<0.20
	TMW48042021	04/23/2021	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<62	<62	<0.20	<0.20
	TMW48102020	10/08/2020	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<62	<62	<0.20	<0.20
TMW49	TMW49042022	04/22/2022	<0.32	<0.32	<0.32	<0.32	<0.32	<0.32	<0.32	<1.2	<0.32	<0.32	<0.60	<0.32	<0.32	<0.66	<0.40	<0.32	<0.32
	TMW49102021	10/15/2021	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	0.68 J	<62	<62	<0.20	<0.20
	TMW49042021	04/23/2021	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	0.43 J	<62	<62	<0.20	<0.20
	TMW49102020	10/08/2020	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	0.47 J	<62	<62	<0.20	<0.20
TMW50	TMW50042022	04/13/2022	<0.32	<0.32	<0.32	<0.32	<0.32	<0.32	<0.32	<1.2	<0.32	<0.32	<0.60	<0.32	<0.32	<0.66	<0.40	<0.32	<0.32
	TMW50042022DUP	04/13/2022	<0.32	<0.32	<0.32	<0.32	<0.32	<0.32	<0.32	<1.2	<0.32	<0.32	<0.60	<0.32	<0.32	<0.66	<0.40	<0.32	<0.32
	TMW50102021	10/06/2021	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<62	<62	<0.20	<0.20
	TMW50042021	04/14/2021	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<62	<62	<0.20	<0.20
TMW51	TMW51042022	04/14/2022	<0.32	<0.32	<0.32	<0.32	<0.32	<0.32	<0.32	<1.2	<0.32	<0.32	<0.60	<0.32	<0.32	<0.66	<0.40	<0.32	<0.32
	TMW51102021	10/04/2021	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<62	<62	<0.20	<0.20
	TMW51042021	04/14/2021	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<62	<62	<0.20	<0.20
TMW52	TMW52042022	04/18/2022	<0.32	<0.32	<0.32	<0.32	<0.32	<0.32	<0.32	<1.2	<0.32	<0.32	<0.60	<0.32	<0.32	<0.66	<0.40	<0.32	<0.32
	TMW52102021	10/11/2021	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<62	<62	<0.20	<0.20
	TMW52042021	04/19/2021	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<62	<62	<0.20	<0.20

TABLE B-2: SUMMARY OF EXPLOSIVES ANALYTICAL RESULTS
2024 INTERIM NORTHERN AREA GROUNDWATER MONITORING PLAN
Fort Wingate Depot Activity, New Mexico

Well ID	Sample ID	Date	1,3,5-Trinitrobenzene	1,3-Dinitrobenzene	2,4,6-Trinitrotoluene	2,4-Dinitrotoluene	2,6-Dinitrotoluene	2-Am-DNT	2-Nitrotoluene	3,5-Dinitroaniline	3-Nitrotoluene	4-Am-DNT	4-Nitrotoluene	HMX	Nitrobenzene	Nitroglycerin	PETN	RDX	Tetryl
SL			590	2	9.8	2.4	0.49	1.9	3.1	7.7	1.7	1.9	43	1,000	1.4	2	170	9.7	39
TMW53	TMW53042022	04/18/2022	<0.32	<0.32	<0.32	<0.32	<0.32	<0.32	<0.32	<1.2	<0.32	<0.32	<0.60	<0.32	<0.32	<0.66	<0.40	<0.32	<0.32
	TMW53102021	10/11/2021	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<62	<62	<0.20	<0.20
	TMW53042021	04/19/2021	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<62	<62	<0.20	<0.20
TMW55	TMW55042022	04/15/2022	<0.32	<0.32	<0.32	<0.32	<0.32	<0.32	<0.32	<1.2	<0.32	<0.32	<0.60	<0.32	<0.32	<0.66	<0.40	<0.32	<0.32
	TMW55102021	10/08/2021	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<62	<62	<0.20	<0.20
	TMW55042021	04/16/2021	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<62	<62	<0.20	<0.20
TMW58	TMW58042022	04/12/2022	<0.32	<0.32	<0.32	<0.32	<0.32	<0.32	<0.32	<1.2	<0.32	<0.32	<0.60	<0.32	<0.32	<0.66	<0.40	<0.32	<0.32
	TMW58102021	10/05/2021	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<62	<62	<0.20	<0.20
	TMW58042021	04/13/2021	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<62	<62	<0.20	<0.20
TMW63	TMW63042022	04/13/2022	1.9 J	1.8 J	1.5 J	1.6 J	1.7 J	1.7 J	1.6 J	1.6 J	1.5 J	1.7 J	1.5 J	1.7 J	1.6 J	2.2 J	1.8 J	1.7 J	0.53 J
	TMW63102021	10/06/2021	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<62	<62	<0.20	<0.20
	TMW63042021	04/14/2021	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<62	<62	<0.20	<0.20
TMW64	TMW64042022	04/19/2022	<0.32	<0.32	<0.32	<0.32	<0.32	<0.32	<0.32	<1.2	<0.32	<0.32	<0.60	<0.32	<0.32	<0.66	<0.40	<0.32	<0.32
	TMW64102021	10/12/2021	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<62	<62	<0.20	<0.20
	TMW64042021	04/20/2021	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<0.20	<62	<62	<0.20	<0.20

NOTES & ABBREVIATIONS:

µg/L	= micrograms per liter	2-Am-DNT	= 2-Amino-4,6-dinitrotoluene	PETN	= Pentaerythritol tetranitrate
<	= less than LOD	4-Am-DNT	= 4-Amino-2,6-dinitrotoluene	RDX	= Hexahydro-1,3,5-trinitro-1,3,5-triazine
NA	= not analyzed	HMX	= Octahydro-1,3,5,7-tetranitro-1,3,5,7-tetrazocine	Tetryl	= Methyl-2,4,6-trinitrophenylnitramine
J	= estimated value				
Q	= One or more quality control criteria failed				
H	= Preparation holding time exceeded				
–	= not established or not applicable				
SL	= screening level				
Number	= Result exceeds cited (lowest) SL.				

TABLE B-3: SUMMARY OF PERCHLORATE ANALYTICAL RESULTS
2024 INTERIM NORTHERN AREA GROUNDWATER MONITORING PLAN
Fort Wingate Depot Activity, New Mexico

Well ID	Sample ID	Date	Perchlorate
			µg/L
SL			14
Alluvial Wells			
BGMW01	BGMW01042022	04/13/2022	0.62
	BGMW01102021	10/05/2021	0.38
	BGMW01042021	04/14/2021	0.30 J
	BGMW01102020	09/30/2020	0.17 J
BGMW02	BGMW02042022	04/13/2022	0.657
	BGMW02102021	10/05/2021	0.58
	BGMW02042021	04/14/2021	0.66 J
	BGMW02102020	09/30/2020	0.50
BGMW03	BGMW03042022	04/11/2022	<0.10
	BGMW03102021	10/04/2021	<0.10
	BGMW03042021	04/12/2021	<0.10
	BGMW03102020	09/28/2020	0.15 J
BGMW11	BGMW11042022	04/15/2022	<0.10
	BGMW11102021	10/11/2021	<0.10
	BGMW11042021	04/20/2021	<0.10
BGMW12	BGMW12042022	04/11/2022	<0.10
	BGMW12102021	10/07/2021	<0.10
	BGMW12042021	04/13/2021	<0.10
BGMW13D	BGMW13D042022	04/21/2022	<0.10
	BGMW13D042022DUP	04/21/2022	<0.10
	BGMW13D102021	10/14/2021	<0.10
	BGMW13D042021	04/23/2021	<0.10
	BGMW13D042021DUP	04/23/2021	<0.10
BGMW13S	BGMW13S042022	04/21/2022	<0.10
	BGMW13S102021	10/11/2021	<0.10
	BGMW13S042021	04/23/2021	<0.50
MW01	MW01042022	04/12/2022	<0.10
	MW01102021	10/05/2021	<0.10
	MW01042021	04/13/2021	<0.10
	MW01102020	09/29/2020	<0.10
MW02	MW02042022	04/12/2022	<0.10
	MW02102021	10/05/2021	<0.50
	MW02042021	04/13/2021	<0.10
	MW02102020	09/29/2020	<0.10
MW03	MW03042022	04/14/2022	<0.10
	MW03042022DUP	04/14/2022	<0.10
	MW03102021	10/11/2021	<0.10
	MW03042021	04/15/2021	<0.50
	MW03042021DUP	04/15/2021	<0.50
	MW03102020	10/01/2020	<0.10

TABLE B-3: SUMMARY OF PERCHLORATE ANALYTICAL RESULTS
2024 INTERIM NORTHERN AREA GROUNDWATER MONITORING PLAN
Fort Wingate Depot Activity, New Mexico

Well ID	Sample ID	Date	Perchlorate
			µg/L
SL			14
MW18D	MW18D042022	04/20/2022	<0.10
	MW18D102021	10/13/2021	<0.10
	MW18D042021	04/21/2021	<0.10
	MW18D102020	10/06/2020	<0.10
MW20	MW20042022	04/20/2022	0.113 J
	MW20102021	10/06/2021	0.42
	MW20042021	04/21/2021	0.39
	MW20102020	10/05/2020	0.21
MW22D	MW22D042022	04/21/2022	0.947
	MW22D102021	10/14/2021	0.98
	MW22D042021	04/22/2021	1.1
	MW22D102020	10/07/2020	1.7
MW23	MW23042022	04/11/2022	<0.10
	MW23102021	10/11/2021	<0.20
	MW23102021DUP	10/11/2021	<0.20
	MW23042021	04/13/2021	<0.10
	MW23102020	09/28/2020	<0.50
MW24	MW24042022	04/12/2022	<0.10
	MW24042022DUP	04/12/2022	<0.10
	MW24102021	10/11/2021	<0.10
	MW24102021DUP	10/11/2021	<0.10
	MW24042021	04/15/2021	<1.0
	MW24102020	09/29/2020	<0.50
MW25	MW25042022	04/13/2022	0.161 J
	MW25102021	10/12/2021	<0.10
	MW25042021	04/21/2021	0.11 J
MW26	MW26042022	04/18/2022	<0.10
	MW26102021	10/11/2021	<0.10
	MW26042021	04/20/2021	<0.10
MW27	MW27042022	04/20/2022	0.067 J
	MW27102021	10/08/2021	<0.10
	MW27042021	04/23/2021	<0.10
MW28	MW28042022	04/13/2022	0.182 J
	MW28102021	10/05/2021	<0.10
	MW28042021	04/16/2021	<0.10
MW29	MW29042022	04/14/2022	0.736
	MW29102021	10/05/2021	0.35
	MW29042021	04/16/2021	0.40 J
MW30	MW30042022	04/20/2022	<0.10
	MW30102021	10/08/2021	<0.10
	MW30042021	04/21/2021	<0.10
MW31	MW31042022	04/21/2022	0.074 J
	MW31102021	10/13/2021	<0.10
	MW31042021	04/21/2021	<0.10

TABLE B-3: SUMMARY OF PERCHLORATE ANALYTICAL RESULTS
2024 INTERIM NORTHERN AREA GROUNDWATER MONITORING PLAN
Fort Wingate Depot Activity, New Mexico

Well ID	Sample ID	Date	Perchlorate
			µg/L
SL			14
MW32	MW32042022	04/11/2022	0.251
	MW32102021	10/04/2021	0.21
	MW32042021	04/13/2021	0.20 J
MW33	MW33042022	04/18/2022	<0.10
	MW33102021	10/11/2021	<0.10
	MW33042021	04/19/2021	<0.10
MW34	MW34042022	04/18/2022	<0.10
	MW34102021	10/11/2021	<0.10
	MW34042021	04/19/2021	<0.10
	MW34042021DUP	04/19/2021	<0.10
MW35	MW35042022	04/20/2022	<0.10
	MW35042022DUP	04/20/2022	<0.10
	MW35102021	10/13/2021	<0.10
	MW35102021DUP	10/13/2021	<0.10
	MW35042021	04/21/2021	<0.10
MW36D	MW36D042022	04/18/2022	<0.10
	MW36D042022DUP	04/18/2022	<0.10
	MW36D102021	10/11/2021	<0.20
	MW36D042021	04/19/2021	<0.10
MW36S	MW36S042022	04/18/2022	<0.10
	MW36S102021	10/11/2021	<0.10
	MW36S042021	04/19/2021	<0.10
MW37	MW37042022	04/20/2022	<0.10
	MW37102021	10/13/2021	<0.10
	MW37042021	04/21/2021	<0.10
MW38	MW38042022	04/22/2022	<0.10
	MW38102021	10/14/2021	<0.10
	MW38042021	04/23/2021	<0.10
MW39	MW39042022	04/22/2022	<0.10
	MW39102021	10/14/2021	<0.10
	MW39042021	04/23/2021	<0.10
SMW01	SMW01042022	04/12/2022	<0.10
	SMW01102021	10/08/2021	<0.10
	SMW01042021	04/13/2021	<0.10
	SMW01042021DUP	04/13/2021	<0.10
	SMW01102020	09/29/2020	<0.10
TMW01	TMW01042022	04/15/2022	253 J
	TMW01102021	10/08/2021	280
	TMW01042021	04/15/2021	270
	TMW01102020	10/01/2020	247

TABLE B-3: SUMMARY OF PERCHLORATE ANALYTICAL RESULTS
2024 INTERIM NORTHERN AREA GROUNDWATER MONITORING PLAN
Fort Wingate Depot Activity, New Mexico

Well ID	Sample ID	Date	Perchlorate
			µg/L
SL			14
TMW02	TMW02042022	04/15/2022	7.19
	TMW02042022DUP	04/15/2022	6.52
	TMW02102021	10/08/2021	6.4
	TMW02102021DUP	10/08/2021	6.1
	TMW02042021	04/16/2021	5.3
	TMW02042021DUP	04/16/2021	5.4
	TMW02102020	10/02/2020	4.7
	TMW02102020DUP	10/02/2020	4.7
TMW03	TMW03042022	04/19/2022	0.852
	TMW03102021	10/14/2021	0.52
	TMW03042021	04/23/2021	0.66
	TMW03102020	10/07/2020	0.72
TMW04	TMW04042022	04/15/2022	0.351
	TMW04102021	10/11/2021	3.0
	TMW04042021	04/16/2021	0.34
	TMW04102020	10/02/2020	0.36
TMW08	TMW08042022	04/14/2022	<0.10
	TMW08102021	10/07/2021	<0.10
	TMW08042021	04/14/2021	<0.10
	TMW08102020	09/30/2020	<0.10
TMW10	TMW10042022	04/14/2022	<0.10
	TMW10102021	10/07/2021	<0.10
	TMW10042021	04/15/2021	<0.10
	TMW10102020	10/01/2020	<0.10
TMW13	TMW13042022	04/20/2022	0.059 J
	TMW13042022DUP	04/20/2022	0.062 J
	TMW13102021	10/13/2021	<0.10
	TMW13042021	04/21/2021	<0.10
	TMW13042021DUP	04/21/2021	<0.50
	TMW13102020	10/06/2020	0.064 J
TMW15	TMW13102020DUP	10/06/2020	<0.10
	TMW15042022	04/20/2022	<0.10
	TMW15102021	10/07/2021	<0.10
	TMW15042021	04/21/2021	<0.10
	TMW15102020	10/05/2020	<0.10
	TMW15102020DUP	10/05/2020	<0.10
TMW21	TMW21042022	04/21/2022	<0.10
	TMW21102021	10/13/2021	<0.10
	TMW21042021	04/22/2021	<0.10
	TMW21102020	10/07/2020	<0.10
TMW22	TMW22042022	04/15/2022	<0.10
	TMW22102021	10/08/2021	<0.10
	TMW22042021	04/21/2021	<0.10
	TMW22102020	10/01/2020	<0.10

TABLE B-3: SUMMARY OF PERCHLORATE ANALYTICAL RESULTS
2024 INTERIM NORTHERN AREA GROUNDWATER MONITORING PLAN
Fort Wingate Depot Activity, New Mexico

Well ID	Sample ID	Date	Perchlorate
			µg/L
SL			14
TMW23	TMW23042022	04/15/2022	<0.10
	TMW23102021	10/08/2021	<0.10
	TMW23042021	04/16/2021	<0.10
	TMW23102020	10/01/2020	<0.50
TMW24	TMW24042022	04/19/2022	<0.10
	TMW24102021	10/14/2021	<0.10
	TMW24042021	04/19/2021	<0.10
	TMW24102020	10/01/2020	<0.10
TMW26	TMW26042022	04/13/2022	<0.10
	TMW26102021	10/04/2021	<0.10
	TMW26042021	04/13/2021	<0.10
	TMW26102020	09/30/2020	<0.10
TMW27	TMW27042022	04/12/2022	<0.10
	TMW27102021	10/10/2021	<0.20
	TMW27042021	04/18/2021	<1.0
	TMW27042021DUP	04/18/2021	<1.0
	TMW27102020	10/02/2020	<0.50
	TMW27102020DUP	10/02/2020	<0.50
TMW29	TMW29042022	04/15/2022	0.082 J
	TMW29102021	10/08/2021	<0.10
	TMW29042021	04/21/2021	<0.50
	TMW29102020	10/01/2020	<0.10
TMW31S	TMW31S042022	04/14/2022	619
	TMW31S102021	10/07/2021	590
	TMW31S042021	04/26/2021	520
	TMW31S102020	10/01/2020	518
TMW34	TMW34042022	04/19/2022	0.308
	TMW34042022DUP	04/19/2022	0.314
	TMW34102021	10/13/2021	0.19 J
	TMW34102021DUP	10/13/2021	0.16 J
	TMW34042021	04/20/2021	0.27
	TMW34102020	10/05/2020	0.25
TMW35	TMW35042022	04/20/2022	0.051 J
	TMW35102021	10/06/2021	<0.10
	TMW35042021	04/26/2021	<0.50
	TMW35102020	10/06/2020	<0.10
TMW39S	TMW39SO42022	04/13/2022	790
	TMW39S102021	10/08/2021	720
	TMW39S042021	04/26/2021	700
	TMW39S102020	10/01/2020	657
TMW41	TMW41042022	04/15/2022	14
	TMW41102021	10/08/2021	12
	TMW41042021	04/16/2021	11
	TMW41102020	10/01/2020	9.1

TABLE B-3: SUMMARY OF PERCHLORATE ANALYTICAL RESULTS
2024 INTERIM NORTHERN AREA GROUNDWATER MONITORING PLAN
Fort Wingate Depot Activity, New Mexico

Well ID	Sample ID	Date	Perchlorate
			µg/L
SL			14
TMW43	TMW43042022	04/19/2022	<0.10
	TMW43102021	10/12/2021	<0.10
	TMW43042021	04/16/2021	<0.50
	TMW43102020	10/02/2020	<0.10
TMW44	TMW44042022	04/12/2022	<0.10
	TMW44102021	10/05/2021	0.24
	TMW44042021	04/12/2021	<0.10
	TMW44102020	09/29/2020	<0.10
TMW45	TMW45042022	04/19/2022	<0.10
	TMW45102021	10/12/2021	<0.10
	TMW45102021DUP	10/12/2021	<0.10
	TMW45042021	04/20/2021	<0.10
	TMW45102020	10/05/2020	<0.10
TMW46	TMW46042022	04/12/2022	0.147 J
	TMW46102021	10/05/2021	0.095 J
	TMW46042021	04/13/2021	0.12 J
	TMW46102020	09/29/2020	0.16 J
TMW47	TMW47042022	04/21/2022	<0.10
	TMW47102021	10/14/2021	<0.10
	TMW47042021	04/23/2021	<0.10
	TMW47102020	10/07/2020	<0.10
TMW57	TMW57042022	04/18/2022	0.051 J
	TMW57102021	10/11/2021	<0.10
	TMW57042021	04/19/2021	<0.10
TMW59	TMW59042022	04/18/2022	0.091 J
	TMW59102021	10/11/2021	<0.10
	TMW59042021	04/23/2021	0.087 J
TMW61	TMW61042022	04/18/2022	<0.10
	TMW61102021	10/13/2021	<0.10
	TMW61042021	04/26/2021	<0.10
TMW62	TMW62042022	04/15/2022	<0.10
	TMW62102021	10/08/2021	<0.10
	TMW62042021	04/21/2021	<0.10
Bedrock Wells			
BGMW07	BGMW07042022	04/11/2022	<0.10
	BGMW07102021	10/04/2021	<0.10
	BGMW07042021	04/12/2021	<0.10
	BGMW07102020	09/28/2020	<0.10
BGMW08	BGMW08042022	04/11/2022	<0.10
	BGMW08102021	10/04/2021	<0.10
	BGMW08042021	04/13/2021	<0.10
	BGMW08102020	09/28/2020	<0.10

TABLE B-3: SUMMARY OF PERCHLORATE ANALYTICAL RESULTS
2024 INTERIM NORTHERN AREA GROUNDWATER MONITORING PLAN
Fort Wingate Depot Activity, New Mexico

Well ID	Sample ID	Date	Perchlorate
			µg/L
SL			14
BGMW09	BGMW09042022	04/12/2022	<0.10
	BGMW09042022DUP	04/12/2022	<0.10
	BGMW09102021	10/06/2021	0.056 J
	BGMW09042021	04/23/2021	<0.10
	BGMW09102020	09/29/2020	<0.10
BGMW10	BGMW10042022	04/12/2022	<0.10
	BGMW10102021	10/07/2021	<0.10
	BGMW10102021DUP	10/07/2021	<0.10
	BGMW10042021	04/16/2021	<0.10
	BGMW10102020	09/29/2020	<0.10
TMW16	TMW16042022	04/11/2022	<0.10
	TMW16102021	10/04/2021	<0.10
	TMW16102021DUP	10/04/2021	<0.10
	TMW16042021	04/12/2021	<0.10
	TMW16042021DUP	04/12/2021	<0.10
	TMW16102020	09/28/2020	<0.50
TMW17	TMW17042022	04/18/2022	<0.10
	TMW17102021	10/13/2021	<0.10
	TMW17042021	04/19/2021	<0.10
	TMW17042021DUP	04/19/2021	<0.10
	TMW17102020	10/02/2020	<0.20
TMW18	TMW18042022	04/11/2022	<0.10
	TMW18102021	10/05/2021	<0.10
	TMW18042021	04/12/2021	<0.10
	TMW18102020	09/28/2020	<0.10
TMW19	TMW19042022	04/11/2022	<0.10
	TMW19102021	10/04/2021	<0.10
	TMW19042021	04/12/2021	<0.10
	TMW19102020	09/28/2020	<0.10
	TMW19102020DUP	09/28/2020	<0.10
TMW30	TMW30042022	04/13/2022	454
	TMW30102021	10/06/2021	400
	TMW30042021	04/14/2021	510
	TMW30102020	09/30/2020	499
TMW31D	TMW31D042022	04/19/2022	874
	TMW31D102021	10/12/2021	860
	TMW31D042021	04/20/2021	890
	TMW31D102020	10/02/2020	802
TMW32	TMW32042022	04/21/2022	405
	TMW32102021	10/14/2021	410
	TMW32042021	04/22/2021	400
	TMW32102020	10/07/2020	454
TMW36	TMW36042022	04/11/2022	<0.10
	TMW36102021	10/13/2021	<0.10
	TMW36042021	04/12/2021	<0.10
	TMW36102020	09/28/2020	<0.10

TABLE B-3: SUMMARY OF PERCHLORATE ANALYTICAL RESULTS
2024 INTERIM NORTHERN AREA GROUNDWATER MONITORING PLAN
Fort Wingate Depot Activity, New Mexico

Well ID	Sample ID	Date	Perchlorate
			µg/L
SL			14
TMW37	TMW37042022	04/12/2022	<0.10
	TMW37102021	10/06/2021	<0.10
	TMW37042021	04/13/2021	<0.10
	TMW37102020	09/29/2020	<0.10
TMW38	TMW38042022	04/21/2022	<0.10
	TMW38102021	10/13/2021	<0.10
	TMW38042021	04/22/2021	<0.10
	TMW38102020	10/06/2020	<0.10
TMW39D	TMW39D042022	04/22/2022	0.072 J
	TMW39D102021	10/13/2021	0.25
	TMW39D042021	04/23/2021	7.5
	TMW39D102020	10/07/2020	0.32
TMW40D	TMW40D042022	04/22/2022	262
	TMW40D102021	10/15/2021	230
	TMW40D042021	04/23/2021	230
	TMW40D102020	10/07/2020	302
TMW48	TMW48042022	04/22/2022	752
	TMW48102021	10/15/2021	800
	TMW48042021	04/23/2021	850
	TMW48102020	10/08/2020	746
TMW49	TMW49042022	04/22/2022	114
	TMW49102021	10/15/2021	230
	TMW49042021	04/23/2021	320
	TMW49102020	10/08/2020	336
TMW50	TMW50042022	04/13/2022	2.2
	TMW50042022DUP	04/13/2022	2.28
	TMW50102021	10/06/2021	1.4
	TMW50042021	04/14/2021	1.2
TMW51	TMW51042022	04/14/2022	715
	TMW51102021	10/04/2021	520
	TMW51042021	04/14/2021	670
TMW52	TMW52042022	04/18/2022	0.051 J
	TMW52102021	10/11/2021	<0.10
	TMW52042021	04/19/2021	<0.10
TMW53	TMW53042022	04/18/2022	<0.10
	TMW53102021	10/11/2021	<0.10
	TMW53042021	04/19/2021	<0.10
TMW55	TMW55042022	04/15/2022	<0.10
	TMW55102021	10/08/2021	0.11 J
	TMW55042021	04/16/2021	<0.10
TMW58	TMW58042022	04/12/2022	<0.10
	TMW58102021	10/05/2021	<0.10
	TMW58042021	04/13/2021	<0.10

TABLE B-3: SUMMARY OF PERCHLORATE ANALYTICAL RESULTS
2024 INTERIM NORTHERN AREA GROUNDWATER MONITORING PLAN
Fort Wingate Depot Activity, New Mexico

Well ID	Sample ID	Date	Perchlorate
			µg/L
SL			14
TMW63	TMW63042022	04/13/2022	<0.10
	TMW63102021	10/06/2021	<0.10
	TMW63042021	04/14/2021	<0.10
TMW64	TMW64042022	04/19/2022	56
	TMW64102021	10/12/2021	54
	TMW64042021	04/20/2021	50

NOTES & ABBREVIATIONS:

µg/L = micrograms per liter
< = less than LOD
NA = not analyzed
J = estimated value
M = manual integrated compound
– = not established or not applicable
SL = screening level
Number = Result exceeds cited (lowest) SL.

Well ID	Sample ID	Date	1,2-Dichloroethane	1,3-Dichlorobenzene	Acetone	Benzene	Bromoform	Carbon Disulfide	Chloroform	Chloromethane	Dibromochloromethane	Methylene chloride	MTBE	Toluene
			µg/L											
			5	75	18,000	5	80	810	80	190	80	5	100	1,000
SL			Alluvial Wells											
BGMW01	BGMW01042022	04/13/2022	<0.20	<0.20	<10	<0.20	<0.30	<0.50	<0.20	<0.50	<0.20	<1.0	<0.30	<0.20
	BGMW01102021	10/05/2021	<0.20	<0.20	<10	<0.20	<0.30	<0.50	<0.20	<0.50	<0.20	<1.0	<0.30	<0.20
	BGMW01042021	04/14/2021	<0.20	<0.20	<10	<0.20	<0.30	<0.50	<0.20	<0.50	<0.20	<1.0	<0.30	<0.20
	BGMW01102020	09/30/2020	<0.20	<0.20	<10	<0.20	<0.30	<0.50	<0.20	<0.50	<0.20	<1.0	<0.30	<0.20
BGMW02	BGMW02042022	04/13/2022	<0.20	<0.20	<10	<0.20	<0.30	<0.50	<0.20	<0.50	<0.20	<1.0	<0.30	<0.20
	BGMW02102021	10/05/2021	<0.20	<0.20	<10	<0.20	<0.30	<0.50	<0.20	<0.50	<0.20	<1.0	<0.30	<0.20
	BGMW02042021	04/14/2021	<0.20	<0.20	<10	<0.20	<0.30	<0.50	<0.20	<0.50	<0.20	<1.0	<0.30	<0.20
	BGMW02102020	09/30/2020	<0.20	<0.20	<10	<0.20	<0.30	<0.50	<0.20	<0.50	<0.20	<1.0	<0.30	<0.20
BGMW03	BGMW03042022	04/11/2022	<0.20	<0.20	<10	<0.20	<0.30	<0.50	<0.20	<0.50	<0.20	<1.0	<0.30	<0.20
	BGMW03102021	10/04/2021	<0.20	<0.20	<10	<0.20	<0.30	<0.50	<0.20	<0.50	<0.20	<1.0	<0.30	<0.20
	BGMW03042021	04/12/2021	<0.20	<0.20	<10	<0.20	<0.30	<0.50	<0.20	<0.50	<0.20	<1.0	<0.30	<0.20
	BGMW03102020	09/28/2020	<0.20	<0.20	<10	<0.20	<0.30	<0.50	<0.20	<0.50	<0.20	1.0 J	<0.30	<0.20
BGMW11	BGMW11042022	04/15/2022	<0.20	<0.20	<10	<0.20	<0.30	<0.50	<0.20	<0.50	<0.20	<1.0	<0.30	<0.20
	BGMW11102021	10/11/2021	<0.20	<0.20	<10	<0.20	<0.30	<0.50	<0.20	<0.50	<0.20	<1.0	<0.30	<0.20
	BGMW11042021	04/20/2021	<0.20	<0.20	<10	<0.20	<0.30	<0.50	<0.20	<0.50	<0.20	<1.0	<0.30	<0.20
	BGMW12042022	04/11/2022	<0.20	<0.20	<10	<0.20	<0.30	<0.50	<0.20	<0.50	<0.20	<1.0	<0.30	<0.20
BGMW12	BGMW12102021	10/07/2021	<0.20	<0.20	<10	<0.20	<0.30	<0.50	<0.20	<0.50	<0.20	<1.0	<0.30	<0.20
	BGMW12042021	04/13/2021	<0.20	<0.20	<10	<0.20	<0.30	<0.50	<0.20	<0.50	<0.20	<1.0	<0.30	<0.20
	BGMW13D042022	04/21/2022	<0.20	<0.20	<10	<0.20	<0.30	<0.50	<0.20	<0.50	<0.20	<1.0	<0.30	<0.20
	BGMW13D042022DUP	04/21/2022	<0.20	<0.20	<10	<0.20	<0.30	<0.50	<0.20	<0.50	<0.20	<1.0	<0.30	<0.20
BGMW13D	BGMW13D042022DUP	04/21/2022	<0.20	<0.20	<10	<0.20	<0.30	<0.50	<0.20	<0.50	<0.20	<1.0	<0.30	<0.20
	BGMW13D102021	10/14/2021	<0.20	<0.20	<10	<0.20	<0.30	<0.50	<0.20	<0.50	<0.20	<1.0	<0.30	<0.20
	BGMW13D042021	04/23/2021	<0.20	<0.20	<10	<0.20	<0.30	<0.50	<0.20	<0.50	<0.20	<1.0		

TABLE B-4: SUMMARY OF VOC ANALYTICAL RESULTS
2024 INTERIM NORTHERN AREA GROUNDWATER MONITORING PLAN
Fort Wingate Depot Activity, New Mexico

Well ID	Sample ID	Date	1,2-Dichloroethane	1,3-Dichlorobenzene	Acetone	Benzene	Bromoform	Carbon Disulfide	Chloroform	Chloromethane	Dibromochloromethane	Methylene chloride	MTBE	Toluene
			µg/L											
			SL	5	75	18,000	5	80	810	80	190	80	5	100
MW25	MW25042022	04/13/2022	2.3	<0.20	<10	<0.20	<0.30	<0.50	<0.20	<0.50	<0.20	<1.0	<0.30	<0.20
	MW25102021	10/12/2021	2.4	<0.20	<10	<0.20	<0.30	<0.50	<0.20	<0.50	<0.20	<1.0	<0.30	<0.20
	MW25042021	04/21/2021	2.3	<0.20	<10	<0.20	<0.30	<0.50	<0.20	<0.50	<0.20	<1.0	<0.30	<0.20
MW26	MW26042022	04/18/2022	<0.20	<0.20	<10	<0.20	<0.30	<0.50	<0.20	<0.50	<0.20	<1.0	<0.30	<0.20
	MW26102021	10/11/2021	<0.20	<0.20	<10	<0.20	<0.30	<0.50	<0.20	<0.50	<0.20	<1.0	<0.30	<0.20
	MW26042021	04/20/2021	<0.20	<0.20	<10	<0.20	<0.30	<0.50	<0.20	<0.50	<0.20	<1.0	<0.30	<0.20
MW27	MW27042022	04/20/2022	<0.20	<0.20	<10	<0.20	<0.30	<0.50	<0.20	<0.50	<0.20	<1.0	<0.30	<0.20
	MW27102021	10/08/2021	<0.20	<0.20	<10	<0.20	<0.30	<0.50	<0.20	<0.50	<0.20	<1.0	<0.30	<0.20
	MW27042021	04/23/2021	<0.20	<0.20	<10	<0.20	<0.30	<0.50	<0.20	<0.50	<0.20	<1.0	<0.30	<0.20
MW28	MW28042022	04/13/2022	<0.20	<0.20	<10	<0.20	<0.30	<0.50	<0.20	<0.50	<0.20	<1.0	<0.30	<0.20
	MW28102021	10/05/2021	<0.20	<0.20	<10	<0.20	<0.30	<0.50	<0.20	<0.50	<0.20	<1.0	<0.30	<0.20
	MW28042021	04/16/2021	<0.20	<0.20	<10	<0.20	<0.30	<0.50	<0.20	<0.50	<0.20	<1.0	<0.30	<0.20
MW29	MW29042022	04/14/2022	<0.20	<0.20	<10	<0.20	<0.30	<0.50	<0.20	<0.50	<0.20	<1.0	<0.30	<0.20
	MW29102021	10/05/2021	<0.20	<0.20	<10	<0.20	<0.30	<0.50	<0.20	<0.50	<0.20	<1.0	<0.30	<0.20
	MW29042021	04/16/2021	0.10 J	<0.20	<10	<0.20	<0.30	<0.50	<0.20	<0.50	<0.20	<1.0	<0.30	<0.20
MW30	MW30042022	04/20/2022	<0.20	<0.20	<10	<0.20	<0.30	<0.50	<0.20	<0.50	<0.20	<1.0	<0.30	<0.20
	MW30102021	10/08/2021	<0.20	<0.20	<10	<0.20	<0.30	<0.50	<0.20	<0.50	<0.20	<1.0	<0.30	<0.20
	MW30042021	04/21/2021	<0.20	<0.20	<10	<0.20	<0.30	<0.50	<0.20	<0.50	<0.20	<1.0	<0.30	<0.20
MW31	MW31042022	04/21/2022	27	<0.20	<10	<0.20	0.18 J	<0.50	<0.20	<0.50	<0.20	<1.0	0.18 J	<0.20
	MW31102021	10/13/2021	25	<0.20	<10	<0.20	<0.30	<0.50	<0.20	<0.50	<0.20	<1.0	<0.30	<0.20
	MW31042021	04/21/2021	21	<0.20	<10	<0.20	<0.30	<0.50	<0.20	<0.50	<0.20	<1.0	<0.30	<0.20
MW32	MW32042022	04/11/2022	<0.20	<0.20	<10	<0.20	<0.30	<0.50	<0.20	<0.50	<0.20	<1.0	<0.30	<0.20
	MW32102021	10/04/2021	<0.20	<0.20	<10	<0.20	<0.30	<0.50	<0.20	<0.50	<0.20	<1.0	<0.30	<0.20
	MW32042021	04/13/2021	<0.20	<0.20	<10	<0.20	<0.30	<0.50	<0.20	<0.50	<0.20	<1.0	<0.30	<0.20
MW33	MW33042022	04/18/2022	<0.20	<0.20	<10	<0.20	<0.30	<0.50	<0.20	<0.50	<0.20	<1.0	<0.30	<0.20
	MW33102021	10/11/2021	<0.20	<0.20	<10	<0.20	<0.30	<0.50	<0.20	0.42 J	<0.20	<1.0	<0.30	<0.20
	MW33042021	04/19/2021	<0.20	<0.20	<10	<0.20	<0.30	<0.50	<0.20	0.51 J	<0.20	<1.0	<0.30	<0.20
MW34	MW34042022	04/18/2022	<0.20	<0.20	<10	<0.20	<0.30	<0.50	<0.20	<0.50	<0.20	<1.0	<0.30	<0.20
	MW34102021	10/11/2021	<0.20	<0.20	<10	<0.20	<0.30	<0.50	<0.20	<0.50	<0.20	<1.0	<0.30	<0.20
	MW34042021	04/19/2021	<0.20	<0.20	<10	<0.20	<0.30	<0.50	<0.20	<0.50	<0.20	<1.0	<0.30	<0.20
	MW34042021DUP	04/19/2021	<0.20	<0.20	<10	<0.20	<0.30	<0.50	<0.20	<0.50	<0.20	<1.0	<0.30	<0.20
MW35	MW35042022	04/20/2022	<0.20	<0.20	<10	<0.20	<0.30	<0.50	<0.20	<0.50	<0.20	<1.0	<0.30	<0.20
	MW35042022DUP	04/20/2022	<0.20	<0.20	8.9 J	<0.20	<0.30	<0.50	<0.20	<0.50	<0.20	<1.0	<0.30	<0.20
	MW35102021	10/13/2021	<0.20	<0.20	<10	<0.20	<0.30	<0.50	<0.20	<0.50	<0.20	<1.0	<0.30	<0.20
MW36D	MW36S042021DUP	10/13/2021	<0.20	<0.20	<10	<0.20	<0.30	<0.50	<0.20	<0.50	<0.20	<1.0	<0.30	<0.20
	MW36D042022	04/21/2022	<0.20	<0.20	<10	<0.20	<0.30	<0.50	<0.20	<0.50	<0.20	<1.0	<0.30	<0.20
	MW36D042022DUP	04/18/2022	<0.20	<0.20	<10	<0.20	<0.30	<0.50	<0.20	<0.50	<0.20	<1.0	<0.30	<0.20
MW36S	MW36D102021	10/11/2021	<0.20	<0.20	<10	<0.20	<0.30	<0.50	<0.20	<0.50	<0.20	<1.0	<0.30	<0.20
	MW36D042021	04/19/2021	<0.20	<0.20	<10	<0.20	<0.30	<0.50	<0.20	<0.50	<0.20	<1.0	<0.30	<0.20
	MW36S042022	04/18/2022	<0.20	<0.20	<10	<0.20	<0.30	<0.50	<0.20	<0.50	<0.20	<1.0	<0.30	<0.20
MW37	MW37042022	04/20/2022	<0.20	<0.20	<10	<0.20	<0.30	<0.50	<0.20	<0.50	<0.20	<1.0	<0.30	<0.20
	MW37102021	10/13/2021	<0.20	<0.20	<10	<0.20	<0.30	<0.50	<0.20	<0.50	<0.20	<1.0	<0.30	<0.20
	MW37042021	04/21/2021	<0.20	<0.20	<10	<0.20	<0.30	<0.50	<0.20	<0.50	<0.20	<1.0	<0.30	<0.20
MW38	MW38042022	04/22/2022	<0.20	<0.20	<10	<0.20	<0.30	<0.50	<0.20	<0.50	<0.20	<1.0	<0.30	<0.20
	MW38102021	10/14/2021	<0.20	<0.20	<10	<0.20	<0.30	<0.50	<0.20	<0.50	<0.20	<1.0	<0.30	<0.20
	MW38042021	04/23/2021	<0.20	<0.20	<10	<0.20	<0.30	<0.50	<0.20	<0.50	<0.20	<1.0	<0.30	<0.20
MW39	MW39042022	04/22/2022	<0.20	<0.20	<10	<0.20	<0.30	<0.50	<0.20	<0.50	<0.20	<1.0	<0.30	<0.20
	MW39102021	10/14/2021	<0.20	<0.20	<10	<0.20	<0.30	<0.50	<0.20	<0.50	<0.20	<1.0	<0.30	<0.20
	MW39042021	04/23/2021	<0.20	<0.20	<10	<0.20	<0.30	<0.50	<0.20	<0.50	<0.20	<1.0	<0.30	<0.20
SMW01	SMW01042022	04/12/2022	<0.20	<0.20	<10	<0.20	<0.30	<0.50	<0.20	<0.50	<0.20	<1.0	<0.30	<0.20
	SMW01102021	10/08/2021	<0.20	<0.20	<10	<0.20	<0.30	<0.50	<0.20	<0.50	<0.20	<1.0	<0.30	<0.20
	SMW01042021	04/13/2021	<0.20	<0.20	<10	<0.20	<0.30	<0.50	<0.20	<0.50	<0.20	<1.0	<0.30	<0.20
	SMW01042021DUP	04/13/2021	<0.20	<0.20	<10	<0.20	<0.30	<0.50	<0.20	<0.50	<0.20	<1.0	<0.30	<0.20
TMW01	SMW01102020	09/29/2020	<0.20	<0.20	<10	<0.20	<0.30	<0.50	<0.20	<0.50	<0.20	<1.0	<0.30	<0.20
	TMW01042022	04/15/2022	<0.20	<0.20	<10	<0.20	<0.30	<0.50	<0.20	<0.50	<0.20	<1.0	<0.30	<0.20
	TMW01102021	10/08/2021	<0.20	<0.20	<10	<0.20	<0.30	<0.50	<0.20	<0.50	<0.20	<1.0	<0.30	<0.20
	TMW01042021	04/15/2021	<0.20	<0.20	<10	<0.20	<0.30	<0.50	<0.20	<0.50	<0.20	<1.0	<0.30	<0.20
	TMW01102020	10/01/2020	<0.20	<0.20	<10	<0.20	<0.30	<0.50	<0.20	<0.50	<0.20	<1.0	<0.30	<0.20

2024 INTERIM NORTHERN AREA GROUNDWATER MONITORING PLAN
Fort Wingate Depot Activity, New Mexico

Well ID	Sample ID	Date	1,2-Dichloroethane	1,3-Dichlorobenzene	Acetone	Benzene	Bromoform	Carbon Disulfide	Chloroform	Chloromethane	Dibromochloromethane	Methylene chloride	MTBE	Toluene
			µg/L											
			SL	5	75	18,000	5	80	810	80	190	80	5	100
TMW02	TMW02042022	04/15/2022	<0.20	<0.20	<10	<0.20	<0.30	<0.50	<0.20	<0.50	<0.20	<1.0	<0.30	<0.20
	TMW02042022DUP	04/15/2022	<0.20	<0.20	<10	<0.20	<0.30	<0.50	<0.20	<0.50	<0.20	<1.0	<0.30	<0.20
	TMW02102021	10/08/2021	<0.20	<0.20	<10	<0.20	<0.30	<0.50	<0.20	<0.50	<0.20	<1.0	<0.30	<0.20
	TMW02102021DUP	10/08/2021	<0.20	<0.20	<10	<0.20	<0.30	<0.50	<0.20	<0.50	<0.20	<1.0	<0.30	<0.20
	TMW02042021	04/16/2021	<0.20	<0.20	<10	<0.20	<0.30	<0.50	<0.20	<0.50	<0.20	<1.0	<0.30	<0.20
	TMW02042021DUP	04/16/2021	<0.20	<0.20	<10	<0.20	<0.30	<0.50	<0.20	<0.50	<0.20	<1.0	<0.30	<0.20
	TMW02102020	10/02/2020	<0.20	<0.20	<10	<0.20	<0.30	<0.50	<0.20	<0.50	<0.20	<1.0	<0.30	<0.20
TMW03	TMW02102020DUP	10/02/2020	<0.20	<0.20	<10	<0.20	<0.30	<0.50	<0.20	<0.50	<0.20	<1.0	<0.30	<0.20
	TMW03042022	04/19/2022	<0.20	<0.20	<10	<0.20	<0.30	<0.50	<0.20	<0.50	<0.20	<1.0	<0.30	<0.20
	TMW03102021	10/14/2021	<0.20	<0.20	<10	<0.20	<0.30	<0.50	<0.20	<0.50	<0.20	<1.0	<0.30	<0.20
	TMW03042021	04/23/2021	<0.20	<0.20	<10	<0.20	<0.30	<0.50	<0.20	<0.50	<0.20	<1.0	<0.30	<0.20
TMW04	TMW03102020	10/07/2020	<0.20	<0.20	<10	<0.20	<0.30	<0.50	<0.20	<0.50	<0.20	<1.0	<0.30	<0.20
	TMW04042022	04/15/2022	<0.20	<0.20	<10	<0.20	<0.30	<0.50	<0.20	<0.50	<0.20	<1.0	<0.30	<0.20
	TMW04102021	10/11/2021	<0.20	<0.20	<10	<0.20	<0.30	<0.50	<0.20	<0.50	<0.20	<1.0	<0.30	<0.20
	TMW04042021	04/16/2021	<0.20	<0.20	<10	<0.20	<0.30	<0.50	<0.20	<0.50	<0.20	<1.0	<0.30	<0.20
TMW06	TMW04102020	10/02/2020	<0.20	<0.20	<10	<0.20	<0.30	<0.50	<0.20	<0.50	<0.20	<1.0	<0.30	<0.20
	TMW06042022	04/20/2022	<0.20	<0.20	<10	<0.20	<0.30	<0.50	<0.20	<0.50	<0.20	<1.0	<0.30	<0.20
	TMW06102021	10/14/2021	<0.20	<0.20	<10	<0.20	<0.30	<0.50	<0.20	<0.50	<0.20	<1.0	<0.30	<0.20
	TMW06102021DUP	10/14/2021	<0.20	<0.20	<10	<0.20	<0.30	<0.50	<0.20	<0.50	<0.20	<1.0	<0.30	<0.20
TMW07	TMW06042021	04/21/2021	<0.20	<0.20	<10	<0.20	<0.30	<0.50	<0.20	<0.50	<0.20	<1.0	<0.30	<0.20
	TMW06102020	10/06/2020	<0.20	<0.20	<10	<0.20	<0.30	<0.50	<0.20	<0.50	<0.20	<1.0	<0.30	<0.20
	TMW07042022	04/15/2022	<0.20	<0.20	<10	<0.20	<0.30	<0.50	<0.20	<0.50	<0.20	<1.0	<0.30	<0.20
	TMW07102021	10/08/2021	<0.20	<0.20	<10	<0.20	<0.30	<0.50	<0.20	<0.50	<0.20	<1.0	<0.30	<0.20
TMW08	TMW07102020	10/01/2020	<0.20	<0.20	<10	<0.20	<0.30	<0.50	<0.20	<0.50	<0.20	<1.0	<0.30	<0.20
	TMW07102020DUP	10/01/2020	<0.20	<0.20	<10	<0.20	<0.30	<0.50	<0.20	<0.50	<0.20	<1.0	<0.30	<0.20
	TMW08042022	04/14/2022	<0.20	<0.20	<10	<0.20	<0.30	<0.50	<0.20	<0.50	<0.20	<1.0	<0.30	<0.20
	TMW08102021	10/07/2021	<0.20	<0.20	<10	<0.20	<0.30	<0.50	<0.20	<0.50	<0.20	<1.0	<0.30	<0.20
TMW10	TMW08042021	04/14/2021	<0.20	<0.20	<10	<0.20	<0.30	<0.50	<0.20	<0.50	<0.20	<1.0	<0.30	<0.20
	TMW08102020	09/30/2020	<0.20	<0.20	<10	<0.20	<0.30	<0.50	<0.20	<0.50	<0.20	<1.0	<0.30	<0.20
	TMW10042022	04/14/2022	<0.20	<0.20	<10	<0.20	<0.30	<0.50	<0.20	<0.50	<0.20	<1.0	<0.30	<0.20
TMW13	TMW10042021	10/07/2021	<0.20	<0.20	<10	<0.20	<0.30	<0.50	<0.20	<0.50	<0.20	<1.0	<0.30	<0.20
	TMW10042021	04/15/2021	<0.20	<0.20	<10	<0.20	<0.30	<0.50	<0.20	<0.50	<0.20	<1.0	<0.30	<0.20
	TMW10102020	10/01/2020	<0.20	<0.20	<10	<0.20	<0.30	<0.50	<0.20	<0.50	<0.20	<1.0	<0.30	<0.20
TMW15	TMW13042022	04/20/2022	<0.20	<0.20	<10	<0.20	<0.30	<0.50	<0.20	<0.50	<0.20	<1.0	<0.30	<0.20
	TMW13042022DUP	04/20/2022	<0.20	<0.20	<10	<0.20	<0.30	<0.50	<0.20	<0.50	<0.20	<1.0	<0.30	<0.20
	TMW13102021	10/13/2021	<0.20	<0.20	<10	<0.20	<0.30	<0.50	<0.20	<0.50	<0.20	<1.0	<0.30	<0.20
	TMW13042021	04/21/2021	<0.20	<0.20	<10	<0.20	<0.30	<0.50	<0.20	<0.50	<0.20	<1.0	<0.30	<0.20
	TMW13042021DUP	04/21/2021	<0.20	<0.20	<10	<0.20	<0.30	<0.50	<0.20	<0.50	<0.20	<1.0	<0.30	<0.20
	TMW13102020	10/06/2020	<0.20	<0.20	<10	<0.20	<0.30	<0.50	<0.20	<0.50	<0.20	<1.0	<0.30	<0.20
TMW21	TMW13102020DUP	10/06/2020	<0.20	<0.20	<10	<0.20	<0.30	<0.50	<0.20	<0.50	<0.20	<1.0	<0.30	<0.20
	TMW15042022	04/20/2022	<0.20	<0.20	<10	<0.20	<0.30	<0.50	<0.20	<0.50	<0.20	<1.0	<0.30	<0.20
	TMW15102021	10/07/2021	<0.20	<0.20	<10	<0.20	<0.30	<0.50	<0.20	<0.50	<0.20	<1.0	<0.30	<0.20
	TMW15042021	04/21/2021	<0.20	<0.20	<10	<0.20	<0.30	<0.50	<0.20	<0.50	<0.20	<1.0	<0.30	<0.20
TMW22	TMW15102020	10/05/2020	<0.20	<0.20	<10	<0.20	<0.30	<0.50	<0.20	<0.50	<0.20	<1.0	<0.30	<0.20
	TMW15102020DUP	10/05/2020	<0.20	<0.20	<10	<0.20	<0.30	<0.50	<0.20	<0.50	<0.20	<1.0	<0.30	<0.20
	TMW21042022	04/21/2022	<0.20	<0.20	<10	<0.20	<0.30	<0.50	<0.20	<0.50	<0.20	<1.0	<0.30	<0.20
	TMW21102021	10/13/2021	<0.20	<0.20	<10	<0.20	<0.30	<0.50	<0.20	<0.50	<0.20	<1.0	<0.30	<0.20
TMW23	TMW21042021	04/22/2021	<0.20	<0.20	<10	<0.20	<0.30	<0.50	<0.20	<0.50	<0.20	<1.0	<0.30	<0.20
	TMW21102020	10/07/2020	<0.20	<0.20	<10	<0.20	<0.30	<0.50	<0.20	<0.50	<0.20	<1.0	<0.30	<0.20
	TMW22042022	04/15/2022	<0.20	<0.20	<10	<0.20	<0.30	<0.50	<0.20	<0.50	<0.20	<1.0	<0.30	<0.20
	TMW22102021	10/08/2021	<0.20	<0.20	<10	<0.20	<0.30	<0.50	<0.20	<0.50	<0.20	<1.0	<0.30	<0.20
TMW24	TMW22042021	04/21/2021	<0.20	<0.20	<10	<0.20	<0.30	<0.50	<0.20	<0.50	<0.20	<1.0	<0.30	<0.20
	TMW22102020	10/01/2020	<0.20	<0.20	<10	<0.20	<0.30	<0.50	<0.20	<0.50	<0.20	<1.0	<0.30	<0.20
	TMW23042022	04/15/2022	<0.20	<0.20	<10	<0.20	<0.30	<0.50	<0.20	<0.50	<0.20	<1.0	<0.30	<0.20
	TMW23102021	10/08/2021	<0.20	<0.20	<10	<0.20	<0.30	<0.50	<0.20	<0.50	<0.20	<1.0	<0.30	<0.20
TMW25	TMW23042021	04/16/2021	<0.20	<0.20	<10	<0.20	<0.30	<0.50	<0.20	<0.50	<0.20	<1.0	<0.30	<0.20
	TMW23102020	10/01/2020	<0.20	<0.20	<10	<0.20	<0.30	<0.50	<0.20	<0.50	<0.20	<1.0	<0.30	<0.20
	TMW24042022	04/19/2022	<0.20	<0.20	<10	<0.20	<0.30	<0.50	<0.20	<0.50	<0.20	<1.0	<0.30	<0.20
	TMW24102021	10/14/2021	<0.20	<0.20	<10	<0.20	<0.30	<0.50	<0.20	<0.50	<0.20	<1.0	<0.30	<0.20
TMW25	TMW24042021	04/19/2021	<0.20	<0.20	<10	<0.20	<0.30	<0.50	<0.20	<0.50	<0.20	<1.0	<0.30	<0.20
	TMW24102020	10/01/2020	<0.20	<0.20	<10	<0.20	<0.30	<0.50	<0.20	<0.50	<0.20	<1.0	<0.30	<0.20
	TMW25042022	04/21/2022	<0.20	<0.20	<10	<0.20	<0.30	<0.50	<0.20	<0.50	<0.20	<1.0	<0.30	<0.20
	TMW25102021	10/13/2021	<0.20	<0.20	<10	<0.20	<0.30	<0.50	<0.20	<0.50	<0.20	<1.0	<0.30	<0.20
TMW25	TMW25042021	04/22/2021	<0.20	<0.20	<10	<0.20	<0.30	<0.50	<0.20	<0.50	<0.20	<1.0	<0.30	<0.20
	TMW25042021DUP	04/22/2021	<0.20	<0.20	<10	<0.20	<0.30	<0.50	<0.20	<0.50	<0.20	<1.0	<0.30	<0.20
	TMW25102020	10/07/2020	<0.20	<0.20	<10	<0.20	<0.30	<0.50	<0.20	<0.50	<0.20	<1.0	<0.30	<0.20

TABLE B-4: SUMMARY OF VOC ANALYTICAL RESULTS
2024 INTERIM NORTHERN AREA GROUNDWATER MONITORING PLAN
Fort Wingate Depot Activity, New Mexico

Well ID	Sample ID	Date	1,2-Dichloroethane	1,3-Dichlorobenzene	Acetone	Benzene	Bromoform	Carbon Disulfide	Chloroform	Chloromethane	Dibromochloromethane	Methylene chloride	MTBE	Toluene
			µg/L											
			SL	5	75	18,000	5	80	810	80	190	80	5	100
TMW26	TMW26042022	04/13/2022	<0.20	<0.20	<10	<0.20	<0.30	<0.50	<0.20	<0.50	<0.20	<1.0	<0.30	<0.20
	TMW26102021	10/04/2021	<0.20	<0.20	<10	<0.20	<0.30	<0.50	<0.20	<0.50	<0.20	<1.0	<0.30	<0.20
	TMW26042021	04/13/2021	<0.20	<0.20	<10	<0.20	<0.30	<0.50	<0.20	<0.50	<0.20	<1.0	<0.30	<0.20
	TMW26102020	09/30/2020	<0.20	<0.20	<10	<0.20	<0.30	<0.50	<0.20	<0.50	<0.20	<1.0	<0.30	<0.20
TMW27	TMW27042022	04/13/2022	<0.20	<0.20	<10	<0.20	<0.30	<0.50	<0.20	<0.50	<0.20	<1.0	<0.30	<0.20
	TMW27102021	10/10/2021	<0.20	<0.20	<10	<0.20	<0.30	<0.50	<0.20	<0.50	<0.20	<1.0	<0.30	<0.20
	TMW27042021	04/18/2021	<0.20	<0.20	<10	<0.20	<0.30	<0.50	<0.20	<0.50	<0.20	<1.0	<0.30	<0.20
	TMW27042021DUP	04/18/2021	<0.20	<0.20	<10	<0.20	<0.30	<0.50	<0.20	<0.50	<0.20	<1.0	<0.30	<0.20
TMW28	TMW27102020	10/02/2020	<0.20	<0.20	<10	<0.20	<0.30	<0.50	<0.20	<0.50	<0.20	0.58 J	<0.30	<0.20
	TMW27102020DUP	10/02/2020	<0.20	<0.20	<10	<0.20	<0.30	<0.50	<0.20	<0.50	<0.20	<1.0	<0.30	<0.20
	TMW28042022	04/18/2022	<0.20	<0.20	<10	<0.20	<0.30	<0.50	<0.20	<0.50	<0.20	<1.0	<0.30	<0.20
	TMW28102021	10/12/2021	<0.20	<0.20	<10	<0.20	<0.30	<0.50	<0.20	<0.50	<0.20	<1.0	<0.30	<0.20
TMW29	TMW28042021	04/16/2021	<0.20	<0.20	<10	<0.20	<0.30	<0.50	<0.20	<0.50	<0.20	<1.0	<0.30	<0.20
	TMW28102020	10/02/2020	<0.20	<0.20	<10	<0.20	<0.30	<0.50	<0.20	<0.50	<0.20	<1.0	<0.30	<0.20
	TMW29042022	04/15/2022	<0.20	<0.20	<10	<0.20	<0.30	<0.50	<0.20	<0.50	<0.20	<1.0	<0.30	<0.20
	TMW29102021	10/08/2021	<0.20	<0.20	<10	<0.20	<0.30	<0.50	<0.20	<0.50	<0.20	<1.0	<0.30	<0.20
TMW31S	TMW29042021	04/21/2021	<0.20	<0.20	<10	<0.20	<0.30	<0.50	<0.20	<0.50	<0.20	<1.0	<0.30	<0.20
	TMW29102020	10/01/2020	<0.20	<0.20	<10	<0.20	<0.30	<0.50	<0.20	<0.50	<0.20	<1.0	<0.30	<0.20
	TMW31S042022	04/14/2022	<0.20	<0.20	<10	<0.20	<0.30	<0.50	<0.20	<0.50	<0.20	<1.0	<0.30	<0.20
	TMW31S102021	10/07/2021	<0.20	<0.20	<10	<0.20	<0.30	<0.50	<0.20	<0.50	<0.20	<1.0	<0.30	<0.20
TMW33	TMW31S042021	04/26/2021	<0.20	<0.20	<10	<0.20	<0.30	<0.50	<0.20	<0.50	<0.20	<1.0	<0.30	<0.20
	TMW31S102020	10/01/2020	<0.20	<0.20	<10	<0.20	<0.30	<0.50	<0.20	<0.50	<0.20	<1.0	<0.30	<0.20
	TMW33042022	04/15/2022	38	<0.20	<10	<0.20	<0.30	<0.50	<0.20	<0.50	<0.20	<1.0	<0.30	<0.20
	TMW33102021	10/08/2021	44	<0.20	<10	<0.20	<0.30	<0.50	<0.20	0.26 J	<0.20	<1.0	<0.30	<0.20
TMW34	TMW33042021	04/16/2021	39	<0.20	<10	<0.20	<0.30	<0.50	<0.20	<0.50	<0.20	<1.0	<0.30	<0.20
	TMW33102020	10/01/2020	45	<0.20	<10	<0.20	<0.30	<0.50	<0.20	<0.50	<0.20	<1.0	<0.30	<0.20
	TMW34042022	04/19/2022	<0.20	<0.20	<10	<0.20	<0.30	<0.50	<0.20	<0.50	<0.20	<1.0	<0.30	<0.20
	TMW34042022DUP	04/19/2022	<0.20	<0.20	<10	<0.20	<0.30	<0.50	<0.20	<0.50	<0.20	<1.0	<0.30	<0.20
TMW35	TMW34102021	10/13/2021	<0.20	<0.20	<10	<0.20	<0.30	<0.50	<0.20	<0.50	<0.20	<1.0	<0.30	<0.20
	TMW34102021DUP	10/13/2021	<0.20	<0.20	6.0 J	<0.20	<0.30	<0.50	<0.20	<0.50	<0.20	<1.0	<0.30	<0.20
	TMW34042021	04/20/2021	<0.20	<0.20	<10	<0.20	<0.30	<0.50	<0.20	<0.50	<0.20	<1.0	<0.30	<0.20
	TMW34102020	10/05/2020	<0.20	<0.20	<10	<0.20	<0.30	<0.50	<0.20	<0.50	<0.20	<1.0	<0.30	<0.20
TMW39S	TMW35042022	04/20/2022	0.64 J	<0.20	<10	<0.20	<0.30	<0.50	<0.20	<0.50	<0.20	<1.0	<0.30	<0.20
	TMW35102021	10/06/2021	0.66 J	<0.20	<10	<0.20	<0.30	<0.50	<0.20	<0.50	<0.20	<1.0	<0.30	<0.20
	TMW35042021	04/21/2021	0.76 J	<0.20	<10	<0.20	<0.30	<0.50	<0.20	<0.50	<0.20	<1.0	<0.30	<0.20
	TMW35102020	10/06/2020	0.78 J	<0.20	<10	<0.20	<0.30	<0.50	<0.20	<0.50	<0.20	<1.0	<0.30	<0.20
TMW41	TMW39S042022	04/13/2022	<0.20	<0.20	<10	<0.20	<0.30	<0.50	<0.20	<0.50	<0.20	<1.0	<0.30	<0.20
	TMW39S102021	10/08/2021	<0.20	<0.20	<10	<0.20	<0.30	<0.50	<0.20	<0.50	<0.20	<1.0	<0.30	<0.20
	TMW39S042021	04/26/2021	<0.20	<0.20	<10	<0.20	<0.30	<0.50	<0.20	<0.50	<0.20	<1.0	<0.30	<0.20
	TMW39S102020	10/01/2020	<0.20	<0.20	<10	<0.20	<0.30	<0.50	<0.20	<0.50	<0.20	<1.0	<0.30	<0.20
TMW43	TMW41042022	04/15/2022	<0.20	<0.20	<10	<0.20	<0.30	<0.50	<0.20	<0.50	<0.20	<1.0	<0.30	<0.20
	TMW41102021	10/08/2021	<0.20	<0.20	<10	<0.20	<0.30	<0.50	<0.20	<0.50	<0.20	<1.0	<0.30	<0.20
	TMW41042021	04/16/2021	<0.20	<0.20	<10	<0.20	<0.30	<0.50	<0.20	<0.50	<0.20	<1.0	<0.30	<0.20
	TMW41102020	10/01/2020	<0.20	<0.20	<10	<0.20	<0.30	<0.50	<0.20	<0.50	<0.20	<1.0	<0.30	<0.20
TMW44	TMW43042022	04/19/2022	<0.20	<0.20	<10	<0.20	<0.30	<0.50	<0.20	<0.50	<0.20	<1.0	<0.30	<0.20
	TMW43102021	10/12/2021	<0.20	<0.20	<10	<0.20	<0.30	<0.50	<0.20	<0.50	<0.20	<1.0	<0.30	<0.20
	TMW43042021	04/16/2021	<0.20	<0.20	<10	<0.20	<0.30	<0.50	<0.20	<0.50	<0.20	<1.0	<0.30	<0.20
	TMW43102020	10/02/2020	<0.20	<0.20	<10	<0.20	<0.30	<0.50	<0.20	<0.50	<0.20	<1.0	<0.30	<0.20
TMW45	TMW44042022	04/12/2022	<0.20	<0.20	<10	<0.20	<0.30	<0.50	<0.20	<0.50	<0.20	<1.0	<0.30	<0.20
	TMW44102021	10/05/2021	<0.20	<0.20	<10	<0.20	<0.30	<0.50	<0.20	<0.50	<0.20	<1.0	<0.30	<0.20
	TMW44042021	04/12/2021	<0.20	<0.20	<10	<0.20	<0.30	<0.50	<0.20	<0.50	<0.20	<1.0	<0.30	<0.20
	TMW44102020	09/29/2020	<0.20	<0.20	<10	<0.20	<0.30	<0.50	<0.20	<0.50	<0.20	<1.0	<0.30	<0.20
TMW46	TMW45042022	04/19/2022	<0.20	<0.20	<10	<0.20	<0.30	<0.50	<0.20	<0.50	<0.20	<1.0	<0.30	<0.20
	TMW45102021	10/12/2021	<0.20	<0.20	<10	<0.20	<0.30	<0.50	<0.20	<0.50	<0.20	<1.0	<0.30	<0.20
	TMW45102021DUP	10/12/2021	<0.20	<0.20	<10	<0.20	<0.30	<0.50	<0.20	<0.50	<0.20	<1.0	<0.30	<0.20
	TMW45042021	04/20/2021	<0.20	<0.20	<10	<0.20	<0.30	<0.50	<0.20	<0.50	<0.20	<1.0	<0.30	<0.20
TMW47	TMW45102020	10/05/2020	<0.20	<0.20	<10	<0.20	<0.30	<0.50	<0.20	<0.50	<0.20	0.54 J	<0.30	<0.20
	TMW46042022	04/12/2022	<0.20	<0.20	<10	<0.20	<0.30	<0.50	<0.20	<0.50	<0.20	<1.0	<0.30	<0.20
	TMW46102021	10/05/2021	<0.20	<0.20	<10	<0.20	<0.30	<0.50	<0.20	<0.50	<0.20	<1.0	<0.30	<0.20
	TMW46042021	04/13/2021	<0.20	<0.20	<10	<0.20	<0.30	<0.50	<0.20	<0.50	<0.20	<1.0	<0.30	<0.20
TMW47	TMW46102020	09/29/2020	<0.20	<0.20	<10	<0.20	<0.30	<0.50	<0.20	<0.50	<0.20	<1.0	<0.30	<0.20
	TMW47042022	04/21/2022	<0.20	<0.20	<10	<0.20	<0.30	1.6	<0.20	<0.50	<0.20	<1.0	<0.30	<0.20
	TMW47102021	10/14/2021	<0.20	<0.20	<10	<0.20	<0.30	2.5	<0.20	<0.50	<0.20	<1.0	<0.30	<0.20
	TMW47042021	04/23/2021	<0.20	<0.20	<10	<0.20	<0.30	2.5	<0.20	<0.50	<0.20	<1.0	<0.30	<0.20
	TMW47102020	10/07/2020	<0.20	<0.20	<10	<0.20	<0.30	1.2	<0.20	<0.50	<0.20	<1.0	<0.30	<0.20

TABLE B-4: SUMMARY OF VOC ANALYTICAL RESULTS
2024 INTERIM NORTHERN AREA GROUNDWATER MONITORING PLAN
Fort Wingate Depot Activity, New Mexico

Well ID	Sample ID	Date	1,2-Dichloroethane	1,3-Dichlorobenzene	Acetone	Benzene	Bromoform	Carbon Disulfide	Chloroform	Chloromethane	Dibromochloromethane	Methylene chloride	MTBE	Toluene
SL			5	75	18,000	5	80	810	80	190	80	5	100	1,000
TMW57	TMW57042022	04/18/2022	<0.20	<0.20	<10	<0.20	<0.30	<0.50	<0.20	<0.50	<0.20	<1.0	<0.30	<0.20
	TMW57102021	10/11/2021	<0.20	<0.20	<10	<0.20	<0.30	<0.50	<0.20	<0.50	<0.20	<1.0	<0.30	<0.20
	TMW57042021	04/19/2021	<0.20	<0.20	<10	<0.20	<0.30	<0.50	<0.20	<0.50	<0.20	<1.0	<0.30	<0.20
TMW59	TMW59042022	04/18/2022	<0.20	<0.20	<10	<0.20	<0.30	<0.50	<0.20	<0.50	<0.20	<1.0	<0.30	<0.20
	TMW59102021	10/11/2021	<0.20	<0.20	<10	<0.20	<0.30	<0.50	<0.20	<0.50	<0.20	<1.0	<0.30	<0.20
	TMW59042021	04/23/2021	<0.20	<0.20	<10	<0.20	<0.30	<0.50	<0.20	<0.50	<0.20	<1.0	<0.30	<0.20
TMW61	TMW61042022	04/18/2022	<0.20	<0.20	<10	<0.20	<0.30	<0.50	<0.20	<0.50	<0.20	<1.0	<0.30	<0.20
	TMW61102021	10/13/2021	<0.20	<0.20	<10	<0.20	<0.30	<0.50	<0.20	<0.50	<0.20	<1.0	<0.30	<0.20
	TMW61042021	04/26/2021	<0.20	<0.20	<10	<0.20	<0.30	<0.50	<0.20	<0.50	<0.20	<1.0	<0.30	<0.20
TMW62	TMW62042022	04/15/2022	<0.20	<0.20	<10	<0.20	<0.30	<0.50	<0.20	<0.50	<0.20	<1.0	<0.30	<0.20
	TMW62102021	10/08/2021	<0.20	<0.20	<10	<0.20	<0.30	<0.50	<0.20	<0.50	<0.20	<1.0	<0.30	<0.20
	TMW62042021	04/21/2021	<0.20	<0.20	<10	<0.20	<0.30	<0.50	<0.20	<0.50	<0.20	<1.0	<0.30	<0.20
Bedrock Wells														
BGMW07	BGMW07042022	04/11/2022	<0.20	<0.20	<10	<0.20	0.24 J	<0.50	<0.20	<0.50	0.17 J	<1.0	<0.30	<0.20
	BGMW07102021	10/04/2021	<0.20	<0.20	<10	<0.20	<0.30	<0.50	<0.20	<0.50	<0.20	<1.0	<0.30	<0.20
	BGMW07042021	04/12/2021	<0.20	<0.20	<10	<0.20	<0.30	<0.50	<0.20	<0.50	<0.20	<1.0	<0.30	<0.20
BGMW08	BGMW07102020	09/28/2020	<0.20	<0.20	<10	<0.20	<0.30	<0.50	<0.20	<0.50	<0.20	<1.0	<0.30	<0.20
	BGMW08042022	04/11/2022	<0.20	<0.20	<10	<0.20	<0.30	<0.50	<0.20	<0.50	<0.20	<1.0	<0.30	<0.20
	BGMW08102021	10/04/2021	<0.20	<0.20	<10	<0.20	<0.30	<0.50	<0.20	<0.50	<0.20	<1.0	<0.30	<0.20
BGMW09	BGMW08042021	04/13/2021	<0.20	<0.20	<10	0.13 J	<0.30	<0.50	<0.20	<0.50	<0.20	<1.0	<0.30	<0.20
	BGMW08102020	09/28/2020	<0.20	<0.20	<10	<0.20	<0.30	<0.50	<0.20	<0.50	<0.20	1.4 J	<0.30	<0.20
	BGMW09042022	04/12/2022	<0.20	<0.20	<10	<0.20	<0.30	<0.50	<0.20	<0.50	<0.20	<1.0	<0.30	<0.20
	BGMW09042022DUP	04/12/2022	<0.20	<0.20	<10	<0.20	<0.30	<0.50	<0.20	<0.50	<0.20	<1.0	<0.30	<0.20
	BGMW09102021	10/06/2021	<0.20	<0.20	<10	<0.20	<0.30	<0.50	<0.20	<0.50	<0.20	<1.0	<0.30	<0.20
BGMW10	BGMW09042021	04/23/2021	<0.20	<0.20	<10	<0.20	<0.30	<0.50	<0.20	<0.50	<0.20	<1.0	<0.30	<0.20
	BGMW09102020	09/29/2020	<0.20	<0.20	<10	<0.20	<0.30	<0.50	<0.20	<0.50	<0.20	<1.0	<0.30	<0.20
	BGMW10042022	04/12/2022	<0.20	<0.20	<10	<0.20	<0.30	<0.50	<0.20	<0.50	<0.20	<1.0	<0.30	<0.20
	BGMW10102021	10/07/2021	<0.20	<0.20	<10	<0.20	<0.30	<0.50	<0.20	<0.50	<0.20	<1.0	<0.30	<0.20
	BGMW10102021DUP	10/07/2021	<0.20	<0.20	<10	<0.20	<0.30	<0.50	<0.20	<0.50	<0.20	<1.0	<0.30	<0.20
TMW14A	TMW14A042022	04/18/2022	<0.20	<0.20	<10	<0.20	<0.30	<0.50	<0.20	<0.50	<0.20	<1.0	<0.30	<0.20
	TMW14A102021	10/12/2021	<0.20	<0.20	<10	<0.20	<0.30	<0.50	<0.20	<0.50	<0.20	<1.0	<0.30	<0.20
	TMW14A102021DUP	10/12/2021	<0.20	<0.20	<10	<0.20	<0.30	<0.50	<0.20	<0.50	<0.20	<1.0	<0.30	<0.20
TMW16	TMW14A042021	04/19/2021	<0.20	<0.20	<10	<0.20	<0.30	0.27 J	<0.20	<0.50	<0.20	<1.0	<0.30	<0.20
	TMW14A102020	10/02/2020	<0.20	<0.20	<10	<0.20	<0.30	<0.50	<0.20	<0.50	<0.20	<1.0	<0.30	<0.20
	TMW16042022	04/11/2022	<0.20	<0.20	<10	<0.20	<0.30	<0.50	<0.20	<0.50	<0.20	<1.0	<0.30	<0.20
	TMW16102021	10/04/2021	<0.20	<0.20	<10	<0.20	<0.30	<0.50	<0.20	<0.50	<0.20	<1.0	<0.30	<0.20
	TMW16102021DUP	10/04/2021	<0.20	<0.20	<10	<0.20	<0.30	<0.50	<0.20	<0.50	<0.20	<1.0	<0.30	<0.20
	TMW16042021	04/12/2021	<0.20	<0.20	<10	<0.20	<0.30	<0.50	<0.20	<0.50	<0.20	<1.0	<0.30	<0.20
	TMW16042021DUP	04/12/2021	<0.20	<0.20	<10	<0.20	<0.30	<0.50	<0.20	<0.50	<0.20	<1.0	<0.30	<0.20
TMW17	TMW16102020	09/28/2020	<0.20	<0.20	<10	<0.20	<0.30	<0.50	<0.20	<0.50	<0.20	<1.0	<0.30	<0.20
	TMW17042022	04/18/2022	<0.20	<0.20	<10	<0.20	<0.30	<0.50	<0.20	<0.50	<0.20	<1.0	<0.30	<0.20
	TMW17102021	10/13/2021	<0.20	<0.20	<10	<0.20	<0.30	<0.50	<0.20	<0.50	<0.20	<1.0	<0.30	<0.20
	TMW17042021	04/19/2021	<0.20	<0.20	<10	<0.20	<0.30	<0.50	<0.20	<0.50	<0.20	<1.0	<0.30	<0.20
TMW18	TMW17042021DUP	04/19/2021	<0.20	<0.20	<10	<0.20	<0.30	<0.50	<0.20	<0.50	<0.20	<1.0	<0.30	<0.20
	TMW17102020	10/02/2020	<0.20	<0.20	<10	<0.20	<0.30	<0.50	<0.20	0.38 J	<0.20	<1.0	<0.30	<0.20
	TMW18042022	04/11/2022	<0.20	<0.20	<10	<0.20	<0.30	<0.50	<0.20	<0.50	<0.20	<1.0	<0.30	<0.20
	TMW18102021	10/05/2021	<0.20	<0.20	<10	<0.20	<0.30	<0.50	<0.20	<0.50	<0.20	<1.0	<0.30	<0.20
	TMW18042021	04/12/2021	<0.20	<0.20	<10	<0.20	<0.30	<0.50	<0.20	<0.50	<0.20	<1.0	<0.30	0.11 J
TMW19	TMW18102020	09/28/2020	<0.20	<0.20	<10	<0.20	<0.30	<0.50	<0.20	<0.50	<0.20	<1.0	<0.30	0.19 J
	TMW19042022	04/11/2022	<0.20	<0.20	<10	<0.20	<0.30	<0.50	<0.20	<0.50	<0.20	<1.0	<0.30	<0.20
	TMW19102021	10/04/2021	<0.20	<0.20	<10	<0.20	<0.30	<0.50	<0.20	<0.50	<0.20	<1.0	<0.30	<0.20
	TMW19042021	04/12/2021	<0.20	<0.20	<10	<0.20	<0.30	<0.50	<0.20	<0.50	<0.20	<1.0	<0.30	<0.20
	TMW19102020	09/28/2020	<0.20	<0.20	<10	<0.20	<0.30	<0.50	<0.20	<0.50	<0.20	<1.0	<0.30	<0.20
TMW30	TMW19102020DUP	09/28/2020	<0.20	<0.20	<10	<0.20	<0.30	<0.50	<0.20	<0.50	<0.20	<1.0	<0.30	<0.20
	TMW30042022	04/13/2022	<0.20	<0.20	<10	<0.20	<0.30	<0.50	<0.20	<0.50	<0.20	<1.0	<0.30	<0.20
	TMW30102021	10/06/2021	<0.20	<0.20	<10	<0.20	<0.30	<0.50	<0.20	<0.50	<0.20	<1.0	<0.30	<0.20
TMW31D	TMW30042021	04/14/2021	<0.20	<0.20	<10	<0.20	<0.30	<0.50	<0.20	<0.50	<0.20	<1.0	<0.30	<0.20
	TMW30102020	09/30/2020	<0.20	<0.20	<10	<0.20	<0.30	<0.50	<0.20	<0.50	<0.20	<1.0	<0.30	<0.20
	TMW31D042022	04/19/2022	<0.20	<0.20	<10	<0.20	<0.30	<0.50	<0.20	<0.50	<0.20	<1.0	<0.30	<0.20
	TMW31D102021	10/12/2021	<0.20	<0.20	<10	<0.20	<0.30	<0.50	<0.20	<0.50	<0.20	<1.0	<0.30	<0.20
	TMW31D042021	04/20/2021	<0.20	<0.20	<10	<0.20	<0.30	<0.50	<0.20	<0.50	<0.20	<1.0	<0.30	<0.20

TABLE B-4: SUMMARY OF VOC ANALYTICAL RESULTS
2024 INTERIM NORTHERN AREA GROUNDWATER MONITORING PLAN
Fort Wingate Depot Activity, New Mexico

Well ID	Sample ID	Date	1,2-Dichloroethane	1,3-Dichlorobenzene	Acetone	Benzene	Bromoform	Carbon Disulfide	Chloroform	Chloromethane	Dibromochloromethane	Methylene chloride	MTBE	Toluene
			µg/L											
			5	75	18,000	5	80	810	80	190	80	5	100	1,000
TMW32	TMW32042022	04/21/2022	<0.20	<0.20	<10	<0.20	<0.30	<0.50	<0.20	<0.50	<0.20	<1.0	<0.30	<0.20
	TMW32102021	10/14/2021	<0.20	<0.20	<10	<0.20	<0.30	<0.50	<0.20	<0.50	<0.20	<1.0	<0.30	<0.20
	TMW32042021	04/22/2021	<0.20	<0.20	<10	<0.20	<0.30	<0.50	<0.20	<0.50	<0.20	<1.0	<0.30	<0.20
	TMW32102020	10/07/2020	<0.20	<0.20	<10	<0.20	<0.30	<0.50	<0.20	<0.50	<0.20	<1.0	<0.30	<0.20
TMW36	TMW36042022	04/11/2022	<0.20	<0.20	<10	<0.20	<0.30	<0.50	<0.20	<0.50	<0.20	<1.0	<0.30	<0.20
	TMW36102021	10/13/2021	<0.20	<0.20	<10	<0.20	<0.30	<0.50	<0.20	<0.50	<0.20	<1.0	<0.30	<0.20
	TMW36042021	04/12/2021	<0.20	<0.20	<10	<0.20	<0.30	<0.50	<0.20	<0.50	<0.20	<1.0	<0.30	<0.20
	TMW36102020	09/28/2020	<0.20	<0.20	<10	<0.20	<0.30	<0.50	<0.20	<0.50	<0.20	1.1 J	<0.30	<0.20
TMW37	TMW37042022	04/12/2022	<0.20	<0.20	<10	<0.20	<0.30	<0.50	<0.20	<0.50	<0.20	<1.0	<0.30	<0.20
	TMW37102021	10/06/2021	<0.20	<0.20	<10	<0.20	<0.30	<0.50	<0.20	<0.50	<0.20	<1.0	<0.30	<0.20
	TMW37042021	04/13/2021	<0.20	<0.20	<10	<0.20	<0.30	<0.50	<0.20	<0.50	<0.20	<1.0	<0.30	<0.20
	TMW37102020	09/29/2020	<0.20	<0.20	<10	<0.20	<0.30	<0.50	<0.20	<0.50	<0.20	<1.0	<0.30	<0.20
TMW38	TMW38042022	04/21/2022	<0.20	<0.20	<10	<0.20	<0.30	0.26 J	<0.20	<0.50	<0.20	<1.0	<0.30	<0.20
	TMW38102021	10/13/2021	<0.20	<0.20	<10	<0.20	<0.30	0.99 J	<0.20	<0.50	<0.20	<1.0	<0.30	<0.20
	TMW38042021	04/22/2021	<0.20	<0.20	<10	<0.20	<0.30	0.79 J	<0.20	<0.50	<0.20	<1.0	<0.30	<0.20
	TMW38102020	10/06/2020	<0.20	<0.20	<10	<0.20	<0.30	0.72 J	<0.20	<0.50	<0.20	<1.0	<0.30	<0.20
TMW39D	TMW39D042022	04/22/2022	<0.20	<0.20	<10	<0.20	<0.30	<0.50	<0.20	<0.50	<0.20	<1.0	<0.30	<0.20
	TMW39D102021	10/13/2021	<0.20	<0.20	<10	<0.20	<0.30	<0.50	<0.20	<0.50	<0.20	<1.0	<0.30	<0.20
	TMW39D042021	04/23/2021	<0.20	<0.20	<10	<0.20	<0.30	<0.50	<0.20	<0.50	<0.20	<1.0	<0.30	<0.20
	TMW39D102020	10/07/2020	<0.20	<0.20	<10	<0.20	<0.30	<0.50	<0.20	<0.50	<0.20	<1.0	<0.30	<0.20
TMW40D	TMW40D042022	04/22/2022	<0.20	<0.20	<10	<0.20	<0.30	<0.50	<0.20	<0.50	<0.20	<1.0	<0.30	<0.20
	TMW40D102021	10/15/2021	<0.20	<0.20	<10	<0.20	<0.30	<0.50	<0.20	<0.50	<0.20	<1.0	<0.30	<0.20
	TMW40D042021	04/23/2021	<0.20	<0.20	<10	<0.20	<0.30	<0.50	<0.20	<0.50	<0.20	<1.0	<0.30	<0.20
	TMW40D102020	10/07/2020	<0.20	<0.20	<10	<0.20	<0.30	<0.50	<0.20	<0.50	<0.20	<1.0	<0.30	<0.20
TMW48	TMW48042022	04/22/2022	<0.20	<0.20	<10	<0.20	<0.30	<0.50	<0.20	<0.50	<0.20	<1.0	<0.30	<0.20
	TMW48102021	10/15/2021	<0.20	<0.20	<10	<0.20	<0.30	<0.50	<0.20	<0.50	<0.20	<1.0	<0.30	<0.20
	TMW48042021	04/23/2021	<0.20	<0.20	<10	<0.20	<0.30	<0.50	<0.20	<0.50	<0.20	<1.0	<0.30	<0.20
	TMW48102020	10/08/2020	<0.20	<0.20	<10	<0.20	<0.30	<0.50	<0.20	<0.50	<0.20	<1.0	<0.30	<0.20
TMW49	TMW49042022	04/22/2022	<0.20	<0.20	<10	<0.20	<0.30	<0.50	<0.20	<0.50	<0.20	<1.0	<0.30	<0.20
	TMW49102021	10/15/2021	<0.20	<0.20	<10	<0.20	<0.30	<0.50	<0.20	<0.50	<0.20	<1.0	<0.30	<0.20
	TMW49042021	04/23/2021	<0.20	<0.20	<10	<0.20	<0.30	<0.50	<0.20	<0.50	<0.20	<1.0	<0.30	<0.20
	TMW49102020	10/08/2020	<0.20	<0.20	<10	<0.20	<0.30	<0.50	<0.20	<0.50	<0.20	<1.0	<0.30	<0.20
TMW50	TMW50042022	04/13/2022	<0.20	<0.20	<10	<0.20	<0.30	0.37 J	<0.20	<0.50	<0.20	<1.0	<0.30	<0.20
	TMW50042022DUP	04/13/2022	<0.20	<0.20	<10	<0.20	<0.30	<0.50	<0.20	<0.50	<0.20	<1.0	<0.30	<0.20
	TMW50102021	10/06/2021	<0.20	<0.20	<10	<0.20	<0.30	<0.50	<0.20	<0.50	<0.20	<1.0	<0.30	<0.20
	TMW50042021	04/14/2021	<0.20	<0.20	<10	<0.20	<0.30	0.40 J	<0.20	<0.50	<0.20	<1.0	<0.30	<0.20
TMW51	TMW51042022	04/14/2022	<0.20	<0.20	<10	<0.20	<0.30	<0.50	<0.20	<0.50	<0.20	<1.0	<0.30	<0.20
	TMW51102021	10/04/2021	<0.20	<0.20	<10	<0.20	<0.30	<0.50	<0.20	<0.50	<0.20	<1.0	<0.30	<0.20
TMW52	TMW51042021	04/14/2021	<0.20	<0.20	<10	<0.20	<0.30	<0.50	<0.20	<0.50	<0.20	<1.0	<0.30	<0.20
	TMW52042022	04/18/2022	<0.20	<0.20	<10	<0.20	<0.30	<0.50	<0.20	<0.50	<0.20	<1.0	<0.30	<0.20
TMW53	TMW52102021	10/11/2021	<0.20	<0.20	<10	<0.20	<0.30	<0.50	<0.20	<0.50	<0.20	<1.0	<0.30	<0.20
	TMW52042021	04/19/2021	<0.20	<0.20	<10	<0.20	<0.30	<0.50	<0.20	<0.50	<0.20	<1.0	<0.30	<0.20
	TMW53042022	04/18/2022	<0.20	<0.20	<10	<0.20	<0.30	<0.50	<0.20	<0.50	<0.20	<1.0	<0.30	<0.20
	TMW53102021	10/11/2021	<0.20	<0.20	<10	<0.20	<0.30	0.33 J	<0.20	<0.50	<0.20	<1.0	<0.30	<0.20
TMW55	TMW53042021	04/19/2021	<0.20	<0.20	<10	<0.20	<0.30	1.2	<0.20	<0.50	<0.20	<1.0	<0.30	<0.20
	TMW55042022	04/15/2022	<0.20	<0.20	<10	<0.20	<0.30	<0.50	<0.20	<0.50	<0.20	<1.0	<0.30	<0.20
	TMW55102021	10/08/2021	<0.20	<0.20	<10	<0.20	<0.30	<0.50	<0.20	<0.50	<0.20	<1.0	<0.30	<0.20
	TMW55042021	04/16/2021	<0.20	<0.20	<10	<0.20	<0.30	<0.50	<0.20	<0.50	<0.20	<1.0	<0.30	<0.20
TMW58	TMW58042022	04/12/2022	<0.20	<0.20	<10	<0.20	<0.30	<0.50	<0.20	<0.50	<0.20	<1.0	<0.30	<0.20
	TMW58102021	10/05/2021	<0.20	<0.20	<10	<0.20	<0.30	0.26 J	<0.20	<0.50	<0.20	<1.0	<0.30	<0.20
	TMW58042021	04/13/2021	<0.20	<0.20	<10	<0.20	<0.30	<0.50	<0.20	<0.50	<0.20	<1.0	<0.30	<0.20
TMW63	TMW63042022	04/13/2022	<0.20	<0.20	<10	<0.20	<0.30	<0.50	<0.20	<0.50	<0.20	<1.0	<0.30	<0.20
	TMW63102021	10/06/2021	<0.20	<0.20	<10	<0.20	<0.30	<0.50	<0.20	<0.50	<0.20	<1.0	<0.30	<0.20
	TMW63042021	04/14/2021	<0.20	<0.20	<10	<0.20	<0.30	<0.50	<0.20	<0.50	<0.20	<1.0	<0.30	<0.20
TMW64	TMW64042022	04/19/2022	<0.20	<0.20	<10	<0.20	<0.30	<0.50	<0.20	<0.50	<0.20	<1.0	<0.30	<0.20
	TMW64102021	10/12/2021	<0.20	<0.20	<10	<0.20	<0.30	<0.50	<0.20	<0.50	<0.20	<1.0	<0.30	<0.20
	TMW64042021	04/20/2021	<0.20	<0.20	<10	<0.20	<0.30	<0.50	<0.20	<0.50	<0.20	<1.0	<0.30	<0.20

NOTES & ABBREVIATIONS:

µg/L = micrograms per liter
< = less than LOD
NA = not analyzed
J = estimated value
Q = one or more quality control criteria failed
– = not established or not applicable
SL = Screening level
Number = Result exceeds cited (lowest) SL.

TABLE B-5: SUMMARY OF TPH AND SVOC ANALYTICAL RESULTS
2024 INTERIM NORTHERN AREA GROUNDWATER MONITORING PLAN
Fort Wingate Depot Activity, New Mexico

Well ID	Sample ID	Date	TPH GRO	TPH DRO	1,2,4-Trichlorobenzene	1,2-Dichlorobenzene	1,3-Dichlorobenzene	1,4-Dichlorobenzene	2,4-Dinitrophenol	2-Chloronaphthalene	2-Methylnaphthalene	2-Nitroaniline	4-Nitroaniline	4-Nitrophenol	bis(2-Ethylhexyl)phthalate	Naphthalene	Caprolactam
			µg/L														
			10.1	16.7	70	600	75	75	39	750	30	190	38	--	6	30	9,900
SL			10.1	16.7	70	600	75	75	39	750	30	190	38	--	6	30	9,900
Alluvial Wells																	
BGMW01	BGMW01042022	04/13/2022	NA	NA	<12	<5.8	<5.8	<5.8	<5.8	<5.8	<5.8	<5.8	<5.8	<5.8	<12	<5.8	<12
	BGMW01102021	10/05/2021	NA	NA	<13	<6.4	<6.4	<6.4	<6.4	<6.4	<6.4	<6.4	<6.4	<6.4	<13	<6.4	<13
	BGMW01042021	04/14/2021	NA	NA	<11	<5.7	<5.7	<5.7	<5.7	<5.7	<5.7	<5.7	<5.7	<5.7	<11	<5.7	<11
	BGMW01102020	09/30/2020	NA	NA	<12	<5.8	<5.8	<5.8	<5.8	<5.8	<5.8	<5.8	<5.8	<5.8	<12	<5.8	<12
BGMW02	BGMW02042022	04/13/2022	NA	NA	<12	<5.8	<5.8	<5.8	<5.8	<5.8	<5.8	<5.8	<5.8	<5.8	<12	<5.8	<12
	BGMW02102021	10/05/2021	NA	NA	<11	<5.7	<5.7	<5.7	<5.7	<5.7	<5.7	<5.7	<5.7	<5.7	<11	<5.7	<11
	BGMW02042021	04/14/2021	NA	NA	<11	<5.7	<5.7	<5.7	<5.7	<5.7	<5.7	<5.7	<5.7	<5.7	<11	<5.7	<11
	BGMW02102020	09/30/2020	NA	NA	<11	<5.4	<5.4	<5.4	<5.4	<5.4	<5.4	<5.4	<5.4	<5.4	<11	<5.4	<11
BGMW03	BGMW03042022	04/11/2022	NA	NA	<11	<5.4	<5.4	<5.4	<5.4	<5.4	<5.4	<5.4	<5.4	<5.4	<11	<5.4	<11
	BGMW03102021	10/04/2021	NA	NA	<11	<5.2	<5.2	<5.2	<5.2	<5.2	<5.2	<5.2	<5.2	<5.2	<11	<5.2	<11
	BGMW03042021	04/12/2021	NA	NA	<11	<5.6	<5.6	<5.6	<5.6	<5.6	<5.6	<5.6	<5.6	<5.6	<11	<5.6	<11
	BGMW03102020	09/28/2020	NA	NA	<23	<11	<11	<11	<11	<11	<11	<11	<11	<11	<23	<11	<23
BGMW11	BGMW11042022	04/15/2022	<20	<100	<11	<5.6	<5.6	<5.6	<5.6	<5.6	<5.6	<5.6	<5.6	<5.6	<11	<5.6	<11
	BGMW11102021	10/11/2021	<20	<110	<11	<5.6	<5.6	<5.6	<5.6	<5.6	<5.6	<5.6	<5.6	<5.6	<11	<5.6	<11
	BGMW11042021	04/20/2021	<20	<100	<11	<5.7	<5.7	<5.7	<5.7	<5.7	<5.7	<5.7	<5.7	<5.7	<11	<5.7	<11
BGMW12	BGMW12042022	04/11/2022	<20	<100	<11	<5.7	<5.7	<5.7	<5.7	<5.7	<5.7	<5.7	<5.7	<5.7	<11	<5.7	<11
	BGMW12102021	10/07/2021	<20	<100	<11	<5.6	<5.6	<5.6	<5.6	<5.6	<5.6	<5.6	<5.6	<5.6	<11	<5.6	<11
	BGMW12042021	04/13/2021	<20	<120	<11	<5.4	<5.4	<5.4	<5.4	<5.4	<5.4	<5.4	<5.4	<5.4	<11	<5.4	<11
BGMW13D	BGMW13D042022	04/21/2022	<20	<95	<11	<5.7	<5.7	<5.7	<5.7	<5.7	<5.7	<5.7	<5.7	<5.7	<11	<5.7	<11
	BGMW13D042022DUP	04/21/2022	<20	120 J	<11	<5.7	<5.7	<5.7	<5.7	<5.7	<5.7	<5.7	<5.7	<5.7	<11	<5.7	<11
	BGMW13D102021	10/14/2021	<20	<100	<11	<5.4	<5.4	<5.4	<5.4	<5.4	<5.4	<5.4	<5.4	<5.4	<11	<5.4	<11
	BGMW13D042021	04/23/2021	<20	<110	<11	<5.4	<5.4	<5.4	<5.4	<5.4	<5.4	<5.4	<5.4	<5.4	<11	<5.4	<11
	BGMW13D042021DUP	04/23/2021	<20	<120	<12	<6.0	<6.0	<6.0	<6.0	<6.0	<6.0	<6.0	<6.0	<6.0	<12	<6.0	<12
BGMW13S	BGMW13S042022	04/21/2022	<20	78 J	<12	<5.8	<5.8	<5.8	<5.8	<5.8	<5.8	<5.8	<5.8	<5.8	<12	<5.8	<12
	BGMW13S102021	10/11/2021	<20	78 J	<10	<5.1	<5.1	<5.1	<5.1	<5.1	<5.1	<5.1	<5.1	<5.1	<10	<5.1	<10
	BGMW13S042021	04/23/2021	<20	<100	<11	<5.5	<5.5	<5.5	<5.5	<5.5	<5.5	<5.5	<5.5	<5.5	<11	<5.5	<11
FW31	FW31042022	04/18/2022	NA	NA	<11	<5.4	<5.4	<5.4	<5.4	<5.4	<5.4	<5.4	<5.4	<5.4	<11	<5.4	<11
	FW31102021	10/12/2021	NA	NA	<11	<5.4	<5.4	<5.4	<5.4	<5.4	<5.4	<5.4	<5.4	<5.4	<11	<5.4	<11
	FW31042021	04/19/2021	NA	NA	<12	<6.0	<6.0	<6.0	<6.0	<6.0	<6.0	<6.0	<6.0	<6.0	<12	<6.0	<12
	FW31102020	10/05/2020	NA	NA	<11	<5.7	<5.7	<5.7	<5.7	<5.7	<5.7	<5.7	<5.7	<5.7	<11	<5.7	<11
	FW31102020DUP	10/05/2020	NA	NA	<11	<5.6	<5.6	<5.6	<5.6	<5.6	<5.6	<5.6	<5.6	<5.6	<11	<5.6	<11

TABLE B-5: SUMMARY OF TPH AND SVOC ANALYTICAL RESULTS
2024 INTERIM NORTHERN AREA GROUNDWATER MONITORING PLAN
Fort Wingate Depot Activity, New Mexico

Well ID	Sample ID	Date	TPH GRO	TPH DRO	1,2,4-Trichlorobenzene	1,2-Dichlorobenzene	1,3-Dichlorobenzene	1,4-Dichlorobenzene	2,4-Dinitrophenol	2-Chloronaphthalene	2-Methylnaphthalene	2-Nitroaniline	4-Nitroaniline	4-Nitrophenol	bis(2-Ethylhexyl)phthalate	Naphthalene	Caprolactam
			µg/L														
			10.1	16.7	70	600	75	75	39	750	30	190	38	--	6	30	9,900
MW01	MW01042022	04/12/2022	<20	54 J	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
	MW01102021	10/05/2021	<20	<120	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
	MW01042021	04/13/2021	<20	89 J	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
	MW01102020	09/29/2020	<20	120 J	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
MW02	MW02042022	04/12/2022	<20	290 J	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
	MW02102021	10/05/2021	<20	<100	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
	MW02042021	04/13/2021	<20	<100	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
	MW02102020	09/29/2020	<20	<110	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
MW03	MW03042022	04/14/2022	<20	<110	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
	MW03042022DUP	04/14/2022	<20	<100	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
	MW03102021	10/11/2021	<20	<110	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
	MW03042021	04/15/2021	<20	<110	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
	MW03042021DUP	04/15/2021	<20	<110	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
	MW03102020	10/01/2020	<20	<100	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
MW18D	MW18D042022	04/20/2022	31 J	<100	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
	MW18D102021	10/13/2021	28 J	<100	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
	MW18D042021	04/21/2021	<20	74 J	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
	MW18D102020	10/06/2020	<20	<100	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
MW20	MW20042022	04/20/2022	<20	130 J	<12	<5.8	<5.8	<5.8	<5.8	<5.8	<5.8	<5.8	<5.8	<5.8	<12	<5.8	<12
	MW20102021	10/06/2021	<20	170 J	<32	<16	<16	<16	<16	<16	<16	<16	<16	<16	<32	<16	<32
	MW20042021	04/21/2021	<20	270 J	<22	<11	<11	<11	<11	<11	<11	<11	<11	<11	<22	<11	<22
	MW20102020	10/05/2020	<20	210 J	<23	<12	<12	<12	<12	<12	<12	<12	<12	<12	<23	<12	<23
MW22D	MW22D042022	04/21/2022	<20	<110	<11	<5.4	<5.4	<5.4	<5.4	<5.4	<5.4	<5.4	<5.4	<5.4	<11	<5.4	<11
	MW22D102021	10/14/2021	<20	<110	<11	<5.7	<5.7	<5.7	<5.7	<5.7	<5.7	<5.7	<5.7	<5.7	<11	<5.7	<11
	MW22D042021	04/22/2021	<20	86 J	<12	<6.0	<6.0	<6.0	<6.0	<6.0	<6.0	<6.0	<6.0	<6.0	<12	<6.0	<12
	MW22D102020	10/07/2020	<20	<100	<11	<5.6	<5.6	<5.6	<5.6	<5.6	<5.6	<5.6	<5.6	<5.6	<11	<5.6	<11
MW23	MW23042022	04/11/2022	NA	NA	<11	<5.4	<5.4	<5.4	<5.4	<5.4	<5.4	<5.4	<5.4	<5.4	<11	<5.4	<11
	MW23102021	10/11/2021	NA	NA	<12	<5.8	<5.8	<5.8	<5.8	<5.8	<5.8	<5.8	<5.8	<5.8	<12	<5.8	<12
	MW23102021DUP	10/11/2021	NA	NA	<11	<5.6	<5.6	<5.6	<5.6	<5.6	<5.6	<5.6	<5.6	<5.6	<11	<5.6	<11
	MW23042021	04/13/2021	NA	NA	<11	<5.6	<5.6	<5.6	<5.6	<5.6	<5.6	<5.6	<5.6	<5.6	<11	<5.6	<11
	MW23102020	09/28/2020	NA	NA	<23	<12	<12	<12	<12	<12	<12	<12	<12	<12	<23	<12	<23

TABLE B-5: SUMMARY OF TPH AND SVOC ANALYTICAL RESULTS
2024 INTERIM NORTHERN AREA GROUNDWATER MONITORING PLAN
Fort Wingate Depot Activity, New Mexico

Well ID	Sample ID	Date	TPH GRO	TPH DRO	1,2,4-Trichlorobenzene	1,2-Dichlorobenzene	1,3-Dichlorobenzene	1,4-Dichlorobenzene	2,4-Dinitrophenol	2-Chloronaphthalene	2-Methylnaphthalene	2-Nitroaniline	4-Nitroaniline	4-Nitrophenol	bis(2-Ethylhexyl)phthalate	Naphthalene	Caprolactam
			µg/L														
			10.1	16.7	70	600	75	75	39	750	30	190	38	--	6	30	9,900
MW24	MW24042022	04/12/2022	NA	NA	<11	<5.4	<5.4	<5.4	<5.4	<5.4	<5.4	<5.4	<5.4	<5.4	<11	<5.4	<11
	MW24042022DUP	04/12/2022	NA	NA	<11	<5.7	<5.7	<5.7	<5.7	<5.7	<5.7	<5.7	<5.7	<5.7	<11	<5.7	<11
	MW24102021	10/11/2021	NA	NA	<12	<5.9	<5.9	<5.9	<5.9	<5.9	<5.9	<5.9	<5.9	<5.9	<12	<5.9	<12
	MW24102021DUP	10/11/2021	NA	NA	<12	<5.9	<5.9	<5.9	<5.9	<5.9	<5.9	<5.9	<5.9	<5.9	<12	<5.9	<12
	MW24042021	04/15/2021	NA	NA	<11	<5.7	<5.7	<5.7	<5.7	<5.7	<5.7	<5.7	<5.7	<5.7	<11	<5.7	<11
	MW24102020	09/29/2020	NA	NA	<12	<6.1	<6.1	<6.1	<6.1	<6.1	<6.1	<6.1	<6.1	<6.1	<12	<6.1	<12
MW25	MW25042022	04/13/2022	<20	<98	<12	<6.0	<6.0	<6.0	<6.0	<6.0	<6.0	<6.0	<6.0	<6.0	<12	<6.0	<12
	MW25102021	10/12/2021	<20	<95	<12	<6.0	<6.0	<6.0	<6.0	<6.0	<6.0	<6.0	<6.0	<6.0	<12	<6.0	<12
	MW25042021	04/21/2021	<20	150 J	<20	<10	<10	<10	<10	<10	<10	<10	<10	<10	<20	<10	<20
MW26	MW26042022	04/18/2022	<20	<110	<11	<5.7	<5.7	<5.7	<5.7	<5.7	<5.7	<5.7	<5.7	<5.7	<11	<5.7	<11
	MW26102021	10/11/2021	<20	110 J	<11	<5.7	<5.7	<5.7	<5.7	<5.7	<5.7	<5.7	<5.7	<5.7	<11	<5.7	<11
	MW26042021	04/20/2021	<20	<100	<24	<12	<12	<12	<12	<12	<12	<12	<12	<12	<24	<12	<24
MW27	MW27042022	04/20/2022	<20	<110	<11	<5.7	<5.7	<5.7	<5.7	<5.7	<5.7	<5.7	<5.7	<5.7	<11	<5.7	<11
	MW27102021	10/08/2021	<20	<100	<11	<5.7	<5.7	<5.7	<5.7	<5.7	<5.7	<5.7	<5.7	<5.7	<11	<5.7	<11
	MW27042021	04/23/2021	<20	88 J	<11	<5.4	<5.4	<5.4	<5.4	<5.4	<5.4	<5.4	<5.4	<5.4	<11	<5.4	<11
MW28	MW28042022	04/13/2022	<20	<98	<11	<5.7	<5.7	<5.7	<5.7	<5.7	<5.7	<5.7	<5.7	<5.7	<11	<5.7	<11
	MW28102021	10/05/2021	<20	<100	<10	<5.1	<5.1	<5.1	<5.1	<5.1	<5.1	<5.1	<5.1	<5.1	<10	<5.1	<10
	MW28042021	04/16/2021	<20	<110	<11	<5.4	<5.4	<5.4	<5.4	<5.4	<5.4	<5.4	<5.4	<5.4	<11	<5.4	<11
MW29	MW29042022	04/14/2022	<20	<150	<11	<5.7	<5.7	<5.7	<5.7	<5.7	<5.7	<5.7	<5.7	<5.7	<11	<5.7	<11
	MW29102021	10/05/2021	<20	<110	<12	<5.9	<5.9	<5.9	<5.9	<5.9	<5.9	<5.9	<5.9	<5.9	<12	<5.9	<12
	MW29042021	04/16/2021	<20	74 J	<25	<12	<12	<12	<12	<12	<12	<12	<12	<12	<25	<12	<25
MW30	MW30042022	04/20/2022	<20	<110	<11	<5.4	<5.4	<5.4	<5.4	<5.4	<5.4	<5.4	<5.4	<5.4	<11	<5.4	<11
	MW30102021	10/08/2021	<20	<100	<12	<5.8	<5.8	<5.8	<5.8	<5.8	<5.8	<5.8	<5.8	<5.8	<12	<5.8	<12
	MW30042021	04/21/2021	<20	<100	<22	<11	<11	<11	<11	<11	<11	<11	<11	<11	<22	<11	<22
MW31	MW31042022	04/21/2022	<20	<98	<11	<5.4	<5.4	<5.4	<5.4	<5.4	<5.4	<5.4	<5.4	<5.4	<11	<5.4	<11
	MW31102021	10/13/2021	<20	<100	<11	<5.5	<5.5	<5.5	<5.5	<5.5	<5.5	<5.5	<5.5	<5.5	<11	<5.5	<11
	MW31042021	04/21/2021	<20	180 J	<22	<11	<11	<11	<11	<11	<11	<11	<11	<11	<22	<11	<22
MW32	MW32042022	04/11/2022	<20	73 J	<11	<5.7	<5.7	<5.7	<5.7	<5.7	<5.7	<5.7	<5.7	<5.7	<11	<5.7	<11
	MW32102021	10/04/2021	<20	<100	<11	<5.4	<5.4	<5.4	<5.4	<5.4	<5.4	<5.4	<5.4	<5.4	<11	<5.4	<11
	MW32042021	04/13/2021	<20	120 J	<25	<12	<12	<12	<12	<12	<12	<12	<12	<12	<25	<12	<25

TABLE B-5: SUMMARY OF TPH AND SVOC ANALYTICAL RESULTS
2024 INTERIM NORTHERN AREA GROUNDWATER MONITORING PLAN
Fort Wingate Depot Activity, New Mexico

Well ID	Sample ID	Date	TPH GRO	TPH DRO	1,2,4-Trichlorobenzene	1,2-Dichlorobenzene	1,3-Dichlorobenzene	1,4-Dichlorobenzene	2,4-Dinitrophenol	2-Chloronaphthalene	2-Methylnaphthalene	2-Nitroaniline	4-Nitroaniline	4-Nitrophenol	bis(2-Ethylhexyl)phthalate	Naphthalene	Caprolactam
			µg/L														
			10.1	16.7	70	600	75	75	39	750	30	190	38	--	6	30	9,900
MW33	MW33042022	04/18/2022	<20	<100	<12	<5.8	<5.8	<5.8	<5.8	<5.8	<5.8	<5.8	<5.8	<5.8	<12	<5.8	<12
	MW33102021	10/11/2021	<20	<100	<32	<16	<16	<16	<16	<16	<16	<16	<16	<16	<32	<16	<32
	MW33042021	04/19/2021	<20	110 J	<25	<12	<12	<12	<12	<12	<12	<12	<12	<12	<25	<12	<25
MW34	MW34042022	04/18/2022	<20	<110	<12	<5.8	<5.8	<5.8	<5.8	<5.8	<5.8	<5.8	<5.8	<5.8	<12	<5.8	<12
	MW34102021	10/11/2021	<20	<120	<22	<11	<11	<11	<11	<11	<11	<11	<11	<11	<22	<11	<22
	MW34042021	04/19/2021	<20	110 J	<24	<12	<12	<12	<12	<12	<12	<12	<12	<12	<24	<12	<24
	MW34042021DUP	04/19/2021	<20	<110	<23	<11	<11	<11	<11	<11	<11	<11	<11	<11	<23	<11	<23
MW35	MW35042022	04/20/2022	<20	<110	<12	<5.8	<5.8	<5.8	<5.8	<5.8	<5.8	<5.8	<5.8	<5.8	<12	<5.8	<12
	MW35042022DUP	04/20/2022	<20	<110	<11	<5.3	<5.3	<5.3	<5.3	<5.3	<5.3	<5.3	<5.3	<5.3	<12	<5.3	<12
	MW35102021	10/13/2021	<20	<100	<11	<5.6	<5.6	<5.6	<5.6	<5.6	<5.6	<5.6	<5.6	<5.6	<11	<5.6	<11
	MW35102021DUP	10/13/2021	<20	<95	<12	<6.0	<6.0	<6.0	<6.0	<6.0	<6.0	<6.0	<6.0	<6.0	<12	<6.0	<12
	MW35042021	04/21/2021	<20	<110	<10	<5.1	<5.1	<5.1	<5.1	<5.1	<5.1	<5.1	<5.1	<5.1	<10	<5.1	<10
MW36D	MW36D042022	04/18/2022	<20	<98	<12	<5.8	<5.8	<5.8	<5.8	<5.8	<5.8	<5.8	<5.8	<5.8	<12	<5.8	<12
	MW36D042022DUP	04/18/2022	<20	<110	<11	<5.6	<5.6	<5.6	<5.6	<5.6	<5.6	<5.6	<5.6	<5.6	<11	<5.6	<11
	MW36D102021	10/11/2021	<20	<120	<12	<5.9	<5.9	<5.9	<5.9	<5.9	<5.9	<5.9	<5.9	<5.9	<12	<5.9	<12
	MW36D042021	04/19/2021	<20	77 J	<23	<11	<11	<11	<11	<11	<11	<11	<11	<11	<23	<11	<23
MW36S	MW36S042022	04/18/2022	<20	<120	<12	<6.1	<6.1	<6.1	<6.1	<6.1	<6.1	<6.1	<6.1	<6.1	<12	<6.1	<12
	MW36S102021	10/11/2021	<20	82 J	<11	<5.7	<5.7	<5.7	<5.7	<5.7	<5.7	<5.7	<5.7	<5.7	<11	<5.7	<11
	MW36S042021	04/19/2021	<20	120 J	<23	<12	<12	<12	<12	<12	<12	<12	<12	<12	<23	<12	<23
MW37	MW37042022	04/20/2022	<20	<100	<12	<5.8	<5.8	<5.8	<5.8	<5.8	<5.8	<5.8	<5.8	<5.8	<12	<5.8	<12
	MW37102021	10/13/2021	<20	<100	<11	<5.6	<5.6	<5.6	<5.6	<5.6	<5.6	<5.6	<5.6	<5.6	<11	<5.6	<11
	MW37042021	04/21/2021	<20	<120	<23	<11	<11	<11	<11	<11	<11	<11	<11	<11	<23	<11	<23
MW38	MW38042022	04/22/2022	<20	<100	<12	<6.0	<6.0	<6.0	<6.0	<6.0	<6.0	<6.0	<6.0	<6.0	<12	<6.0	<12
	MW38102021	10/14/2021	<20	53 J	<12	<5.9	<5.9	<5.9	<5.9	<5.9	<5.9	<5.9	<5.9	<5.9	<12	<5.9	<12
	MW38042021	04/23/2021	<20	<100	<12	<6.0	<6.0	<6.0	<6.0	<6.0	<6.0	<6.0	<6.0	<6.0	<12	<6.0	<12
MW39	MW39042022	04/22/2022	<20	<110	<9.9	<4.9	<4.9	<4.9	<4.9	<4.9	<4.9	<4.9	<4.9	<4.9	<9.9	<4.9	<9.9
	MW39102021	10/14/2021	<20	<98	<12	<5.9	<5.9	<5.9	<5.9	<5.9	<5.9	<5.9	<5.9	<5.9	<12	<5.9	<12
	MW39042021	04/23/2021	<20	<110	<11	<5.6	<5.6	<5.6	<5.6	<5.6	<5.6	<5.6	<5.6	<5.6	<11	<5.6	<11

TABLE B-5: SUMMARY OF TPH AND SVOC ANALYTICAL RESULTS
2024 INTERIM NORTHERN AREA GROUNDWATER MONITORING PLAN
Fort Wingate Depot Activity, New Mexico

Well ID	Sample ID	Date	TPH GRO	TPH DRO	1,2,4-Trichlorobenzene	1,2-Dichlorobenzene	1,3-Dichlorobenzene	1,4-Dichlorobenzene	2,4-Dinitrophenol	2-Chloronaphthalene	2-Methylnaphthalene	2-Nitroaniline	4-Nitroaniline	4-Nitrophenol	bis(2-Ethylhexyl)phthalate	Naphthalene	Caprolactam
			µg/L														
			10.1	16.7	70	600	75	75	39	750	30	190	38	--	6	30	9,900
SMW01	SMW01042022	04/12/2022	NA	NA	<12	<6.0	<6.0	<6.0	<6.0	<6.0	<6.0	<6.0	<6.0	<6.0	<12	<6.0	<12
	SMW01102021	10/08/2021	NA	NA	<12	<5.9	<5.9	<5.9	<5.9	<5.9	<5.9	<5.9	<5.9	<5.9	<12	<5.9	<12
	SMW01042021	04/13/2021	NA	NA	<12	<5.8	<5.8	<5.8	<5.8	<5.8	<5.8	<5.8	<5.8	<5.8	<12	<5.8	<12
	SMW01042021DUP	04/13/2021	NA	NA	<11	<5.7	<5.7	<5.7	<5.7	<5.7	<5.7	<5.7	<5.7	<5.7	<11	<5.7	<11
	SMW01102020	09/29/2020	NA	NA	<12	<6.0	<6.0	<6.0	<6.0	<6.0	<6.0	<6.0	<6.0	<6.0	<12	<6.0	<12
TMW03	TMW03042022	04/19/2022	NA	NA	<24	<12	<12	<12	<12	<12	<12	<12	<12	<12	<24	<12	<24
	TMW03102021	10/14/2021	NA	NA	<22	<11	<11	<11	<11	<11	<11	<11	<11	<11	<22	<11	<22
	TMW03042021	04/23/2021	NA	NA	<24	<12	<12	<12	<12	<12	<12	<12	<12	<12	<24	<12	<24
	TMW03102020	10/07/2020	NA	NA	<21	<10	<10	<10	<10	<10	<10	<10	<10	<10	<21	<10	<21
TMW04	TMW04042022	04/15/2022	NA	NA	<12	<5.8	<5.8	<5.8	<5.8	<5.8	<5.8	<5.8	<5.8	<5.8	<12	<5.8	<12
	TMW04102021	10/11/2021	NA	NA	<21	<10	<10	<10	<10	<10	<10	<10	<10	<10	<21	<10	<21
	TMW04042021	04/16/2021	NA	NA	<22	<11	<11	<11	<11	<11	<11	<11	<11	<11	<22	<11	<22
	TMW04102020	10/02/2020	NA	NA	<22	<11	<11	<11	<11	<11	<11	<11	<11	<11	<22	<11	<22
TMW06	TMW06042022	04/20/2022	<20	<110	<12	<5.8	<5.8	<5.8	<5.8	<5.8	<5.8	<5.8	<5.8	<5.8	<12	<5.8	<12
	TMW06102021	10/14/2021	<20	<100	<11	<5.4	<5.4	<5.4	<5.4	<5.4	<5.4	<5.4	<5.4	<5.4	<11	<5.4	<11
	TMW06102021DUP	10/14/2021	<20	<95	<11	<5.7	<5.7	<5.7	<5.7	<5.7	<5.7	<5.7	<5.7	<5.7	<11	<5.7	<11
	TMW06042021	04/21/2021	<20	<110	<11	<5.4	<5.4	<5.4	<5.4	<5.4	<5.4	<5.4	<5.4	<5.4	<11	<5.4	<11
	TMW06102020	10/06/2020	NA	NA	<11	<5.7	<5.7	<5.7	<5.7	<5.7	<5.7	<5.7	<5.7	<5.7	<11	<5.7	<11
TMW07	TMW07042022	04/15/2022	<20	120 J	<12	<6.1	<6.1	<6.1	<6.1	<6.1	<6.1	<6.1	<6.1	<6.1	<12	<6.1	<12
	TMW07102021	10/08/2021	<20	<100	<11	<5.5	<5.5	<5.5	<5.5	<5.5	<5.5	<5.5	<5.5	<5.5	<11	<5.5	<11
	TMW07042021	04/16/2021	<20	<110	<11	<5.6	<5.6	<5.6	<5.6	<5.6	<5.6	<5.6	<5.6	<5.6	<11	<5.6	<11
	TMW07102020	10/01/2020	NA	NA	<11	<5.5	<5.5	<5.5	<5.5	<5.5	<5.5	<5.5	<5.5	<5.5	<11	<5.5	<11
	TMW07102020DUP	10/01/2020	NA	NA	<10	<5.0	<5.0	<5.0	<5.0	<5.0	<5.0	<5.0	<5.0	<5.0	<10	<5.0	<10
TMW08	TMW08042022	04/14/2022	<20	<100	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
	TMW08102021	10/07/2021	<20	70 J	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
	TMW08042021	04/14/2021	<20	200 J	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
	TMW08102020	09/30/2020	<10	55 J	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
TMW10	TMW10042022	04/14/2022	<20	<100	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
	TMW10102021	10/07/2021	<20	<100	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
	TMW10042021	04/15/2021	<20	<100	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA

TABLE B-5: SUMMARY OF TPH AND SVOC ANALYTICAL RESULTS
2024 INTERIM NORTHERN AREA GROUNDWATER MONITORING PLAN
Fort Wingate Depot Activity, New Mexico

Well ID	Sample ID	Date	TPH GRO	TPH DRO	1,2,4-Trichlorobenzene	1,2-Dichlorobenzene	1,3-Dichlorobenzene	1,4-Dichlorobenzene	2,4-Dinitrophenol	2-Chloronaphthalene	2-Methylnaphthalene	2-Nitroaniline	4-Nitroaniline	4-Nitrophenol	bis(2-Ethylhexyl)phthalate	Naphthalene	Caprolactam
			µg/L														
			10.1	16.7	70	600	75	75	39	750	30	190	38	--	6	30	9,900
TMW15	TMW15042022	04/20/2022	NA	NA	<12	<6.0	<6.0	<6.0	<6.0	<6.0	<6.0	<6.0	<6.0	<6.0	<12	<6.0	<12
	TMW15102021	10/07/2021	NA	NA	<12	<6.1	<6.1	<6.1	<6.1	<6.1	<6.1	<6.1	<6.1	<6.1	<12	<6.1	<12
	TMW15042021	04/21/2021	NA	NA	<10	<5.2	<5.2	<5.2	<5.2	<5.2	<5.2	<5.2	<5.2	<5.2	<10	<5.2	<10
	TMW15102020	10/05/2020	NA	NA	<12	<6.0	<6.0	<6.0	<6.0	<6.0	<6.0	<6.0	<6.0	<6.0	<12	<6.0	<12
	TMW15102020DUP	10/05/2020	NA	NA	<11	<5.4	<5.4	<5.4	<5.4	<5.4	<5.4	<5.4	<5.4	<5.4	<11	<5.4	<11
TMW21	TMW21042022	04/21/2022	<20	230 J	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
	TMW21102021	10/13/2021	<20	<100	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
	TMW21042021	04/22/2021	<20	<100	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
TMW22	TMW22042022	04/15/2022	NA	NA	<12	<5.8	<5.8	<5.8	<5.8	<5.8	<5.8	<5.8	<5.8	<5.8	<12	<5.8	<12
	TMW22102021	10/08/2021	NA	NA	<22	<11	<11	<11	<11	<11	<11	<11	<11	<11	<22	<11	<22
	TMW22042021	04/21/2021	NA	NA	<20	<10	<10	<10	<10	<10	<10	<10	<10	<10	<20	<10	<20
	TMW22102020	10/01/2020	NA	NA	<11	<5.3	<5.3	<5.3	<5.3	<5.3	<5.3	<5.3	<5.3	<5.3	<11	<5.3	<11
TMW31S	TMW31S042022	04/14/2022	NA	NA	<11	<5.4	<5.4	<5.4	<5.4	<5.4	<5.4	<5.4	7.3 J	<5.4	<11	<5.4	<11
	TMW31S102021	10/07/2021	NA	NA	<12	<6.0	<6.0	<6.0	<6.0	<6.0	<6.0	<6.0	<6.0	<6.0	<12	<6.0	<12
	TMW31S042021	04/26/2021	NA	NA	<11	<5.6	<5.6	<5.6	<5.6	<5.6	<5.6	<5.6	<5.6	<5.6	<11	<5.6	<11
	TMW31S102020	10/01/2020	NA	NA	<11	<5.6	<5.6	<5.6	<5.6	<5.6	<5.6	<5.6	<5.6	<5.6	<11	<5.6	<11
TMW33	TMW33042022	04/15/2022	23 J	<100	<11	<5.4	<5.4	<5.4	<5.4	<5.4	<5.4	<5.4	<5.4	<5.4	<11	<5.4	<11
	TMW33102021	10/08/2021	24 J	<98	<11	<5.6	<5.6	<5.6	<5.6	<5.6	<5.6	<5.6	<5.6	<5.6	<11	<5.6	<11
	TMW33042021	04/16/2021	<20	200 J	<24	<12	<12	<12	<12	<12	<12	<12	<12	<12	<24	<12	<24
	TMW33102020	10/01/2020	<20	77 J	<11	<5.6	<5.6	<5.6	<5.6	<5.6	<5.6	<5.6	<5.6	<5.6	<11	<5.6	<11
TMW34	TMW34042022	04/19/2022	<20	<120	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
	TMW34042022DUP	04/19/2022	<20	89 J	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
	TMW34102021	10/13/2021	<20	<100	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
	TMW34102021DUP	10/13/2021	<20	<100	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
	TMW34042021	04/20/2021	<20	100 J	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
	TMW34102020	10/05/2020	<20	<110	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
TMW35	TMW35042022	04/20/2022	<20	<110	<11	<5.7	<5.7	<5.7	<5.7	<5.7	<5.7	<5.7	<5.7	<5.7	<11	<5.7	<11
	TMW35102021	10/06/2021	<20	<100	<10	<5.0	<5.0	<5.0	<5.0	<5.0	<5.0	<5.0	<5.0	<5.0	<10	<5.0	<10
	TMW35042021	04/26/2021	NA	<110	<11	<5.5	<5.5	<5.5	<5.5	<5.5	<5.5	<5.5	<5.5	<5.5	<11	<5.5	<11
	TMW35102020	10/06/2020	<20	<100	<12	<6.1	<6.1	<6.1	<6.1	<6.1	<6.1	<6.1	<6.1	<6.1	<12	<6.1	<12

TABLE B-5: SUMMARY OF TPH AND SVOC ANALYTICAL RESULTS
2024 INTERIM NORTHERN AREA GROUNDWATER MONITORING PLAN
Fort Wingate Depot Activity, New Mexico

Well ID	Sample ID	Date	TPH GRO	TPH DRO	1,2,4-Trichlorobenzene	1,2-Dichlorobenzene	1,3-Dichlorobenzene	1,4-Dichlorobenzene	2,4-Dinitrophenol	2-Chloronaphthalene	2-Methylnaphthalene	2-Nitroaniline	4-Nitroaniline	4-Nitrophenol	bis(2-Ethylhexyl)phthalate	Naphthalene	Caprolactam
			µg/L														
			10.1	16.7	70	600	75	75	39	750	30	190	38	--	6	30	9,900
TMW39S	TMW39S042022	04/13/2022	NA	NA	<11	<5.4	<5.4	<5.4	<5.4	<5.4	<5.4	<5.4	<5.4	<5.4	<11	<5.4	<11
	TMW39S102021	10/08/2021	NA	NA	<11	<5.6	<5.6	<5.6	<5.6	<5.6	<5.6	<5.6	<5.6	<5.6	<11	<5.6	<11
	TMW39S042021	04/26/2021	NA	NA	<31	<15	<15	<15	<15	<15	<15	<15	<15	<15	<31	<15	<31
	TMW39S102020	10/01/2020	NA	NA	<11	<5.5	<5.5	<5.5	<5.5	<5.5	<5.5	<5.5	<5.5	<5.5	<11	<5.5	<11
TMW41	TMW41042022	04/15/2022	NA	NA	<12	<5.8	<5.8	<5.8	<5.8	<5.8	<5.8	<5.8	<5.8	<5.8	<12	<5.8	<12
	TMW41102021	10/08/2021	NA	NA	<12	<6.0	<6.0	<6.0	<6.0	<6.0	<6.0	<6.0	<6.0	<6.0	<12	<6.0	<12
	TMW41042021	04/16/2021	NA	NA	<11	<5.6	<5.6	<5.6	<5.6	<5.6	<5.6	<5.6	<5.6	<5.6	<11	<5.6	<11
	TMW41102020	10/01/2020	NA	NA	<11	<5.4	<5.4	<5.4	<5.4	<5.4	<5.4	<5.4	<5.4	<5.4	<11	<5.4	<11
TMW43	TMW43042022	04/19/2022	NA	NA	<11	<5.7	<5.7	<5.7	<5.7	<5.7	<5.7	<5.7	<5.7	<5.7	<11	<5.7	<11
	TMW43102021	10/12/2021	NA	NA	<11	<5.6	<5.6	<5.6	<5.6	<5.6	<5.6	<5.6	<5.6	<5.6	<11	<5.6	<11
	TMW43042021	04/16/2021	NA	NA	<11	<5.2	<5.2	<5.2	<5.2	<5.2	<5.2	<5.2	<5.2	<5.2	<11	<5.2	<11
	TMW43102020	10/02/2020	NA	NA	<11	<5.6	<5.6	<5.6	<5.6	<5.6	<5.6	<5.6	<5.6	<5.6	<11	<5.6	<11
TMW44	TMW44042022	04/12/2022	NA	NA	<21	<11	<11	<11	<11	<11	<11	<11	<11	<11	<21	<11	<21
	TMW44102021	10/05/2021	NA	NA	<25	<12	<12	<12	<12	<12	<12	<12	<12	<12	<25	<12	<25
	TMW44042021	04/12/2021	NA	NA	<24	<12	<12	<12	<12	<12	<12	<12	<12	<12	<24	<12	<24
	TMW44102020	09/29/2020	NA	NA	<22	<11	<11	<11	<11	<11	<11	<11	<11	<11	<22	<11	<22
TMW45	TMW45042022	04/19/2022	NA	NA	<12	<5.8	<5.8	<5.8	<5.8	<5.8	<5.8	<5.8	<5.8	<5.8	<12	<5.8	<12
	TMW45102021	10/12/2021	NA	NA	<12	<6.1	<6.1	<6.1	<6.1	<6.1	<6.1	<6.1	<6.1	<6.1	<12	<6.1	<12
	TMW45102021DUP	10/12/2021	NA	NA	<12	<6.2	<6.2	<6.2	<6.2	<6.2	<6.2	<6.2	<6.2	<6.2	<12	<6.2	<12
	TMW45042021	04/20/2021	NA	NA	<22	<11	<11	<11	<11	<11	<11	<11	<11	<11	<22	<11	<22
	TMW45102020	10/05/2020	NA	NA	<11	<5.7	<5.7	<5.7	<5.7	<5.7	<5.7	<5.7	<5.7	<5.7	<11	<5.7	<11
TMW46	TMW46042022	04/12/2022	<20	<100	<11	<5.7	<5.7	<5.7	<5.7	<5.7	<5.7	<5.7	<5.7	<5.7	<11	<5.7	<11
	TMW46102021	10/05/2021	<20	<100	<11	<5.4	<5.4	<5.4	<5.4	<5.4	<5.4	<5.4	<5.4	<5.4	<11	<5.4	<11
	TMW46042021	04/13/2021	<20	150 J	<11	<5.6	<5.6	<5.6	<5.6	<5.6	<5.6	<5.6	<5.6	<5.6	<11	<5.6	<11
	TMW46102020	09/29/2020	NA	NA	<12	<5.9	<5.9	<5.9	<5.9	<5.9	<5.9	<5.9	<5.9	<5.9	<12	<5.9	<12
TMW47	TMW47042022	04/21/2022	NA	NA	<11	<5.3	<5.3	<5.3	<5.3	<5.3	<5.3	<5.3	<5.3	<5.3	<12	<5.3	<12
	TMW47102021	10/14/2021	NA	NA	<11	<5.7	<5.7	<5.7	<5.7	<5.7	<5.7	<5.7	<5.7	<5.7	<11	<5.7	<11
	TMW47042021	04/23/2021	NA	NA	<12	<6.0	<6.0	<6.0	<6.0	<6.0	<6.0	<6.0	<6.0	<6.0	<12	<6.0	<12
	TMW47102020	10/07/2020	NA	NA	<11	<5.3	<5.3	<5.3	<5.3	<5.3	<5.3	<5.3	<5.3	<5.3	<11	<5.3	<11

TABLE B-5: SUMMARY OF TPH AND SVOC ANALYTICAL RESULTS
2024 INTERIM NORTHERN AREA GROUNDWATER MONITORING PLAN
Fort Wingate Depot Activity, New Mexico

Well ID	Sample ID	Date	TPH GRO	TPH DRO	1,2,4-Trichlorobenzene	1,2-Dichlorobenzene	1,3-Dichlorobenzene	1,4-Dichlorobenzene	2,4-Dinitrophenol	2-Chloronaphthalene	2-Methylnaphthalene	2-Nitroaniline	4-Nitroaniline	4-Nitrophenol	bis(2-Ethylhexyl)phthalate	Naphthalene	Caprolactam
			µg/L														
			10.1	16.7	70	600	75	75	39	750	30	190	38	--	6	30	9,900
TMW57	TMW57042022	04/18/2022	<20	<110	<12	<5.8	<5.8	<5.8	<5.8	<5.8	<5.8	<5.8	<5.8	<5.8	<12	<5.8	<12
	TMW57102021	10/11/2021	<20	<100	<11	<5.4	<5.4	<5.4	<5.4	<5.4	<5.4	<5.4	<5.4	<5.4	<11	<5.4	<11
	TMW57042021	04/19/2021	<20	<100	<11	<5.7	<5.7	<5.7	<5.7	<5.7	<5.7	<5.7	<5.7	<5.7	<11	<5.7	<11
TMW59	TMW59042022	04/18/2022	<20	<110	<12	<5.8	<5.8	<5.8	<5.8	<5.8	<5.8	<5.8	<5.8	<5.8	<12	<5.8	<12
	TMW59102021	10/11/2021	<20	97 J	<24	<12	<12	<12	<12	<12	<12	<12	<12	<12	<24	<12	<24
	TMW59042021	04/23/2021	<20	<110	<24	<12	<12	<12	<12	<12	<12	<12	<12	<12	<24	<12	<24
TMW61	TMW61042022	04/18/2022	<20	<110	<11	<5.7	<5.7	<5.7	<5.7	<5.7	<5.7	<5.7	<5.7	<5.7	<11	<5.7	<11
	TMW61102021	10/13/2021	<20	<98	<11	<5.5	<5.5	<5.5	<5.5	<5.5	<5.5	<5.5	<5.5	<5.5	<11	<5.5	<11
	TMW61042021	04/26/2021	<20	74 J	<32	<16	<16	<16	<16	<16	<16	<16	<16	<16	<32	<16	<32
TMW62	TMW62042022	04/15/2022	<20	<95	<11	<5.4	<5.4	<5.4	<5.4	<5.4	<5.4	<5.4	<5.4	<5.4	<11	<5.4	<11
	TMW62102021	10/08/2021	<20	<100	<11	<5.5	<5.5	<5.5	<5.5	<5.5	<5.5	<5.5	<5.5	<5.5	<11	<5.5	<11
	TMW62042021	04/21/2021	<20	<100	<24	<12	<12	<12	<12	<12	<12	<12	<12	<12	<24	<12	<24
Bedrock Wells																	
BGMW07	BGMW07042022	04/11/2022	NA	NA	<11	<5.4	<5.4	<5.4	<5.4	<5.4	<5.4	<5.4	<5.4	<5.4	<11	<5.4	11 J
	BGMW07102021	10/04/2021	NA	NA	<12	<6.0	<6.0	<6.0	<6.0	<6.0	<6.0	<6.0	<6.0	<6.0	<12	<6.0	<12
	BGMW07042021	04/12/2021	NA	NA	<11	<5.3	<5.3	<5.3	<5.3	<5.3	<5.3	<5.3	<5.3	<5.3	<11	<5.3	<11
	BGMW07102020	09/28/2020	NA	NA	<12	<6.0	<6.0	<6.0	<6.0	<6.0	<6.0	<6.0	<6.0	<6.0	<12	<6.0	<12
BGMW08	BGMW08042022	04/11/2022	NA	NA	<11	<5.3	<5.3	<5.3	<5.3	<5.3	<5.3	<5.3	<5.3	<5.3	<12	<5.3	<12
	BGMW08102021	10/04/2021	NA	NA	<12	<6.0	<6.0	<6.0	<6.0	<6.0	<6.0	<6.0	<6.0	<6.0	<12	<6.0	<12
	BGMW08042021	04/13/2021	NA	NA	<23	<11	<11	<11	<11	<11	<11	<11	<11	<11	<23	<11	<23
	BGMW08102020	09/28/2020	NA	NA	<12	<6.0	<6.0	<6.0	<6.0	<6.0	<6.0	<6.0	<6.0	<6.0	<12	<6.0	<12
BGMW09	BGMW09042022	04/12/2022	NA	NA	<11	<5.4	<5.4	<5.4	<5.4	<5.4	<5.4	<5.4	<5.4	<5.4	<11	<5.4	<11
	BGMW09042022DUP	04/12/2022	NA	NA	<10	<5.1	<5.1	<5.1	<5.1	<5.1	<5.1	<5.1	<5.1	<5.1	<10	<5.1	<10
	BGMW09102021	10/06/2021	NA	NA	<11	<5.4	<5.4	<5.4	<5.4	<5.4	<5.4	<5.4	<5.4	<5.4	<11	<5.4	<11
	BGMW09042021	04/23/2021	NA	NA	<11	<5.7	<5.7	<5.7	<5.7	<5.7	<5.7	<5.7	<5.7	<5.7	<11	<5.7	<11
	BGMW09102020	09/29/2020	NA	NA	<11	<5.7	<5.7	<5.7	<5.7	<5.7	<5.7	<5.7	<5.7	<5.7	<11	<5.7	<11
BGMW10	BGMW10042022	04/12/2022	NA	NA	<11	<5.3	<5.3	<5.3	<5.3	<5.3	<5.3	<5.3	<5.3	<5.3	<12	<5.3	<12
	BGMW10102021	10/07/2021	NA	NA	<11	<5.6	<5.6	<5.6	<5.6	<5.6	<5.6	<5.6	<5.6	<5.6	<11	<5.6	<11
	BGMW10102021DUP	10/07/2021	NA	NA	<12	<5.8	<5.8	<5.8	<5.8	<5.8	<5.8	<5.8	<5.8	<5.8	<12	<5.8	<12
	BGMW10042021	04/16/2021	NA	NA	<12	<6.2	<6.2	<6.2	<6.2	<6.2	<6.2	<6.2	<6.2	<6.2	<12	<6.2	<12
	BGMW10102020	09/29/2020	NA	NA	<11	<5.6	<5.6	<5.6	<5.6	<5.6	<5.6	<5.6	<5.6	<5.6	<11	<5.6	<11

TABLE B-5: SUMMARY OF TPH AND SVOC ANALYTICAL RESULTS
2024 INTERIM NORTHERN AREA GROUNDWATER MONITORING PLAN
Fort Wingate Depot Activity, New Mexico

Well ID	Sample ID	Date	TPH GRO	TPH DRO	1,2,4-Trichlorobenzene	1,2-Dichlorobenzene	1,3-Dichlorobenzene	1,4-Dichlorobenzene	2,4-Dinitrophenol	2-Chloronaphthalene	2-Methylnaphthalene	2-Nitroaniline	4-Nitroaniline	4-Nitrophenol	bis(2-Ethylhexyl)phthalate	Naphthalene	Caprolactam
			µg/L														
			10.1	16.7	70	600	75	75	39	750	30	190	38	--	6	30	9,900
SL			10.1	16.7	70	600	75	75	39	750	30	190	38	--	6	30	9,900
TMW14A	TMW14A042022	04/18/2022	NA	NA	<12	<6.0	<6.0	<6.0	<6.0	<6.0	<6.0	<6.0	<6.0	<6.0	<12	<6.0	<12
	TMW14A102021	10/12/2021	NA	NA	<11	<5.4	<5.4	<5.4	<5.4	<5.4	<5.4	<5.4	<5.4	<5.4	<11	<5.4	<11
	TMW14A102021DUP	10/12/2021	NA	NA	<12	<5.8	<5.8	<5.8	<5.8	<5.8	<5.8	<5.8	<5.8	<5.8	<12	<5.8	<12
	TMW14A042021	04/19/2021	NA	NA	<12	<5.9	<5.9	<5.9	<5.9	<5.9	<5.9	<5.9	<5.9	<5.9	<12	<5.9	<12
	TMW14A102020	10/02/2020	NA	NA	<11	<5.7	<5.7	<5.7	<5.7	<5.7	<5.7	<5.7	<5.7	<5.7	<11	<5.7	<11
TMW16	TMW16042022	04/11/2022	NA	NA	<11	<5.7	<5.7	<5.7	<5.7	<5.7	<5.7	<5.7	<5.7	<5.7	<11	<5.7	<11
	TMW16102021	10/04/2021	NA	NA	<11	<5.4	<5.4	<5.4	<5.4	<5.4	<5.4	<5.4	<5.4	<5.4	<11	<5.4	<11
	TMW16102021DUP	10/04/2021	NA	NA	<11	<5.2	<5.2	<5.2	<5.2	<5.2	<5.2	<5.2	<5.2	<5.2	<11	<5.2	<11
	TMW16042021	04/12/2021	NA	NA	<12	<5.8	<5.8	<5.8	<5.8	<5.8	<5.8	<5.8	<5.8	<5.8	<12	<5.8	<12
	TMW16042021DUP	04/12/2021	NA	NA	<11	<5.7	<5.7	<5.7	<5.7	<5.7	<5.7	<5.7	<5.7	<5.7	<11	<5.7	<11
	TMW16102020	09/28/2020	NA	NA	<11	<5.7	<5.7	<5.7	<5.7	<5.7	<5.7	<5.7	<5.7	<5.7	<11	<5.7	<11
TMW18	TMW18042022	04/11/2022	NA	NA	<11	<5.7	<5.7	<5.7	<5.7	<5.7	<5.7	<5.7	<5.7	<5.7	<11	<5.7	<11
	TMW18102021	10/05/2021	NA	NA	<11	<5.5	<5.5	<5.5	<5.5	<5.5	<5.5	<5.5	<5.5	<5.5	<11	<5.5	<11
	TMW18042021	04/12/2021	NA	NA	<11	<5.6	<5.6	<5.6	<5.6	<5.6	<5.6	<5.6	<5.6	<5.6	<11	<5.6	<11
	TMW18102020	09/28/2020	NA	NA	<12	<6.0	<6.0	<6.0	<6.0	<6.0	<6.0	<6.0	<6.0	<6.0	<12	<6.0	<12
TMW19	TMW19042022	04/11/2022	NA	NA	<11	<5.3	<5.3	<5.3	<5.3	<5.3	<5.3	<5.3	<5.3	<5.3	<12	<5.3	<12
	TMW19102021	10/04/2021	NA	NA	<12	<6.0	<6.0	<6.0	<6.0	<6.0	<6.0	<6.0	<6.0	<6.0	<12	<6.0	<12
	TMW19042021	04/12/2021	NA	NA	<11	<5.5	<5.5	<5.5	<5.5	<5.5	<5.5	<5.5	<5.5	<5.5	<11	<5.5	<11
	TMW19102020	09/28/2020	NA	NA	<12	<6.0	<6.0	<6.0	<6.0	<6.0	<6.0	<6.0	<6.0	<6.0	<12	<6.0	<12
	TMW19102020DUP	09/28/2020	NA	NA	<13	<6.3	<6.3	<6.3	<6.3	<6.3	<6.3	<6.3	<6.3	<6.3	<13	<6.3	<13
TMW30	TMW30042022	04/13/2022	NA	NA	<12	<6.1	<6.1	<6.1	<6.1	<6.1	<6.1	<6.1	<6.1	<6.1	<12	<6.1	<12
	TMW30102021	10/06/2021	NA	NA	<11	<5.6	<5.6	<5.6	<5.6	<5.6	<5.6	<5.6	<5.6	<5.6	<11	<5.6	<11
	TMW30042021	04/14/2021	NA	NA	<12	<6.2	<6.2	<6.2	<6.2	<6.2	<6.2	<6.2	<6.2	<6.2	<12	<6.2	<12
	TMW30102020	09/30/2020	NA	NA	<11	<5.7	<5.7	<5.7	<5.7	<5.7	<5.7	<5.7	<5.7	<5.7	<11	<5.7	<11
TMW31D	TMW31D042022	04/19/2022	NA	NA	<11	<5.7	<5.7	<5.7	<5.7	<5.7	<5.7	<5.7	<5.7	<5.7	<11	<5.7	<11
	TMW31D102021	10/12/2021	NA	NA	<11	<5.6	<5.6	<5.6	<5.6	<5.6	<5.6	<5.6	<5.6	<5.6	<11	<5.6	<11
	TMW31D042021	04/20/2021	NA	NA	<11	<5.7	<5.7	<5.7	<5.7	<5.7	<5.7	<5.7	<5.7	<5.7	<11	<5.7	<11
	TMW31D102020	10/02/2020	NA	NA	<12	<5.9	<5.9	<5.9	<5.9	<5.9	<5.9	<5.9	<5.9	<5.9	<12	<5.9	<12
TMW32	TMW32042022	04/21/2022	NA	NA	<12	<5.8	<5.8	<5.8	<5.8	<5.8	<5.8	<5.8	<5.8	<5.8	<12	<5.8	<12
	TMW32102021	10/14/2021	NA	NA	<11	<5.7	<5.7	<5.7	<5.7	<5.7	<5.7	<5.7	<5.7	<5.7	<11	<5.7	<11
	TMW32042021	04/22/2021	NA	NA	<11	<5.6	<5.6	<5.6	<5.6	<5.6	<5.6	<5.6	<5.6	<5.6	<11	<5.6	<11
	TMW32102020	10/07/2020	NA	NA	<12	<5.8	<5.8	<5.8	<5.8	<5.8	<5.8	<5.8	<5.8	<5.8	<12	<5.8	<12

TABLE B-5: SUMMARY OF TPH AND SVOC ANALYTICAL RESULTS
2024 INTERIM NORTHERN AREA GROUNDWATER MONITORING PLAN
Fort Wingate Depot Activity, New Mexico

Well ID	Sample ID	Date	TPH GRO	TPH DRO	1,2,4-Trichlorobenzene	1,2-Dichlorobenzene	1,3-Dichlorobenzene	1,4-Dichlorobenzene	2,4-Dinitrophenol	2-Chloronaphthalene	2-Methylnaphthalene	2-Nitroaniline	4-Nitroaniline	4-Nitrophenol	bis(2-Ethylhexyl)phthalate	Naphthalene	Caprolactam
			µg/L														
			10.1	16.7	70	600	75	75	39	750	30	190	38	--	6	30	9,900
TMW36	TMW36042022	04/11/2022	NA	NA	<11	<5.3	<5.3	<5.3	<5.3	<5.3	<5.3	<5.3	<5.3	<5.3	<12	<5.3	<12
	TMW36102021	10/13/2021	NA	NA	<12	<6.0	<6.0	<6.0	<6.0	<6.0	<6.0	<6.0	<6.0	<6.0	<12	<6.0	<12
	TMW36042021	04/12/2021	NA	NA	<12	<6.2	<6.2	<6.2	<6.2	<6.2	<6.2	<6.2	<6.2	<6.2	<12	<6.2	<12
	TMW36102020	09/28/2020	NA	NA	<12	<5.9	<5.9	<5.9	<5.9	<5.9	<5.9	<5.9	<5.9	<5.9	<12	<5.9	<12
TMW37	TMW37042022	04/12/2022	NA	NA	<12	<5.8	<5.8	<5.8	<5.8	<5.8	<5.8	<5.8	<5.8	<5.8	<12	<5.8	<12
	TMW37102021	10/06/2021	NA	NA	<5.4	<2.7	<2.7	<2.7	<2.7	<2.7	<2.7	<2.7	<2.7	<2.7	<5.4	<2.7	<5.4
	TMW37042021	04/13/2021	NA	NA	<11	<5.5	<5.5	<5.5	<5.5	<5.5	<5.5	<5.5	<5.5	<5.5	<11	<5.5	<11
	TMW37102020	09/29/2020	NA	NA	<11	<5.6	<5.6	<5.6	<5.6	<5.6	<5.6	<5.6	<5.6	<5.6	<11	<5.6	<11
TMW38	TMW38042022	04/21/2022	NA	NA	<12	<6.0	<6.0	<6.0	<6.0	<6.0	<6.0	<6.0	<6.0	<6.0	<12	<6.0	<12
	TMW38102021	10/13/2021	NA	NA	<11	<5.4	<5.4	<5.4	<5.4	<5.4	<5.4	<5.4	<5.4	<5.4	<11	<5.4	<11
	TMW38042021	04/22/2021	NA	NA	<12	<6.0	<6.0	<6.0	<6.0	<6.0	<6.0	<6.0	<6.0	<6.0	<12	<6.0	<12
	TMW38102020	10/06/2020	NA	NA	<12	<6.0	<6.0	<6.0	<6.0	<6.0	<6.0	<6.0	<6.0	<6.0	<12	<6.0	<12
TMW39D	TMW39D042022	04/22/2022	NA	NA	<12	<5.8	<5.8	<5.8	<5.8	<5.8	<5.8	<5.8	<5.8	<5.8	<12	<5.8	<12
	TMW39D102021	10/13/2021	NA	NA	<11	<5.6	<5.6	<5.6	<5.6	<5.6	<5.6	<5.6	<5.6	<5.6	<11	<5.6	<11
	TMW39D042021	04/23/2021	NA	NA	<11	<5.7	<5.7	<5.7	<5.7	<5.7	<5.7	<5.7	<5.7	<5.7	<11	<5.7	<11
	TMW39D102020	10/07/2020	NA	NA	<11	<5.4	<5.4	<5.4	<5.4	<5.4	<5.4	<5.4	<5.4	<5.4	<11	<5.4	<11
TMW40D	TMW40D042022	04/22/2022	NA	NA	<12	<5.8	<5.8	<5.8	<5.8	<5.8	<5.8	<5.8	<5.8	<5.8	<12	<5.8	<12
	TMW40D102021	10/15/2021	NA	NA	<12	<6.1	<6.1	<6.1	<6.1	<6.1	<6.1	<6.1	<6.1	<6.1	<12	<6.1	<12
	TMW40D042021	04/23/2021	NA	NA	<11	<5.6	<5.6	<5.6	<5.6	<5.6	<5.6	<5.6	<5.6	<5.6	<11	<5.6	<11
	TMW40D102020	10/07/2020	NA	NA	<11	<5.7	<5.7	<5.7	<5.7	<5.7	<5.7	<5.7	<5.7	<5.7	<11	<5.7	<11
TMW48	TMW48042022	04/22/2022	NA	NA	<11	<5.3	<5.3	<5.3	<5.3	<5.3	<5.3	<5.3	<5.3	<5.3	<12	<5.3	<12
	TMW48102021	10/15/2021	NA	NA	<12	<5.8	<5.8	<5.8	<5.8	<5.8	<5.8	<5.8	<5.8	<5.8	<12	<5.8	<12
	TMW48042021	04/23/2021	NA	NA	<12	<5.9	<5.9	<5.9	<5.9	<5.9	<5.9	<5.9	<5.9	<5.9	<12	<5.9	<12
	TMW48102020	10/08/2020	NA	NA	<11	<5.4	<5.4	<5.4	<5.4	<5.4	<5.4	<5.4	<5.4	<5.4	<11	<5.4	<11
TMW49	TMW49042022	04/22/2022	NA	NA	<11	<5.3	<5.3	<5.3	<5.3	<5.3	<5.3	<5.3	<5.3	<5.3	<12	<5.3	<12
	TMW49102021	10/15/2021	NA	NA	<11	<5.7	<5.7	<5.7	<5.7	<5.7	<5.7	<5.7	<5.7	<5.7	<11	<5.7	<11
	TMW49042021	04/23/2021	NA	NA	<11	<5.2	<5.2	<5.2	<5.2	<5.2	<5.2	<5.2	<5.2	<5.2	<11	<5.2	<11
	TMW49102020	10/08/2020	NA	NA	<12	<6.2	<6.2	<6.2	<6.2	<6.2	<6.2	<6.2	<6.2	<6.2	<12	<6.2	<12
TMW50	TMW50042022	04/13/2022	<20	<100	<11	<5.7	<5.7	<5.7	<5.7	<5.7	<5.7	<5.7	<5.7	<5.7	<11	<5.7	<11
	TMW50042022DUP	04/13/2022	<20	260 J	<12	<5.8	<5.8	<5.8	<5.8	<5.8	<5.8	<5.8	<5.8	<5.8	<12	<5.8	<12
	TMW50102021	10/06/2021	12 J	<110	<21	<10	<10	<10	<10	<10	<10	<10	<10	<10	<21	<10	<21
	TMW50042021	04/14/2021	<20	51 J	<11	<5.3	<5.3	<5.3	<5.3	<5.3	<5.3	<5.3	<5.3	<5.3	<11	<5.3	<11

TABLE B-5: SUMMARY OF TPH AND SVOC ANALYTICAL RESULTS
2024 INTERIM NORTHERN AREA GROUNDWATER MONITORING PLAN
Fort Wingate Depot Activity, New Mexico

Well ID	Sample ID	Date	TPH GRO	TPH DRO	1,2,4-Trichlorobenzene	1,2-Dichlorobenzene	1,3-Dichlorobenzene	1,4-Dichlorobenzene	2,4-Dinitrophenol	2-Chloronaphthalene	2-Methylnaphthalene	2-Nitroaniline	4-Nitroaniline	4-Nitrophenol	bis(2-Ethylhexyl)phthalate	Naphthalene	Caprolactam
			µg/L														
			10.1	16.7	70	600	75	75	39	750	30	190	38	--	6	30	9,900
SL			10.1	16.7	70	600	75	75	39	750	30	190	38	--	6	30	9,900
TMW51	TMW51042022	04/14/2022	<20	<98	<11	<5.3	<5.3	<5.3	<5.3	<5.3	<5.3	<5.3	<5.3	<5.3	<12	<5.3	<12
	TMW51102021	10/04/2021	<20	<110	<12	<6.2	<6.2	<6.2	<6.2	<6.2	<6.2	<6.2	<6.2	<6.2	<12	<6.2	<12
	TMW51042021	04/14/2021	<20	<110	<12	<5.8	<5.8	<5.8	<5.8	<5.8	<5.8	<5.8	<5.8	<5.8	<12	<5.8	<12
TMW52	TMW52042022	04/18/2022	<20	<110	<11	<5.2	<5.2	<5.2	<5.2	<5.2	<5.2	<5.2	<5.2	<5.2	<11	<5.2	<11
	TMW52102021	10/11/2021	<20	87 J	<12	<5.9	<5.9	<5.9	<5.9	<5.9	<5.9	<5.9	<5.9	<5.9	<12	<5.9	<12
	TMW52042021	04/19/2021	<20	<100	<22	<11	<11	<11	<11	<11	<11	<11	<11	<11	<22	<11	<22
TMW53	TMW53042022	04/18/2022	<20	72 J	<12	<6.1	<6.1	<6.1	<6.1	<6.1	<6.1	<6.1	<6.1	<6.1	<12	<6.1	<12
	TMW53102021	10/11/2021	<20	120 J	<11	<5.6	<5.6	<5.6	<5.6	<5.6	<5.6	<5.6	<5.6	<5.6	<11	<5.6	<11
	TMW53042021	04/19/2021	<20	150 J	<24	<12	<12	<12	<12	<12	<12	<12	<12	<12	<24	<12	<24
TMW55	TMW55042022	04/15/2022	<20	<100	<11	<5.7	<5.7	<5.7	<5.7	<5.7	<5.7	<5.7	<5.7	<5.7	<11	<5.7	<11
	TMW55102021	10/08/2021	<20	<98	<11	<5.7	<5.7	<5.7	<5.7	<5.7	<5.7	<5.7	<5.7	<5.7	<11	<5.7	<11
	TMW55042021	04/16/2021	<20	<100	<11	<5.7	<5.7	<5.7	<5.7	<5.7	<5.7	<5.7	<5.7	<5.7	<11	<5.7	<11
TMW58	TMW58042022	04/12/2022	<20	<98	<12	<5.8	<5.8	<5.8	<5.8	<5.8	<5.8	<5.8	<5.8	<5.8	<12	<5.8	<12
	TMW58102021	10/05/2021	<20	65 J	<12	<5.9	<5.9	<5.9	<5.9	<5.9	<5.9	<5.9	<5.9	<5.9	<12	<5.9	<12
	TMW58042021	04/13/2021	<20	58 J	<11	<5.4	<5.4	<5.4	<5.4	<5.4	<5.4	<5.4	<5.4	<5.4	<11	<5.4	<11
TMW63	TMW63042022	04/13/2022	<20	<100	<12	<5.8	<5.8	<5.8	<5.8	<5.8	<5.8	<5.8	<5.8	<5.8	<12	<5.8	<12
	TMW63102021	10/06/2021	<20	<100	<5.3	<2.6	<2.6	<2.6	<2.6	<2.6	<2.6	<2.6	<2.6	<2.6	<5.3	<2.6	<5.3
	TMW63042021	04/14/2021	<20	<94	<11	<5.5	<5.5	<5.5	<5.5	<5.5	<5.5	<5.5	<5.5	<5.5	<11	<5.5	<11
TMW64	TMW64042022	04/19/2022	<20	<110	<11	<5.3	<5.3	<5.3	<5.3	<5.3	<5.3	<5.3	<5.3	<5.3	<12	<5.3	<12
	TMW64102021	10/12/2021	<20	<100	<10	<5.1	<5.1	<5.1	<5.1	<5.1	<5.1	<5.1	<5.1	<5.1	<10	<5.1	<10
	TMW64042021	04/20/2021	<20	<120	<11	<5.7	<5.7	<5.7	<5.7	<5.7	<5.7	<5.7	<5.7	<5.7	<11	<5.7	<11

NOTES & ABBREVIATIONS:

µg/L = micrograms per liter

< = less than LOD

NA = not analyzed

J = estimated value

M = manual integrated compound

– = not established or not applicable

SL = screening level

Number = Result exceeds cited (lowest) SL.

TABLE B-6: SUMMARY OF DISSOLVED METALS ANALYTICAL RESULTS
2024 INTERIM NORTHERN AREA GROUNDWATER MONITORING PLAN
Fort Wingate Depot Activity, New Mexico

Well ID	Sample ID	Date	Aluminum	Antimony	Arsenic	Barium	Beryllium	Cadmium	Calcium	Chromium	Cobalt	Copper	Iron	Lead	Magnesium	Manganese	Nickel	Potassium	Selenium	Silver	Sodium	Thallium	Vanadium	Zinc	Mercury	
			µg/L																							
SL			5,000	6	10	2,000	4	5	-	50	50	1,000	1,000	15	-	200	200	-	50	50	-	2	86	10,000	2	
Alluvial Wells																										
BGMW01	BGMW01042022	04/13/2022	<250	<2.5	<1.2	18	<1.0	<1.0	70,000	<1.0	<1.0	16	<250	<0.5	38,000	430	1.4 J	430 J	4.0 J	<1.0	930,000	<1.0	4.3 J	<50	<0.20	
	BGMW01102021	10/05/2021	<250	<2.5	<1.2	16	<1.0	<1.0	64,000	<1.0	<1.0	4.0 J	<250	<0.5	38,000	220	<2.5	440 J	4.1 J	<1.0	950,000	<1.0	2.6 J	<50	<0.20	
	BGMW01042021	04/14/2021	<250	<2.5	0.65 J	18	<1.0	<1.0	72,000	<1.0	<1.0	4.6 J	<250	<0.5	39,000	450	<2.5	<500	3.5 J	<1.0	950,000	<1.0	3.7 J	<50	<0.20	
	BGMW01102020	09/30/2020	<250	<2.5	<1.25	17.1	<1.0	<1.0	62,000	<1.0	<1.0	3.6 J	<250	<0.5	33,000	67	<2.5	263 J	5.1	<1.0	970,000	<1.0	5.0 J	<50	<0.20	
BGMW02	BGMW02042022	04/13/2022	<250	<2.5	<1.2	13	<1.0	<1.0	53,000	<1.0	<1.0	<5.0	<250	<0.5	74,000	47	<2.5	360 J	30	<1.0	800,000	<1.0	7.6	<50	<0.20	
	BGMW02102021	10/05/2021	<250	<2.5	<1.2	11	<1.0	<1.0	58,000	<1.0	<1.0	3.6 J	<250	<0.5	81,000	47	<2.5	420 J	35	<1.0	800,000	<1.0	5.3	<50	<0.20	
	BGMW02042021	04/14/2021	<250	<2.5	0.73 J	13	<1.0	<1.0	63,000	<1.0	<1.0	4 J	<250	<0.5	87,000	47	<2.5	<500	39	<1.0	870,000	<1.0	6.6	<50	<0.20	
	BGMW02102020	09/30/2020	<250	<2.5	0.66 J	13.4	<1.0	<1.0	69,400	<1.0	<1.0	<5.0	<250	<0.5	96,000	57.5	<2.5	387 J	46.5	<1.0	931,000	<1.0	8.0	<50	<0.20	
BGMW03	BGMW03042022	04/11/2022	<250	<2.5	0.82 J	21	<1.0	<1.0	62,000	<1.0	<1.0	3.8 J	<250	<0.5	13,000	5.2	<2.5	1,400	9.2	<1.0	570,000	<1.0	8.0	<50	<0.20	
	BGMW03102021	10/04/2021	<250	<2.5	2.5 J	15	<1.0	<1.0	24,000	<1.0	<1.0	5.1 J	<250	<0.5	7,100	21	1.5 J	830 J	31	<1.0	710,000	<1.0	15	<50	<0.20	
	BGMW03042021	04/12/2021	<250	<2.5	1.1 J	24	<1.0	<1.0	79,000	<1.0	<1.0	3.5 J	<250	<0.5	17,000	2 J	<2.5	1,300	10	<1.0	560,000	<1.0	7.2	<50	<0.20	
	BGMW03102020	09/28/2020	<250	<2.5	1.8 J	24.8	<1.0	<1.0	55,800	0.62 J	0.73 J	3.9 J	<250	<0.5	13,500	11.4	2.6 J	1,200	23.1	<1.0	685,000	<1.0	13.5	<50	<0.20	
BGMW11	BGMW11042022	04/15/2022	<250	<2.5	<1.2	8.1	<1.0	<1.0	130,000	<1.0	1.0 J	24	250 J	<0.5	53,000	400	3.8 J	780 J	<1.5	<1.0	1,300,000	<1.0	<2.5	27 J	<0.20	
	BGMW11102021	10/11/2021	<500	<5.0	<2.5	12	<2.0	<2.0	100,000	<2.0	<2.0	<10	<500	<1.0	40,000	230	<5.0	1,100 J	<3.0	<2.0	1,000,000	<2.0	4.6 J	<100	<0.20	
	BGMW11042021	04/20/2021	<250	<2.5	<1.2	7.4	<1.0	<1.0	100,000	<1.0	0.54 J	5.5 J	140 J	<0.5	41,000	400	1.9 J	750 J	<1.5	<1.0	1,200,000	<1.0	<2.5	<50	<0.20	
BGMW12	BGMW12042022	04/11/2022	<250	<2.5	<1.2	25	<1.0	<1.0	26,000	<1.0	<1.0	3.1 J	<250	<0.5	13,000	31	1.5 J	290 J	<0.75	<0.50	440,000	<1.0	<2.5	<50	0.12 J	
	BGMW12102021	10/07/2021	<250	<2.5	<1.2	21	<1.0	<1.0	26,000	0.71 J	<1.0	2.8 J	<250	<0.5	14,000	31	<2.5	290 J	<1.5	<1.0	440,000	<1.0	4.2 J	<50	<0.20	
	BGMW12042021	04/13/2021	<250	<2.5	<1.2	20	<1.0	<1.0	23,000	<1.0	<1.0	3.6 J	<250	<0.5	12,000	26	1.3 J	<500	<1.5	<1.0	410,000	<1.0	1.4 J	<50	<0.20	
BGMW13D	BGMW13D042022	04/21/2022	<250	<2.5	<1.2	240	<1.0	<1.0	14,000	1.9 J	<1.0	15	500 J	<0.5	4,100	120	2.2 J	800 J	<1.5	<1.0	290,000	<1.0	1.3 J	<50	<0.20	
	BGMW13D042022DUP	04/21/2022	<250	<2.5	<1.2	240	<1.0	<1.0	15,000	2.8 J	<1.0	13	150 J	<0.5	4,100	120	2.4 J	840 J	<1.5	<1.0	290,000	<1.0	1.7 J	<50	<0.20	
	BGMW13D102021	10/14/2021	<250	<2.5	<1.2	210	<1.0	<1.0	14,000	<1.0	<1.0	<5.0	<250	<0.5	3,900	120	<2.5	700 J	<1.5	<1.0	270,000	<1.0	2.2 J	<50	<0.20	
	BGMW13D042021	04/23/2021	<250	<2.5	<1.2	220	<1.0	<1.0	14,000	<1.0	<1.0	<5.0	<250	<0.5	4,100	110	<2.5	730 J	<1.5	<1.0	270,000	<1.0	1.3 J	<50	<0.20	
	BGMW13D042021DUP	04/23/2021	<250	<2.5	<1.2	220	<1.0	<1.0	14,000	<1.0	<1.0	<5.0	<250	<0.5	4,000	110	<2.5	720 J	<1.5	<1.0	270,000	<1.0	<2.5	<50	<0.20	
BGMW13S	BGMW13S042022	04/21/2022	<250	<2.5	<1.2	200	<1.0	<1.0	26,000	0.67 J	<1.0	8.4 J	490 J	<0.5	8,300	340	1.3 J	970 J	<1.5	<1.0	300,000	<1.0	<2.5	<50	<0.20	
	BGMW13S102021	10/11/2021	<40	<0.50	0.49 J	170	<0.20	<0.20	25,000	0.13 J	0.15 J	<1.0	150 J	<0.10	8,100	310	<0.50	930	<0.30	<0.20	280,000	<0.20	1.3	<10	<0.20	
	BGMW13S042021	04/23/2021	<250	<2.5	<1.2	200	<1.0	<1.0	26,000	<1.0	<1.0	2.6 J	400 J	<0.5	8,300	340	<2.5	990 J	<1.5	<1.0	290,000	<1.0	<2.5	<50	<0.20	
FW31	FW31042022	04/18/2022	<250	<2.5	5.7	9.0	<1.0	<1.0	5,800	<1.0	<1.0	<5.0	<250	<0.5	2,400	<2.5	<2.5	1,300	<1.5	<1.0	530,000	<1.0	11	<50	<0.20	
	FW31102021	10/12/2021	<250	<2.5	5.6	8.6	<1.0	<1.0	5,900	<1.0	<1.0	<5.0	<250	<0.5	2,500	<2.5	<2.5	1,400	<1.5	<1.0	510,000	<1.0	11	<50	<0.20	
	FW31042021	04/19/2021	<250	<2.5	5.5	7.5	<1.0	<1.0	5,600	<1.0	<1.0	<5.0	<250	<0.5	2,200	<2.5	<2.5	1,300	<1.5	<1.0	490,000	<1.0	9	<50	<0.20	
	FW31102020	10/05/2020	<250	<2.5	7.4	14.7	<1.0	<1.0	8,180	0.90 J	<1.0	<5.0	<250	<0.5	3,120	<2.5	<2.5	1,380	<1.5	<1.0	586,000	<1.0	10.5	<50	<0.20	
	FW31102020DUP	10/05/2020	<250	<2.5	7.3	14.3	<1.0	<1.0	8,060	0.90 J	<1.0	2.6 J	<250	<0.5	2,950	<2.5	<2.5	1,390	<1.5	<1.0	578,000	<1.0	10.4	<50	<0.20	
MW01	MW01042022	04/12/2022	<250	<2.5	<1.2	14	<1.0	<1.0	32,000	0.61 J	<1.0	<5.0	<250	<0.5	7,200	<2.5	<2.5	420 J	4.3 J	<1.0	820,000	<1.0	2.2 J	<50	<0.20	
	MW01102021	10/05/2021	<250	<2.5	<1.2	13	<1.0	<1.0																		

TABLE B-6: SUMMARY OF DISSOLVED METALS ANALYTICAL RESULTS
2024 INTERIM NORTHERN AREA GROUNDWATER MONITORING PLAN
Fort Wingate Depot Activity, New Mexico

Well ID	Sample ID	Date	Aluminum	Antimony	Arsenic	Barium	Beryllium	Cadmium	Calcium	Chromium	Cobalt	Copper	Iron	Lead	Magnesium	Manganese	Nickel	Potassium	Selenium	Silver	Sodium	Thallium	Vanadium	Zinc	Mercury
			µg/L																						
SL			5,000	6	10	2,000	4	5	-	50	50	1,000	1,000	15	-	200	200	-	50	50	-	2	86	10,000	2
MW20	MW20042022	04/20/2022	<1000	<10	<5.0	19 J	<4.0	<4.0	310,000	<4.0	<4.0	<20	<1000	<2.0	60,000	1,000	<10	1,200 J	18 J	<4.0	3,400,000	<4.0	<10	<200	<0.20
	MW20102021	10/06/2021	<1000	<10	<5.0	13 J	<4.0	<4.0	260,000	<4.0	<4.0	<20	<1000	<2.0	56,000	1,500	<10	<2000	97	<4.0	3,000,000	<4.0	<10	<200	<0.20
	MW20042021	04/21/2021	<1000	<10	<5.0	14 J	<4.0	<4.0	280,000	<4.0	<4.0	<20	<1000	<2.0	57,000	1,500	<10	<2000	89	<4.0	3,100,000	<4.0	<10	110 J	<0.20
	MW20102020	10/05/2020	<1000	<10	<5.0	16.5 J	<4.0	<4.0	289,000	<4.0	<4.0	<20	<1000	<2.0	62,000	1,340	<10	<2000	62	<4.0	3,320,000	<4.0	<10	107 J	<0.20
MW22D	MW22D042022	04/21/2022	<500	<5.0	<2.5	11	<2.0	<2.0	94,000	<2.0	<2.0	28	<500	<1.0	19,000	150	<5.0	<1000	40	<2.0	1,100,000	<2.0	<5.0	<100	<0.20
	MW22D102021	10/14/2021	<500	<5.0	<2.5	9.4 J	<2.0	<2.0	85,000	<2.0	<2.0	<10	<500	<1.0	17,000	130	<5.0	<1000	37	<2.0	1,000,000	<2.0	<5.0	<100	<0.20
	MW22D042021	04/22/2021	<250	<2.5	<1.2	9.8	<1.0	<1.0	89,000	<1.0	<1.0	3.2 J	<250	<0.50	18,000	130	<2.5	300 J	39	<1.0	1,100,000	<1.0	<2.5	<50	<0.20
	MW22D102020	10/07/2020	<250	<2.5	<1.25	10.5	<1.0	<1.0	92,600	<1.0	<1.0	4.5 J	<250	<0.25	18,600	145	<2.5	380 J	38	<1.0	1,140,000	<1.0	<2.5	<50	<0.20
MW23	MW23042022	04/11/2022	<250	<2.5	<1.25	190	<1.0	<1.0	19,000	<1.0	<1.0	<5.0	260 J	<0.5	7,400	91	<2.5	1,100	<1.5	<1.0	470,000	<1.0	<2.5	<50	0.11 J
	MW23102021	10/11/2021	<250	<2.5	1.4 J	210	<1.0	<1.0	17,000	<1.0	<1.0	<5.0	<250	<0.5	7,100	67	<2.5	1,000	<1.5	<1.0	460,000	<1.0	4.1 J	<50	<0.20
	MW23102021DUP	10/11/2021	<250	<2.5	1.4 J	210	<1.0	<1.0	16,000	<1.0	<1.0	<5.0	<250	<0.5	7,100	67	<2.5	1,000	<1.5	<1.0	470,000	<1.0	4.2 J	<50	<0.20
	MW23042021	04/13/2021	<250	<2.5	1.3 J	220	<1.0	<1.0	16,000	<1.0	<1.0	3.8 J	<250	<0.50	6,700	62	<2.5	920 J	<1.5	<1.0	480,000	<1.0	2.4 J	<50	<0.20
MW24	MW23102020	09/28/2020	<200	<2.5	1.1 J	217	<1.0	<1.0	15,200	<1.0	<1.0	<5.0	<250	<0.50	6,610	69.2	1.3 J	1,050	<1.5	<1.0	484,000	<1.0	2.5 J	<50	<0.20
	MW24042022	04/12/2022	<250	<2.5	0.91 J	200	<1.0	<1.0	33,000	<1.0	<1.0	<5.0	<250	<0.50	11,000	440	<2.5	820 J	<1.5	<1.0	260,000	<1.0	2.8 J	<50	<0.20
	MW24042022DUP	04/12/2022	<250	<2.5	0.69 J	210	<1.0	<1.0	33,000	<1.0	<1.0	<5.0	170 J	<0.50	11,000	440	<2.5	810 J	<1.5	<1.0	270,000	<1.0	<2.5	<50	<0.20
	MW24102021	10/11/2021	<40	<0.50	0.76 J	290	<0.20	<0.20	32,000	<0.20	<0.20	<1.0	1,800	<0.10	11,000	440	<0.50	740	<0.30	<0.20	260,000	<0.20	0.58 J	<10	<0.20
	MW24102021DUP	10/11/2021	<40	<0.50	0.77 J	290	<0.20	<0.20	32,000	0.1 J	<0.20	<1.0	1,800	<0.10	11,000	430	<0.50	740	<0.30	<0.20	260,000	<0.20	0.68 J	<10	<0.20
	MW24042021	04/15/2021	<40	<0.50	0.89 J	280	<0.20	<0.20	32,000	<0.20	<0.20	<1.0	1,900	<0.10	10,000	420	<0.50	710	<0.30	<0.20	250,000	<0.20	0.34 J	<10	<0.20
	MW24102020	09/29/2020	<200	<2.5	<1.25	298	<1.0	<1.0	33,600	0.78 J	<1.0	3.6 J	1,870	0.43 J	11,100	463	<2.5	821 J	<1.5	<1.0	309,000	<1.0	<2.5	<50	<0.20
	MW25042022	04/13/2022	<250	<2.5	<1.25	14	<1.0	<1.0	110,000	1.6 J	<1.0	<5.0	<250	<0.50	21,000	19	1.7 J	880 J	58	<1.0	1,400,000	<1.0	2.2 J	<50	0.13 J
MW25	MW25102021	10/12/2021	<500	<5.0	<2.5	12	<2.0	<2.0	120,000	<2.0	<2.0	<10	<500	<1.0	22,000	17	<5.0	920 J	59	<2.0	1,400,000	<2.0	<5.0	<100	<0.20
	MW25042021	04/21/2021	<250	<2.5	<1.2	13	<1.0	<1.0	120,000	<1.0	<1.0	3.7 J	<250	<0.50	22,000	21	<2.5	790 J	59	<1.0	1,400,000	<1.0	<2.5	<50	<0.20
	MW26042022	04/18/2022	<250	<2.5	<1.25	14	<1.0	<1.0	95,000	<1.0	<1.0	21	<250	<0.50	17,000	1,100	<2.5	570 J	<1.5	<1.0	1,100,000	<1.0	3.4 J	<50	0.11 J
MW26	MW26102021	10/11/2021	<250	<2.5	0.66 J	16	<1.0	<1.0	110,000	<1.0	<1.0	<5.0	<250	<0.5	19,000	1,300	<2.5	670 J	<1.5	<1.0	1,000,000	<1.0	4.3 J	<50	<0.20
	MW26042021	04/20/2021	<250	<2.5	<1.2	16	<1.0	<1.0	92,000	1 J	<1.0	4.5 J	<250	<0.50	17,000	930	<2.5	580 J	<1.5	<1.0	980,000	<1.0	2.8 J	<50	<0.20
	MW27042022	04/20/2022	<250	<2.5	<1.25	25	<1.0	<1.0	71,000	<1.0	<1.0	<5.0	<250	<0.50	15,000	13	<2.5	790 J	36	<1.0	1,000,000	<1.0	<2.5	<50	<0.20
MW27	MW27102021	10/08/2021	<250	<2.5	0.7 J	24	<1.0	<1.0	64,000	<1.0	<1.0	2.5 J	<250	<0.5	14,000	20	<2.5	820 J	31	<1.0	890,000	<1.0	2.2 J	<50	<0.20
	MW27042021	04/23/2021	<250	<2.5	0.76 J	28	<1.0	<1.0	70,000	<1.0	<1.0	6.3 J	<250	<0.50	15,000	28	<2.5	820 J	34	<1.0	950,000	<1.0	2 J	<50	<0.20
	MW28042022	04/13/2022	210 J	<2.5	0.71 J	42	<1.0	<1.0	82,000	0.79 J	<1.0	10	180 J	<0.50	19,000	81	1.3 J	620 J	18	<1.0	1,000,000	<1.0	3.4 J	<50	<0.20
MW28	MW28102021	10/05/2021	<250	<2.5	0.73 J	31	<1.0	<1.0	70,000	<1.0	<1.0	13	<250	<0.5	16,000	52	1.3 J	550 J	9.1	<1.0	1,000,000	<1.0	1.6 J	26 J	<0.20
	MW28042021	04/16/2021	<250	<2.5	1.1 J	37	<1.0	<1.0	68,000	<1.0	<1.0	16	<250	<0.50	15,000	62	1.8 J	530 J	5.9	<1.0	940,000	<1.0	2.9 J	<50	<0.20
	MW29042022	04/14/2022	<250	<2.5	1.2 J	40	<1.0	<1.0	41,000	<1.0	<1.0	51	<25												

TABLE B-6: SUMMARY OF DISSOLVED METALS ANALYTICAL RESULTS
2024 INTERIM NORTHERN AREA GROUNDWATER MONITORING PLAN
Fort Wingate Depot Activity, New Mexico

Well ID	Sample ID	Date	Aluminum	Antimony	Arsenic	Barium	Beryllium	Cadmium	Calcium	Chromium	Cobalt	Copper	Iron	Lead	Magnesium	Manganese	Nickel	Potassium	Selenium	Silver	Sodium	Thallium	Vanadium	Zinc	Mercury
			µg/L																						
SL			5,000	6	10	2,000	4	5	-	50	50	1,000	1,000	15	-	200	200	-	50	50	-	2	86	10,000	2
MW35	MW35042022	04/20/2022	<250	<2.5	<1.2	11	<1.0	<1.0	19,000	<1.0	<1.0	<5.0	<250	<0.50	2,700	35	<2.5	1,100	<1.5	<1.0	790,000	<1.0	1.4 J	<50	<0.20
	MW35042022DUP	04/20/2022	<250	<2.5	<1.2	10	<1.0	<1.0	19,000	<1.0	<1.0	<5.0	<250	<0.50	2,700	36	1.6 J	1,100	<1.5	<1.0	780,000	<1.0	<2.5	<50	<0.20
	MW35102021	10/13/2021	<250	<2.5	<1.2	9.3	<1.0	<1.0	19,000	<1.0	<1.0	<5.0	<250	<0.5	2,700	37	<2.5	1,100	<1.5	<1.0	750,000	<1.0	<2.5	<50	<0.20
	MW35102021DUP	10/13/2021	<250	<2.5	<1.2	9.3	<1.0	<1.0	20,000	<1.0	<1.0	<5.0	<250	<0.5	2,700	37	<2.5	1,200	<1.5	<1.0	760,000	<1.0	1.6 J	<50	<0.20
	MW35042021	04/21/2021	<250	<2.5	<1.2	10	<1.0	<1.0	19,000	<1.0	<1.0	<5.0	<250	<0.50	2,900	43	<2.5	990 J	0.76 J	<1.0	760,000	<1.0	1.9 J	<50	<0.20
MW36D	MW36D042022	04/18/2022	<250	<2.5	<1.2	160	<1.0	<1.0	38,000	<1.0	<1.0	<5.0	<250	<0.50	13,000	200	<2.5	840 J	<1.5	<1.0	600,000	<1.0	2.1 J	<50	<0.20
	MW36D042022DUP	04/18/2022	<250	<2.5	<1.2	160	<1.0	<1.0	36,000	<1.0	<1.0	<5.0	<250	<0.50	13,000	200	<2.5	820 J	<1.5	<1.0	570,000	<1.0	<2.5	<50	<0.20
	MW36D102021	10/11/2021	<250	<2.5	<1.2	150	<1.0	<1.0	37,000	<1.0	<1.0	<5.0	<250	<0.5	14,000	200	<2.5	890 J	<1.5	<1.0	540,000	<1.0	3.3 J	<50	<0.20
	MW36D042021	04/19/2021	<250	<2.5	<1.2	160	<1.0	<1.0	38,000	<1.0	<1.0	3.1 J	<250	<0.50	14,000	230	<2.5	880 J	<1.5	<1.0	570,000	<1.0	<2.5	<50	<0.20
MW36S	MW36S042022	04/18/2022	<500	<5.0	<2.5	6.8 J	<2.0	<2.0	300,000	<2.0	1.1 J	<10	<500	<1.0	130,000	1,300	<5.0	1,300 J	<3.0	<2.0	2,100,000	<2.0	<5.0	<100	<0.20
	MW36S102021	10/11/2021	<500	<5.0	<2.5	7.5 J	<2.0	<2.0	320,000	<2.0	1.5 J	<10	<500	<1.0	130,000	1,300	<5.0	1,500 J	<3.0	<2.0	2,000,000	<2.0	4.3 J	<100	<0.20
	MW36S042021	04/19/2021	<250	<2.5	<1.2	8	<1.0	<1.0	320,000	<1.0	1.4 J	4.1 J	<250	<0.50	130,000	1,400	<2.5	1,400	0.80 J	<1.0	2,100,000	<1.0	<2.5	<50	<0.20
MW37	MW37042022	04/20/2022	<250	<2.5	<1.2	39	<1.0	<1.0	18,000	<1.0	<1.0	<5.0	<250	<0.50	4,300	72	<2.5	<500	<1.5	<1.0	620,000	<1.0	1.3 J	<50	<0.20
	MW37102021	10/13/2021	<250	<2.5	0.87 J	32	<1.0	<1.0	19,000	<1.0	<1.0	<5.0	<250	<0.5	4,600	18	1.4 J	260 J	<1.5	<1.0	630,000	<1.0	2.7 J	39 J	<0.20
	MW37042021	04/21/2021	<250	<2.5	0.89 J	37	<1.0	<1.0	18,000	<1.0	<1.0	3.6 J	<250	<0.50	4,400	57	<2.5	<500	<1.5	<1.0	590,000	<1.0	3.4 J	<50	<0.20
MW38	MW38042022	04/22/2022	<250	<2.5	<1.2	16	<1.0	<1.0	30,000	<1.0	<1.0	24	<250	<0.50	6,800	16	2.1 J	270 J	<1.5	<1.0	770,000	<1.0	2.1 J	<50	<0.20
	MW38102021	10/14/2021	<250	<2.5	0.67 J	14	<1.0	<1.0	29,000	<1.0	<1.0	<5.0	<250	<0.5	6,500	21	1.4 J	<250	<1.5	<1.0	720,000	<1.0	3.0 J	<50	<0.20
	MW38042021	04/23/2021	<250	<2.5	0.72 J	15	<1.0	<1.0	31,000	<1.0	<1.0	5.2 J	<250	<0.50	6,800	81	<2.5	<500	<1.5	<1.0	720,000	<1.0	2.8 J	<50	<0.20
MW39	MW39042022	04/22/2022	<500	<5.0	3.0 J	38	<2.0	<2.0	40,000	<2.0	<2.0	28	310 J	<1.0	14,000	190	3.6 J	510 J	<3.0	<2.0	1,400,000	<2.0	5.8 J	<100	<0.20
	MW39102021	10/14/2021	<500	<5.0	4.0 J	35	<2.0	<2.0	41,000	<2.0	<2.0	<10	<500	<1.0	14,000	250	2.6 J	<1000	<3.0	<2.0	1,400,000	<2.0	9.9 J	<100	<0.20
	MW39042021	04/23/2021	<250	<2.5	5.3	41	<1.0	<1.0	23,000	<1.0	<1.0	8.3 J	<250	<0.50	8,800	98	<2.5	450 J	1.2 J	<1.0	1,200,000	<1.0	17	<50	<0.20
SMW01	SMW01042022	04/12/2022	<500	<5.0	2.5 J	30	<2.0	<2.0	21,000	<2.0	<2.0	<10	<500	<1.0	7,300	110	<5.0	<1000	<3.0	<2.0	1,100,000	<2.0	9.8 J	<100	<0.20
	SMW01102021	10/08/2021	<250	<2.5	2.2 J	23	<1.0	<1.0	19,000	<1.0	<1.0	<5.0	<250	<0.5	6,700	24	1.7 J	<500	0.76 J	<1.0	950,000	<1.0	5.4	<50	<0.20
	SMW01042021	04/13/2021	<500	<5.0	2.3 J	25	<2.0	<2.0	22,000	<2.0	<2.0	<10	<500	<1.0	7,700	41	<5.0	<1000	<3.0	<2.0	1,000,000	<2.0	5.3 J	<100	<0.20
	SMW01042021DUP	04/13/2021	<500	<5.0	2.1 J	25	<2.0	<2.0	22,000	<2.0	<2.0	5.2 J	<500	<1.0	7,500	75	<5.0	<1000	<3.0	<2.0	1,000,000	<2.0	5.3 J	<100	<0.20
	SMW01102020	09/29/2020	<500	<5.0	1.8 J	29.1	<2.0	<2.0	22,600	<2.0	<2.0	<10	<500	<1.0	7,660	30.8	<5.0	<1000	<3.0	<2.0	1,020,000	<2.0	6.0 J	<100	<0.20
TMW01	TMW01042022	04/15/2022	<250	<2.5	<1.2	11	<1.0	<1.0	110,000	<1.0	<1.0	3.2 J	<250	<0.5	19,000	13	<2.5	<500	2.8 J	<1.0	580,000	<1.0	12	<50	<0.20
	TMW01102021	10/08/2021	<250	<2.5	0.78 J	10	<1.0	<1.0	110,000	<1.0	<1.0	3.9 J	<250	<0.5	20,000	11	<2.5	290 J	3.1 J	<1.0	530,000	<1.0	13	<50	<0.20
	TMW01042021	04/15/2021	<250	<2.5	<1.2	10	<1.0	<1.0	110,000	<1.0	<1.0	3.8 J	<250	<0.50	19,000	10	2.1 J	<500	3.1 J	<1.0	550,000	<1.0	12	<50	<0.20
	TMW01102020	10/01/2020	<250	<2.5	0.97 J	11.5	<1.0	<1.0	110,000	<1.0	<1.0	3.9 J	<250	<0.50	18,700	11.9	<2.5	<500	3.5 J	<1.0	579,000	<1.0	12.7	<50	<0.20
TMW02	TMW02042022	04/15/2022	<500	<5.0	<2.5	7.9 J	<2.0	<2.0	24,000	1.2 J	<2.0	24	<500	<1.0	2,900	<5.0	<5.0	1,300 J	76	<2.0	1,100,000	<2.0	40	<100	<0.20
	TMW02042022DUP	04/15/2																							

TABLE B-6: SUMMARY OF DISSOLVED METALS ANALYTICAL RESULTS
2024 INTERIM NORTHERN AREA GROUNDWATER MONITORING PLAN
Fort Wingate Depot Activity, New Mexico

Well ID	Sample ID	Date	Aluminum	Antimony	Arsenic	Barium	Beryllium	Cadmium	Calcium	Chromium	Cobalt	Copper	Iron	Lead	Magnesium	Manganese	Nickel	Potassium	Selenium	Silver	Sodium	Thallium	Vanadium	Zinc	Mercury
			µg/L																						
SL			5,000	6	10	2,000	4	5	-	50	50	1,000	1,000	15	-	200	200	-	50	50	-	2	86	10,000	2
TMW07	TMW07042022	04/15/2022	<500	<5.0	<2.5	15	<2.0	<2.0	56,000	<2.0	1.7 J	27	<500	<1.0	10,000	280	29	4,200	<3.0	<2.0	1,300,000	<2.0	<5.0	<100	<0.20
	TMW07102021	10/08/2021	<500	<5.0	<2.5	13	<2.0	<2.0	54,000	<2.0	<2.0	<10	<500	<1.0	10,000	250	4.1 J	4,100	<3.0	<2.0	1,200,000	<2.0	4.7 J	<100	<0.20
	TMW07042021	04/16/2021	<500	<5.0	<2.5	14	<2.0	<2.0	55,000	<2.0	<2.0	<10	<500	<1.0	9,800	290	<5.0	3,800	<3.0	<2.0	1,200,000	<2.0	2.7 J	<100	<0.20
	TMW07102020	10/01/2020	<500	<5.0	<2.5	13.2	<2.0	<2.0	57,800	<2.0	<2.0	<10	<500	<1.0	10,200	296	<5.0	3,960	<3.0	<2.0	1,250,000	<2.0	5.9 J	<100	<0.20
	TMW07102020DUP	10/01/2020	<500	<5.0	<2.5	13.4	<2.0	<2.0	58,500	<2.0	<2.0	5.0 J	<500	<1.0	10,400	302	<5.0	4,160	<3.0	<2.0	1,250,000	<2.0	5.9 J	<100	<0.20
TMW08	TMW08042022	04/14/2022	<1000	<10	<5.0	6.5 J	<4.0	<4.0	490,000	<4.0	<4.0	<20	<1000	<2.0	120,000	560	<10	1,800 J	34	<4.0	4,600,000	<4.0	<10	<200	<0.20
	TMW08102021	10/07/2021	<1000	<10	<5.0	7.7 J	<4.0	<4.0	280,000	<4.0	<4.0	<20	<1000	<2.0	86,000	450	<10	1,400 J	43	<4.0	4,500,000	<4.0	<10	<200	<0.20
	TMW08042021	04/14/2021	<1000	<10	<5.0	8.2 J	<4.0	<4.0	440,000	<4.0	<4.0	<20	<1000	<2.0	110,000	420	<10	1,200 J	36	<4.0	4,400,000	<4.0	<10	<200	<0.20
	TMW08102020	09/30/2020	<1000	<10	<5.0	9.8 J	<4.0	<4.0	394,000	<4.0	<4.0	<20	<1000	<2.0	103,000	399	<10	1,670 J	27.8	<4.0	4,450,000	<4.0	<10	<200	<0.20
TMW10	TMW10042022	04/14/2022	<500	<5.0	<2.5	13	<2.0	<2.0	52,000	<2.0	<2.0	23	<500	<1.0	12,000	11	<5.0	<1000	<3.0	<2.0	1,600,000	<2.0	2.9 J	<100	<0.20
	TMW10102021	10/07/2021	<500	<5.0	<2.5	11	<2.0	<2.0	49,000	<2.0	<2.0	<10	<500	<1.0	12,000	14	<5.0	<1000	<3.0	<2.0	1,600,000	<2.0	4.7 J	<100	<0.20
	TMW10042021	04/15/2021	<500	<5.0	<2.5	13	<2.0	<2.0	52,000	<2.0	<2.0	<10	<500	<1.0	12,000	4.5 J	4.1 J	<1000	<3.0	<2.0	1,500,000	<2.0	<5.0	<100	<0.20
	TMW10102020	10/01/2020	<500	<5.0	<2.5	13.1	<2.0	<2.0	50,200	2.1 J	<2.0	<10	<500	<1.0	11,900	6.1 J	<5.0	<1000	<3.0	<2.0	1,530,000	<2.0	3.4 J	<100	<0.20
TMW13	TMW13042022	04/20/2022	<250	<2.5	<1.2	17	<1.0	<1.0	27,000	<1.0	<1.0	<5.0	<250	<0.5	5,100	<2.5	<2.5	360 J	9.3	<1.0	580,000	<1.0	<2.5	<50	<0.20
	TMW13042022DUP	04/20/2022	<250	<2.5	<1.2	17	<1.0	<1.0	27,000	<1.0	<1.0	<5.0	<250	<0.5	5,000	<2.5	<2.5	340 J	9.5	<1.0	580,000	<1.0	<2.5	<50	<0.20
	TMW13102021	10/13/2021	<250	<2.5	<1.2	15	<1.0	<1.0	28,000	<1.0	<1.0	<5.0	<250	<0.5	5,200	<2.5	<2.5	420 J	10	<1.0	560,000	<1.0	2.6 J	<50	<0.20
	TMW13042021	04/21/2021	<250	<2.5	<1.2	16	<1.0	<1.0	27,000	<1.0	<1.0	2.7 J	<250	<0.50	5,000	<2.5	<2.5	360 J	9.6	<1.0	560,000	<1.0	2 J	<50	<0.20
	TMW13042021DUP	04/21/2021	<250	<2.5	<1.2	16	<1.0	<1.0	27,000	<1.0	<1.0	<5.0	<250	<0.50	5,000	<2.5	<2.5	340 J	10	<1.0	560,000	<1.0	2 J	<50	<0.20
	TMW13102020	10/06/2020	<250	<2.5	<1.25	16.8	<1.0	<1.0	27,500	0.62 J	<1.0	4.9 J	<250	0.29 J	5,190	<2.5	<2.5	370 J	10.8	<1.0	579,000	<1.0	<2.5	<50	<0.20
	TMW13102020DUP	10/06/2020	<250	<2.5	<1.25	16.6	<1.0	<1.0	28,000	<1.0	<1.0	<5.0	<250	<0.50	5,220	<2.5	<2.5	366 J	10.5	<1.0	575,000	<1.0	<2.5	<50	<0.20
TMW15	TMW15042022	04/20/2022	<250	<2.5	<1.2	20	<1.0	<1.0	17,000	0.79 J	<1.0	<5.0	<250	<0.5	3,200	<2.5	<2.5	330 J	12	<1.0	550,000	<1.0	<2.5	<50	<0.20
	TMW15102021	10/07/2021	<250	<2.5	<1.2	19	<1.0	<1.0	17,000	1.7 J	<1.0	<5.0	<250	<0.5	3,300	<2.5	<2.5	360 J	12	<1.0	540,000	<1.0	2.7 J	<50	<0.20
	TMW15042021	04/21/2021	<250	<2.5	<1.2	20	<1.0	<1.0	18,000	0.85 J	<1.0	2.8 J	<250	<0.50	3,200	<2.5	<2.5	320 J	12	<1.0	540,000	<1.0	1.4 J	<50	<0.20
	TMW15102020	10/05/2020	<250	<2.5	<1.25	21.2	<1.0	<1.0	18,600	0.73 J	<1.0	3.9 J	<250	<0.50	3,500	<2.5	<2.5	364 J	12.4	<1.0	563,000	<1.0	<2.5	<50	<0.20
	TMW15102020DUP	10/05/2020	<250	<2.5	<1.25	20.4	<1.0	<1.0	18,100	0.68 J	<1.0	<5.0	<250	<0.50	3,420	<2.5	<2.5	334 J	11.9	<1.0	551,000	<1.0	<2.5	<50	<0.20
TMW21	TMW21042022	04/21/2022	<250	<2.5	<1.2	16	<1.0	<1.0	34,000	1.2 J	<1.0	23	<250	<0.5	6,400	23	2.6 J	480 J	5.7	<1.0	650,000	<1.0	1.6 J	<50	<0.20
	TMW21102021	10/13/2021	<250	<2.5	<1.2	14	<1.0	<1.0	35,000	0.94 J	<1.0	<5.0	<250	<0.5	6,800	23	1.8 J	510 J	4.8 J	<1.0	630,000	<1.0	2.3 J	<50	<0.20
	TMW21042021	04/22/2021	<250	<2.5	0.71 J	15	<1.0	<1.0	35,000	0.81 J	<1.0	4.2 J	<250	<0.50	6,700	<2.5	<2.5	390 J	5.1	<1.0	660,000	<1.0	2.3 J	<50	<0.20
	TMW21102020	10/07/2020	<250	<2.5	<1.25	15.5	<1.0	<1.0	35,900	0.90 J	<1.0	4.8 J	<250	<0.50	6,720	<2.5	<2.5	474 J	5.9	<1.0	646,000	<1.0	2.0 J	<50	0.12 J
TMW22	TMW22042022	04/15/2022	<250	<2.5	<1.2	19	<1.0	<1.0	35,000	0.92 J	<1.0	<5.0	<250	<0.5	11,000	<2.5	<2.5	510 J	1.7 J	<1.0	830,000	<1.0	4.5 J	<50	<0.20
	TMW22102021	10/08/2021	<250	<2.5	0.98 J	16	<1.0	<1.0	35,000	0.66 J	<1.0	<5.0	<250	<0.5	11,000	<2.5	<2.5	520 J	3.0 J	<1.0	800,000	<1.0	4.8 J	27 J	<0.20
	TMW22042021	04/21/2021	<250	<2.5	0.88 J	17	<1.0	<1.0	35																

TABLE B-6: SUMMARY OF DISSOLVED METALS ANALYTICAL RESULTS
2024 INTERIM NORTHERN AREA GROUNDWATER MONITORING PLAN
Fort Wingate Depot Activity, New Mexico

Well ID	Sample ID	Date	Aluminum	Antimony	Arsenic	Barium	Beryllium	Cadmium	Calcium	Chromium	Cobalt	Copper	Iron	Lead	Magnesium	Manganese	Nickel	Potassium	Selenium	Silver	Sodium	Thallium	Vanadium	Zinc	Mercury
			µg/L																						
SL			5,000	6	10	2,000	4	5	-	50	50	1,000	1,000	15	-	200	200	-	50	50	-	2	86	10,000	2
TMW27	TMW27042022	04/13/2022	<250	<2.5	20	120	<1.0	<1.0	23,000	<1.0	<1.0	<5.0	550 J	<0.50	6,300	550	<2.5	450 J	<1.5	<1.0	340,000	<1.0	<2.5	<50	<0.20
	TMW27102021	10/10/2021	<250	<2.5	21	110	<1.0	<1.0	24,000	<1.0	<1.0	<5.0	560 J	<0.50	6,300	550	<2.5	460 J	<1.5	<1.0	330,000	<1.0	1.9 J	<50	<0.20
	TMW27042021	04/18/2021	<250	<2.5	21	120	<1.0	<1.0	24,000	<1.0	<1.0	<5.0	540 J	<0.50	6,200	560	<2.5	430 J	<1.5	<1.0	340,000	<1.0	<2.5	<50	<0.20
	TMW27042021DUP	04/18/2021	<250	<2.5	21	120	<1.0	<1.0	24,000	<1.0	<1.0	<5.0	540 J	<0.50	6,100	560	<2.5	450 J	<1.5	<1.0	340,000	<1.0	<2.5	<50	<0.20
	TMW27102020	10/02/2020	<250	<2.5	20.7	121	<1.0	<1.0	24,400	<1.0	<1.0	<5.0	576 J	<0.50	6,290	555	<2.5	476 J	<1.5	<1.0	343,000	<1.0	<2.5	<50	<0.20
TMW28	TMW27102020DUP	10/02/2020	<250	<2.5	20.9	120	<1.0	<1.0	24,500	<1.0	<1.0	<5.0	574 J	<0.50	6,440	570	<2.5	454 J	<1.5	<1.0	347,000	<1.0	<2.5	<50	<0.20
	TMW28042022	04/18/2022	<250	<2.5	<1.2	43	<1.0	<1.0	88,000	<1.0	<1.0	<5.0	260 J	<0.50	27,000	330	<2.5	980 J	<1.5	<1.0	360,000	<1.0	<2.5	<50	<0.20
	TMW28102021	10/12/2021	<250	<2.5	<1.2	44	<1.0	<1.0	99,000	<1.0	<1.0	<5.0	290 J	<0.50	31,000	380	<2.5	1,100	<1.5	<1.0	360,000	<1.0	1.6 J	<50	<0.20
	TMW28042021	04/16/2021	<250	<2.5	<1.2	43	<1.0	<1.0	110,000	<1.0	<1.0	<5.0	280 J	<0.50	33,000	400	<2.5	980 J	<1.5	<1.0	340,000	<1.0	<2.5	<50	<0.20
TMW29	TMW28102020	10/02/2020	<250	<2.5	<1.25	42.3	<1.0	<1.0	96,600	<1.0	<1.0	<5.0	294 J	<0.50	30,300	361	<2.5	1,110	<1.5	<1.0	351,000	<1.0	<2.5	<50	<0.20
	TMW29042022	04/15/2022	<250	<2.5	<1.2	18	<1.0	<1.0	37,000	1.3 J	<1.0	23	<250	<0.50	7,100	<2.5	<2.5	710 J	17	<1.0	570,000	<1.0	4.4 J	<50	<0.20
	TMW29102021	10/08/2021	<250	<2.5	1.1 J	16	<1.0	<1.0	36,000	1.3 J	<1.0	<5.0	<250	<0.50	7,100	<2.5	<2.5	700 J	19	<1.0	540,000	<1.0	4.6 J	<50	<0.20
	TMW29042021	04/21/2021	<250	<2.5	0.97 J	16	<1.0	<1.0	36,000	1.7 J	<1.0	3 J	<250	<0.50	6,900	<2.5	<2.5	650 J	19	<1.0	560,000	<1.0	3.8 J	<50	<0.20
TMW31S	TMW29102020	10/01/2020	<250	<2.5	1.1 J	18.7	<1.0	<1.0	37,100	1.9 J	<1.0	4.9 J	<250	0.42 J	6,910	3.0 J	<2.5	693 J	22.8	<1.0	570,000	<1.0	4.8 J	<50	<0.20
	TMW31S042022	04/14/2022	<250	<2.5	<1.2	13	<1.0	<1.0	110,000	1.5 J	<1.0	<5.0	<250	<0.50	20,000	9.9	<2.5	320 J	6.4	<1.0	540,000	<1.0	1.5 J	<50	<0.20
	TMW31S102021	10/07/2021	<250	<2.5	<1.2	12	<1.0	<1.0	120,000	1.0 J	<1.0	2.5 J	<250	<0.50	22,000	7.8	<2.5	360 J	7.9	<1.0	560,000	<1.0	2.2 J	<50	<0.20
	TMW31S042021	04/26/2021	<250	<2.5	<1.2	13	<1.0	<1.0	120,000	1.2 J	<1.0	3 J	<250	<0.50	22,000	13	<2.5	360 J	8.3	<1.0	540,000	<1.0	1.7 J	<50	<0.20
TMW33	TMW31S102020	10/01/2020	<250	<2.5	0.71 J	16.1	<1.0	4.0 J	133,000	2.3 J	0.97 J	45.5	<250	0.84 J	23,100	5.3	2.6 J	495 J	9.9	<1.0	563,000	<1.0	3.4 J	408	<0.20
	TMW33042022	04/15/2022	<500	<5.0	<2.5	15	<2.0	<2.0	110,000	<2.0	<2.0	<10	<500	<1.0	31,000	48	<5.0	560 J	<3.0	<2.0	2,400,000	<2.0	<5.0	<100	<0.20
	TMW33102021	10/08/2021	<500	<5.0	<2.5	14	<2.0	<2.0	110,000	<2.0	<2.0	<10	<500	<1.0	33,000	52	<5.0	720 J	<3.0	<2.0	2,300,000	<2.0	4.0 J	<100	0.12 J
	TMW33042021	04/16/2021	<500	<5.0	<2.5	14	<2.0	<2.0	100,000	<2.0	<2.0	<10	<500	<1.0	30,000	48	<5.0	<1000	<3.0	<2.0	2,300,000	<2.0	<5.0	<100	<0.20
TMW34	TMW33102020	10/01/2020	<500	<5.0	<2.5	15.2	<2.0	<2.0	112,000	<2.0	<2.0	<10	<500	<1.0	31,300	52.9	<5.0	523 J	<3.0	<2.0	2,360,000	<2.0	4.0 J	<100	<0.20
	TMW34042022	04/19/2022	<500	<5.0	<2.5	12	<2.0	<2.0	130,000	<2.0	<2.0	<10	<500	<1.0	27,000	140	<5.0	610 J	120	<2.0	1,300,000	<2.0	<5.0	<100	<0.20
	TMW34042022DUP	04/19/2022	<500	<5.0	<2.5	12	<2.0	<2.0	130,000	<2.0	<2.0	22	<500	<1.0	27,000	140	<5.0	650 J	120	<2.0	1,300,000	<2.0	<5.0	<100	<0.20
	TMW34102021	10/13/2021	<500	<5.0	<2.5	9.9 J	<2.0	<2.0	120,000	<2.0	<2.0	<10	<500	<1.0	26,000	120	<5.0	700 J	120	<2.0	1,300,000	<2.0	<5.0	<100	<0.20
	TMW34102021DUP	10/13/2021	<250	<2.5	<1.2	11	<1.0	<1.0	120,000	<1.0	<1.0	<5.0	<250	<0.50	27,000	120	<2.5	630 J	120	<1.0	1,300,000	<1.0	<2.5	<50	<0.20
TMW35	TMW34042021	04/20/2021	<500	<5.0	<2.5	11	<2.0	<2.0	120,000	<2.0	<2.0	<10	<500	<1.0	26,000	130	<5.0	<1000	120	<2.0	1,300,000	<2.0	<5.0	<100	<0.20
	TMW34102020	10/05/2020	<500	<5.0	<2.5	11.8	<2.0	<2.0	127,000	<2.0	<2.0	<10	<500	<1.0	27,500	143	<5.0	690 J	125	<2.0	1,330,000	<2.0	<5.0	<100	<0.20
	TMW35042022	04/20/2022	<250	<2.5	<1.2	11	<1.0	<1.0	74,000	<1.0	<1.0	<5.0	140 J	<0.50	14,000	21	<2.5	290 J	3.5 J	<1.0	1,100,000	<1.0	<2.5	<50	<0.20
	TMW35102021	10/06/2021	<500	<5.0	<2.5	9.6 J	<2.0	<2.0	73,000	<2.0	<2.0	<10	<500	<1.0	14,000	30	<5.0	<1000	4.1 J	<2.0	1,100,000	<2.0	<5.0	<100	<0.20
TMW39S	TMW35042021	04/26/2021	<250	<2.5	<1.2	11	<1.0	<1.0	75,000	0.99 J	<1.0	4.4 J	5,000	<0.50	15,000	120	<2.5	290 J	5.6	<1.0	1,100,000	<1.0	1.3 J	<50	<0.20
	TMW35102020	10/06/2020	<250	<2.5	<1.25	11.1	<1.0	<1.0	75,100	<1.0	<1.0	5.2 J	<250	<0.50	14,200	137	<2.5	319 J	7.0	<1.0	1,100,000	<1.0	<2.5	<50	<0.20
	TMW3																								

TABLE B-6: SUMMARY OF DISSOLVED METALS ANALYTICAL RESULTS
2024 INTERIM NORTHERN AREA GROUNDWATER MONITORING PLAN
Fort Wingate Depot Activity, New Mexico

Well ID	Sample ID	Date	Aluminum	Antimony	Arsenic	Barium	Beryllium	Cadmium	Calcium	Chromium	Cobalt	Copper	Iron	Lead	Magnesium	Manganese	Nickel	Potassium	Selenium	Silver	Sodium	Thallium	Vanadium	Zinc	Mercury
			µg/L																						
SL			5,000	6	10	2,000	4	5	-	50	50	1,000	1,000	15	-	200	200	-	50	50	-	2	86	10,000	2
TMW45	TMW45042022	04/19/2022	<250	<2.5	<1.2	63	<1.0	<1.0	29,000	<1.0	<1.0	<5.0	<250	<0.50	7,500	20	<2.5	460 J	0.86 J	<1.0	960,000	<1.0	2.5 J	<50	<0.20
	TMW45102021	10/12/2021	<250	<2.5	<1.2	56	<1.0	<1.0	28,000	<1.0	<1.0	<5.0	<250	<0.50	7,500	53	<2.5	530 J	0.8 J	<1.0	930,000	<1.0	4.5 J	<50	<0.20
	TMW45102021DUP	10/12/2021	<250	<2.5	<1.2	55	<1.0	<1.0	28,000	<1.0	<1.0	<5.0	<250	<0.50	7,400	51	<2.5	440 J	0.95 J	<1.0	910,000	<1.0	4.2 J	<50	<0.20
	TMW45042021	04/20/2021	<250	<2.5	0.81 J	58	<1.0	<1.0	28,000	<1.0	<1.0	3.2 J	<250	<0.50	7,200	9.9	<2.5	370 J	0.91 J	<1.0	930,000	<1.0	3.7 J	<50	<0.20
TMW45	TMW45102020	10/05/2020	<250	<2.5	<1.25	64.4	<1.0	<1.0	29,200	<1.0	<1.0	5.4 J	<250	<0.50	7,770	50.7	<2.5	471 J	0.89 J	<1.0	959,000	<1.0	2.5 J	<50	<0.20
	TMW46042022	04/12/2022	<500	<5.0	<2.5	10	<2.0	<2.0	99,000	<2.0	<2.0	<10	<500	<1.0	23,000	<5.0	<5.0	<500	120	<2.0	1,300,000	<2.0	7.6 J	<100	<0.20
	TMW46102021	10/05/2021	<500	<5.0	<2.5	9.3 J	<2.0	<2.0	94,000	<2.0	<2.0	<10	<500	<1.0	22,000	<5.0	<5.0	530 J	120	<2.0	1,300,000	<2.0	<5.0	<100	<0.20
	TMW46042021	04/13/2021	<500	<5.0	<2.5	9.6 J	<2.0	<2.0	94,000	<2.0	<2.0	<10	<500	<1.0	22,000	<5.0	<5.0	<1000	120	<2.0	1,300,000	<2.0	3.2 J	<100	<0.20
TMW46	TMW46102020	09/29/2020	<500	<5.0	<2.5	10.4	<2.0	<2.0	94,100	<2.0	<2.0	<10	<500	<1.0	22,500	<5.0	<5.0	<1000	128	<2.0	1,320,000	<2.0	<5.0	<100	<0.20
	TMW47042022	04/21/2022	<250	<2.5	<1.2	12	<1.0	<1.0	6,100	<1.0	<1.0	10	<250	<0.50	690	34	<2.5	800 J	<1.5	<1.0	570,000	<1.0	<2.5	<50	<0.20
	TMW47102021	10/14/2021	<250	<2.5	0.64 J	10	<1.0	<1.0	6,000	<1.0	<1.0	<5.0	<250	<0.50	660	32	<2.5	720 J	<1.5	<1.0	540,000	<1.0	<2.5	<50	<0.20
	TMW47042021	04/23/2021	<250	<2.5	0.64 J	11	<1.0	<1.0	6,100	<1.0	<1.0	<5.0	<250	<0.50	660	30	<2.5	760 J	<1.5	<1.0	550,000	<1.0	<2.5	<50	<0.20
TMW47	TMW47102020	10/07/2020	<250	<2.5	<1.25	11.3	<1.0	<1.0	6,120	<1.0	<1.0	<5.0	<250	<0.50	661	34.5	<2.5	780 J	<1.5	<1.0	563,000	<1.0	<2.5	<50	<0.20
	TMW57042022	04/18/2022	<250	<2.5	0.79 J	26	<1.0	<1.0	11,000	<1.0	<1.0	22	<250	<0.50	2,500	13	<2.5	440 J	8.7	<1.0	570,000	<1.0	2.8 J	<50	<0.20
	TMW57102021	10/11/2021	<250	<2.5	1.3 J	26	<1.0	<1.0	12,000	<1.0	<1.0	<5.0	<250	<0.50	2,800	3.3 J	<2.5	560 J	9.5	<1.0	530,000	<1.0	3.8 J	<50	<0.20
	TMW57042021	04/19/2021	<250	<2.5	1.2 J	29	<1.0	<1.0	12,000	<1.0	<1.0	3.2 J	<250	<0.50	2,600	66	<2.5	460 J	9	<1.0	550,000	<1.0	2.4 J	<50	<0.20
TMW59	TMW59042022	04/18/2022	<250	<2.5	1.3 J	21	<1.0	<1.0	34,000	2.7 J	<1.0	25	<250	<0.50	8,700	11	2.3 J	530 J	0.94 J	<1.0	810,000	<1.0	5.0 J	<50	<0.20
	TMW59102021	10/11/2021	<250	<2.5	2.2 J	21	<1.0	<1.0	35,000	2.1 J	<1.0	4.2 J	<250	<0.50	8,900	15	1.5 J	610 J	0.89 J	<1.0	740,000	<1.0	5.2	<50	<0.20
	TMW59042021	04/23/2021	<250	<2.5	2.2 J	22	<1.0	<1.0	35,000	1.1 J	<1.0	7.4 J	<250	<0.50	9,100	44	<2.5	610 J	0.79 J	<1.0	750,000	<1.0	4.3 J	<50	<0.20
TMW61	TMW61042022	04/18/2022	<250	<2.5	<1.2	31	<1.0	<1.0	63,000	<1.0	<1.0	<5.0	<250	<0.50	16,000	110	<2.5	330 J	3.6 J	<1.0	1,600,000	<1.0	3.1 J	<50	<0.20
	TMW61102021	10/13/2021	<500	<5.0	<2.5	28	<2.0	<2.0	64,000	<2.0	<2.0	<10	<500	<1.0	17,000	44	<5.0	530 J	5.0 J	<2.0	1,500,000	<2.0	2.7 J	<100	0.15 J
	TMW61042021	04/26/2021	<250	<2.5	1.2 J	31	<1.0	<1.0	65,000	<1.0	<1.0	3.8 J	<250	<0.50	17,000	82	<2.5	390 J	6.3	<1.0	1,500,000	<1.0	3 J	<50	<0.20
TMW62	TMW62042022	04/15/2022	<250	<2.5	<1.2	16	<1.0	<1.0	28,000	<1.0	<1.0	23	<250	<0.50	6,400	21	<2.5	470 J	<1.5	<1.0	740,000	<1.0	1.8 J	<50	<0.20
	TMW62102021	10/08/2021	<250	<2.5	0.85 J	16	<1.0	<1.0	28,000	<1.0	<1.0	<5.0	<250	<0.50	6,500	32	<2.5	570 J	1.6 J	<1.0	670,000	<1.0	2.1 J	<50	<0.20
	TMW62042021	04/21/2021	<250	<2.5	0.68 J	21	<1.0	<1.0	29,000	<1.0	<1.0	3.7 J	<250	<0.50	6,600	96	<2.5	580 J	1.4 J	<1.0	710,000	<1.0	1.3 J	<50	<0.20
Bedrock Wells																									
BGMW07	BGMW07042022	04/11/2022	<1000	<10	<5.0	25	<4.0	<4.0	710,000	2.3 J	<4.0	<20	<1000	<2.0	94,000	1,500	<10	7,800	<6.0	<4.0	6,100,000	<4.0	<10	<200	<0.20
	BGMW07102021	10/04/2021	<1000	<10	<5.0	26	<4.0	<4.0	700,000	<4.0	2.1 J	<20	<1000	<2.0	95,000	1,100	5.2 J	7,700	<6.0	<4.0	6,200,000	<4.0	<10	<200	<0.20
	BGMW07042021	04/12/2021	<1000	<10	3.8 J	27	<4.0	<4.0	690,000	<4.0	<4.0	<20	<1000	<2.0	94,000	1,100	<10	7,100	<6.0	<4.0	6,000,000	<4.0	<10	<200	<0.20
	BGMW07102020	09/28/2020	<1000	<10	<5.0	29.1	<4.0	<4.0	617,000	<4.0	<4.0	<20	<1000	<2.0	84,300	1,310	<10	7,780	<6.0	<4.0	5,820,000	<4.0	<10	<200	<0.20
BGMW08	BGMW08042022	04/11/2022	940 J	<10	<5.0	65	<4.0	<4.0	360,000	<4.0	<4.0	<20	<1000	1.3 J	41,000	170	<10	5,300	<6.0	<4.0	3,900,000	<4.0	<10	<200	<0.20
	BGMW08102021	10/04/2021	<1000	<10	<5.0	11 J	<4.0	<4.0	330,000	<4.0	<4.0	<20	<1000	<2.0	38,000	160	6.1 J	4,500	<6.0	<4.0	3,800,000	<4.0	<10	<200	<0.20
	BGMW08042021	04/13/2021	<1000	<10	<5.0	25	<4.0	<4.0	330,000	9.9 J	3.8 J	<20	<1000	<2.0	41,000	280	6.3 J	3,800 J	<6.0	<4.0	3,800,000	<4.0	<10	<200	<0.20
	BGMW08102020	09/28/2020	<1000	<10	<5.0	13.8 J	<4.0	<4.0	335,000	<4.0	<4														

TABLE B-6: SUMMARY OF DISSOLVED METALS ANALYTICAL RESULTS
2024 INTERIM NORTHERN AREA GROUNDWATER MONITORING PLAN
Fort Wingate Depot Activity, New Mexico

Well ID	Sample ID	Date	Aluminum	Antimony	Arsenic	Barium	Beryllium	Cadmium	Calcium	Chromium	Cobalt	Copper	Iron	Lead	Magnesium	Manganese	Nickel	Potassium	Selenium	Silver	Sodium	Thallium	Vanadium	Zinc	Mercury
			µg/L																						
SL			5,000	6	10	2,000	4	5	-	50	50	1,000	1,000	15	-	200	200	-	50	50	-	2	86	10,000	2
TMW16	TMW16042022	04/11/2022	<250	<2.5	<1.2	11	<1.0	<1.0	4,600	<1.0	<1.0	<5.0	<250	<0.50	450 J	7.0	17	610 J	<1.5	<1.0	460,000	<1.0	4.6 J	<50	0.12 J
	TMW16102021	10/04/2021	<250	<2.5	<1.2	11	<1.0	<1.0	4,000	<1.0	<1.0	<5.0	<250	<0.50	430 J	4.3 J	18	610 J	<1.5	<1.0	450,000	<1.0	4.1 J	<50	<0.20
	TMW16102021DUP	10/04/2021	<250	<2.5	<1.2	10	<1.0	<1.0	3,900	<1.0	<1.0	3.9 J	<250	<0.50	440 J	3.7 J	16	620 J	<1.5	<1.0	440,000	<1.0	4.0 J	<50	<0.20
	TMW16042021	04/12/2021	120 J	<2.5	<1.2	12	<1.0	<1.0	4,100	1.4 J	<1.0	3.5 J	<250	<0.50	430 J	4.2 J	10	460 J	<1.5	<1.0	450,000	<1.0	4.3 J	<50	<0.20
	TMW16042021DUP	04/12/2021	<250	<2.5	<1.2	11	<1.0	<1.0	3,800	<1.0	<1.0	3 J	<250	<0.50	400 J	2 J	7.4	430 J	<1.5	<1.0	450,000	<1.0	3.9 J	<50	<0.20
TMW17	TMW16102020	09/28/2020	<250	<2.5	<1.25	19.1	<1.0	<1.0	12,600	0.96 J	1.7 J	5.2 J	<250	<0.50	949	84.9	146	829 J	<1.5	<1.0	598,000	<1.0	4.0 J	48.3 J	<0.20
	TMW17042022	04/18/2022	<250	<2.5	<1.2	14	<1.0	<1.0	3,800	<1.0	<1.0	<5.0	<250	<0.50	640	10	<2.5	690 J	<1.5	<1.0	490,000	<1.0	<2.5	<25	<0.20
	TMW17102021	10/13/2021	<250	<2.5	<1.2	12	<1.0	<1.0	3,300	<1.0	<1.0	<5.0	<250	<0.50	540	6.9	<2.5	800 J	<1.5	<1.0	460,000	<1.0	<2.5	<50	<0.20
	TMW17042021	04/19/2021	<250	<2.5	<1.2	13	<1.0	<1.0	3,300	<1.0	<1.0	<5.0	<250	<0.50	510	7.5	<2.5	700 J	<1.5	<1.0	450,000	<1.0	<2.5	<50	<0.20
	TMW17042021DUP	04/19/2021	<250	<2.5	<1.2	13	<1.0	<1.0	3,300	<1.0	<1.0	<5.0	<250	<0.50	530	7.6	<2.5	680 J	<1.5	<1.0	460,000	<1.0	<2.5	<50	<0.20
TMW18	TMW17102020	10/02/2020	<250	<2.5	<1.25	12.6	<1.0	<1.0	3,580	<1.0	<1.0	<5.0	<250	<0.50	466 J	11.2	<2.5	660 J	<1.5	<1.0	434,000	<1.0	<2.5	<50	<0.20
	TMW18042022	04/11/2022	<250	<2.5	<1.2	11	<1.0	<1.0	7,400	<1.0	<1.0	<5.0	<250	<0.50	1,200	<2.5	<2.5	2,100	<1.5	<1.0	690,000	<1.0	3.5 J	<50	0.16 J
	TMW18102021	10/05/2021	160 J	1.7 J	<1.2	11	<1.0	<1.0	7,600	0.79 J	<1.0	2.6 J	<250	<0.50	1,100	5.3	<2.5	2,200	<1.5	<1.0	640,000	<1.0	13	<50	<0.20
	TMW18042021	04/12/2021	190 J	<2.5	0.77 J	11	<1.0	<1.0	7,900	0.68 J	<1.0	3.3 J	<250	0.52 J	1,100	5.4	<2.5	2,000	<1.5	<1.0	670,000	<1.0	14	<50	<0.20
TMW19	TMW18102020	09/28/2020	175 J	<2.5	<1.25	10.9	<1.0	<1.0	7,010	0.75 J	<1.0	<5.0	<250	<0.50	1,070	6.2	<2.5	2,450	<1.5	<1.0	684,000	<1.0	5.3	<50	<0.20
	TMW19042022	04/11/2022	<250	<2.5	<1.2	5.8	<1.0	<1.0	9,900	<1.0	<1.0	<5.0	<250	<0.50	1,100	28	62	850 J	<1.5	<1.0	690,000	<1.0	<2.5	<50	<0.20
	TMW19102021	10/04/2021	<250	<2.5	<1.2	5.7	<1.0	<1.0	9,900	<1.0	<1.0	<5.0	<250	<0.50	1,100	26	19	830 J	<1.5	<1.0	670,000	<1.0	2.8 J	<50	<0.20
	TMW19042021	04/12/2021	<250	<2.5	<1.2	5.8	<1.0	<1.0	9,900	<1.0	<1.0	<5.0	<250	<0.50	1,100	23	8.3	670 J	<1.5	<1.0	690,000	<1.0	4.4 J	<50	<0.20
	TMW19102020	09/28/2020	<250	<2.5	<1.25	6.8	<1.0	<1.0	10,500	0.53 J	<1.0	<5.0	<250	<0.50	1,180	28.8	16.1	865 J	<1.5	<1.0	699,000	<1.0	4.2 J	<50	<0.20
TMW30	TMW19102020DUP	09/28/2020	<250	<2.5	<1.25	6.5	<1.0	<1.0	10,400	0.50 J	<1.0	<5.0	<250	<0.50	1,140	29.6	19.6	838 J	<1.5	<1.0	720,000	<1.0	4.2 J	<50	<0.20
	TMW30042022	04/13/2022	<250	<2.5	<1.2	10	<1.0	<1.0	59,000	0.55 J	<1.0	24	<250	<0.50	12,000	<2.5	<2.5	720 J	6.8	<1.0	460,000	<1.0	13	<50	<0.20
	TMW30102021	10/06/2021	<250	<2.5	<1.2	9.2	<1.0	<1.0	59,000	<1.0	<1.0	<5.0	<250	<0.50	12,000	<2.5	<2.5	730 J	6.4	<1.0	470,000	<1.0	11	<50	<0.20
	TMW30042021	04/14/2021	<250	<2.5	0.83 J	8.9	<1.0	<1.0	57,000	<1.0	<1.0	2.7 J	<250	<0.50	12,000	<2.5	<2.5	550 J	6.8	<1.0	470,000	<1.0	12	<50	<0.20
TMW31D	TMW30102020	09/30/2020	<250	<2.5	<1.25	9.4	<1.0	<1.0	61,900	0.55 J	<1.0	3.0 J	<250	<0.50	12,700	<2.5	<2.5	736 J	7.3	<1.0	469,000	<1.0	13.1	<50	<0.20
	TMW31D042022	04/19/2022	<250	<2.5	<1.2	9.3	<1.0	<1.0	64,000	<1.0	<1.0	23	<250	<0.50	11,000	10	<2.5	1,300	6.9	<1.0	620,000	<1.0	4.2 J	<50	<0.20
	TMW31D102021	10/12/2021	<250	<2.5	<1.2	8.6	<1.0	<1.0	61,000	<1.0	<1.0	<5.0	<250	<0.50	11,000	8.3	<2.5	1,300	6.9	<1.0	630,000	<1.0	6.3	<50	<0.20
	TMW31D042021	04/20/2021	<250	<2.5	<1.2	8.8	<1.0	<1.0	69,000	<1.0	<1.0	3.9 J	<250	<0.50	12,000	5.8	<2.5	1,200	7	<1.0	600,000	<1.0	6	<50	<0.20
TMW32	TMW31D102020	10/02/2020	<250	<2.5	<1.25	9.2	<1.0	<1.0	63,900	<1.0	<1.0	2.6 J	<250	<0.50	11,100	8.1	<2.5	1,280	7.2	<1.0	613,000	<1.0	3.6 J	<50	<0.20
	TMW32042022	04/21/2022	<250	<2.5	0.89 J	8.0	<1.0	<1.0	14,000	<1.0	<1.0	17	140 J	<0.50	1,400	31	<2.5	930 J	2.2 J	<1.0	800,000	<1.0	<2.5	<50	<0.20
	TMW32102021	10/14/2021	<250	<2.5	1.4 J	5.4	<1.0	<1.0	11,000	<1.0	<1.0	2.5 J	<250	<0.50	1,200	24	<2.5	780 J	3.0 J	<1.0	720,000	<1.0	1.8 J	<50	<0.20
	TMW32042021	04/22/2021	<250	<2.5	1.3 J	5.6	<1.0	<1.0	11,000	<1.0	<1.0	<5.0	<250	<0.50	1,100	21	<2.5	750 J	3.9 J	<1.0	730,000	<1.0	1.6 J	<50	<0.20
TMW36	TMW32102020	10/07/2020	<250	<2.5	1.4 J	6.3	<1.0	<1.0	11,200	<1.0	<1.0	2.5 J	<250	<0.50	1,190	24.6	<2.5	850 J	3.1 J	<1.0	754,000	<1.0	<2.5	<50	<0.20
	TMW36042022	04/11/2022	<250	<2.5	<1.2	7.9	<1.0	<1.0	8,900																

TABLE B-6: SUMMARY OF DISSOLVED METALS ANALYTICAL RESULTS
2024 INTERIM NORTHERN AREA GROUNDWATER MONITORING PLAN
Fort Wingate Depot Activity, New Mexico

Well ID	Sample ID	Date	Aluminum	Antimony	Arsenic	Barium	Beryllium	Cadmium	Calcium	Chromium	Cobalt	Copper	Iron	Lead	Magnesium	Manganese	Nickel	Potassium	Selenium	Silver	Sodium	Thallium	Vanadium	Zinc	Mercury
			µg/L																						
SL			5,000	6	10	2,000	4	5	-	50	50	1,000	1,000	15	-	200	200	-	50	50	-	2	86	10,000	2
TMW40D	TMW40D042022	04/22/2022	<250	<2.5	<1.2	8.5	<1.0	<1.0	14,000	<1.0	<1.0	12	<250	<0.50	1,900	48	<2.5	960 J	2.4 J	<1.0	730,000	<1.0	2.8 J	<50	<0.20
	TMW40D102021	10/15/2021	<250	<2.5	<1.2	7.7	<1.0	<1.0	14,000	<1.0	<1.0	3.1 J	<250	<0.50	1,900	42	<2.5	910 J	2.5 J	<1.0	710,000	<1.0	2.4 J	<50	<0.20
	TMW40D042021	04/23/2021	<250	<2.5	<1.2	8.4	<1.0	<1.0	15,000	<1.0	<1.0	<5.0	<250	<0.50	1,900	46	<2.5	900 J	3.2 J	<1.0	700,000	<1.0	2.5 J	<50	<0.20
	TMW40D102020	10/07/2020	<250	<2.5	<1.25	8.6	<1.0	<1.0	14,800	<1.0	<1.0	2.7 J	<250	<0.50	1,950	46.7	<2.5	926 J	3.0 J	<1.0	725,000	<1.0	2.1 J	<50	0.15 J
TMW48	TMW48042022	04/22/2022	<250	<2.5	<1.2	9.5	<1.0	<1.0	78,000	<1.0	<1.0	<5.0	<250	<0.50	14,000	76	<2.5	1,200	5.5	<1.0	640,000	<1.0	3.1 J	<50	<0.10
	TMW48102021	10/15/2021	<250	<2.5	<1.2	9.1	<1.0	<1.0	76,000	<1.0	<1.0	3.2 J	<250	<0.50	14,000	73	<2.5	1,200	5.2	<1.0	630,000	<1.0	2.9 J	<50	<0.20
	TMW48042021	04/23/2021	<250	<2.5	<1.2	9.8	<1.0	<1.0	85,000	<1.0	<1.0	<5.0	<250	<0.50	16,000	68	<2.5	1,200	6.6	<1.0	590,000	<1.0	3.9 J	<50	<0.20
	TMW48102020	10/08/2020	<250	<2.5	<1.25	10.8	<1.0	<1.0	85,300	<1.0	<1.0	<5.0	<250	<0.50	16,700	59	<2.5	1,290	6.9	<1.0	630,000	<1.0	4.1 J	<50	<0.20
TMW49	TMW49042022	04/22/2022	<250	<2.5	<1.2	11	<1.0	<1.0	78,000	<1.0	<1.0	<5.0	<250	<0.50	13,000	120	4.9 J	1,800	8.1	<1.0	980,000	<1.0	5.6	<50	<0.20
	TMW49102021	10/15/2021	<250	<2.5	<1.2	8.6	<1.0	<1.0	76,000	1.2 J	<1.0	<5.0	<250	<0.50	13,000	34	5.3	1,600	22	<1.0	870,000	<1.0	12	<50	<0.20
	TMW49042021	04/23/2021	<250	<2.5	<1.2	9.5	<1.0	<1.0	80,000	1.2 J	<1.0	2.5 J	<250	<0.50	14,000	31	5.8	1,600	23	<1.0	840,000	<1.0	12	<50	<0.20
	TMW49102020	10/08/2020	<250	<2.5	<1.25	10.5	<1.0	<1.0	76,600	0.71 J	<1.0	<5.0	<250	<0.50	12,900	67.2	12.1	1,620	21.7	<1.0	921,000	<1.0	9.0	<50	<0.20
TMW50	TMW50042022	04/13/2022	<250	<2.5	1.9 J	16	<1.0	<1.0	5,300	<1.0	<1.0	<5.0	<250	<0.50	590	14	<2.5	630 J	<1.5	<1.0	510,000	<1.0	23	<50	<0.20
	TMW50042022DUP	04/13/2022	<250	<2.5	3.0 J	16	<1.0	<1.0	5,300	<1.0	<1.0	5.3 J	<250	<0.50	600	13	<2.5	690 J	<1.5	<1.0	520,000	<1.0	42	<50	<0.20
	TMW50102021	10/06/2021	<250	<2.5	2.2 J	17	<1.0	<1.0	5,300	<1.0	<1.0	<5.0	<250	<0.50	580	14	<2.5	760 J	<1.5	<1.0	500,000	<1.0	24	<50	<0.20
TMW51	TMW50042021	04/14/2021	<250	<2.5	2.4 J	22	<1.0	<1.0	5,400	<1.0	<1.0	3.4 J	<250	<0.50	650	15	<2.5	670 J	<1.5	<1.0	530,000	<1.0	16	<50	<0.20
	TMW51042022	04/14/2022	<250	<2.5	<1.2	9.0	<1.0	<1.0	18,000	0.76 J	<1.0	15	<250	<0.50	2,900	32	1.4 J	940 J	4.7 J	<1.0	690,000	<1.0	4.6 J	<50	<0.20
	TMW51102021	10/04/2021	<250	<2.5	<1.2	7.4	<1.0	<1.0	17,000	<1.0	<1.0	3.3 J	<250	<0.50	2,900	30	<2.5	960 J	5.0	<1.0	670,000	<1.0	3.3 J	<50	<0.20
	TMW51042021	04/14/2021	<250	<2.5	<1.2	8	<1.0	<1.0	17,000	<1.0	<1.0	4.4 J	<250	<0.50	2,800	28	<2.5	770 J	7.4	<1.0	670,000	<1.0	4.7 J	<50	<0.20
TMW52	TMW52042022	04/18/2022	<250	<2.5	4.8 J	13	<1.0	<1.0	4,200	<1.0	<1.0	20	<250	<0.50	460 J	3.7 J	<2.5	520 J	1.6 J	<1.0	470,000	<1.0	18	<50	<0.20
	TMW52102021	10/11/2021	<250	<2.5	7.6	12	<1.0	<1.0	3,800	<1.0	<1.0	<5.0	<250	<0.50	460 J	15	<2.5	580 J	<1.5	<1.0	430,000	<1.0	22	<50	<0.20
	TMW52042021	04/19/2021	<250	<2.5	8	14	<1.0	<1.0	3,900	<1.0	<1.0	4.6 J	<250	<0.50	430 J	11	<2.5	580 J	0.90 J	<1.0	440,000	<1.0	43	<50	<0.20
TMW53	TMW53042022	04/18/2022	<250	<2.5	1.6 J	98	<1.0	<1.0	2,800	<1.0	<1.0	<5.0	<250	<0.50	430 J	34	<2.5	370 J	<1.5	<1.0	380,000	<1.0	1.5 J	<50	<0.20
	TMW53102021	10/11/2021	<250	<2.5	2.1 J	96	<1.0	<1.0	2,900	<1.0	<1.0	<5.0	<250	<0.50	430 J	36	<2.5	460 J	<1.5	<1.0	350,000	<1.0	2.2 J	<50	<0.20
	TMW53042021	04/19/2021	<250	<2.5	2.3 J	110	<1.0	<1.0	3,100	<1.0	<1.0	<5.0	<250	<0.50	450 J	46	<2.5	380 J	<1.5	<1.0	370,000	<1.0	1.4 J	<50	<0.20
TMW55	TMW55042022	04/15/2022	<250	<2.5	2.2 J	8.2	<1.0	<1.0	6,600	<1.0	<1.0	8.6 J	<250	<0.50	690	<2.5	<2.5	790 J	<1.5	<1.0	590,000	<1.0	9.1	<50	<0.20
	TMW55102021	10/08/2021	<250	<2.5	2.5 J	8.0	<1.0	<1.0	6,600	<1.0	<1.0	<5.0	<250	<0.50	710	3.3 J	<2.5	780 J	<1.5	<1.0	560,000	<1.0	8.6	<50	<0.20
	TMW55042021	04/16/2021	<250	<2.5	2.8 J	8.8	<1.0	<1.0	6,600	<1.0	<1.0	<5.0	<250	<0.50	700	5.9	<2.5	720 J	<1.5	<1.0	560,000	<1.0	7.9	<50	<0.20
TMW58	TMW58042022	04/12/2022	<250	<2.5	2.0 J	21	<1.0	<1.0	8,200	<1.0	<1.0	<5.0	<250	<0.50	970	23	<2.5	830 J	<1.5	<1.0	620,000	<1.0	12	<50	<0.20
	TMW58102021	10/05/2021	<250	<2.5	2.5 J	19	<1.0	<1.0	7,600	<1.0	<1.0	<5.0	<250	<0.50	930	24	<2.5	810 J	<1.5	<1.0	590,000	<1.0	7.2	<50	<0.20
	TMW58042021	04/13/2021	<250	<2.5	4.5 J	23	<1.0	<1.0	7,800	<1.0	<1.0	<5.0	<250	<0.50	930	25	<2.5	700 J	<1.5	<1.0	590,000	<1.0	6.8	<50	<0.20
	TMW63042022	04/13/2022	<250	<2.5	<1.2	10	<1.0	<1.0	9,000	<1.0	<1.0	18	<250	<0.50	1,000	23	<2.5	750 J	<1.5	<1.0	660,000	<1.0	<2.5	<50	0.11 J
TMW63	TMW63102021	10/06/2021	<250	<2.5	<1.2	11	<1.0	<1.0	9,100	<1.0	<1.0	<5.0	<250	<0.50	980	20	<2.5	730 J	<1.5	<1.0	660,000	<1.0	<2.5	<50	<0.20
	TMW63042021	04/14/2021	<250	<2.5	<1.2	11	<1.0	<1.0	9,300	<1.0	<1.0	<5.0	<250	<0.50	1,000	22	<2.5	590 J	<1.5	<1.0	670,000	<1.0	<2.5	<50	<0.20
	TMW64042022	04/19/2022	<250	<2.5	<1.2	26	<1.0	<1.0	11,000	<1.0	<1.0	<5.0	<250	<0.50	1,400	29	<2.5	800 J	<1.5	<1.0	620,000	<1.0	5.8	<50	<0.20
TMW64	TMW64102021	10/12/2021	<250	<2.5	<1.2	23	<1.0	<1.0	11,000	<1.0	<1.0	<5.0	<250	<0.50	1,400	28	<2.5	800 J	<1.5	<1.0	620,000	<1.0	6.1	<50	<0.20
	TMW64042021	04/20/2021	<250	<2.5	<1.2	24	<1.0	<1.0	11,000	0.64 J	<1.0	<5.0	<250	<0.50	1,300	29	<2.5	740 J	<1.5	<1.0	620,000	<1.0	5.1	<50	<0.20

NOTES & ABBREVIATIONS:
µg/L = micrograms per liter
< = less than LOD
NA = not analyzed
J = estimated value
- = not established or not applicable
SL = screening level
Number = Result exceeds cited (lowest) SL.

TABLE B-7: SUMMARY OF TOTAL METALS ANALYTICAL RESULTS
2024 INTERIM NORTHERN AREA GROUNDWATER MONITORING PLAN
Fort Wingate Depot Activity, New Mexico

Well ID	Sample ID	Date	Aluminum	Antimony	Arsenic	Barium	Beryllium	Cadmium	Calcium	Chromium	Cobalt	Copper	Iron	Lead	Magnesium	Manganese	Nickel	Potassium	Selenium	Silver	Sodium	Thallium	Vanadium	Zinc	Mercury	
			µg/L																							
			SL	5,000	6	10	2,000	4	5	-	50	50	1,000	1,000	15	-	200	200	-	50	50	-	2	86	10,000	2
Alluvial Wells																										
BGMW01	BGMW01042022	04/13/2022	<250	<2.5	<1.2	20	<1.0	<1.0	69,000	<1.0	0.61 J	<5.0	<250	<0.50	37,000	480	<2.5	390 J	3.9 J	<1.0	940,000	<1.0	4.1 J	<50	<0.20	
	BGMW01102021	10/05/2021	<250	<2.5	<1.2	18	<1.0	<1.0	67,000	<1.0	<1.0	<5.0	<250	<0.50	38,000	280	<2.5	450 J	4.2 J	<1.0	940,000	<1.0	2.8 J	<50	<0.20	
	BGMW01042021	04/14/2021	<250	<2.5	0.78 J	19	<1.0	<1.0	74,000	<1.0	<1.0	<5.0	<250	<0.50	40,000	510	<2.5	<500	3.9 J	<1.0	940,000	<1.0	4.1 J	<50	<0.20	
	BGMW01102020	09/30/2020	<250	<2.5	<1.25	21.5	<1.0	<1.0	66,200	<1.0	0.55 J	<5.0	<250	0.33 J	38,700	328	1.6 J	267 J	5.4	<1.0	1,010,000	<1.0	5.8	<50	<0.20	
BGMW02	BGMW02042022	04/13/2022	1,400	<2.5	0.83 J	33	<1.0	<1.0	61,000	1.1 J	0.69 J	<5.0	850 J	1.2 J	75,000	370	<2.5	570 J	31	<1.0	780,000	<1.0	11	<50	<0.20	
	BGMW02102021	10/05/2021	<250	<2.5	<1.2	12	<1.0	<1.0	59,000	<1.0	<1.0	<5.0	<250	<0.50	82,000	68	<2.5	420 J	35	<1.0	810,000	<1.0	5.3	<50	<0.20	
	BGMW02042021	04/14/2021	<250	<2.5	0.85 J	13	<1.0	<1.0	63,000	<1.0	<1.0	<5.0	<250	<0.50	85,000	67	<2.5	<500	39	<1.0	860,000	<1.0	6.7	<50	<0.20	
	BGMW02102020	09/30/2020	<250	<2.5	0.70 J	14.1	<1.0	<1.0	70,400	<1.0	<1.0	<5.0	<250	<0.50	99,900	62.7	<2.5	359 J	46.6	<1.0	924,000	<1.0	8.3	<50	<0.20	
BGMW03	BGMW03042022	04/11/2022	200 J	<2.5	1.0 J	25	<1.0	<1.0	69,000	<1.0	<1.0	<5.0	160 J	<0.50	14,000	21	<2.5	1,500	10	<1.0	560,000	<1.0	8.0	<50	<0.20	
	BGMW03102021	10/04/2021	110 J	<2.5	2.3 J	18	<1.0	<1.0	31,000	1.5 J	<1.0	3.9 J	<250	<0.50	8,300	22	1.9 J	880 J	28	<1.0	690,000	<1.0	14	<50	<0.20	
	BGMW03042021	04/12/2021	170 J	<2.5	1.3 J	28	<1.0	<1.0	82,000	<1.0	<1.0	<5.0	130 J	0.37 J	18,000	20	<2.5	1,500	12	<1.0	560,000	<1.0	8.1	<50	<0.20	
	BGMW03102020	09/28/2020	230 J	<2.5	1.8 J	27.5	<1.0	<1.0	71,700	1.1 J	0.82 J	<5.0	136 J	<0.50	15,700	18.7	2.0 J	1,480	15.5	<1.0	607,000	<1.0	11.7	<50	<0.20	
BGMW11	BGMW11042022	04/15/2022	<250	<2.5	<1.2	9.4	<1.0	<1.0	120,000	2.0 J	0.71 J	<5.0	300 J	<0.50	45,000	300	2.1 J	850 J	<1.5	<1.0	1,200,000	<1.0	<2.5	<50	<0.20	
	BGMW11102021	10/11/2021	620 J	<5.0	1.4 J	16	<2.0	<2.0	110,000	<2.0	<2.0	<10	540 J	<1.0	45,000	310	<5.0	1,200 J	<3.0	<2.0	1,100,000	<2.0	7.1 J	<100	<0.20	
	BGMW11042021	04/20/2021	720	<2.5	1 J	19	<1.0	<1.0	93,000	1.4 J	0.81 J	4 J	610 J	0.67 J	37,000	440	2 J	800 J	<1.5	<1.0	1,100,000	<1.0	4 J	<50	<0.20	
BGMW12	BGMW12042022	04/11/2022	1,100	<2.5	<1.2	38	<1.0	<1.0	33,000	0.83 J	0.50 J	<5.0	860 J	0.62 J	14,000	84	2.0 J	430 J	<1.5	<1.0	460,000	<1.0	2.4 J	<50	<0.20	
	BGMW12102021	10/07/2021	3,600	<2.5	1.1 J	61	0.64 J	<1.0	53,000	2.4 J	1.8 J	5.0 J	2,600	3.1 J	16,000	270	3.2 J	740 J	<1.5	<1.0	450,000	<1.0	13	26 J	<0.20	
	BGMW12042021	04/13/2021	2,100	<2.5	1.8 J	61	<1.0	<1.0	44,000	1.4 J	1.3 J	2.9 J	1,700	2 J	14,000	250	2.2 J	360 J	<1.5	<1.0	420,000	<1.0	7.6	<50	<0.20	
BGMW13D	BGMW13D042022	04/21/2022	200 J	<2.5	<1.2	260	<1.0	<1.0	17,000	18	0.54 J	<5.0	610 J	0.31 J	4,300	150	19	850 J	<1.5	<1.0	290,000	<1.0	1.9 J	<50	<0.20	
	BGMW13D042022DUP	04/21/2022	280 J	<2.5	<1.2	260	<1.0	<1.0	18,000	16	<1.0	<5.0	620 J	0.34 J	4,400	150	17	850 J	<1.5	<1.0	290,000	<1.0	2.5 J	<50	<0.20	
	BGMW13D102021	10/14/2021	<250	<2.5	<1.2	230	<1.0	<1.0	15,000	0.68 J	<1.0	<5.0	240 J	<0.50	4,200	130	<2.5	750 J	<1.5	<1.0	280,000	<1.0	3.3 J	<50	<0.20	
	BGMW13D042021	04/23/2021	<250	<2.5	<1.2	220	<1.0	<1.0	15,000	<1.0	<1.0	<5.0	180 J	<0.50	4,100	120	<2.5	730 J	<1.5	<1.0	270,000	<1.0	1.9 J	<50	<0.20	
BGMW13D042021DUP	04/23/2021	<250	<2.5	<1.2	230	<1.0	<1.0	15,000	<1.0	<1.0	<5.0	180 J	<0.50	4,200	120	<2.5	730 J	<1.5	<1.0	280,000	<1.0	1.7 J	<50	<0.20		
	BGMW13S042022	04/21/2022	110 J	<2.5	<1.2	210	<1.0	<1.0	26,000	1.5 J	<1.0	<5.0	690 J	<0.50	8,200	350	<2.5	940 J	<1.5	<1.0	300,000	<1.0	<2.5	<50	<0.20	
	BGMW13S102021	10/11/2021	71 J	<0.50	0.37 J	190	<0.20	<0.20	26,000	0.81 J	1.0	0.57 J	560	<0.10	8,300	320	0.48 J	930	<0.30	<0.20	280,000	<0.20	1.6	<10	<0.20	
BGMW13S042021	04/23/2021	<250	<2.5	<1.2	190	<1.0	<1.0	25,000	<1.0	<1.0	<5.0	470 J	<0.50	8,400	320	<2.5	940 J	<1.5	<1.0	290,000	<1.0	<1.2	<50	<0.20		
FW31	FW31042022	04/18/2022	490 J	<1.2	5.7	21	<1.0	<1.0	6,600	0.67 J	<1.0	<5.0	160 J	<0.50	2,500	33	<2.5	1,400	<1.5	<1.0	530,000	<1.0	12	<50	<0.20	
	FW31102021	10/12/2021	730	<2.5	5.5	23	<1.0	<1.0	8,800	0.66 J	<1.0	<5.0	180 J	0.61 J	2,800	100	<2.5	1,500	<1.5	<1.0	520,000	<1.0	12	<50	<0.20	
	FW31042021	04/19/2021	<250	<2.5	5.9	9.1	<1.0	<1.0	5,800	<1.0	<1.0	<5.0	<250	<0.50	2,300	2.4 J	<2.5	1,300	<1.5	<1.0	510,000	<1.0	8.9	<50	<0.20	
	FW31102020	10/05/2020	198 J	<2.5	7.3	23.3	<1.0	<1.0	8,660	1.7 J	<1.0	<5.0	<250	<0.50	3,130	20.8	2.2 J	1,470	<1.5	<1.0	587,000	<1.0	11.5	<50	<0.20	
	FW31102020DUP	10/05/2020	177 J	<2.5	7.3	22.4	<1.0	<1.0	8,380	1.5 J	<1.0	<5.0	<250	<0.50	3,040	21.1	2.5 J	1,440								

TABLE B-7: SUMMARY OF TOTAL METALS ANALYTICAL RESULTS
2024 INTERIM NORTHERN AREA GROUNDWATER MONITORING PLAN
Fort Wingate Depot Activity, New Mexico

Well ID	Sample ID	Date	Aluminum	Antimony	Arsenic	Barium	Beryllium	Cadmium	Calcium	Chromium	Cobalt	Copper	Iron	Lead	Magnesium	Manganese	Nickel	Potassium	Selenium	Silver	Sodium	Thallium	Vanadium	Zinc	Mercury
			µg/L																						
			SL	5,000	6	10	2,000	4	5	-	50	50	1,000	1,000	15	-	200	200	-	50	50	-	2	86	10,000
MW20	MW20042022	04/20/2022	<1000	<10	<5.0	20 J	<4.0	<4.0	320,000	<4.0	<4.0	<20	590 J	<2.0	61,000	1,100	<10	1,100 J	19 J	<4.0	3,400,000	<4.0	<10	<200	<0.20
	MW20102021	10/06/2021	<1000	<10	<5.0	17 J	<4.0	<4.0	260,000	<4.0	<4.0	<20	<1000	<2.0	53,000	1,400	<10	<2000	90	<4.0	3,000,000	<4.0	<10	120 J	<0.20
	MW20042021	04/21/2021	<1000	<10	<5.0	15 J	<4.0	<4.0	270,000	2.3 J	<4.0	<20	<1000	<2.0	57,000	1,300	<10	<2000	72	<4.0	3,200,000	<4.0	<10	160 J	<0.20
	MW20102020	10/05/2020	<1000	<10	<5.0	19 J	<4.0	<4.0	282,000	<4.0	<4.0	<20	<1000	<2.0	62,500	1,400	<10	<2000	66.8	<4.0	3,270,000	<4.0	<10	146 J	<0.20
MW22D	MW22D042022	04/21/2022	<500	<5.0	<2.5	10	<2.0	<2.0	92,000	<2.0	<2.0	<10	<500	<1.0	18,000	140	<5.0	<1,000	39	<2.0	1,100,000	<2.0	<5.0	<100	<0.20
	MW22D102021	10/14/2021	<400	<5.0	<2.5	9.9 J	<2.0	<2.0	89,000	<2.0	<2.0	<10	<500	<1.0	18,000	140	<5.0	<1,000	39	<2.0	1,100,000	<2.0	<5.0	<100	<0.20
	MW22D042021	04/22/2021	<250	<2.5	<1.2	10	<1.0	<1.0	92,000	<1.0	<1.0	<5.0	<250	<0.50	19,000	150	<2.5	300 J	39	<1.0	1,100,000	<1.0	<2.5	<50	<0.20
	MW22D102020	10/07/2020	<250	<2.5	<1.25	10.1	<1.0	<1.0	90,900	<1.0	<1.0	<5.0	<250	<0.50	17,900	141	<2.5	380 J	37.6	<1.0	1,110,000	<1.0	<2.5	<50	<0.20
MW23	MW23042022	04/11/2022	180 J	<2.5	<1.2	220	<1.0	<1.0	20,000	<1.0	<1.0	<5.0	740 J	<0.50	7,600	99	<2.5	1,100	<1.5	<1.0	480,000	<1.0	<2.5	<50	<0.20
	MW23102021	10/11/2021	<250	<2.5	1.6 J	220	<1.0	<1.0	17,000	<1.0	<1.0	<5.0	160 J	<0.50	7,000	73	<2.5	1,000	<1.5	<1.0	460,000	<1.0	4.8 J	<50	<0.20
	MW23102021DUP	10/11/2021	<250	<2.5	1.6 J	230	<1.0	<1.0	17,000	11	<1.0	<5.0	210 J	0.42 J	7,100	76	15	1,000	<1.5	<1.0	460,000	<1.0	5.2	<50	<0.20
	MW23042021	04/13/2021	<250	<2.5	1.4 J	230	<1.0	<1.0	16,000	<1.0	<1.0	<5.0	210 J	<0.50	7,000	73	<2.5	930 J	<1.5	<1.0	480,000	<1.0	2.8 J	<50	<0.20
	MW23102020	09/28/2020	<250	<2.5	1.5 J	233	<1.0	<1.0	16,700	<1.0	<1.0	<5.0	145 J	<0.50	7,210	77.7	<2.5	1,050	<1.5	<1.0	480,000	<1.0	3.6 J	<50	<0.20
MW24	MW24042022	04/12/2022	<250	<2.5	0.86 J	300	<1.0	<1.0	34,000	0.61 J	<1.0	<5.0	2,000	<0.50	11,000	470	<2.5	820 J	<1.5	<1.0	280,000	<1.0	1.3 J	<50	<0.20
	MW24042022DUP	04/12/2022	<250	<2.5	0.83 J	280	<1.0	<1.0	33,000	0.67 J	<1.0	<5.0	1,900	<0.50	11,000	470	<2.5	800 J	<1.5	<1.0	270,000	<1.0	1.9 J	<50	<0.20
	MW24102021	10/11/2021	<50	<0.50	0.71 J	310	<0.20	<0.20	32,000	0.13 J	<0.20	<1.0	1,800	<0.10	11,000	470	<0.50	730	<0.30	<0.20	260,000	<0.20	0.47 J	<10	<0.20
	MW24102021DUP	10/11/2021	<50	<0.50	0.85 J	290	<0.20	<0.20	32,000	0.13 J	<0.20	<1.0	1,800	<0.10	11,000	430	<0.50	750	<0.30	<0.20	260,000	<0.20	0.85 J	<10	<0.20
	MW24042021	04/15/2021	<50	<0.50	0.64 J	290	<0.20	<0.20	31,000	0.12 J	<0.20	<1.0	1,800	<0.10	10,000	430	<0.50	710	<0.30	<0.20	250,000	<0.20	0.42 J	<10	<0.20
	MW24102020	09/29/2020	<250	<2.5	0.95 J	293	<1.0	<1.0	32,500	<1.0	<1.0	<5.0	1,870	<0.50	11,000	449	<2.5	756 J	<1.5	<1.0	263,000	<1.0	1.6 J	<50	<0.20
MW25	MW25042022	04/13/2022	340 J	<2.5	<1.2	16	<1.0	<1.0	110,000	4.0 J	0.55 J	<5.0	170 J	0.28 J	21,000	54	4.2 J	890 J	58	<1.0	1,400,000	<1.0	3.0 J	<50	<0.20
	MW25102021	10/12/2021	510 J	<5.0	<2.5	18	<2.0	<2.0	120,000	<2.0	<2.0	<10	<500	<1.0	25,000	68	<5.0	1,100 J	61	<2.0	1,400,000	<2.0	3.3 J	<100	<0.20
	MW25042021	04/21/2021	110 J	<2.5	<1.2	13	<1.0	<1.0	120,000	<1.0	<1.0	<5.0	<250	<0.50	21,000	33	<2.5	790 J	60	<1.0	1,400,000	<1.0	<2.5	<50	<0.20
MW26	MW26042022	04/18/2022	490 J	<2.5	<1.2	24	<1.0	<1.0	100,000	1.6 J	0.85 J	<5.0	440 J	0.56 J	17,000	1,500	1.3 J	590 J	<1.5	<1.0	1,000,000	<1.0	3.4 J	28 J	<0.20
	MW26102021	10/11/2021	<250	<2.5	0.81 J	15	<1.0	<1.0	100,000	<1.0	<1.0	<5.0	<250	<0.50	18,000	1,200	<2.5	630 J	<1.5	<1.0	970,000	<1.0	4.8 J	<50	<0.20
	MW26042021	04/20/2021	2,100	<2.5	1.5 J	38	<1.0	<1.0	110,000	2.5 J	1.6 J	3.9 J	1,200	2.1 J	18,000	1,300	2.2 J	770 J	<1.5	<1.0	980,000	<1.0	6.4	<50	<0.20
MW27	MW27042022	04/20/2022	1,100	<2.5	1.2 J	35	<1.0	<1.0	82,000	2.6 J	1.4 J	23	1,100	2.1 J	14,000	230	2.6 J	840 J	32	<1.0	980,000	<1.0	3.1 J	46 J	<0.20
	MW27102021	10/08/2021	1,100	<2.5	2.1 J	30	<1.0	<1.0	83,000	2.7 J	1.3 J	21	1,200	1.8 J	15,000	200	2.6 J	980 J	32	<1.0	900,000	<1.0	6.7	<50	<0.20
	MW27042021	04/23/2021	2,000	<2.5	2.3 J	43	<1.0	<1.0	91,000	4.4 J	1.8 J	31	2,100	2.8 J	16,000	260	<2.5	1,000	33	<1.0	980,000	<1.0	6.9	31 J	<0.20
MW28	MW28042022	04/13/2022	2,000	<2.5	2.1 J	54	<1.0	<1.0	94,000	3.2 J	2.3 J	69	1,700	3.1 J	19,000	390	3.8 J	820 J	18	<1.0	1,000,000	<1.0	8.0	<50	<0.20
	MW28102021	10/05/2021	220 J	<2.5	0.90 J	34	<1.0	<1.0	70,000	<1.0	<1.0	17	160 J	<0.50	17,000	81	1.6 J	640 J	8.7						

TABLE B-7: SUMMARY OF TOTAL METALS ANALYTICAL RESULTS
2024 INTERIM NORTHERN AREA GROUNDWATER MONITORING PLAN
Fort Wingate Depot Activity, New Mexico

Well ID	Sample ID	Date	Aluminum	Antimony	Arsenic	Barium	Beryllium	Cadmium	Calcium	Chromium	Cobalt	Copper	Iron	Lead	Magnesium	Manganese	Nickel	Potassium	Selenium	Silver	Sodium	Thallium	Vanadium	Zinc	Mercury
			µg/L																						
			SL	5,000	6	10	2,000	4	5	-	50	50	1,000	1,000	15	-	200	200	-	50	50	-	2	86	10,000
MW35	MW35042022	04/20/2022	<250	<2.5	<1.2	9.6	<1.0	<1.0	19,000	1.2 J	<1.0	<5.0	<250	<0.50	2,600	36	<2.5	1,100	<1.5	<1.0	780,000	<1.0	1.3 J	<50	<0.20
	MW35042022DUP	04/20/2022	300 J	<2.5	<1.2	14	<1.0	<1.0	19,000	0.53 J	<1.0	<5.0	170 J	<0.50	2,700	42	<2.5	1,100	<1.5	<1.0	770,000	<1.0	1.4 J	<50	<0.20
	MW35102021	10/13/2021	210 J	<2.5	<1.2	13	<1.0	<1.0	20,000	0.86 J	<1.0	<5.0	130 J	<0.50	2,800	43	<2.5	1,100	0.95 J	<1.0	770,000	<1.0	3.0 J	<50	<0.20
	MW35102021DUP	10/13/2021	210 J	<2.5	<1.2	12	<1.0	<1.0	20,000	<1.0	<1.0	<5.0	<250	<0.50	2,800	44	<2.5	1,100	<1.5	<1.0	760,000	<1.0	1.6 J	<50	<0.20
MW36D	MW35042021	04/21/2021	150 J	<2.5	<1.2	12	<1.0	<1.0	20,000	0.51 J	<1.0	<5.0	<250	<0.50	2,800	40	<2.5	1,000	<1.5	<1.0	770,000	<1.0	2.5 J	<50	<0.20
	MW36D042022	04/18/2022	<250	<2.5	<1.2	190	<1.0	<1.0	37,000	<1.0	<1.0	<5.0	870 J	<0.50	13,000	220	<2.5	830 J	<1.5	<1.0	580,000	<1.0	<2.5	<50	<0.20
	MW36D042022DUP	04/18/2022	<250	<2.5	<1.2	190	<1.0	<1.0	35,000	<1.0	<1.0	<5.0	840 J	<0.50	13,000	220	<2.5	790 J	<1.5	<1.0	560,000	<1.0	<2.5	<50	<0.20
	MW36D102021	10/11/2021	<250	<2.5	<1.2	200	<1.0	<1.0	38,000	<1.0	<1.0	<5.0	990 J	<0.50	14,000	230	<2.5	860 J	<1.5	<1.0	550,000	<1.0	1.7 J	<50	<0.20
MW36S	MW36D042021	04/19/2021	<100	<2.5	<1.2	190	<1.0	<1.0	38,000	<1.0	<1.0	<5.0	930 J	<0.50	13,000	260	<2.5	830 J	<1.5	<1.0	570,000	<1.0	<1.2	<50	<0.20
	MW36S042022	04/18/2022	<500	<5.0	<2.5	8.1 J	<2.0	<2.0	300,000	<2.0	1.4 J	<10	<500	<1.0	120,000	1,300	<5.0	1,300 J	<3.0	<2.0	2,000,000	<2.0	<5.0	50 J	<0.20
	MW36S102021	10/11/2021	530 J	<5.0	<2.5	12	<2.0	<2.0	320,000	<2.0	2.5 J	<10	480 J	<1.0	140,000	1,300	<5.0	1,700 J	1.6 J	<2.0	2,000,000	<2.0	5.0 J	<100	<0.20
	MW36S042021	04/19/2021	<100	<2.5	<1.2	8.4	<1.0	<1.0	310,000	<1.0	1.6 J	<5.0	<250	<0.50	130,000	1,400	<2.5	1,400	0.83 J	<1.0	2,000,000	<1.0	1.4 J	<50	<0.20
MW37	MW37042022	04/20/2022	1,300	<2.5	1.0 J	55	<1.0	<1.0	27,000	0.57 J	1.1 J	2.8 J	600 J	1.2 J	4,800	320	2.1 J	320 J	<1.5	<1.0	630,000	<1.0	3.9 J	<50	<0.20
	MW37102021	10/13/2021	1,600	<2.5	1.9 J	65	<1.0	<1.0	37,000	0.68 J	1.7 J	3.1 J	480 J	1.7 J	5,700	420	3.6 J	380 J	<1.5	<1.0	650,000	<1.0	7.5	56 J	<0.20
	MW37042021	04/21/2021	2,500	<2.5	2.1 J	77	<1.0	<1.0	44,000	1 J	2.4 J	3.9 J	950 J	3.1 J	5,900	470	2.6 J	470 J	<1.5	<1.0	600,000	<1.0	9.3	<50	<0.20
MW38	MW38042022	04/22/2022	1,600	<2.5	1.2 J	48	<1.0	<1.0	45,000	1.0 J	1.9 J	6.5 J	450 J	0.64 J	7,800	960	6.1	370 J	<1.5	<1.0	770,000	<1.0	6.8	27 J	<0.20
	MW38102021	10/14/2021	630	<2.5	<1.2	27	<1.0	<1.0	34,000	<1.0	0.93 J	3.6 J	160 J	<0.50	7,200	770	4.3 J	290 J	<1.5	<1.0	720,000	<1.0	5.1	<50	<0.20
	MW38042021	04/23/2021	3,000	<2.5	2.5 J	54	0.70 J	<1.0	63,000	1.4 J	2.9 J	6.7 J	1,100	6.3	9,000	720	1.6 J	630 J	<1.5	<1.0	760,000	<1.0	12	<50	<0.20
MW39	MW39042022	04/22/2022	850 J	<5.0	3.5 J	49	<2.0	<2.0	36,000	1.1 J	1.1 J	<10	700 J	1.1 J	12,000	160	3.7 J	510 J	<3.0	<2.0	1,400,000	<2.0	7.0 J	<100	<0.20
	MW39102021	10/14/2021	1,200	<5.0	2.7 J	44	<2.0	<2.0	41,000	<2.0	1.3 J	<10	510 J	0.90 J	14,000	260	3.1 J	640 J	<3.0	<2.0	1,400,000	<2.0	12	<100	<0.20
	MW39042021	04/23/2021	4,700	<2.5	5.8	62	0.90 J	<1.0	72,000	2.4 J	4.1	7.9 J	2,100	5.6	19,000	670	2.8 J	980 J	<1.5	<1.0	1,500,000	<1.0	20	27 J	<0.20
SMW01	SMW01042022	04/12/2022	<500	<5.0	2.2 J	31	<2.0	<2.0	21,000	3.3 J	<2.0	<10	<500	<1.0	7,200	140	<5.0	<500	<3.0	<2.0	1,100,000	<2.0	6.4 J	1,400	<0.20
	SMW01102021	10/08/2021	<250	<2.5	2.6 J	39	<1.0	<1.0	21,000	<1.0	0.93 J	3.4 J	<250	<0.50	7,200	540	2.7 J	270 J	0.88 J	<1.0	1,000,000	<1.0	7.1	<50	<0.20
	SMW01042021	04/13/2021	<500	<5.0	2.5 J	47	<2.0	<2.0	22,000	<2.0	1.2 J	<10	<500	<1.0	7,500	860	3 J	<1000	<3.0	<2.0	1,000,000	<2.0	6.2 J	<100	<0.20
	SMW01042021DUP	04/13/2021	<500	<5.0	2.4 J	46	<2.0	<2.0	22,000	<2.0	1.2 J	<10	<500	<1.0	7,600	860	2.8 J	<1000	<3.0	<2.0	1,000,000	<2.0	6.4 J	<100	<0.20
TMW01	SMW01102020	09/29/2020	<500	<5.0	2.4 J	30.7	<2.0	<2.0	23,100	<2.0	<2.0	<10	<500	<1.0	7,960	87.6	<5.0	<1000	<3.0	<2.0	1,040,000	<2.0	7.5 J	<100	<0.20
	TMW01042022	04/15/2022	<250	<2.5	<1.2	11	<1.0	<1.0	110,000	0.76 J	<1.0	3.8 J	<250	<0.50	19,000	19	<2.5	250 J	2.8 J	<1.0	570,000	<1.0	12	<50	<0.20
	TMW01102021	10/08/2021	<250	<2.5	0.88 J	10	<1.0	<1.0	110,000	9.8	<1.0	4.2 J	<250	<0.50	20,000	12	3.6 J	290 J	3.3 J	<1.0	540,000	<1.0	13	<50	<0.20
	TMW01042021	04/15/2021	<250	<2.5	<1.2	11	<1.0	<1.0	110,000	<1.0	<1.0	3.7 J	<250	<0.50	19,000	10	<2.5	<500	3.2 J	<1.0	550,000	<1.0	12	<50	<0.20
TMW02	TMW01102020	10/01/2020	<250	<2.5	0.91 J	11.5	<1.0	<1.0	111,000	0.95 J	<1.0	<5.0</													

TABLE B-7: SUMMARY OF TOTAL METALS ANALYTICAL RESULTS
2024 INTERIM NORTHERN AREA GROUNDWATER MONITORING PLAN
Fort Wingate Depot Activity, New Mexico

Well ID	Sample ID	Date	Aluminum	Antimony	Arsenic	Barium	Beryllium	Cadmium	Calcium	Chromium	Cobalt	Copper	Iron	Lead	Magnesium	Manganese	Nickel	Potassium	Selenium	Silver	Sodium	Thallium	Vanadium	Zinc	Mercury
			µg/L																						
			5,000	6	10	2,000	4	5	-	50	50	1,000	1,000	15	-	200	200	-	50	50	-	2	86	10,000	2
TMW07	TMW07042022	04/15/2022	<500	<5.0	<2.5	16	<2.0	<2.0	57,000	21	4.4 J	<10	320 J	<1.0	10,000	330	46	4,100	<3.0	<2.0	1,300,000	<2.0	<5.0	<100	<0.20
	TMW07102021	10/08/2021	<500	<5.0	<2.5	15	<2.0	<2.0	62,000	2.6 J	<2.0	<10	<500	<1.0	11,000	390	5.8 J	3,200	<3.0	<2.0	1,200,000	<2.0	5.1 J	73 J	<0.20
	TMW07042021	04/16/2021	<500	<5.0	<2.5	14	<2.0	<2.0	62,000	1.2 J	<2.0	<10	<500	<1.0	11,000	370	<5.0	2,700	<3.0	<2.0	1,300,000	<2.0	3.7 J	<100	<0.20
	TMW07102020	10/01/2020	<500	<5.0	<2.5	13.7	<2.0	<2.0	59,400	<2.0	<2.0	<10	<500	<1.0	10,400	337	<5.0	3,660	<3.0	<2.0	1,270,000	<2.0	6.2 J	<100	<0.20
	TMW07102020DUP	10/01/2020	<500	<5.0	<2.5	14	<2.0	<2.0	57,100	1.1 J	<2.0	<10	<500	<1.0	9,970	324	<5.0	3,920	<3.0	<2.0	1,260,000	<2.0	5.7 J	<100	<0.20
TMW08	TMW08042022	04/14/2022	<1000	<10	<5.0	6.6 J	<4.0	<4.0	490,000	<4.0	<4.0	<20	<1000	<2.0	120,000	550	<10	1,700 J	37	<4.0	4,600,000	<4.0	<10	<200	<0.20
	TMW08102021	10/07/2021	<1000	<10	<5.0	8.0 J	<4.0	<4.0	290,000	<4.0	<4.0	<20	1,000 J	<2.0	86,000	420	<10	1,500 J	41	<4.0	4,400,000	<4.0	<10	<200	<0.20
	TMW08042021	04/14/2021	<1000	<10	<5.0	8.5 J	<4.0	<4.0	450,000	<4.0	<4.0	<20	660 J	<2.0	110,000	410	<10	1,100 J	34	<4.0	4,500,000	<4.0	<10	<200	<0.20
	TMW08102020	09/30/2020	<1000	<10	<5.0	10.3 J	<4.0	<4.0	427,000	<4.0	<4.0	<20	873 J	<2.0	108,000	421	<10	1,680 J	28.8	<4.0	4,590,000	<4.0	<10	<200	<0.20
TMW10	TMW10042022	04/14/2022	<500	<5.0	<2.5	13	<2.0	<2.0	50,000	<2.0	<2.0	<10	<500	<1.0	12,000	19	<5.0	<1000	<3.0	<2.0	1,500,000	<2.0	3.1 J	<100	<0.20
	TMW10102021	10/07/2021	<500	<5.0	<2.5	11	<2.0	<2.0	48,000	<2.0	<2.0	<10	<500	<1.0	12,000	14	<5.0	<1000	<3.0	<2.0	1,500,000	<2.0	<5.0	<100	<0.20
	TMW10042021	04/15/2021	<500	<5.0	<2.5	13	<2.0	<2.0	51,000	<2.0	<2.0	<10	<500	<1.0	12,000	4.9 J	<5.0	<1000	<3.0	<2.0	1,500,000	<2.0	<5.0	<100	<0.20
	TMW10102020	10/01/2020	<500	<5.0	<2.5	11.6	<2.0	<2.0	48,200	<2.0	<2.0	<10	<500	<1.0	11,700	7.0 J	<5.0	<1000	<3.0	<2.0	1,520,000	<2.0	3.6 J	<100	<0.20
TMW13	TMW13042022	04/20/2022	<250	<2.5	<1.2	17	<1.0	<1.0	28,000	<1.0	<1.0	<5.0	<250	<0.50	5,100	<2.5	<2.5	340 J	10	<1.0	580,000	<1.0	<2.5	<50	<0.20
	TMW13042022DUP	04/20/2022	<250	<2.5	<1.2	17	<1.0	<1.0	27,000	<1.0	<1.0	<5.0	<250	<0.50	5,100	<2.5	<2.5	330 J	9.4	<1.0	590,000	<1.0	<2.5	<50	<0.20
	TMW13102021	10/13/2021	<250	<2.5	<1.2	16	<1.0	<1.0	28,000	<1.0	<1.0	<5.0	<250	<0.50	5,400	<2.5	<2.5	380 J	11	<1.0	570,000	<1.0	1.9 J	<50	<0.20
	TMW13042021	04/21/2021	<250	<2.5	<1.2	16	<1.0	<1.0	27,000	<1.0	<1.0	<5.0	<250	<0.50	5,000	<2.5	<2.5	310 J	9.6	<1.0	560,000	<1.0	2.1 J	<50	<0.20
	TMW13042021DUP	04/21/2021	<250	<2.5	<1.2	17	<1.0	<1.0	27,000	<1.0	<1.0	<5.0	<250	<0.50	5,100	<2.5	<2.5	320 J	10	<1.0	580,000	<1.0	1.9 J	<50	<0.20
	TMW13102020	10/06/2020	<250	<2.5	<1.5	16.6	<1.0	<1.0	27,900	0.67 J	<1.0	<5.0	<250	<0.50	5,200	<2.5	<2.5	356 J	10.6	<1.0	600,000	<1.0	2.3 J	<50	<0.20
TMW15	TMW13102020DUP	10/06/2020	<250	<2.5	<1.5	16.8	<1.0	<1.0	27,400	0.82 J	<1.0	<5.0	<250	<0.50	5,040	<2.5	<2.5	332 J	10.5	<1.0	570,000	<1.0	2.3 J	<50	<0.20
	TMW15042022	04/20/2022	<250	<2.5	<1.2	21	<1.0	<1.0	18,000	1.5 J	<1.0	<5.0	820 J	<0.50	3,200	4.2 J	3.0 J	310 J	12	<1.0	560,000	<1.0	1.5 J	<50	<0.20
	TMW15102021	10/07/2021	<250	<2.5	<1.2	20	<1.0	<1.0	18,000	0.94 J	<1.0	<5.0	<250	<0.50	3,500	<2.5	<2.5	350 J	12	<1.0	550,000	<1.0	2.7 J	<50	<0.20
	TMW15042021	04/21/2021	<250	<2.5	<1.2	20	<1.0	<1.0	18,000	0.97 J	<1.0	<5.0	<250	<0.50	3,300	<2.5	<2.5	320 J	11	<1.0	540,000	<1.0	1.3 J	<50	<0.20
	TMW15102020	10/05/2020	<250	<2.5	<1.5	20	<1.0	<1.0	18,400	0.74 J	<1.0	<5.0	<250	<0.50	3,380	<2.5	<2.5	356 J	12.2	<1.0	555,000	<1.0	<2.5	<50	<0.20
TMW21	TMW15102020DUP	10/05/2020	<250	<2.5	<1.5	20.8	<1.0	<1.0	18,500	0.99 J	<1.0	<5.0	<250	<0.50	3,560	<2.5	<2.5	345 J	12.4	<1.0	562,000	<1.0	<2.5	<50	<0.20
	TMW21042022	04/21/2022	<250	<2.5	<1.2	18	<1.0	<1.0	34,000	1.3 J	<1.0	2.6 J	<250	<0.50	6,600	27	1.9 J	510 J	6.1	<1.0	660,000	<1.0	1.3 J	<50	0.11 J
	TMW21102021	10/13/2021	<250	<2.5	0.84 J	15	<1.0	<1.0	35,000	1.2 J	<1.0	<5.0	<250	<0.50	6,900	22	1.9 J	470 J	5.7	<1.0	640,000	<1.0	2.2 J	<50	<0.20
	TMW21042021	04/22/2021	<250	<2.5	0.78 J	16	<1.0	<1.0	34,000	0.82 J	<1.0	<5.0	<250	<0.50	6,600	<2.5	<2.5	390 J	5.1	<1.0	640,000	<1.0	2 J	<50	<0.20
TMW22	TMW21102020	10/07/2020	<250	<2.5	<1.5	16.4	<1.0	<1.0	35,800	0.93 J	<1.0	2.5 J	<250	<0.50	6,920	<2.5	<2.5	462 J	6.0	<1.0	658,000	<1.0	1.7 J	<50	<0.20
	TMW22042022	04/15/2022	<250	<2.5	<1.2	18	<1.0	<1.0	36,000	1.0 J	<1.0	<5.0	<25												

TABLE B-7: SUMMARY OF TOTAL METALS ANALYTICAL RESULTS
2024 INTERIM NORTHERN AREA GROUNDWATER MONITORING PLAN
Fort Wingate Depot Activity, New Mexico

Well ID	Sample ID	Date	Aluminum	Antimony	Arsenic	Barium	Beryllium	Cadmium	Calcium	Chromium	Cobalt	Copper	Iron	Lead	Magnesium	Manganese	Nickel	Potassium	Selenium	Silver	Sodium	Thallium	Vanadium	Zinc	Mercury
			µg/L																						
			5,000	6	10	2,000	4	5	-	50	50	1,000	1,000	15	-	200	200	-	50	50	-	2	86	10,000	2
TMW27	TMW27042022	04/13/2022	<250	<2.5	20	120	<1.0	<1.0	23,000	<1.0	<1.0	<5.0	530 J	<0.50	6,100	540	1.3 J	450 J	<1.5	<1.0	330,000	<1.0	<2.5	<50	<0.20
	TMW27102021	10/10/2021	<250	<2.5	22	110	<1.0	<1.0	25,000	<1.0	<1.0	<5.0	600 J	<0.50	6,500	560	<2.5	480 J	<1.5	<1.0	330,000	<1.0	2.5 J	<50	<0.20
	TMW27042021	04/18/2021	<250	<2.5	21	110	<1.0	<1.0	24,000	<1.0	<1.0	<5.0	570 J	<0.50	6,100	560	<2.5	420 J	<1.5	<1.0	340,000	<1.0	<2.5	<50	<0.20
	TMW27042021DUP	04/18/2021	<250	<2.5	21	120	<1.0	<1.0	24,000	<1.0	<1.0	<5.0	580 J	<0.50	6,100	560	<2.5	420 J	<1.5	<1.0	340,000	<1.0	<2.5	<50	<0.20
	TMW27102020	10/02/2020	<250	<2.5	21.2	118	<1.0	<1.0	24,100	<1.0	<1.0	<5.0	600 J	<0.50	6,230	552	<2.5	460 J	<1.5	<1.0	335,000	<1.0	<2.5	<50	<0.20
TMW28	TMW27102020DUP	10/02/2020	<250	<2.5	20.6	118	<1.0	<1.0	24,200	<1.0	<1.0	<5.0	602 J	<0.50	6,270	553	<2.5	450 J	<1.5	<1.0	345,000	<1.0	<2.5	<50	<0.20
	TMW28042022	04/18/2022	<250	<2.5	<1.2	44	<1.0	<1.0	92,000	<1.0	<1.0	<5.0	280 J	<0.50	28,000	340	<2.5	1,000 J	<1.5	<1.0	370,000	<1.0	<2.5	<50	<0.20
	TMW28102021	10/12/2021	<250	<2.5	<1.2	45	<1.0	<1.0	100,000	<1.0	<1.0	<5.0	290 J	<0.50	32,000	380	<2.5	1,100	<1.5	<1.0	360,000	<1.0	1.8 J	<50	<0.20
	TMW28042021	04/16/2021	<250	<2.5	<1.2	43	<1.0	<1.0	110,000	<1.0	<1.0	<5.0	300 J	<0.50	33,000	390	<2.5	1,000	<1.5	<1.0	350,000	<1.0	<2.5	<50	<0.20
TMW29	TMW28102020	10/02/2020	<250	<2.5	<1.25	45.7	<1.0	<1.0	105,000	<1.0	<1.0	<5.0	311 J	<0.50	32,300	386	<2.5	1,080	<1.5	<1.0	361,000	<1.0	<2.5	<50	<0.20
	TMW29042022	04/15/2022	350 J	<2.5	0.67 J	26	<1.0	<1.0	37,000	1.6 J	<1.0	<5.0	200 J	0.28 J	7,000	21	<2.5	710 J	18	<1.0	560,000	<1.0	5.0	<50	<0.20
	TMW29102021	10/08/2021	1,100	<2.5	1.7 J	42	<1.0	<1.0	44,000	3.9 J	1.3 J	3.4 J	540 J	1.9 J	7,600	120	3.7 J	840 J	21	<1.0	540,000	<1.0	8.0	<50	0.20 J
	TMW29042021	04/21/2021	1,600	<2.5	1.5 J	50	<1.0	<1.0	45,000	2.8 J	0.99 J	2.7 J	890 J	2 J	7,700	120	2.7 J	840 J	19	<1.0	570,000	<1.0	6.9	53 J	<0.20
TMW31S	TMW29102020	10/01/2020	1,430	<2.5	1.3 J	34.4	<1.0	<1.0	37,200	9.2	3.6 J	2.8 J	770 J	1.2 J	7,130	35.6	11.4	985 J	21.9	<1.0	565,000	<1.0	6.6	<50	<0.20
	TMW31S042022	04/14/2022	1,500	<2.5	<1.2	39	<1.0	<1.0	120,000	2.7 J	1.2 J	<5.0	500 J	3.0 J	21,000	370	2.5 J	470 J	6.6	<1.0	540,000	<1.0	5.0	<50	<0.20
	TMW31S102021	10/07/2021	<250	<2.5	<1.2	13	<1.0	<1.0	120,000	1.1 J	<1.0	<5.0	<250	<0.50	21,000	28	<2.5	320 J	8.1	<1.0	550,000	<1.0	1.3 J	<50	<0.20
	TMW31S042021	04/26/2021	<250	<2.5	<1.2	13	<1.0	<1.0	120,000	1.2 J	<1.0	<5.0	<250	<0.50	21,000	21	<2.5	320 J	8.4	<1.0	540,000	<1.0	1.6 J	38 J	<0.20
TMW33	TMW31S102020	10/01/2020	827	<2.5	<1.25	22.9	<1.0	<1.0	119,000	1.5 J	0.55 J	<5.0	348 J	0.56 J	21,100	197	<2.5	598 J	7.4	<1.0	574,000	<1.0	3.9 J	<50	<0.20
	TMW33042022	04/15/2022	<500	<5.0	<2.5	16	<2.0	<2.0	110,000	<2.0	<2.0	<10	<500	<1.0	31,000	280	<5.0	550 J	<3.0	<2.0	2,400,000	<2.0	<5.0	<100	<0.20
	TMW33102021	10/08/2021	<500	<5.0	<2.5	15	<2.0	<2.0	110,000	<2.0	<2.0	<10	<500	<1.0	33,000	390	<5.0	640 J	<3.0	<2.0	2,300,000	<2.0	4.1 J	<100	<0.20
	TMW33042021	04/16/2021	350 J	<5.0	<2.5	18	<2.0	<2.0	110,000	<2.0	<2.0	<10	<500	<1.0	31,000	640	3.3 J	<1000	<3.0	<2.0	2,300,000	<2.0	3.6 J	<100	<0.20
TMW34	TMW33102020	10/01/2020	<500	<5.0	<2.5	15.7	<2.0	<2.0	109,000	<2.0	<2.0	<10	<500	<1.0	30,800	350	<5.0	502 J	<3.0	<2.0	2,430,000	<2.0	4.2 J	<100	<0.20
	TMW34042022	04/19/2022	<500	<5.0	<2.5	13	<2.0	<2.0	130,000	<2.0	<2.0	<10	<500	<1.0	26,000	230	<5.0	600 J	120	<2.0	1,300,000	<2.0	<5.0	<100	<0.20
	TMW34042022DUP	04/19/2022	<500	<5.0	<2.5	13	<2.0	<2.0	130,000	<2.0	<2.0	<10	<500	<1.0	27,000	170	<5.0	600 J	120	<2.0	1,300,000	<2.0	<5.0	<100	<0.20
	TMW34102021	10/13/2021	<500	<5.0	<2.5	11	<2.0	<2.0	130,000	<2.0	<2.0	<10	<500	<1.0	27,000	200	<5.0	620 J	120	<2.0	1,400,000	<2.0	<5.0	<100	<0.20
	TMW34102021DUP	10/13/2021	<250	<2.5	<1.2	11	<1.0	<1.0	130,000	<1.0	<1.0	<5.0	<250	<0.50	27,000	190	<2.5	580 J	120	<1.0	1,300,000	<1.0	<2.5	<50	<0.20
	TMW34042021	04/20/2021	<500	<5.0	<2.5	11	<2.0	<2.0	130,000	<2.0	<2.0	<10	<500	<1.0	27,000	140	<5.0	<1000	110	<2.0	1,300,000	<2.0	<5.0	<100	<0.20
TMW35	TMW34102020	10/05/2020	<500	<5.0	<2.5	13.1	<2.0	<2.0	128,000	<2.0	<2.0	<10	<500	<1.0	27,700	220	<5.0	551 J	126	<2.0	1,340,000	<2.0	<5.0	<100	<0.20
	TMW35042022	04/20/2022	<250	<2.5	<1.2	11	<1.0	<1.0	73,000	<1.0	<1.0	<5.0	<250	<0.50	14,000	160	<2.5	270 J	3.5 J	<1.0	1,100,000	<1.0	<2.5	<50	<0.20
	TMW35102021	10/06/2021	<500	<5.0	<2.5	10	<2.0	<2.0	74,000	<2.0	<2.0	<10	<500	<1.0	14,000	59	<5.0	<500	3.9 J	<2.0	1,100,000	<2.0	<5.0	<100	<0.20
	TMW3504																								

TABLE B-7: SUMMARY OF TOTAL METALS ANALYTICAL RESULTS
2024 INTERIM NORTHERN AREA GROUNDWATER MONITORING PLAN
Fort Wingate Depot Activity, New Mexico

Well ID	Sample ID	Date	Aluminum	Antimony	Arsenic	Barium	Beryllium	Cadmium	Calcium	Chromium	Cobalt	Copper	Iron	Lead	Magnesium	Manganese	Nickel	Potassium	Selenium	Silver	Sodium	Thallium	Vanadium	Zinc	Mercury	
			µg/L																							
			5,000	6	10	2,000	4	5	–	50	50	1,000	1,000	15	–	200	200	–	50	50	–	2	86	10,000	2	
TMW45	TMW45042022	04/19/2022	<250	<2.5	<1.2	59	<1.0	<1.0	27,000	<1.0	<1.0	<5.0	<250	<0.50	7,200	48	<2.5	420 J	0.96 J	<1.0	950,000	<1.0	2.4 J	<50	<0.20	
	TMW45102021	10/12/2021	<250	<2.5	<1.2	59	<1.0	<1.0	29,000	<1.0	<1.0	<5.0	<250	<0.50	7,800	130	<2.5	460 J	1.0 J	<1.0	950,000	<1.0	4.3 J	<50	<0.20	
	TMW45102021DUP	10/12/2021	<250	<2.5	<1.2	58	<1.0	<1.0	28,000	<1.0	<1.0	<5.0	<250	<0.50	7,600	110	<2.5	480 J	0.87 J	<1.0	960,000	<1.0	4.8 J	<50	<0.20	
	TMW45042021	04/20/2021	<250	<2.5	1 J	61	<1.0	<1.0	28,000	<1.0	<1.0	<5.0	<250	<0.50	7,300	130	<2.5	380 J	1.2 J	<1.0	930,000	<1.0	3.9 J	<50	<0.20	
	TMW45102020	10/05/2020	<250	<2.5	<1.25	67.2	<1.0	<1.0	32,100	<1.0	<1.0	<5.0	<250	<0.50	7,970	303	1.4 J	475 J	0.94 J	<1.0	1,010,000	<1.0	2.5 J	<50	<0.20	
TMW46	TMW46042022	04/12/2022	<500	<5.0	<2.5	12	<2.0	<2.0	100,000	<2.0	<2.0	<10	<500	<1.0	23,000	24	<5.0	<1000	120	<2.0	1,300,000	<2.0	4.4 J	<100	<0.20	
	TMW46102021	10/05/2021	<500	<5.0	<2.5	11	<2.0	<2.0	97,000	<2.0	<2.0	<10	<500	<1.0	22,000	25	<5.0	520 J	120	<2.0	1,300,000	<2.0	<5.0	<100	<0.20	
	TMW46042021	04/13/2021	<500	<5.0	<2.5	11	<2.0	<2.0	96,000	<2.0	<2.0	<10	<500	<1.0	22,000	15	<5.0	<1000	120	<2.0	1,300,000	<2.0	4.1 J	<100	<0.20	
	TMW46102020	09/29/2020	<500	<5.0	<2.5	10.9	<2.0	<2.0	95,500	9.3 J	<2.0	<10	<500	<1.0	22,100	8.7 J	6.5 J	<1000	122	<2.0	1,270,000	<2.0	6.0 J	<100	<0.20	
TMW47	TMW47042022	04/21/2022	<250	<2.5	<1.2	12	<1.0	<1.0	6,300	<1.0	<1.0	<5.0	<250	<0.50	670	32	<2.5	800 J	<1.5	<1.0	580,000	<1.0	<2.5	<50	<0.20	
	TMW47102021	10/14/2021	<250	<2.5	<1.2	10	<1.0	<1.0	6,000	<1.0	<1.0	<5.0	<250	<0.50	680	30	<2.5	740 J	<1.5	<1.0	540,000	<1.0	<2.5	<50	<0.20	
	TMW47042021	04/23/2021	<250	<2.5	<1.2	11	<1.0	<1.0	6,200	<1.0	<1.0	<5.0	<250	<0.50	660	31	<2.5	700 J	<1.5	<1.0	550,000	<1.0	<2.5	<50	<0.20	
	TMW47102020	10/07/2020	<250	<2.5	<1.25	11.5	<1.0	<1.0	6,110	<1.0	<1.0	<5.0	<250	<0.50	682	36.6	<2.5	734 J	<1.5	<1.0	559,000	<1.0	<2.5	<50	<0.20	
TMW57	TMW57042022	04/18/2022	1,400	<2.5	1.7 J	72	<1.0	<1.0	24,000	2.6 J	2.6 J	18	890 J	1.6 J	3,300	750	4.0 J	620 J	9.7	<1.0	570,000	<1.0	6.1	<50	<0.20	
	TMW57102021	10/11/2021	2,400	<2.5	2.7 J	66	<1.0	<1.0	23,000	3.5 J	2.8 J	19	1,500	1.5 J	3,600	470	3.6 J	820 J	9.6	<1.0	520,000	<1.0	9.9	<50	<0.20	
	TMW57042021	04/19/2021	3,700	<2.5	3.7 J	110	1 J	<1.0	47,000	6.6	6.2	42	2,700	3.8 J	4,400	1,500	6.9	840 J	8.6	<1.0	550,000	<1.0	13	<50	<0.20	
TMW59	TMW59042022	04/18/2022	1,000	<2.5	2.2 J	35	<1.0	<1.0	39,000	7.4	1.6 J	8.6 J	930 J	1.4 J	8,900	180	6.5	630 J	0.75 J	<1.0	790,000	<1.0	8.1	<50	<0.20	
	TMW59102021	10/11/2021	4,600	<2.5	7.1	72	2.3 J	<1.0	94,000	18	13	35	4,000	10	12,000	1,600	20	1,200	<1.5	<1.0	750,000	<1.0	34	40 J	<0.20	
	TMW59042021	04/23/2021	5,100	<2.5	7.3	81	2 J	<1.0	110,000	12	14	60	4,000	12	13,000	1,900	11	1,200	<1.5	<1.0	760,000	<1.0	32	68 J	<0.20	
TMW61	TMW61042022	04/18/2022	410 J	<2.5	0.68 J	37	<1.0	<1.0	66,000	<1.0	1.1 J	<5.0	230 J	0.29 J	17,000	1,200	1.6 J	370 J	3.6 J	<1.0	1,600,000	<1.0	3.7 J	<50	<0.20	
	TMW61102021	10/13/2021	450 J	<5.0	1.3 J	30	<2.0	<2.0	69,000	1.2 J	<2.0	<10	260 J	<1.0	17,000	800	2.7 J	<1000	4.3 J	<2.0	1,500,000	<2.0	3.9 J	<100	<0.20	
	TMW61042021	04/26/2021	650	<2.5	1.4 J	36	<1.0	<1.0	67,000	1 J	<1.0	3.3 J	440 J	<0.50	18,000	370	<2.5	510 J	4.6 J	<1.0	1,500,000	<1.0	4.4 J	<50	<0.20	
TMW62	TMW62042022	04/15/2022	380 J	<2.5	<1.2	25	<1.0	<1.0	30,000	0.57 J	<1.0	2.5 J	240 J	0.35 J	6,600	160	<2.5	580 J	1.1 J	<1.0	720,000	<1.0	2.6 J	<50	<0.20	
	TMW62102021	10/08/2021	140 J	<2.5	1.2 J	20	<1.0	<1.0	29,000	<1.0	<1.0	<5.0	<250	<0.50	6,800	96	<2.5	610 J	1.5 J	<1.0	680,000	<1.0	3.8 J	<50	<0.20	
	TMW62042021	04/21/2021	130 J	<2.5	<1.2	20	<1.0	<1.0	29,000	<1.0	<1.0	<2.5	<250	<0.50	6,600	78	<2.5	460 J	1.1 J	<1.0	710,000	<1.0	<1.2	<50	<0.20	
Bedrock Wells																										
BGMW07	BGMW07042022	04/11/2022	<1000	<10	<5.0	28	<4.0	<4.0	720,000	5.4 J	2.3 J	<20	<1000	<2.0	99,000	2,200	<10	8,200	<6.0	<4.0	6,200,000	<4.0	<10	<200	<0.20	
	BGMW07102021	10/04/2021	<1000	<10	<5.0	27	<4.0	<4.0	710,000	<4.0	2.2 J	<20	<1000	<2.0	98,000	1,200	5.2 J	7,600	<6.0	<4.0	6,200,000	<4.0	<10	<200	<0.20	
	BGMW07042021	04/12/2021	<1000	<10	<5.0	26	<4.0	<4.0	690,000	<4.0	<4.0	<20	<1000	<2.0	95,000	1,100	<10	7,100	<6.0	<4.0	6,100,000	<4.0	<10	<200	<0.20	
	BGMW07102020	09/28/2020	<1000	<10	<5.0	30	<4.0	<4.0	637,000	<4.0	<4.0	<20	<1000	<2.0	87,100	1,430	<10	8,310	<6.0	<4.0	6,100,000	<4.0	6.9 J	<200	<0.20	
BGMW08	BGMW08042022	04/11/2022	6,100	<10	<5.0	54	<4.0	<4.0	350,000	29	8.4 J	<20	2,800 J	3.2 J	43,000	770	23	5,200	<6.0	<4.0	3,900,000	<4.0	<10	<200	<0.20	
	BGMW08102021	10/04/2021	5,400	<10	<5.0	24	<4.0	<4.0	390,000	33	12 J	31 J	2,900 J	7.5 J	43,000	2,000	34									

TABLE B-7: SUMMARY OF TOTAL METALS ANALYTICAL RESULTS
2024 INTERIM NORTHERN AREA GROUNDWATER MONITORING PLAN
Fort Wingate Depot Activity, New Mexico

Well ID	Sample ID	Date	Aluminum	Antimony	Arsenic	Barium	Beryllium	Cadmium	Calcium	Chromium	Cobalt	Copper	Iron	Lead	Magnesium	Manganese	Nickel	Potassium	Selenium	Silver	Sodium	Thallium	Vanadium	Zinc	Mercury
			µg/L																						
			SL	5,000	6	10	2,000	4	5	-	50	50	1,000	1,000	15	-	200	200	-	50	50	-	2	86	10,000
TMW16	TMW16042022	04/11/2022	350 J	<2.5	<1.2	16	<1.0	<1.0	4,700	4.7 J	<1.0	8.6 J	180 J	0.77 J	560	12	25	630 J	<1.5	<1.0	470,000	<1.0	4.1 J	27 J	<0.20
	TMW16102021	10/04/2021	530	<2.5	<1.2	24	<1.0	<1.0	6,100	8.0	1.2 J	21	380 J	1.4 J	680	30	78	690 J	<1.5	<1.0	500,000	<1.0	5.7	36 J	<0.20
	TMW16102021DUP	10/04/2021	530	<2.5	<1.2	22	<1.0	<1.0	5,900	6.6	1.2 J	19	370 J	1.2 J	670	29	76	690 J	<1.5	<1.0	500,000	<1.0	5.5	36 J	<0.20
	TMW16042021	04/12/2021	<250	<2.5	<1.2	11	<1.0	<1.0	3,900	<1.0	<1.0	<5.0	<250	<0.50	430 J	3.1 J	7.4	470 J	<1.5	<1.0	440,000	<1.0	4.6 J	<50	<0.20
	TMW16042021DUP	04/12/2021	190 J	<2.5	<1.2	13	<1.0	<1.0	4,100	2.2 J	<1.0	3.4 J	<250	<0.50	460 J	4.8 J	10	450 J	<1.5	<1.0	440,000	<1.0	4.3 J	<50	<0.20
TMW17	TMW16102020	09/28/2020	547	<2.5	<1.25	23.5	<1.0	<1.0	11,800	6.8	2.2 J	5.9 J	487 J	0.54 J	1,010	94.1	135	849 J	<1.5	<1.0	571,000	<1.0	5.8	82.4 J	0.11 J
	TMW17042022	04/18/2022	<250	<2.5	<1.2	13	<1.0	<1.0	3,500	<1.0	<1.0	<5.0	<250	<0.50	560	12	<2.5	640 J	<1.5	<1.0	480,000	<1.0	<2.5	<50	<0.20
	TMW17102021	10/13/2021	170 J	<2.5	<1.2	15	<1.0	<1.0	3,900	<1.0	<1.0	<5.0	<250	0.89 J	640	18	1.5 J	930 J	<1.5	<1.0	470,000	<1.0	1.6 J	240	<0.20
	TMW17042021	04/19/2021	<250	<2.5	<1.2	14	<1.0	<1.0	3,600	<1.0	<1.0	<5.0	<250	<0.50	560	11	<2.5	650 J	<1.5	<1.0	460,000	<1.0	<2.5	<50	<0.20
	TMW17042021DUP	04/19/2021	<250	<2.5	<1.2	13	<1.0	<1.0	3,600	<1.0	<1.0	<5.0	<250	<0.50	560	11	<2.5	640 J	<1.5	<1.0	460,000	<1.0	<2.5	<50	<0.20
TMW18	TMW17102020	10/02/2020	127 J	<2.5	<1.25	13.8	<1.0	<1.0	3,850	<1.0	<1.0	<5.0	<250	0.58 J	534	14.7	<2.5	655 J	<1.5	<1.0	441,000	<1.0	<2.5	<50	<0.20
	TMW18042022	04/11/2022	<250	<2.5	<1.2	11	<1.0	<1.0	7,500	0.55 J	<1.0	<5.0	<250	<0.50	1,200	<2.5	<2.5	2,100	<1.5	<1.0	670,000	<1.0	3.3 J	<50	<0.20
	TMW18102021	10/05/2021	250 J	1.8 J	<1.2	13	<1.0	<1.0	7,800	1.1 J	<1.0	<5.0	<250	0.38 J	1,200	7.0	<2.5	2,200	<1.5	<1.0	640,000	<1.0	13	<50	<0.20
	TMW18042021	04/12/2021	280 J	<2.5	0.70 J	16	<1.0	<1.0	8,400	1 J	<1.0	<5.0	<250	0.67 J	1,200	7.2	<2.5	2,100	<1.5	<1.0	670,000	<1.0	13	<50	<0.20
TMW19	TMW18102020	09/28/2020	210 J	<2.5	0.65 J	13.6	<1.0	<1.0	7,720	1.8 J	<1.0	<5.0	<250	0.78 J	1,200	10.9	1.9 J	2,590	<1.5	<1.0	733,000	<1.0	8.9	<50	0.12 J
	TMW19042022	04/11/2022	1,200	<2.5	<1.2	11	<1.0	<1.0	12,000	17	1.3 J	12	810 J	0.88 J	1,400	58	92	1,000	<1.5	<1.0	700,000	<1.0	3.2 J	<50	<0.20
	TMW19102021	10/04/2021	220 J	<2.5	<1.2	7.2	<1.0	<1.0	10,000	9.8	0.57 J	3.5 J	280 J	<0.50	1,100	33	25	840 J	<1.5	<1.0	680,000	<1.0	4.7 J	<50	<0.20
	TMW19042021	04/12/2021	<250	<2.5	<1.2	6.1	<1.0	<1.0	10,000	<1.0	<1.0	<5.0	<250	<0.50	1,100	25	11	690 J	<1.5	<1.0	700,000	<1.0	4.6 J	<50	<0.20
	TMW19102020	09/28/2020	683	<2.5	<1.25	13	<1.0	<1.0	13,800	1.4 J	0.73 J	5.8 J	572 J	2.2 J	1,360	86.1	13.9	905 J	<1.5	<1.0	697,000	<1.0	6.4	<50	<0.20
TMW30	TMW19102020DUP	09/28/2020	1,930	<2.5	<1.25	15.1	<1.0	<1.0	12,800	2.7 J	0.87 J	<5.0	976 J	1.9 J	1,620	74.5	18	1,050	<1.5	<1.0	691,000	<1.0	6.6	<50	<0.20
	TMW30042022	04/13/2022	130 J	<2.5	<1.2	11	<1.0	<1.0	58,000	1.4 J	<1.0	3.3 J	<250	<0.50	12,000	5.9	<2.5	740 J	6.0	<1.0	480,000	<1.0	12	<50	<0.20
	TMW30102021	10/06/2021	<250	<2.5	<1.2	10	<1.0	<1.0	61,000	0.55 J	<1.0	<5.0	<250	<0.50	12,000	3.8 J	1.7 J	700 J	6.5	<1.0	470,000	<1.0	12	71 J	<0.20
	TMW30042021	04/14/2021	190 J	<2.5	0.92 J	12	<1.0	<1.0	58,000	0.95 J	<1.0	7.5 J	350 J	0.94 J	12,000	16	<2.5	580 J	6.6	<1.0	470,000	<1.0	13	<50	<0.20
TMW31D	TMW30102020	09/30/2020	119 J	<2.5	<1.25	11.2	<1.0	<1.0	64,200	1.6 J	<1.0	<5.0	691 J	0.25 J	13,100	9.2	<2.5	744 J	7.2	<1.0	481,000	<1.0	14.2	<50	<0.20
	TMW31D042022	04/19/2022	<250	<2.5	<1.2	9.1	<1.0	<1.0	55,000	<1.0	<1.0	<5.0	<250	<0.50	9,500	13	<2.5	1,200	6.6	<1.0	670,000	<1.0	3.8 J	<50	<0.20
	TMW31D102021	10/12/2021	<250	<2.5	<1.2	8.4	<1.0	<1.0	65,000	<1.0	<1.0	<5.0	<250	<0.50	11,000	7.8	<2.5	1,300	6.8	<1.0	620,000	<1.0	7.1	<50	<0.20
	TMW31D042021	04/20/2021	<250	<2.5	<1.2	8.7	<1.0	<1.0	65,000	<1.0	<1.0	<5.0	<250	<0.50	11,000	7.6	<2.5	1,200	6.7	<1.0	610,000	<1.0	5.8	<50	<0.20
TMW32	TMW31D102020	10/02/2020	<250	<2.5	<1.25	9.2	<1.0	<1.0	60,300	<1.0	<1.0	<5.0	<250	<0.50	10,600	9.1	<2.5	1,230	7.4	<1.0	626,000	<1.0	3.5 J	<50	<0.20
	TMW32042022	04/21/2022	<250	<2.5	1.0 J	6.4	<1.0	<1.0	13,000	<1.0	<1.0	<5.0	<250	<0.50	1,300	29	<2.5	910 J	2.2 J	<1.0	810,000	<1.0	<2.5	<50	<0.20
	TMW32102021	10/14/2021	<250	<2.5	0.70 J	6.2	<1.0	<1.0	11,000	<1.0	<1.0	<5.0	<250	<0.50	1,300	24	<2.5	850 J	2.7 J	<1.0	730,000	<1.0	1.6 J	<50	<0.20
	TMW32042021	04/22/2021	<250	<2.5	0.75 J	6.3	<1.0	<1.0	11,000	<1.0	<1.0	<5.0	<250	<0.5											

TABLE B-7: SUMMARY OF TOTAL METALS ANALYTICAL RESULTS
2024 INTERIM NORTHERN AREA GROUNDWATER MONITORING PLAN
Fort Wingate Depot Activity, New Mexico

Well ID	Sample ID	Date	Aluminum	Antimony	Arsenic	Barium	Beryllium	Cadmium	Calcium	Chromium	Cobalt	Copper	Iron	Lead	Magnesium	Manganese	Nickel	Potassium	Selenium	Silver	Sodium	Thallium	Vanadium	Zinc	Mercury
			µg/L																						
SL			5,000	6	10	2,000	4	5	–	50	50	1,000	1,000	15	–	200	200	–	50	50	–	2	86	10,000	2
TMW40D	TMW40D042022	04/22/2022	<250	<2.5	<1.2	8.6	<1.0	<1.0	14,000	<1.0	<1.0	<5.0	<250	<0.50	1,900	48	<2.5	940 J	2.4 J	<1.0	740,000	<1.0	2.0 J	<50	<0.20
	TMW40D102021	10/15/2021	270 J	<2.5	<1.2	9.3	<1.0	<1.0	15,000	<1.0	<1.0	<5.0	170 J	0.26 J	2,100	49	<2.5	970 J	2.6 J	<1.0	730,000	<1.0	2.4 J	<50	<0.20
	TMW40D042021	04/23/2021	<250	<2.5	<1.2	8.6	<1.0	<1.0	15,000	<1.0	<1.0	<5.0	<250	<0.50	2,000	44	<2.5	890 J	2.9 J	<1.0	710,000	<1.0	2.7 J	<50	<0.20
	TMW40D102020	10/07/2020	<250	<2.5	<1.25	8.7	<1.0	<1.0	15,100	<1.0	<1.0	<5.0	<250	<0.50	2,000	48.4	<2.5	970 J	3.1 J	<1.0	734,000	<1.0	2.9 J	<50	<0.20
TMW48	TMW48042022	04/22/2022	<250	<2.5	<1.2	10	<1.0	<1.0	84,000	<1.0	<1.0	<5.0	170 J	<0.50	16,000	75	<2.5	1,200	6.0	<1.0	640,000	<1.0	3.0 J	<50	<0.20
	TMW48102021	10/15/2021	<250	<2.5	<1.2	9.5	<1.0	<1.0	83,000	<1.0	<1.0	<5.0	<250	<0.50	15,000	74	<2.5	1,100	6.0	<1.0	620,000	<1.0	2.9 J	<50	<0.20
	TMW48042021	04/23/2021	<250	<2.5	<1.2	9.7	<1.0	<1.0	90,000	<1.0	<1.0	<5.0	<250	<0.50	17,000	57	<2.5	1,100	6.9	<1.0	590,000	<1.0	4.4 J	<50	<0.20
	TMW48102020	10/08/2020	<250	<2.5	<1.25	10.7	<1.0	<1.0	85,600	<1.0	<1.0	<5.0	<250	<0.50	16,900	58.9	<2.5	1,300	6.7	<1.0	626,000	<1.0	4.5 J	<50	<0.20
TMW49	TMW49042022	04/22/2022	<250	<2.5	<1.2	10	<1.0	<1.0	78,000	1.0 J	<1.0	<5.0	140 J	<0.50	14,000	58	5.2	1,700	16	<1.0	930,000	<1.0	10	<50	<0.20
	TMW49102021	10/15/2021	<250	<2.5	<1.2	9.1	<1.0	<1.0	75,000	1.4 J	<1.0	<5.0	<250	<0.50	13,000	30	3.2 J	1,500	24	<1.0	810,000	<1.0	12	<50	<0.20
	TMW49042021	04/23/2021	<250	<2.5	<1.2	9	<1.0	<1.0	71,000	1.7 J	<1.0	<5.0	<250	<0.50	13,000	29	1.3 J	1,400	25	<1.0	760,000	<1.0	11	<50	<0.20
	TMW49102020	10/08/2020	<250	<2.5	<1.25	9.3	<1.0	<1.0	71,700	1.4 J	<1.0	<5.0	<250	<0.50	12,400	26.2	3.8 J	1,480	27.9	<1.0	791,000	<1.0	12.4	<50	<0.20
TMW50	TMW50042022	04/13/2022	3,000	<2.5	3.1 J	59	0.56 J	<1.0	25,000	10	3.5 J	17	2,800	2.2 J	1,900	750	4.9 J	810 J	<1.5	<1.0	520,000	<1.0	59	28 J	<0.20
	TMW50042022DUP	04/13/2022	3,100	<2.5	3.4 J	61	0.58 J	<1.0	27,000	11	3.7 J	17	3,000	2.3 J	1,900	810	5.6	820 J	<1.5	<1.0	520,000	<1.0	61	30 J	<0.20
	TMW50102021	10/06/2021	1,600	<2.5	2.5 J	40	<1.0	<1.0	14,000	7.4	1.5 J	7.5 J	1,600	1.2 J	1,300	310	5.4	750 J	<1.5	<1.0	510,000	<1.0	28	43 J	<0.20
	TMW50042021	04/14/2021	1,700	<2.5	3.1 J	42	<1.0	<1.0	17,000	6.5	1.4 J	5.8 J	1,600	1.6 J	1,300	440	4.3 J	720 J	<1.5	<1.0	530,000	<1.0	26	<50	<0.20
TMW51	TMW51042022	04/14/2022	520	<2.5	<1.2	16	<1.0	<1.0	18,000	4.3 J	<1.0	<5.0	350 J	0.45 J	2,900	65	4.8 J	930 J	4.9 J	<1.0	670,000	<1.0	5.5	<50	<0.20
	TMW51102021	10/04/2021	<250	<2.5	<1.2	8.0	<1.0	<1.0	18,000	<1.0	<1.0	<5.0	<250	<0.50	3,000	33	<2.5	960 J	5.6	<1.0	700,000	<1.0	3.6 J	<50	<0.20
	TMW51042021	04/14/2021	<250	<2.5	<1.2	7.9	<1.0	<1.0	18,000	<1.0	<1.0	<5.0	<250	<0.50	2,900	30	<2.5	770 J	5.2	<1.0	690,000	<1.0	4.6 J	<50	<0.20
TMW52	TMW52042022	04/18/2022	3,300	<2.5	6.9	110	1.4 J	<1.0	39,000	4.3 J	3.4 J	12	1,600	4.2 J	1,900	590	6.4	1,000	0.95 J	<1.0	460,000	<1.0	29	32 J	<0.20
	TMW52102021	10/11/2021	3,700	<2.5	8.5	93	1.3 J	<1.0	33,000	4.5 J	3.4 J	10	1,900	3.8 J	1,900	490	6.1	1,100	<1.5	<1.0	450,000	<1.0	41	28 J	<0.20
	TMW52042021	04/19/2021	6,800	<2.5	10	190	3	<1.0	80,000	9.4	7.9	27	4,000	7.4	3,700	1,200	8.2	1,700	0.99 J	<1.0	470,000	<1.0	76	28 J	<0.20
TMW53	TMW53042022	04/18/2022	980	<2.5	1.3 J	160	<1.0	<1.0	5,200	2.3 J	<1.0	<5.0	880 J	0.86 J	650	89	2.9 J	470 J	<1.5	<1.0	360,000	<1.0	2.9 J	<50	<0.20
	TMW53102021	10/11/2021	1,300	<2.5	1.8 J	190	<1.0	<1.0	6,700	2.8 J	0.62 J	<5.0	1,300	1.3 J	830	120	3.5 J	560 J	<1.5	<1.0	340,000	<1.0	4.7 J	33 J	<0.20
	TMW53042021	04/19/2021	4,500	<2.5	1.9 J	280	<1.0	<1.0	10,000	6.9	1.4 J	<5.0	3,100	2.3 J	1,700	220	4.3 J	990 J	<1.5	<1.0	360,000	<1.0	6.8	<50	<0.20
TMW55	TMW55042022	04/15/2022	160 J	<2.5	2.2 J	9.6	<1.0	<1.0	6,600	0.81 J	<1.0	<5.0	130 J	<0.50	740	5.0 J	<2.5	740 J	<1.5	<1.0	580,000	<1.0	9.2	<50	<0.20
	TMW55102021	10/08/2021	180 J	<2.5	3.0 J	11	<1.0	<1.0	7,200	1.1 J	<1.0	8.5 J	200 J	<0.50	810	12	<2.5	870 J	<1.5	<1.0	570,000	<1.0	10	<50	<0.20
	TMW55042021	04/16/2021	500 J	<2.5	2.9 J	13	<1.0	<1.0	7,000	1.1 J	<1.0	5.2 J	370 J	<0.50	860	17	<2.5	770 J	<1.5	<1.0	570,000	<1.0	8.7	<50	<0.20
TMW58	TMW58042022	04/12/2022	190 J	<2.5	2.4 J	24	<1.0	<1.0	8,700	1.9 J	<1.0	<5.0	<250	<0.50	1,100	34	1.6 J	870 J	<1.5	<1.0	630,000	<1.0	12	<50	<0.20
	TMW58102021	10/05/2021	180 J	<2.5	2.7 J	21	<1.0	<1.0	7,900	<1.0	<1.0	<5.0	<250	<0.50	990	28	<2.5	840 J	<1.5	<1.0	590,000	<1.0	7.9	<50	<0.20
	TMW58042021	04/13/2021	130 J	<2.5	4.7 J	25	<1.0	<1.0	8,300	1.1 J	<1.0	<5.0	<250	<0.50	1,000	29	1.4 J	700 J	<1.5	<1.0	610,000	<1.0	7.7	<50	<0.20
TMW63	TMW63042022	04/13/2022	<250	<2.5	<1.2	9.6	<1.0	<1.0	9,000	<1.0	<1.0	<5.0	<250	<0.50	980	22	<2.5	710 J	<1.5	<1.0	660,000	<1.0	<2.5	<50	<0.20
	TMW63102021	10/06/2021	<250	<2.5	<1.2	11	<1.0	<1.0	9,700	<1.0	<1.0	<5.0	<250	<0.50	1,000	30	<2.5	710 J	<1.5	<1.0	650,000	<1.0	<2.5	<50	<0.20
	TMW63042021	04/14/2021	<250	<2.5	<1.2	11	<1.0	<1.0	9,200	<1.0	<1.0	<5.0	<250	<0.50	1,000	22	<2.5	570 J	<1.5	<1.0	660,000	<1.0	<2.5	<50	<0.20
TMW64	TMW64042022	04/19/2022	390 J	<2.5	<1.2	31	<1.0	<1.0	12,000	4.5 J	<1.0	<5.0	310 J	0.29 J	1,500	60	3.3 J	820 J	<1.5	<1.0	610,000	<1.0	7.3	<50	<0.20
	TMW64102021	10/12/2021	240 J	<2.5	<1.2	29	<1.0	<1.0	12,000	0.92 J	<1.0	<5.0	130 J	<0.50	1,600	41	<2.5	840 J	4.2 J	<1.0	630,000	<1.0	9.0	<50	<0.20
	TMW64042021	04/20/2021	<250	<2.5	<1.2	24	<1.0	<1.0	11,000	0.86 J	<1.0	<5.0	<250	<0.50	1,400	34	<2.5	710 J	<1.5	<1.0	620,000	<1.0	5.3	<50	<0.20

NOTES & ABBREVIATIONS:

µg/L = micrograms per liter

< = less than LOD

NA = not analyzed

J = estimated value

– = not established or not applicable

SL = screening level

Number = Result exceeds cited (lowest) SL.

APPENDIX C

Field Forms



CHAIN OF CUSTODY

Lab Info	
Lab	EMAX Laboratories
Address	1835 W. 205th St, Torrance, CA 90501
POC	Richard Beauvil
Email	info@emaxlabs.com Ph 310-618-8889

Project Info		Company Contact Info	
Company	Eco & Associates, Inc.	PM / POC	Paul Peterson
Project Name	USACE Wingate	Email	ppeterson@ecoinc.info
Project No	Eco-18-1237	Phone	(714) 289-0995
Site Name	Northern Area	Email (Rpt)	chem@ecoinc.info (Reports only)
Site Address	Fort Wingate Depot Activity	Sampler(s)	
	McKinley County, NM		

#	Sample ID	Date	Time	NOC*	SOC*	Matrix
1						
2						

Relinquished By	Date	Time	Signature	Received By	Date	Time	Signature

[illegible]

NOTES:

- 1) $HN=HNO_3$, $HC=HCl$
- 2) NOC - Number of Containers
- 3) SOC - Size of Containers
- 4) TAT - Turn Around Time

* NOC - Number of Containers, SOC - Size of Container, TAT - Turn Around Time